



**mitsubishi  
ELECTRIC**

Mitsubishi Graphic Operation Terminal

GRAPHIC OPERATION TERMINAL

**GOT1000**

The best solutions for your industry needs.

An innovative and highly perfected platform -- the GOT1000 Series.

*Best*



**Dec. 2007** GOT1000 GRAPHIC OPERATION TERMINAL

Mitsubishi Electric Corporation Nagoya Works and Himeji Works are factories certified for ISO14001 (standards for environmental management systems) and ISO9001 (standards for quality assurance management systems).







GT15

*With various sophisticated functions and a vast lineup,  
now is the start of a new movement in the GOT symphony.*



GT11



GRAPHIC OPERATION TERMINAL

# GOT1000

*The GOT1000 series, originating from and developed for the needs of the industry*

The desire to offer a display which meets users' needs has been our theme since the birth of GOT1000 and its development has been continued by constantly adding new functions.

The vast GOT1000 lineup with its new functions continues to advance.

GOT1000 boasts unique and innovative functions such as the backup/restoration function which is the key to shortening downtime, and the operator authentication function which is an effective from of security to work management.

Now with the compact GT10 series models including the 3.7" type micro-GOT, we have a total of 45 models in our lineup.

The GOT is developed based on the idea of usability, taking into account the requests from customers.

Under the slogan "Simply the best!" Mitsubishi Electric aims at a unique brand of display.

Again, we bring you new possibilities.

## Toward a unique GOT brand

The needs expressed by users will continue to be a central part of the GOT series evolution to the next-generation display. Mitsubishi Electric's aims are summed up by the slogan, "Simply the best!"

## CONTENTS

Concept	2
GOT1000 Basic Performance	4
Lineup	5
GOT Solution	8
Features	18
For Designers	20
For Operators	35
For Initial Startup & Adjustment Operators	36
For Maintenance Personnel	38
Handy GOT	46
GT10	47
GT SoftGOT1000 Version 2	50
List of Connectable Models	52
Specifications	56
External Dimensions	60
Notes for Use	63
Function List	66
Product List	68

**A total of 45 GOT1000 models**

GRAPHIC OPERATION TERMINAL

# GOT1000

**Performance is  
the pride of GOT1000.**



### Common features

#### Performance 1

##### Beautiful and expressive screens

- TFT65536 full color (GT15)
- STN4096 colors (GT15)
- Monochrome 16 gray scales
- Greatly increased memory capacity



#### Performance 2

##### Standard front-mounted USB interface

- Up to 20 times faster data transmission than previous models.
- Front-mounted USB interface improves work efficiency.



#### Performance 3

##### Drawing, computing, communication A triad of high-speed response

- Drawing: Equipped with a high-speed drawing chip (GT15)
- Computing: Offers high-speed computing performance
- Communication: Bus connection and RS-232 communication (max. 115.2 kbps)



**OPEN!**



A total of 45 GOT1000 models providing user friendliness in 3.7 inch to 15 inch models.

**15"** **TFT** (High-brightness, wide viewing angle)  
**type** GT1595-XTBA **AC type**  
**XGA** GT1595-XTBD **DC type**

Resolution : 1024 × 768  
Display colors : 65536 colors



**12.1"** **TFT** (High-brightness, wide viewing angle)  
**type** GT1585V-STBA **AC type**  
**SVGA** GT1585V-STBD **DC type**

Resolution : 800 × 600  
Display colors : 65536 colors  
Video/RGB model



**12.1"** **TFT** (High-brightness, wide viewing angle)  
**type** GT1585-STBA **AC type**  
**SVGA** GT1585-STBD **DC type**

Resolution : 800 × 600  
Display colors : 65536 colors



**10.4"** **TFT** (High-brightness, wide viewing angle)  
**type** GT1575V-STBA **AC type**  
**SVGA** GT1575V-STBD **DC type**

Resolution : 800 × 600  
Display colors : 65536 colors  
Video/RGB model



**10.4"** **TFT** (High-brightness, wide viewing angle)  
**type** GT1575-STBA **AC type**  
**SVGA** GT1575-STBD **DC type**

Resolution : 800 × 600  
Display colors : 65536 colors



**10.4"** **TFT** (High-brightness, wide viewing angle)  
**type** GT1575-VTBA **AC type**  
**VGA** GT1575-VTBD **DC type**

Resolution : 640 × 480  
Display colors : 65536 colors



**10.4"** **TFT**  
**type** GT1575-VNBA **AC type**  
**VGA** GT1575-VNBD **DC type**

Resolution : 640 × 480  
Display colors : 256 colors



**10.4"** **TFT**  
**type** GT1572-VNBA **AC type**  
**VGA** GT1572-VNBD **DC type**

Resolution : 640 × 480  
Display colors : 16 colors



**8.4"** **TFT** (High-brightness, wide viewing angle)  
**type** GT1565-VTBA **AC type**  
**VGA** GT1565-VTBD **DC type**

Resolution : 640 × 480  
Display colors : 65536 colors



**8.4"** **TFT**  
**type** GT1562-VNBA **AC type**  
**VGA** GT1562-VNBD **DC type**

Resolution : 640 × 480  
Display colors : 16 colors



( Full-spec models accommodate a wide range of applications  
in stand-alone or network environments )

**Full-spec models**

# GT15

The upper model of the GOT1000 series  
aiming at the best performance for the next-generation HMI.

Various models are available to meet the application needs.

**5.7"** **TFT** (High-brightness, wide viewing angle)  
**type** GT1555-VTBD **DC type**

Resolution : 640 × 480  
Display colors : 65536 colors



**5.7"** **TFT** (High-brightness, wide viewing angle)  
**QVGA** GT1555-QTBD **DC type**

Resolution : 320 × 240  
Display colors : 65536 colors



**5.7"** **STN**  
**QVGA** GT1555-QSBD **DC type**

Resolution : 320 × 240  
Display colors : 4096 colors



**5.7"** **STN**  
**QVGA** GT1550-QLBD **DC type**

Resolution : 320 × 240  
Display colors : 16 gray scales



( Standard models offer a full array of basic functions  
for stand-alone use )

**Standard models**

# GT11

A convenient, standard model with usability as a design concept.

Even beginners can utilize the

brilliant performance of the standard series.

**5.7"** **TFT**  
**type** GT1155-QTBD **DC type** **NEW**  
**QVGA** GT1155-QTBDQ **DC type** Q bus connection  
GT1155-QTBDA **DC type** A bus connection

Resolution : 320 × 240  
Display colors : 256 colors



**5.7"** **STN**  
**type** GT1155-QSBD **DC type**  
**QVGA** GT1155-QSBDQ **DC type** Q bus connection  
GT1155-QSBDA **DC type** A bus connection

Resolution : 320 × 240  
Display colors : 256 colors



**5.7"** **STN**  
**type** GT1150-QLBD **DC type**  
**QVGA** GT1150-QLBDQ **DC type** Q bus connection  
GT1150-QLBDA **DC type** A bus connection

Resolution : 320 × 240  
Display colors : 16 gray scales



**5.7"** **Handy GOT/STN**  
**type** GT1155HS-QSBD **DC type**

Resolution : 320 × 240  
Display colors : 256 colors



**5.7"** **Handy GOT/STN**  
**type** GT1150HS-QLBD **DC type**

Resolution : 320 × 240  
Display colors : 16 gray scales



( Compact models include all the basic functions  
required for a HMI display )

**Compact models**

# GT10

A compact model which meets customers' needs.

The usability of the GOT1000 series in its simplest design.

**4.5"** **STN**  
**type** GT1030-LBD **24 VDC type** RS-422 connection  
GT1030-LBD2 **24 VDC type** RS-232 connection

Resolution : 288 × 96  
Display colors : Monochrome (black/white)  
(Tricolor LED (green/orange/red))



**4.5"** **STN**  
**type** GT1030-LBDW **24 VDC type** RS-422 connection  
GT1030-LBDW2 **24 VDC type** RS-232 connection

Resolution : 288 × 96  
Display colors : Monochrome (black/white)  
(Tricolor LED (white/pink/red))



**3.7"** **STN**  
**type** GT1020-LBD **24 VDC type** RS-422 connection  
GT1020-LBD2 **24 VDC type** RS-232 connection  
GT1020-LBL **5 VDC type** RS-422 connection

Resolution : 160 × 64  
Display colors : Monochrome (black/white)  
(Tricolor LED (green/orange/red))



**3.7"** **STN**  
**type** GT1020-LBDW **24 VDC type** RS-422 connection  
GT1020-LBDW2 **24 VDC type** RS-232 connection  
GT1020-LBLW **5 VDC type** RS-422 connection

Resolution : 160 × 64  
Display colors : Monochrome (black/white)  
(Tricolor LED (white/pink/red))




\* : For the detailed functions of the GT10 series, see pages 47 - 49.



## CASE 1


### Don't panic when encountering unexpected errors — Quick troubleshooting at the worksite

#### Before

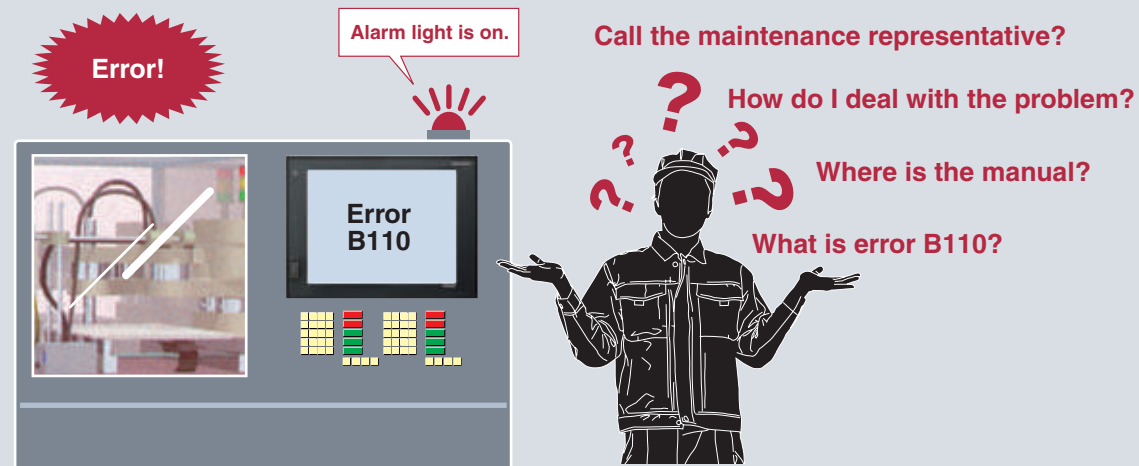

#### GOTSolution①

##### Troubleshooting by GOT1000

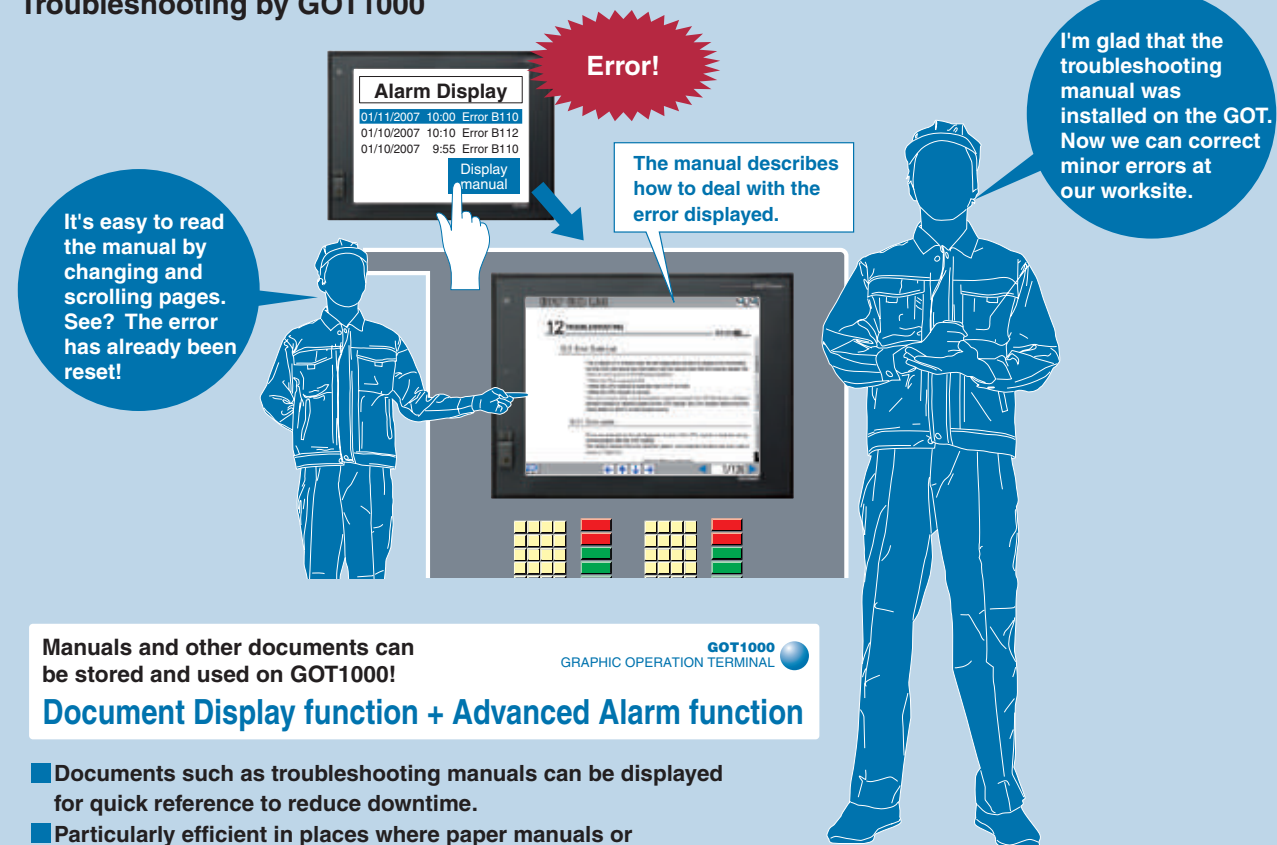

Manuals and other documents can be stored and used on GOT1000!

GOT1000  
GRAPHIC OPERATION TERMINAL

#### Document Display function + Advanced Alarm function


- Documents such as troubleshooting manuals can be displayed for quick reference to reduce downtime.
- Particularly efficient in places where paper manuals or personal computers cannot be brought in, such as clean rooms.
- Various types of general-purpose documents can be displayed. (doc, xls, ppt, pdf, jpg and bmp)

<For more details, see pages 38 to 39 of this catalog.>

#### GOTSolution②

##### Investigate the problem cause at the production site

(Error occurred in ST2 device!)

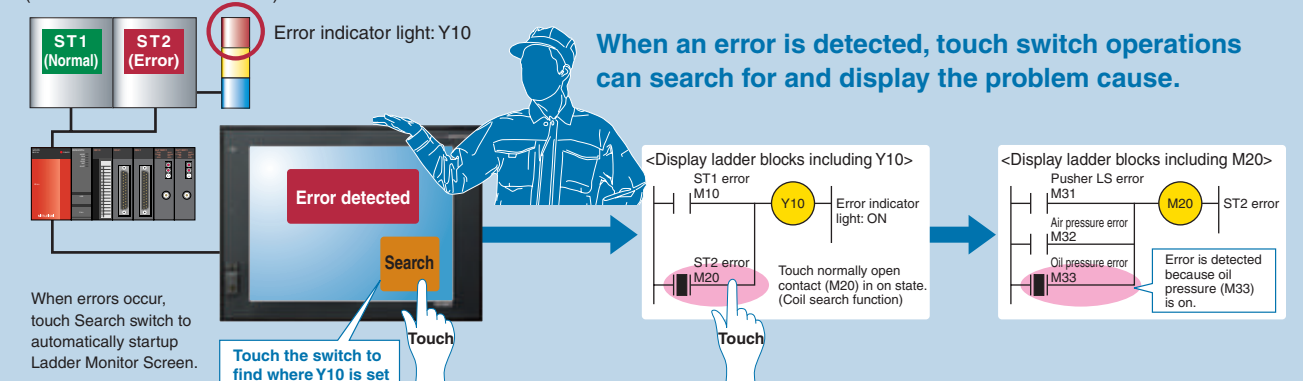

Reduce downtime after problems caused by equipment breakdown or halt in the operation

GOT1000  
GRAPHIC OPERATION TERMINAL


#### One-Touch Ladder Jump function

- Just touch the operation flow diagram on the GOT, which will show you the root cause of the problem. There is no need to use personal computers or ladder programs.
- Using general purpose PLC error indication programs and detection programs makes developing new search programs and screens unnecessary.


<For more details, see page 44 of this catalog.>

#### (Application case) When error messages are not displayed

##### Before

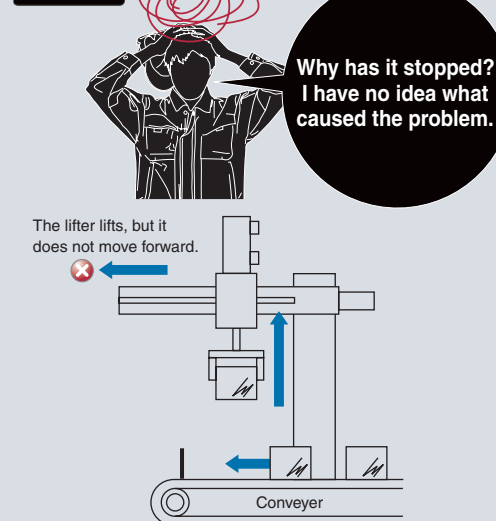

##### GOTSolution

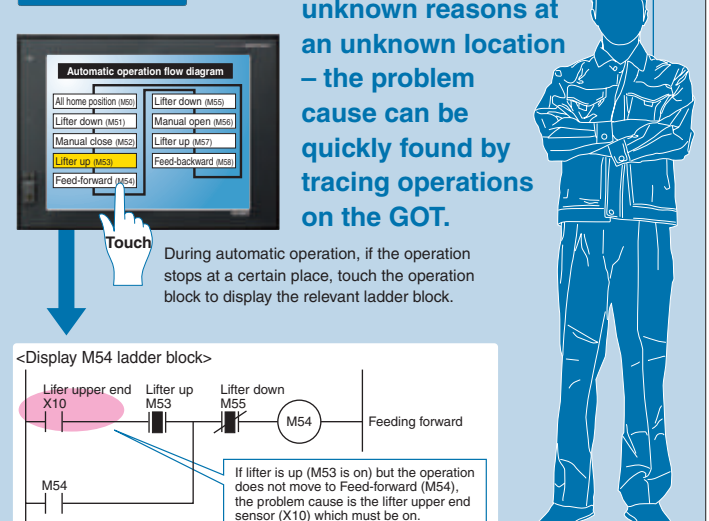





## CASE 2

Quickly detect the cause of the problem to minimize production loss due to unexpected product failures

### Before

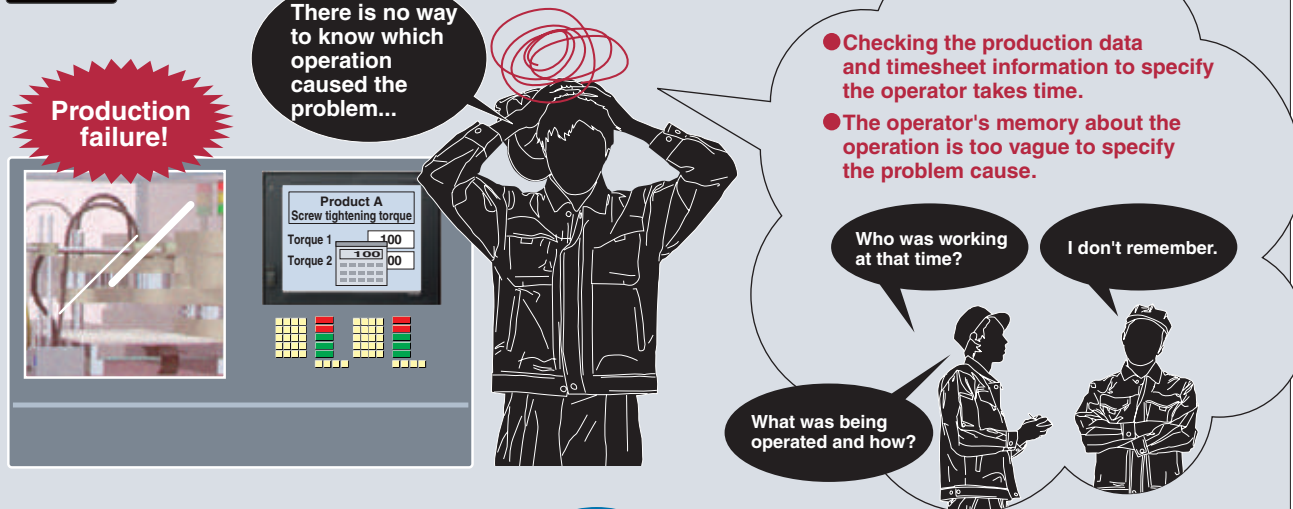


### GOT Solution

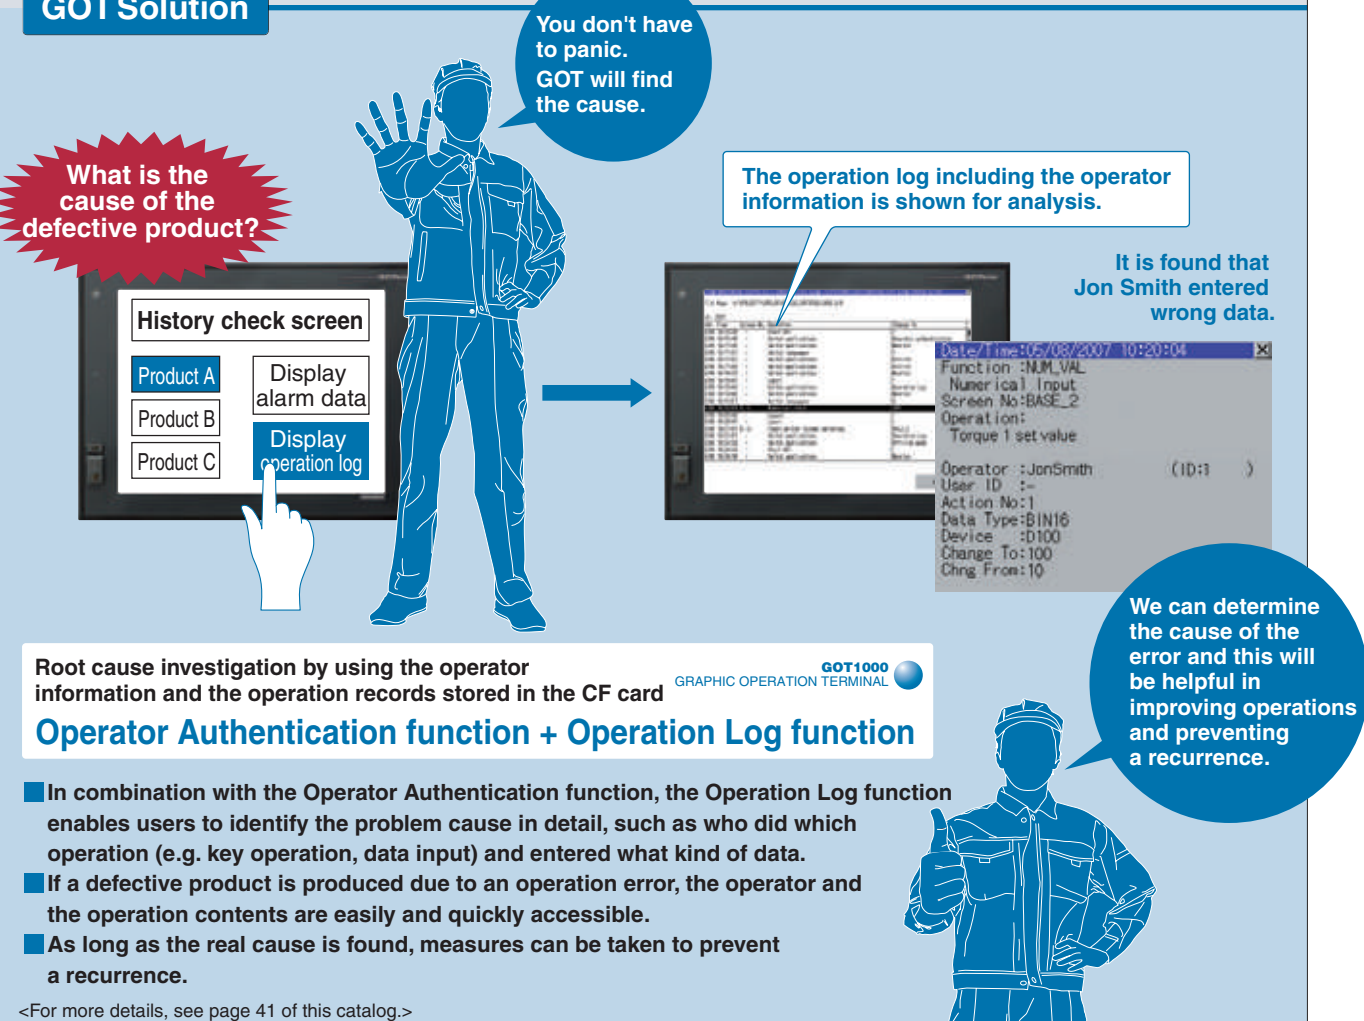


## CASE 3

Backup your sequence programs on the GOT. Keep your system safe in case of a PLC failure.

### Before

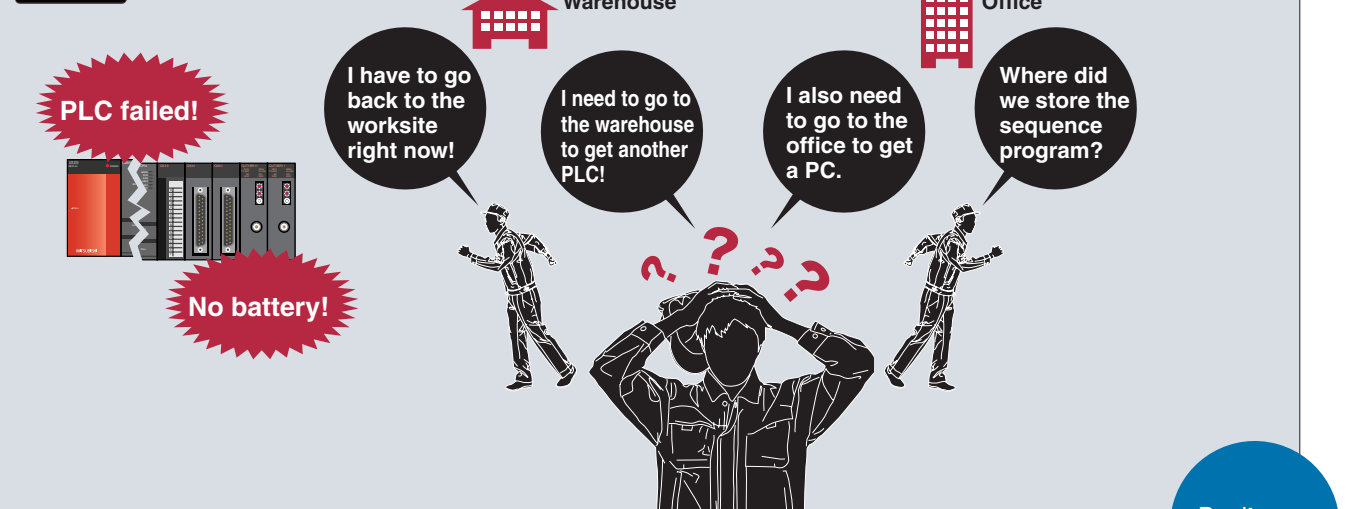

### GOT Solution

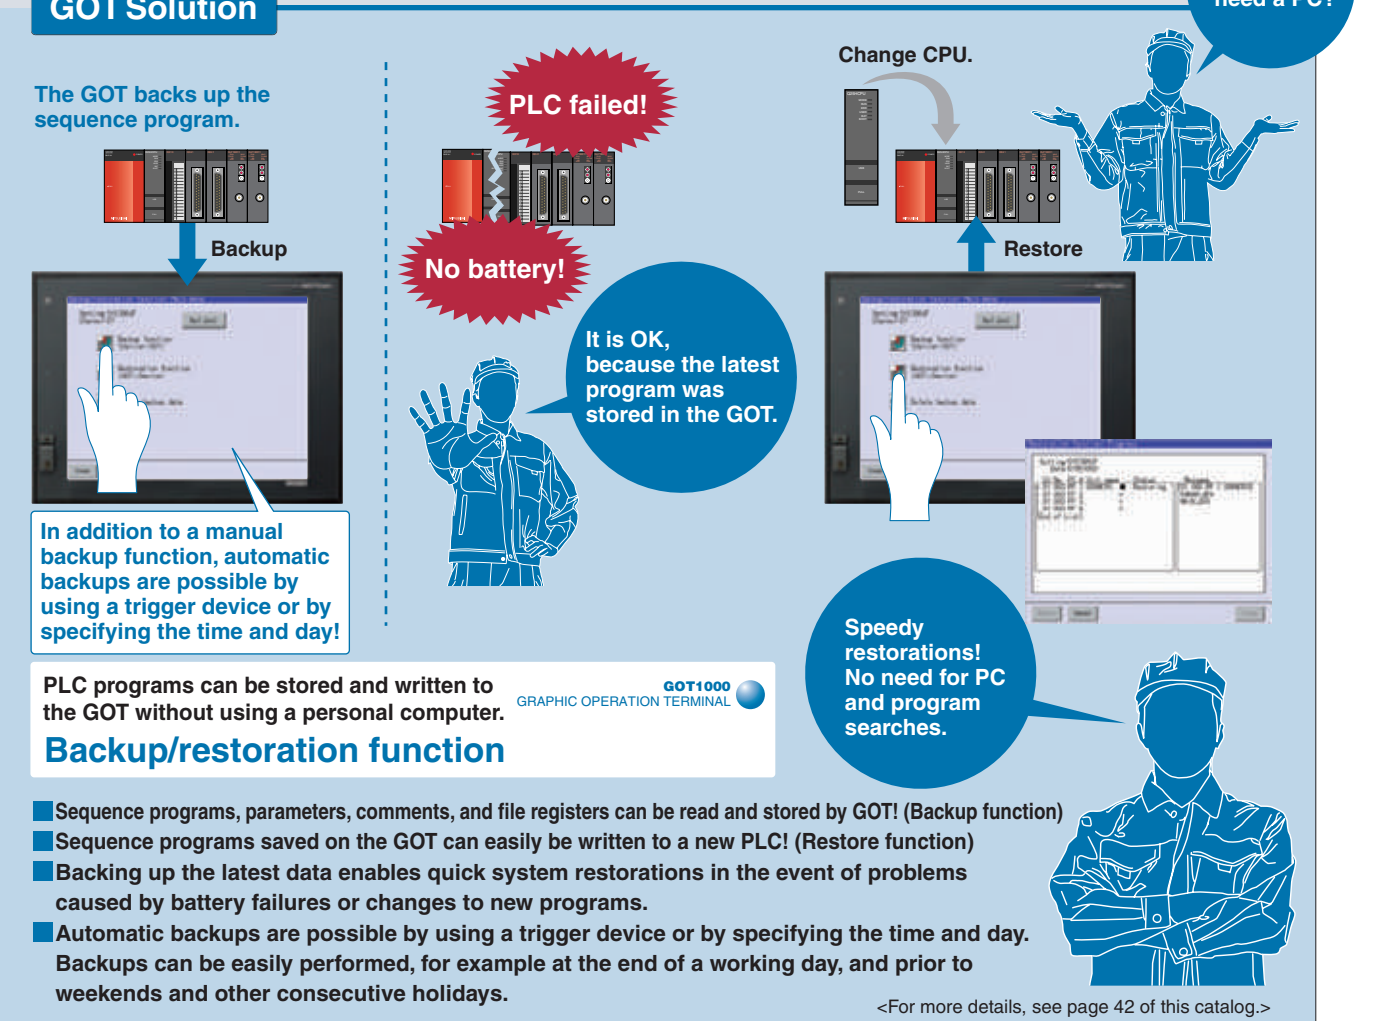





## CASE 4

### Quick connection of third-party FA devices! Data exchange without using programs.

**Before** Connection of temperature controller requires a dedicated unit and program.  
Extra cost and PLC burdens...

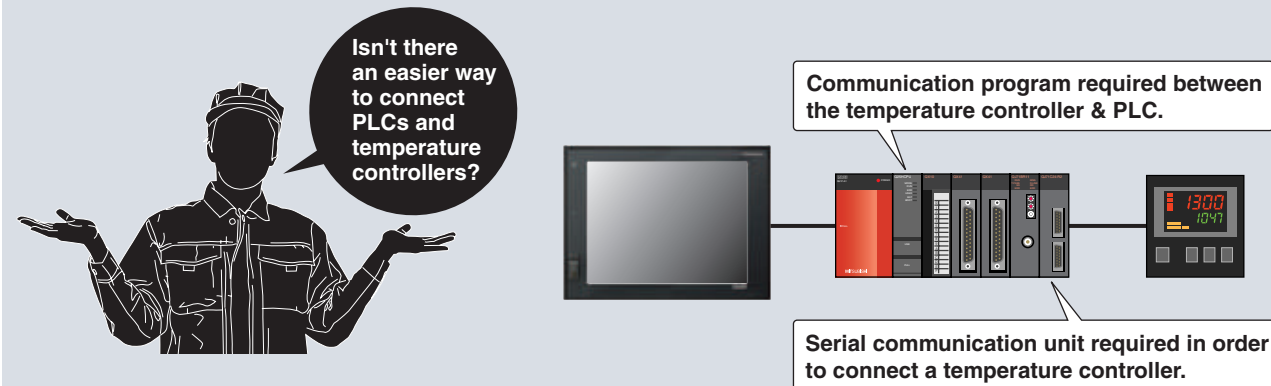

## GOT Solution

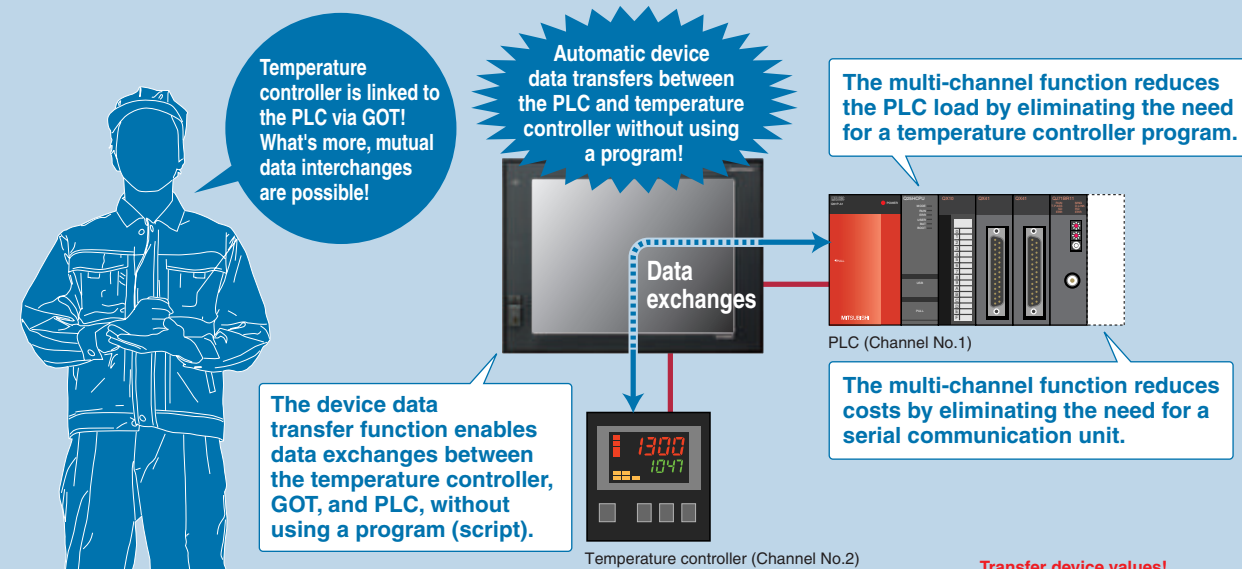


The PLC and temperature controller are easily linked via GOT!

### Multi-channel function + Device data transfer function

- With the multi-channel function, a single GOT unit can monitor up to 4 channels of FA devices.
- The device data transfer function can be set to read/write specified device values at specified times, or periodically!
- Simply specify the transfer source & destination devices, and the trigger in GT Designer2!

<For more details, see pages 26 to 27 of this catalog.>

**GOT1000**  
GRAPHIC OPERATION TERMINAL

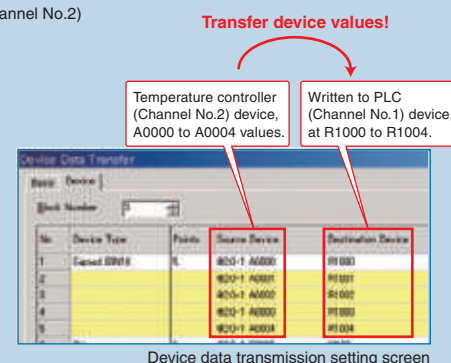


Device data transmission setting screen


## CASE 5

### Direct connection to I/O devices! Effectively reduces both costs and wiring.

**Before** In systems where the PLC and the operation panel are separated, connecting wires to the operation panel switches and lamps is troublesome...

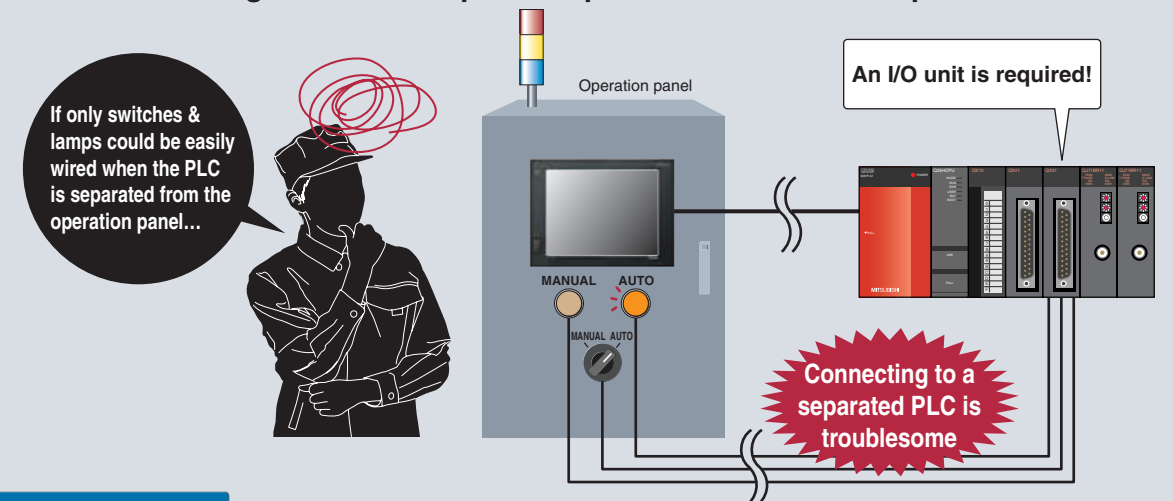

## GOT Solution

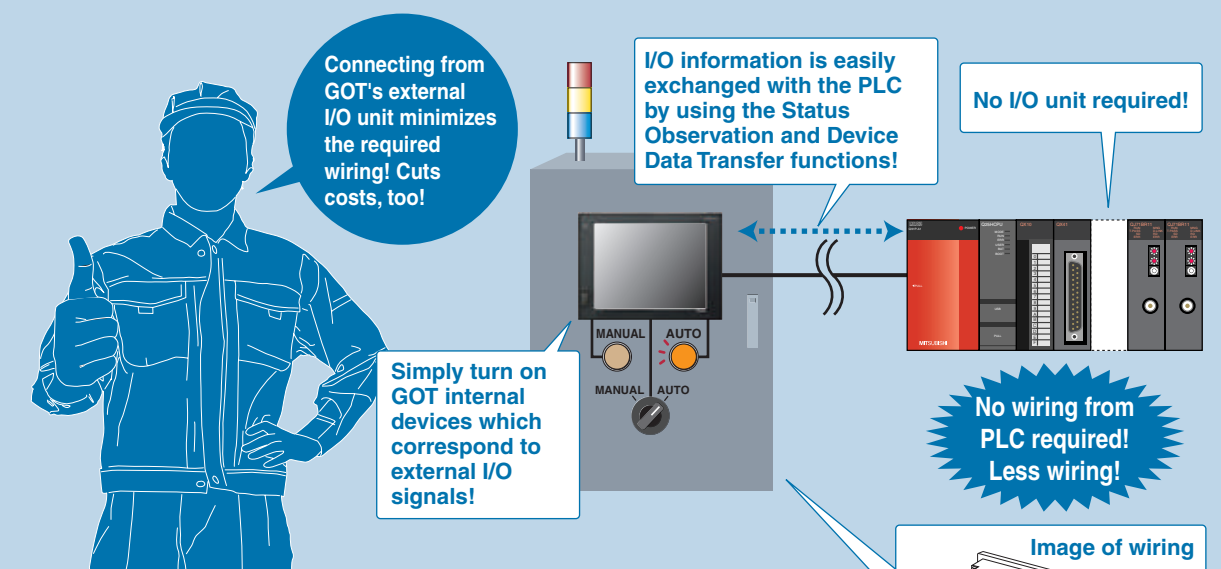

Less wiring is required with direct inputs/ outputs from GOT!

### External input/output function

- Up to 128 input points (16 input points x 8 scan points), and 16 output points!
- The system can be simplified by connecting GOT directly to the I/O device!

<For more details, see page 25 of this catalog.>

**GOT1000**  
GRAPHIC OPERATION TERMINAL

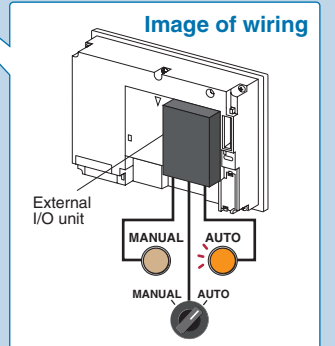



Image of wiring




## CASE 6

### Smooth debugging even when the operation & control panels are separated.

**Before** Assuming a system in which the equipment is on the 1st floor and the control panel is on the 2nd floor in an electrical room, a debugging operation involving actual equipment operation is a major undertaking requiring several workers...

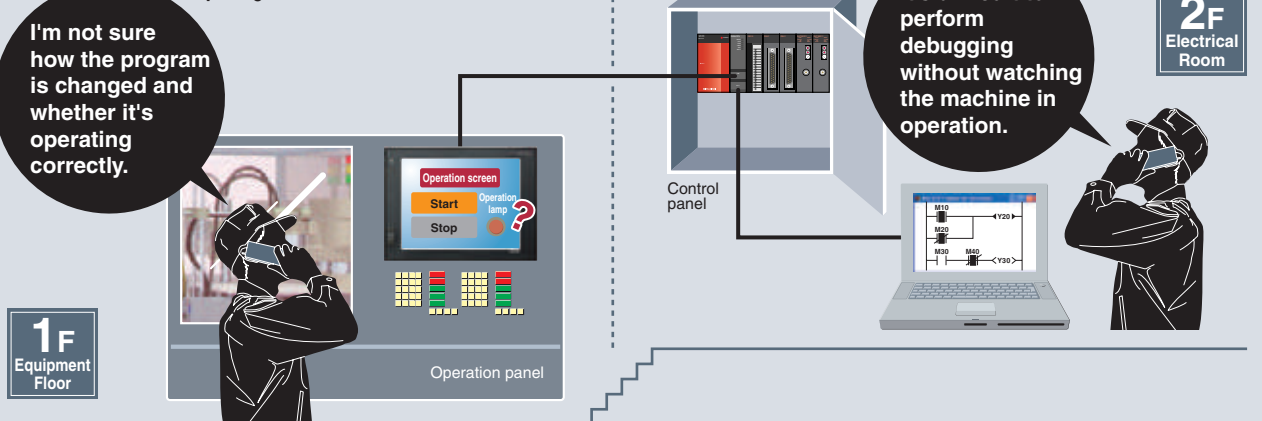

## GOT Solution

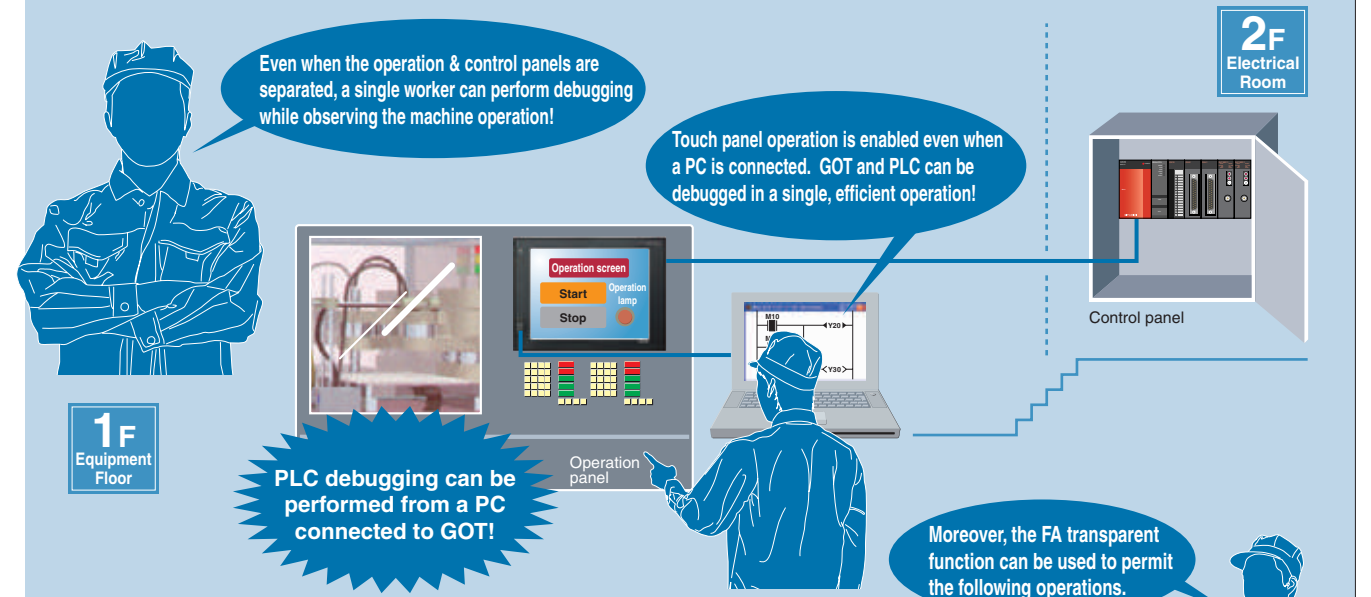

PLC and PC can be connected via GOT.

### FA Transparent Function

- Programming and setup software can be operated via GOT's front face USB port.
- The programming and setup of Mitsubishi PLCs, motion CPUs, inverters, and servo amplifiers can be performed from GOT's front face USB port.
- Bus connection and CPU direct connection formats are supported for GOT and PLC connections. Computer link connection will be supported in the near future. **Coming soon**

<For more details, see page 36 of this catalog.>


Using the GX Developer and GOT Ladder Monitor simultaneously (e.g., a large GX Developer display at the Device Test screen, and a GOT display at the Ladder Monitor screen), permits debugging operations which are both efficient and easy to view. This is also a convenient way to check the linked operation of multiple programs.



## CASE 7

### SFC monitor function enables quick identification of line stop causes.

**Before** Because ladder program configurations vary from one program creator to another, they can be confusing when viewed by someone other than the creator...

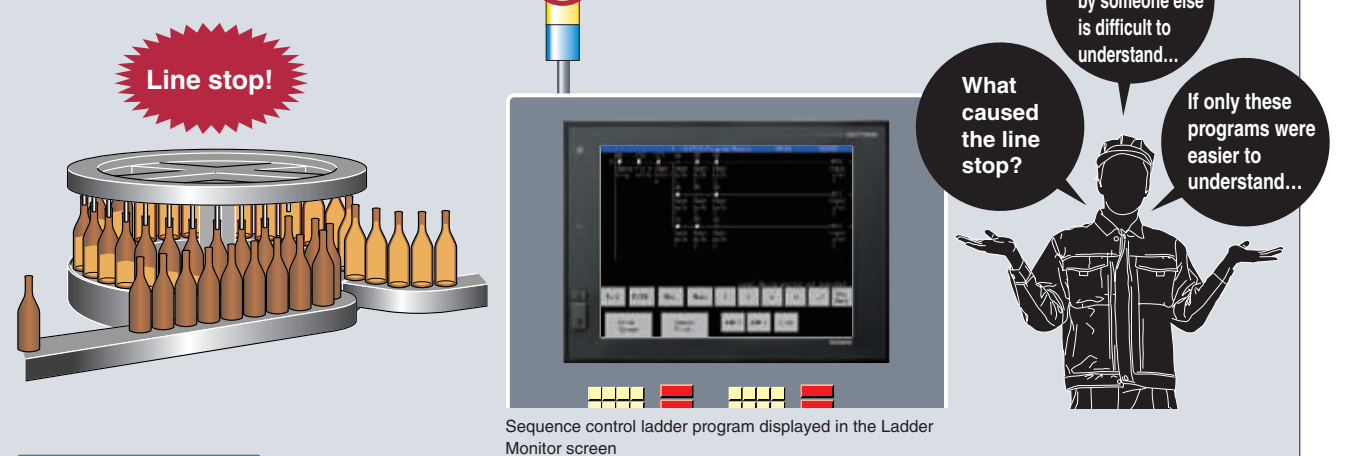

## GOT Solution

SFC programs are easily understood by anyone! Moreover, GOT's SFC monitor function allows the equipment operation status to be verified at a glance, even without a PC, thereby facilitating corrective actions!

SFC programs express the equipment operation sequences in a flowchart format, making them easy to create and understand, even when created by someone else.

\* : These programs are created/edited in GX Developer.



A visualized process format makes troubleshooting easy.

### SFC Monitor Function **Coming soon**

- Mitsubishi Q-Series PLC SFC programs (MELSP3, MELSP-L) can be monitored on GOT.
- SFC graphics allow the current process to be identified at a glance, for quick and efficient status verification.
- List displays such as block lists, step lists, and device lists, are also possible.


<For more details, see page 45 of this catalog.>



## CASE 8

### Portable handy type GOT expands machine design flexibility and increases work comfort.


**Before** In machine tool manufacturing, the position and layout of the operation panel for easy operation have been a problem.

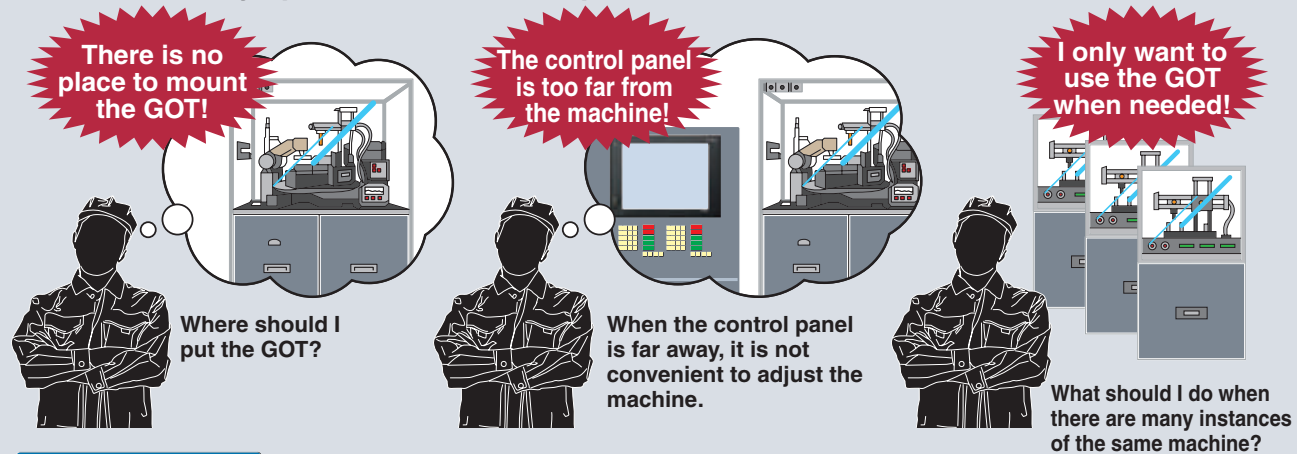


## GOT Solution

Portable and wearable Handy terminals can be used in many ways.

### Limitless installation possibilities

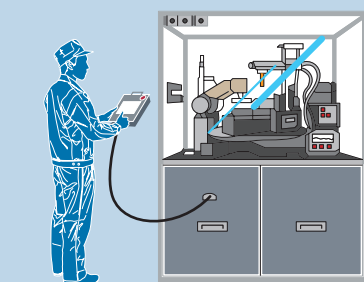


### Operable from every direction

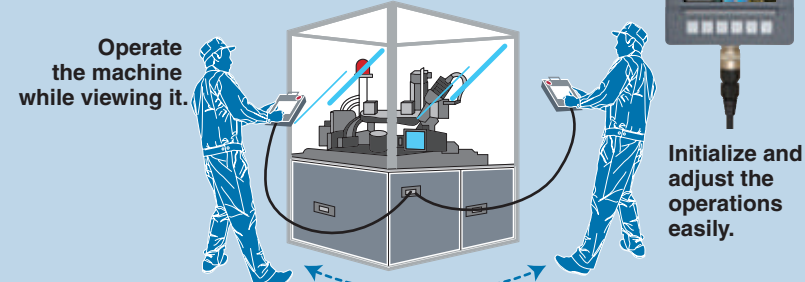

### Take the GOT around only when needed

Easy to connect and disconnect. One GOT for two or more devices.

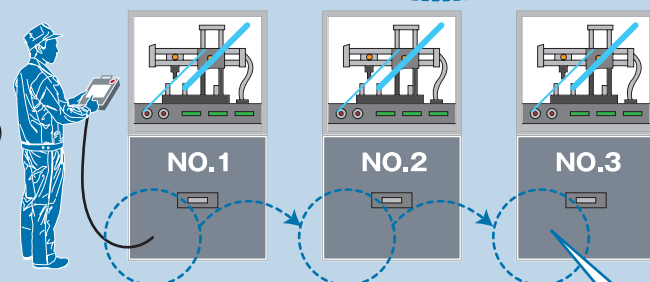

Easy to carry, easy to mount. The possibilities are endless.

## Handy GOT

- Minimum mounting space required for handy terminal.
- Possible to use a single GOT to operate multiple machines by connecting the GOT to the machines one by one.
- Easy to initialize and adjust machine tools. The portable handy GOT can be used from every direction of the machine.


Note: Direct disconnection of the handy unit will cause the emergency stop switch to activate unless an external parallel circuit or other design is implemented. Refer to GOT Handy manual for details.

<For more details of functions, see page 46 of this catalog.>

## CASE 9


### Extremely compact size expands the effective use of the GOT1000 series

**Before** Hardware switches and lamps take up space on the control panel, and it takes a lot of effort to change the layout and wiring when specifications are changed.

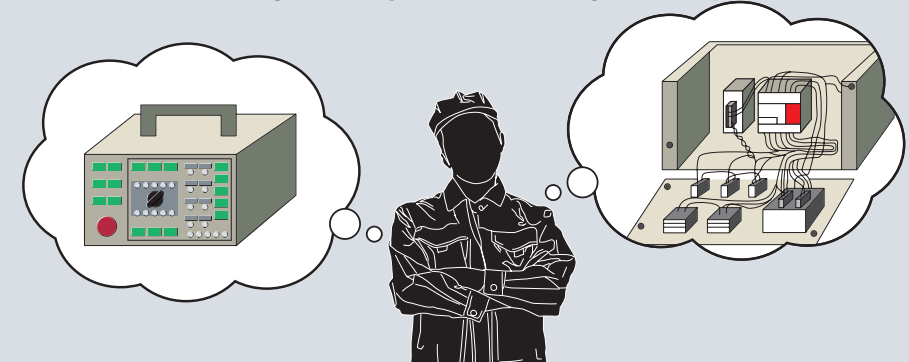


## GOT Solution

Compact, easy-to-use, simple wiring unit reduces assembling man-hours

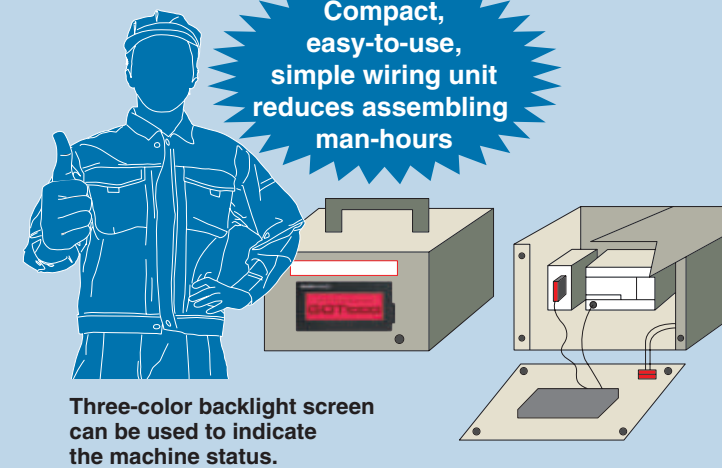

Both horizontal and vertical mounting available to meet the needs of different applications.

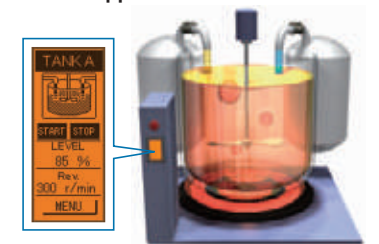

For simple and small applications, GOT1000 is just right.

GOT1000  
GRAPHIC OPERATION TERMINAL

## GT10 series

■ Highly flexible GOT screen layout with bright, clear 3-color indication

### Compact, readable display GT1020 3.7 inch type



### Clear, sharp, wide display GT1030 4.5 inch type



<For more details of functions, see pages 47 to 49 of this catalog.>





# GOT1000 provides a variety of functions to satisfy user requirements

Usability depends on who the users are and where they carry out their tasks. Designers want to use the most advanced HMI technology, while maintenance engineers want the safest HMI for their facilities. To satisfy all of our customers, we are constantly developing more and more functions for the GOT1000.





# Greatly improved comment input, language selection and screen drawing efficiency


For designers

## Efficient input of extensive comment data

GOT1000  
GRAPHIC OPERATION TERMINAL

### Comment groups

- CSV/Unicode text format files can be imported. Multiple files can also be imported to individual comment groups, allowing the comment input task to be distributed among several workers, greatly reducing the required input time.
- GT Designer2 allows easy column and line insertions and comment No. changes similar to those offered by Microsoft® Excel.

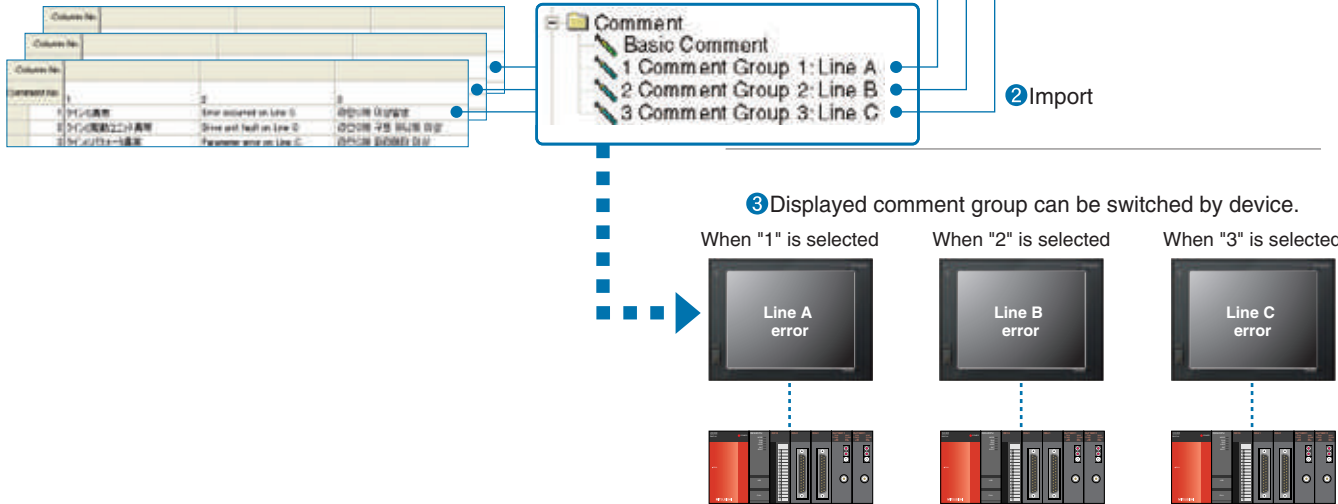

## No need to adjust character string length

GOT1000  
GRAPHIC OPERATION TERMINAL

### Automatic length adjustment of comment group labels

- Automatically adjusts character size and inserts line feeds according to the object size.  
<Supported objects> • Touch switches or lamps where "comment group" is selected for labels  
• Comment displays where "comment group" is used




When switching languages, character string length is automatically adjusted to fit within the object.

## Easy-to-create language switching screens

GOT1000  
GRAPHIC OPERATION TERMINAL

### Comment groups for switch/lamp labels and alarm history comments

- Comment groups can be used for the alarm history comments. **NEW**
- Comment groups can be used to display label names on touch switches and lamps.  
<Supported objects> • Touch switches, lamps, alarm history, comment display, advanced alarm

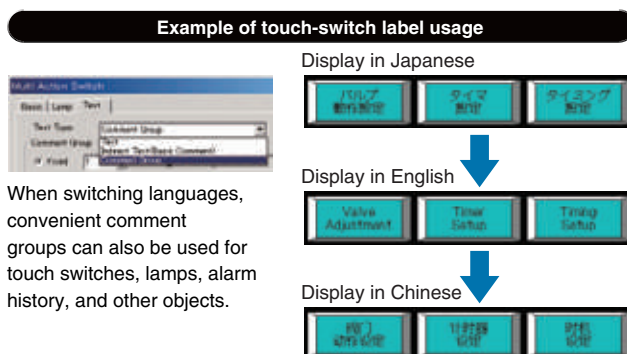

## Easy creation of multilingual screens


GOT1000  
GRAPHIC OPERATION TERMINAL

### Multilingual support

- Different language comments can be created for each comment group column to switch the display language.
- Up to 10 columns can be created for 1 comment group.
- Comment group comments can be created freely for applications, as well as for different languages.  
\*: For details, see "Comment group" on page 20.

### Convenient for language switching

When stroke fonts are used with switching languages for touch switches, lamps or comment displays, the character size is automatically adjusted by the size of the object. There is no need to adjust the size of the object when creating a multi-language screen.

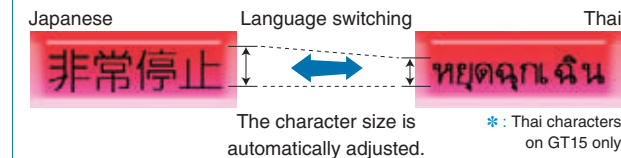

## For better work efficiency and enhanced customization functions


GOT1000  
GRAPHIC OPERATION TERMINAL

### Script function

#### Project script/screen script


- Controlling GOT display by using GOT scripts can reduce the load on PLCs (PLC CPU, microcomputer, etc.) dramatically.
- Along with the object script, the project/screen script can also execute a script file that includes multiple data formats (e.g. integer, real number). (Data format conversion function) **NEW**
- **Input support function makes it easy to specify functions and properties, thereby preventing spelling errors and reducing the time to look up control statements.**

#### GT Designer2 script editor screen

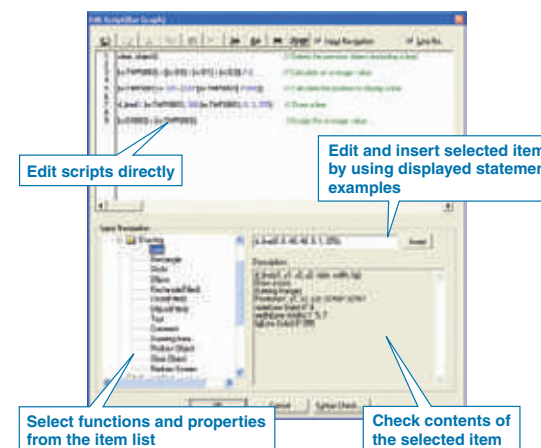

## Users can quickly change the language display.

### Example of switching between Japanese, English, and Korean screens

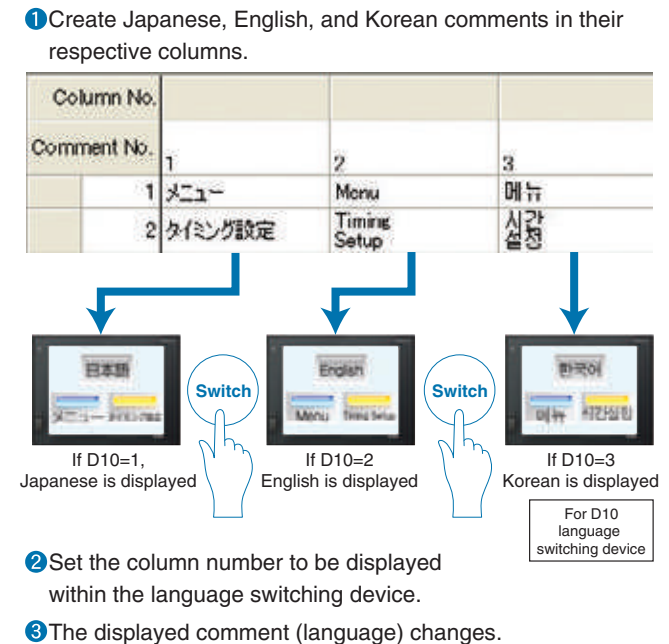


### Object script (GT15 only)

- Drawing and display control functions can be specified for every object, allowing objects to be easily used in other projects.
- Scripts make screen display control highly flexible by changing properties (colors and display positions) and making the object design process flexible.

Now the optional function board (GT15-FNB) is not required.  
For more details, see Notes for Use on page 65.

### Example of how to use object scripts (draw straight line on graph display)

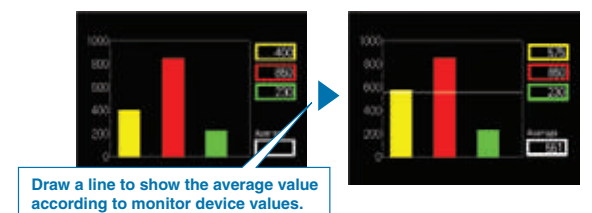

```
clear_object();  
[w:TMP0003] = ([w:D0] + [w:D1] + [w:D2]) / 3;  
[w:TMP0001] = 320 - (320 * ([w:TMP0003] / 1000));  
d_line(0, [w:TMP0001], 380, [w:TMP0001], 0, 3, 255);  
[w:D0003] = [w:TMP0003];
```

// Delete the previous object (including the line).  
// Calculate the average value.  
// Calculate the position to display the line.  
// Draw the line.  
// Assign an average value.



# Improved usability provides designers with more comfortable and flexible screen design options


For designers

## Designing without memory capacity limitations

GOT1000  
GRAPHIC OPERATION TERMINAL

### Vastly increased memory capacity

- GT15 memory capacity can be optionally expanded up to 57MB (optional function board with add-on memory + CF card).
- GT11 has 3MB memory standard.
- BMP and JPEG\* images can be used to create easy-to-understand screens with minimal memory usage.
- \* : JPEG format is supported only by GT15.
- The GT15 permits the installation of an extension & optional function OS on the CF card instead of on the internal flash memory (C-drive) user area. This allows a large number of optional functions to be used simultaneously. **NEW**

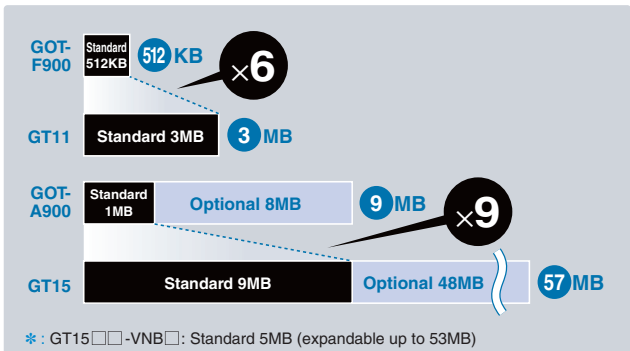


## Increased flexibility in designing screens

GOT1000  
GRAPHIC OPERATION TERMINAL

### Component layering (Layer function)

- Component (object, figures) layering increases the flexibility of design.

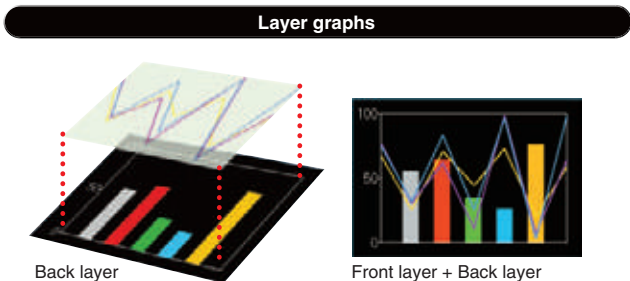


## Improved expressiveness in screen design

GOT1000  
GRAPHIC OPERATION TERMINAL

### Transparent bitmap figures

- Designers can specify a transparent color for bitmap data.
- Since the background of figures (not limited to rectangle) can be made transparent, the expressiveness of screen design is widely expanded.

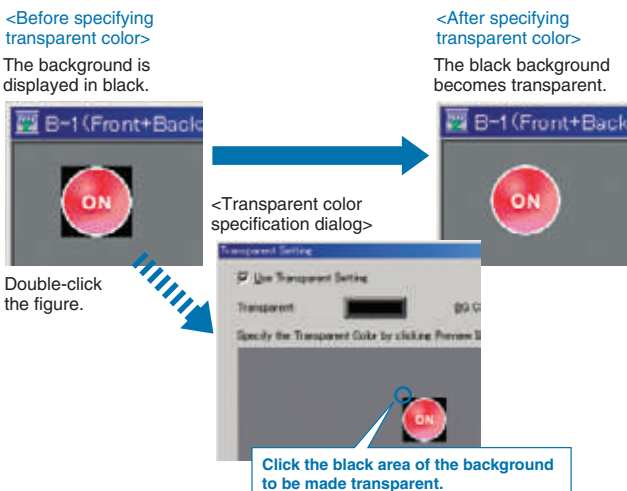

## Easy check and analysis of resource data


GOT1000  
GRAPHIC OPERATION TERMINAL

### CSV/Unicode text file conversion

- Binary resource data files can be converted into CSV or Unicode format text files by external control using a trigger device.

<Supported resource data>

- Advanced alarm log files
- Advanced recipe data files
- Operation log files

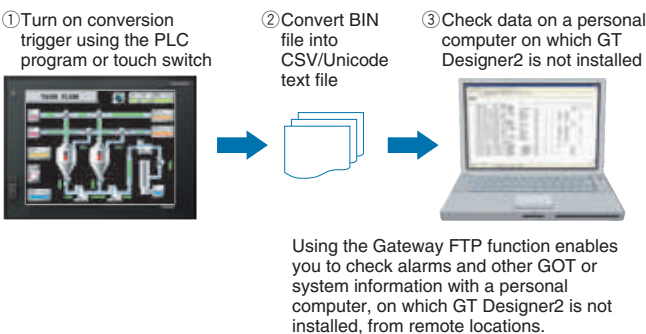

# Simplify complicated production setup with the GOT

For designers

## Simple process of creating complicated recipe data

GOT1000  
GRAPHIC OPERATION TERMINAL

### Advanced recipe function


This function allows material combination data and processing conditions data (device values) to be held in the GOT, with only the required data being written to and read from the PLC.

### Extensive number of recipe files, device points, and record points

- Greatly expanded capacity permits up to 2048 recipe files and 32767 device points.
- Up to 2000 types of device values can be handled by a single advanced recipe setting file.

### Flexible recipe data can now be created.


- Flexible recipe data can be created by combining advanced recipe settings and records.
- Reading/writing is performed by specifying the recipe No. and record No., eliminating the need for a trigger device for each file. This reduces the number of devices, and permits trigger device concentration. \*1
- Up to 2048 blocks can be used, each block comprises of sequential word devices, an arbitrary word device (1 point), and a bit device (1 point).
- Because devices also permit bit and word combinations and arbitrary device settings, there is no need to centralize the sequential devices used, thereby economizing the total number of device points used.
- Advanced recipe files can be converted into CSV or Unicode format text files, and can be edited on a personal computer. \*2

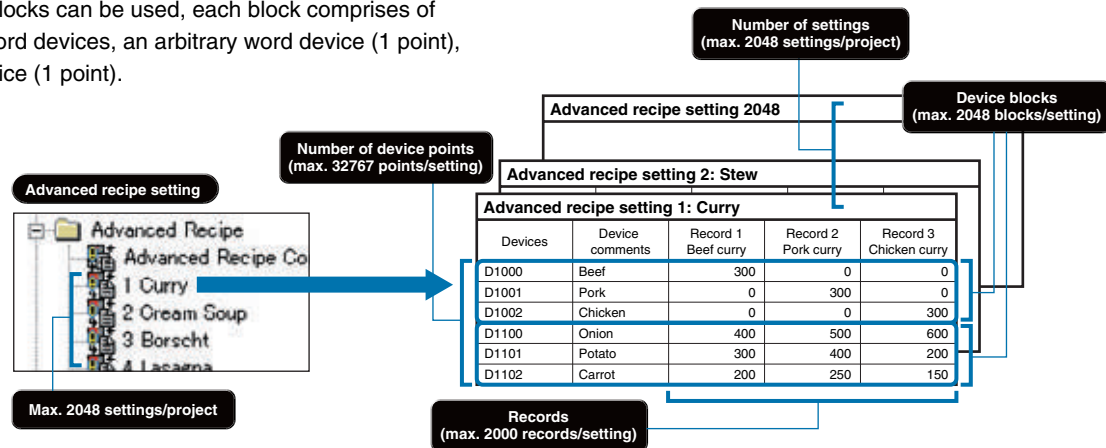

### Easy handling of recipe data at GOT

- Recipes can be handled easily by the GOT's utility function without having to create a recipe operation screen.
- The utility function permits the following operations: folder create/delete, advanced recipe file copy/delete/rename change, record write/read/consistency check.

Now the optional function board (GT15-FNB) is not required.  
For more details, see Notes for Use on page 63.

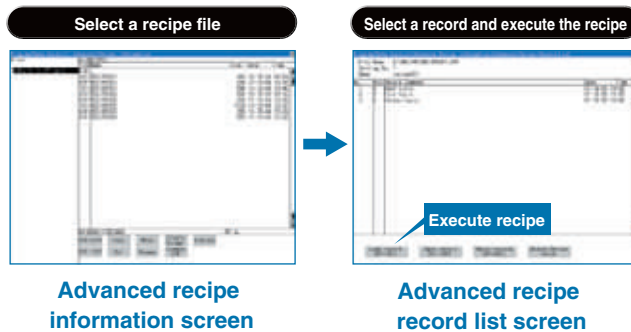

\*1 : The "recipe No. saving device," "record No. saving device," and the "external control device" can be specified in the advanced recipe common settings in GT Designer2. (These settings are required when using Advanced Recipe) After values are saved to every device, reading and writing of the recipe data is enabled in accordance with the ON/OFF status of the external control device. (It is also possible to specify a trigger device for reading/writing each advanced recipe setting)

\*2 : The advanced recipe file has a binary format. It must therefore be converted to either a CSV file or a Unicode text file by using GT Designer2, the GOT utility, or an external control trigger device. After being converted, only the device values can be edited. When more than 251 records are included in a exported Advanced Recipe file (CSV or Unicode text format), use a text editor or Microsoft Excel 2007 to open the file.



# Connectability to various types of FA equipment and peripheral devices including support for sound output and external I/O



## Continuously expanding connectable devices and models

### Wide selection of connectable FA devices and peripherals

#### PLCs

- A wide array of device models / types are now connectable. **NEW**
- Mitsubishi MELSEC Q-Series: CC-Link connection via AJ65BT-R2N (RS-232)
- Schneider Electric: MODBUS® / TCP connection to Modicon Premium, Modicon Quantum
- Yokokawa Electric: MODBUS® / TCP connection to STARDOM
- Mitsubishi MELSEC Q-Series: Large volume, high-speed communication CC-Link IE control network **Coming soon**

#### Microcomputers

- Supported protocol
- Mitsubishi Q/QnA/A computer link unit (8 types)
- GOT-A900 series compatible (2 types)
- GOT-F900 series compatible (2 types)
- Digital Electronics (Proface) memory link format (3 types)

#### Temperature controllers

- Data logging, parameter setting, and alarm display for temperature controllers are possible.

#### Mitsubishi CNCs

- When the C70 CNC is connected, the CNC data I/O function can be used to copy and delete work programs and parameters, etc.

\* : For CNC data I/O function details, see the "CNC Monitor Function / CNC Data I/O Function" (page 43).

#### Mitsubishi servo amplifiers

- MR-J3-□T and MR-J2S-□CP point tables can be edited. Positioning information is easily edited by connecting GOT to the servo amplifier.

- Users can create parameter setting, alarm display, and test operation screens. There is no need to create screens to use the servo amplifier monitor function.

\* : For more details on the servo amplifier monitor function, see Servo amplifier monitor function on page 43.

#### Mitsubishi inverters

- Up to 10 inverters can be connected in multi-drop connection with capabilities of parameter setting and alarm display.


#### Mitsubishi industrial robots **NEW**

- Connection to robot controllers is now possible.
- CRnQ-700 series
- CRnD-700 series

#### Other peripheral devices

- External devices (operation panels, switches, lamps, and relays)
- Speakers
- Video cameras
- Displays (RGB output)
- Personal computers (RGB input)
- Printers
- The latest PictBridge printers can be connected with a USB cable.
- Print GOT screens (Hardcopy function) and output production results (Report function) when an error occurs.
- Two-dimensional code readers and barcode readers
- RFID reader **NEW**


\* : Connectable models and usable functions vary depending on the GOT main unit. For more details, see List of Connectable Models (page 52), Notes for Use (page 63) and Functions List (page 66).

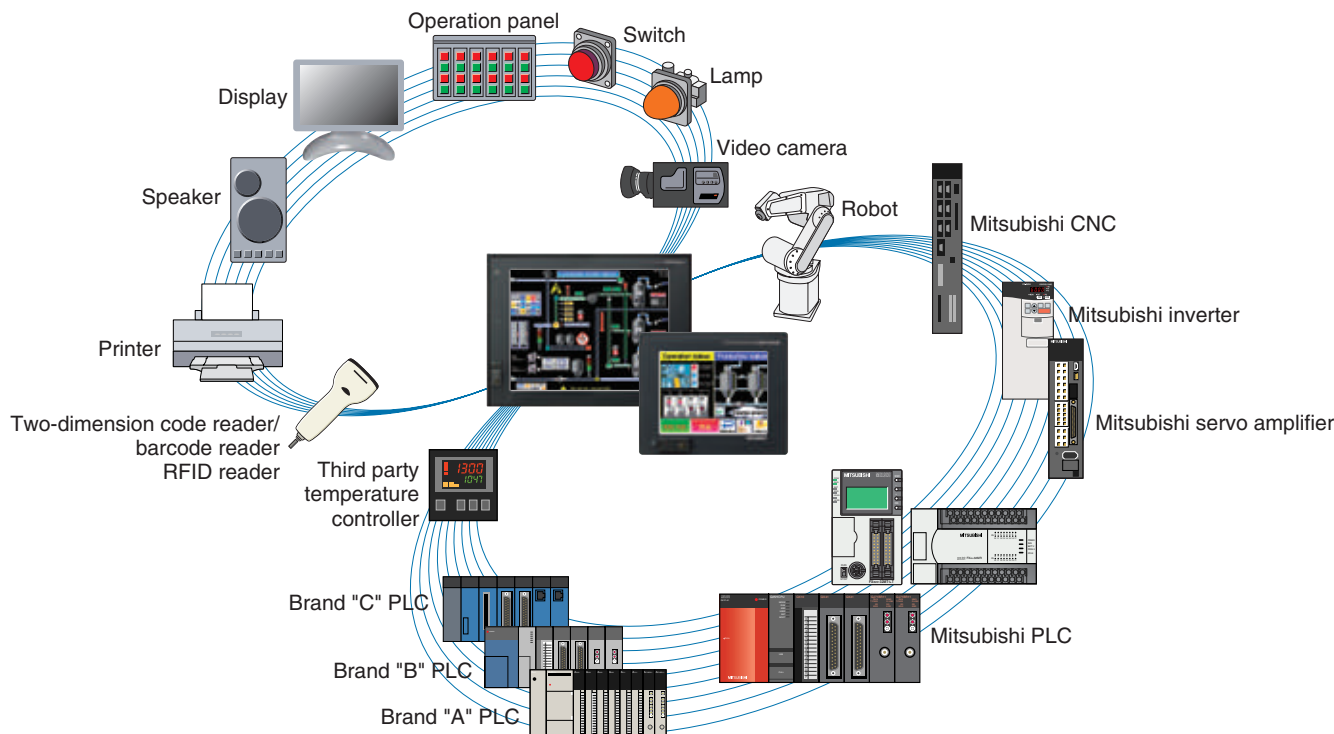

## Additional CF card unit for more convenient use

### CF card unit/CF card extension unit

- The standard CF card interface unit (A drive) and the optional CF card interface unit (B drive) can be used for separate purposes.

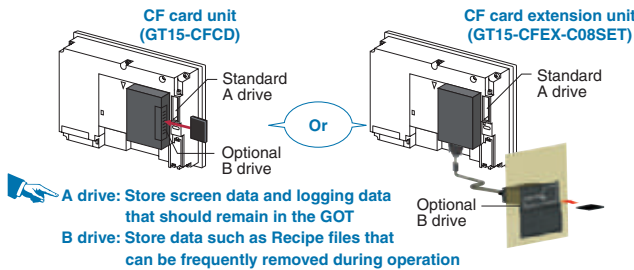

- Using the new CF card extension unit attached to the front face of a panel, operators can insert/remove a CF card without opening the control panel. This greatly improves the machine operability.


[Required device] • CF card unit (GT15-CFCD) or CF card extension unit (GT15-CFEX-C08SET)

\* : CF card unit and CF card extension unit cannot be used together.

## Direct connection to I/O devices simplifies your system

### External I/O function

- Connecting various I/O devices (e.g. hard switches, lamps, sensors, relays) directly to the GOT can reduce PLC I/O connections and wiring in order to reduce the cost of your system.
- A user-created operation panel can be connected to use Numerical Input and ASCII Input without displaying key windows on the GOT screen.

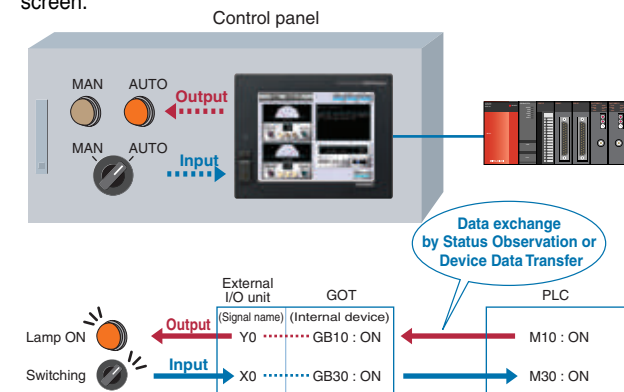

\* : An internal device is assigned to a signal in advance.


<Input: Max. 128 device points (16 input points × 8 scanning points = 128 points), Output: Max. 16 points>

[Required device] • External I/O unit (GT15-DIO)

## Sound notification of alarms

### Sound output function

- By connecting a speaker, the GOT can play WAV sound files (8kHz, 16bit mono) synchronized with device operation.
- Synchronized with alarms, audio error notifications quickly notify operators of problems.

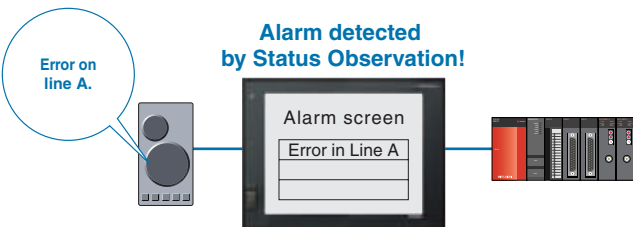

\* : A speaker with a built-in amplifier must be used. (Compatible jack: φ3.5 stereo mini-jack, straight type)

[Required device] • Sound output unit (GT15-SOUT)

## High-quality images with 65536 colors provide precise detail

### For Video/RGB

#### Enhanced compatibility with cameras and inspection devices <Video input>

- Input images from up to four video cameras and inspection devices are simultaneously and precisely displayed on four windows in 65536 colors. Images can be saved in JPEG format.
- Since a video window can be placed anywhere on the screen the screen flexibility is improved.
- A simple one-touch operation allows users to switch the display size. (100%, 50%, 25%)

[Required device] • Video input unit (GT15V-75V4) or video/RGB input unit (GT15V-75V4R1)

#### Display a personal computer screen on the GOT <RGB input>

- PC images of either SVGA (800 × 600 dots) or VGA (640 × 480 dots) can be displayed at the same time as the GOT monitor screen.

[Required device] • RGB input module (GT15V-75R1) or video/RGB input module (GT15V-75V4R1)

#### Display the GOT screen on a display <RGB output>

- Connect to a commercial display so that the GOT screen can be displayed larger.

[Required device] • RGB output unit (GT15V-75ROUT)

\* : For GT1585V and GT1575V only. Only one of the following devices can be used at a time: video input unit, RGB input unit, video/RGB input unit, or RGB output unit.




# Monitor, collect, and archive data with the GOT

For designers

## Central storage of FA device information on a single GOT terminal

GT 15


### Multi-channel function

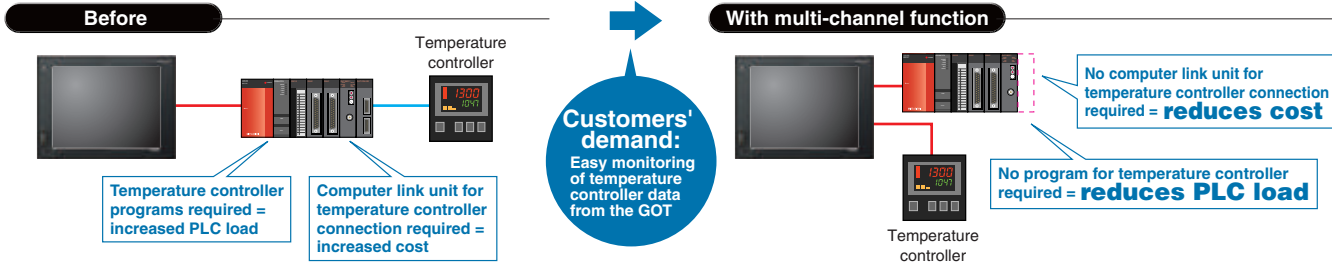

[Required device] • Optional function board (GT15-QFNB (□M) or GT15-MESB48M)  
For more details, see Notes for Use on page 63.

- Monitor up to 4 channels of FA devices (e.g. PLCs, servos, inverters, and temperature controllers).
- Monitor all FA devices on a single screen on the GOT. The monitor screen can be flexibly designed.

## Examples of using the multi-channel function

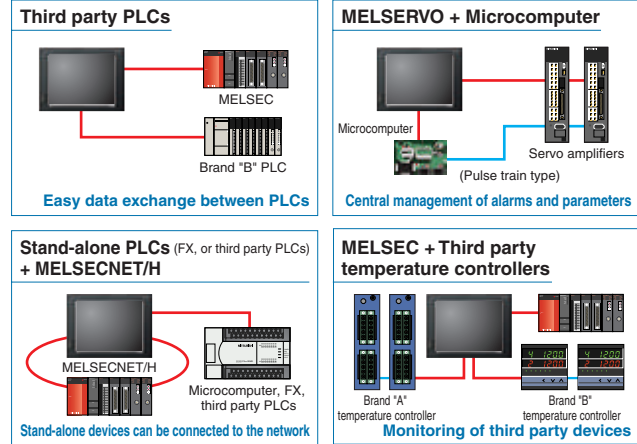

\* : The number of channels and functions, which can be used with the multi-channel function, vary depending on the connection configuration. For more details, see Notes for Use on page 63.

## Greater control flexibility for system applications

NEW GT 15

### Device data transfer function

- Device values from FA devices connected to GOT can easily be transmitted to GOT's internal device. Also, the multi-channel function can be used for easy mutual data transfer between multiple FA equipment.
- Data transfer timing can be set periodically or can be set by a trigger device, enabling control of various applications.
- Easily specify the transfer source, transfer destination, and the trigger in GT Designer2.



## Be alerted to worksite errors and collect device data from an office desk

GT 15


### Gateway function

The gateway function remotely monitors the worksite and supports remote maintenance from the office.

#### 1 Collect data on a personal computer (server function)

- A GOT (server) can be monitored from the host personal computer (MX Component) to perform indirect reading/writing of connected devices being monitored by the GOT.
- Even when monitoring third party devices, the server function can be used to perform reading/writing with the MX Component alone.

\* : The collected data can be displayed and analyzed by Excel without using any programs other than MX sheet. Programming Visual C++ and Visual Basic enables applications to be flexibly designed and built.

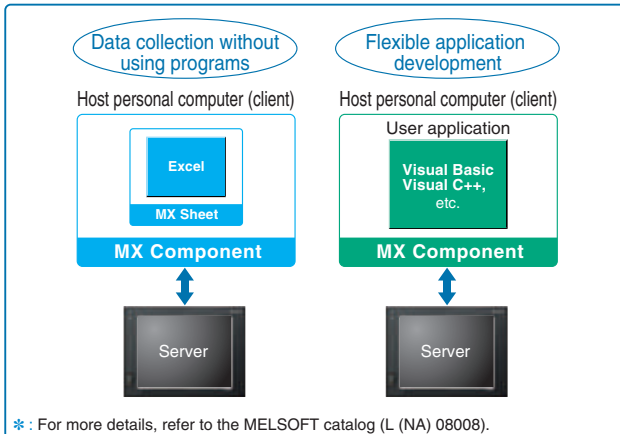

\* : For more details, refer to the MELSOFT catalog (L (NA) 08008).

#### 2 Monitor other GOTs from a GOT (client function)

- A GOT (client) indirectly reads/writes device values of equipment monitored by the GOT (server).
- The client function can also be used to indirectly read/write device values of PLC CPUs other than the one to which the GOT (client) is connected.


- Communication is possible between GOT1000 and GOT-A900.

#### 3 Direct check/edit of data in CF card (FTP server function)

- Files in the CF card within the GOT (e.g. alarms, recipes, and hard copies) can be directly read and written from a personal computer.
- No need to visit all factories to collect CF cards from all GOTs when there are multiple GOTs or when a GOT is located far away from the personal computer.

#### 4 Mail send function

- The alarm history display function can transmit alarm occurrences and recovery information by e-mail to personal computers and mobile phones.
- Error information can be checked from locations far away from the worksite.

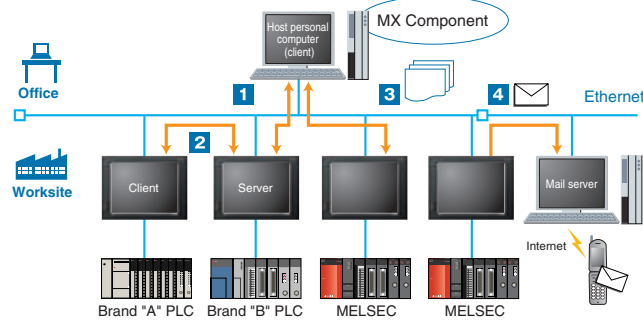

[Required devices] • Ethernet communication unit (GT15-J71E-100) • Communication unit for connection between the GOT and the connected equipment  
Now the optional function board (GT15-FNB) is not required. For more details, see Notes for Use on page 63.


## Database linkage supports enhances productivity at your worksite

NEW GT 15

### MES interface function

The GOT transmits data from connected FA devices to the server personal computer database via SQL statements.

- For communication with the database, just specify the necessary data in GT Designer2 without programming. There is no need to use a gateway personal computer and complicated programs to communicate with the MES database server.
- If an error occurs during communication with the database, buffering of the transmission data (SQL statement) and recording an error log are possible. Important data can be protected, and errors can be analyzed.
- When trigger conditions are met, the actions (data calculation and transmission) are stored in the buffer. The GOT can securely execute actions without any omission even if data sending is concentrated temporarily and actions cannot be executed immediately.

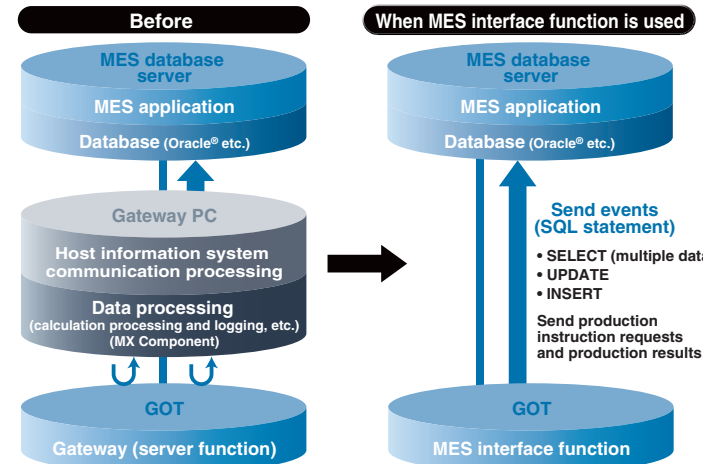

[Required devices] • Optional function board (GT15-MESB48M) • Ethernet communication unit (GT15-J71E71-100)  
• Communication unit to connect the GOT and the device to be used  
• A personal computer with screen resolution 1024 × 768 or higher for configuration is recommended.  
For more details, see Notes for Use on page 63.

- Multiple database records can be acquired in a single operation, and those records can be sorted and written to devices. Database information can easily be checked at the worksite GOT. **NEW**

### MES interface function

- DB link function (tag function / trigger buffering function / trigger monitor function / SQL statement transmission function <SELECT / SELECT multiple data / UPDATE / INSERT> / calculation processing function / program execution function / DB buffering function) **NEW**
- SNTP time synchronization function
- Diagnosis function
- DB server function (ODBC connection function, connection setting function, and log output function)


### Usable databases\*

- Oracle® 8i/9i/10g
- Microsoft® Access 2000/2003
- Microsoft® SQL Server 2000/2005
- Microsoft® SQL Server 2000 Desktop Engine (MSDE2000)
- Wonderware® Industrial SQL Server 9.0

\*1 : Not usable on a 64-bit OS.

### <MES (Manufacturing Execution System)>

A manufacturing execution system (MES) is a system which controls and manages the production processes at a worksite in order to optimize quality, productivity, delivery date and cost.

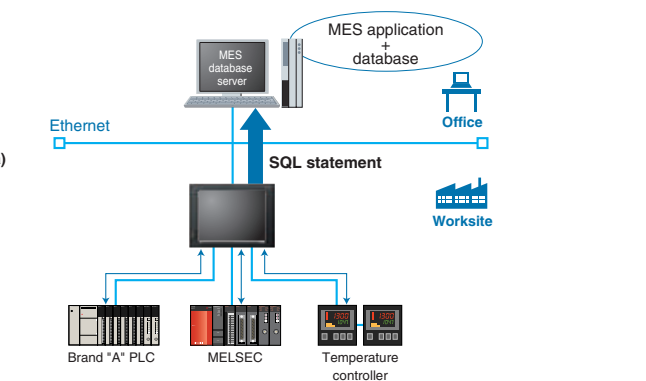

e-Factory

Mitsubishi Electric e-Factory presents the appropriate products to connect production information and MES (manufacturing execution system) to improve productivity of clients' plants.



# A screen design software with many user-oriented functions, making custom screen creation easy

For designers

## MELSOFT GT Designer 2 Version 2

Cut screen drawing time in half\*

Reduced screen drawing time

Windows® standard operability and menu configuration

Data compatibility with GT Designer

Efficient screen creation, even when there are many screens


### Drawing screen (editor)

- The area for designing GOT screens.
- A set maximum number of screens can be opened simultaneously (up to 25 screens). When additional screens are opened, screens starting from the first opened screen are closed.

Conversion of multiple objects and figures all at once

### Batch conversion

- Device numbers, objects, figure colors, and lamp and touch switch figures can be converted all at once.
- This tool is useful for changing objects and figures located on multiple screens.
- Different types of objects (touch switches and numerical displays) and figures (circles and rectangles) can also be converted at once.

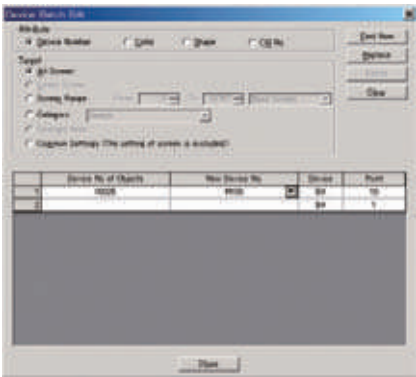

An intuitive tree display makes copying, deleting, and component registration easy

### Workspace

#### Project workspace

The entire project settings such as the created screens and common settings can be shown in a tree view. It is easy to see the entire project so the screen to be edited can be selected quickly.

#### Category work space

The entire project settings can be displayed in categories in a tree view. The devices, colors, and figures of components in multiple screens can be adjusted all at once by category.

\* : "Category" refers to objects or figures that have been grouped according to purpose.

#### Library workspace

Registered objects and figures are displayed in a tree view. Frequently used components can be registered as "favorites," permitting quick access to an object or figure.

Image display of registered components

### Library image list

- Registered components can be shown by image color, making it easy to find the component to be used.
- Designing screens is made easy by selecting components from the image list and putting them on the drawing screen.



List display of object & figure attributes


### Property sheet

- An attributes list can be displayed for the selected object or figure.
- Object settings can be changed without opening the dialog box.
- Multiple same-type objects and figures can be selected, and their color and character size can be adjusted all at once.

Easy to select overlapped figures

### Data list


- All objects and figures located on the screen are listed.
- Data can be edited by double-clicking the object or figure from the list.

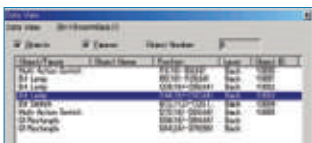

Device search jump for increasing work efficiency

### Device list Ver.UP

- Devices used in the screen or in the project are displayed in a list. Device search can be performed by specifying a screen number or a device number.
- Double-clicking on a selected result jumps to the relevant object.
- The list can be output as a CSV format or Unicode text format file.

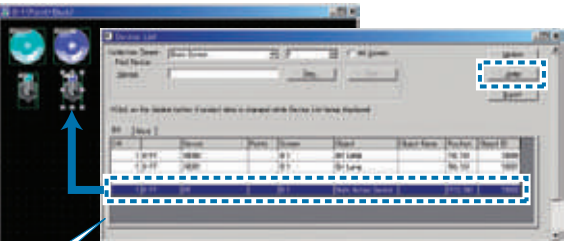

To jump to the relevant object, double-click or use the jump button.

Icon display improves work efficiency

### Tool bar

- Various tool bars are available such as Figure, Object, View, and My Favorites.
- Icons show object, figure type, and operation at a glance, improving work efficiency.
- Frequently used objects and figures can be registered as My Favorites.

Dedicated component editing screen

### Library editor

- A component editing screen appears by double-clicking a registered component within the library workspace.
- Editing registered components is quick and easy.

Smoother screen design

### Temporary area

- Placing objects in the temporary area facilitates smoother screen design and screen layout change operations.

### Dialog box

\* : Compared to Mitsubishi Electric's GT Designer.



# The latest developments and functions of GT Designer2

MELSOFT **GT Designer2** Version2


For designers

## Crystal clear display, easy-to-create screens

GOT1000  
GRAPHIC OPERATION TERMINAL

### High-quality parts library

- User library can be easily imported.
- A variety of styles and designs are available for touch switches and lamps, easily permitting customized designs.
- All users can easily design sophisticated screen by using high-quality parts.

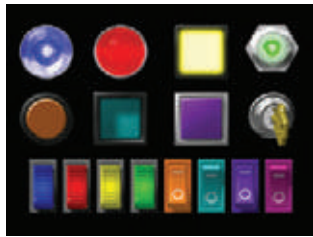

Real parts are now available

## Elegant characters in any font and size

GOT1000  
GRAPHIC OPERATION TERMINAL

### An assortment of fonts allows for more expression

- The Unicode2.1 compatible standard font, high-quality font, and TrueType font display sharp and attractive characters in all languages.
- When using a Windows® font, the font style (italic, underline, italic underline) can also be specified.
- Since the curve of stroke fonts are clear even if it is enlarged or reduced, the font size can be incrementally adjusted. Thai and Chinese (Simplified and Traditional) are available as well as Japanese.




## Easy confirmation of screen display

GOT1000  
GRAPHIC OPERATION TERMINAL

### Screen preview

- Language switching, security level change and on/off image switching of objects can be checked with GT Designer2 on a personal computer.

Example: How to switch languages

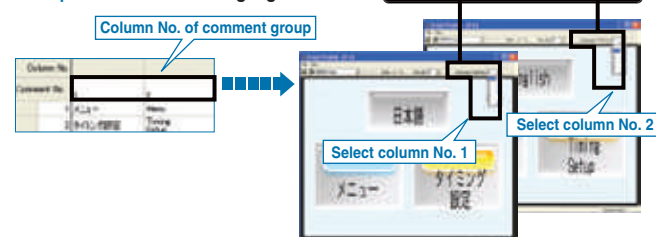


## A variety of colors and easy-to-use library


GOT1000  
GRAPHIC OPERATION TERMINAL

### Library color selection function

- Library images can be displayed by color. The new sort method helps users quickly look for the image to be used.

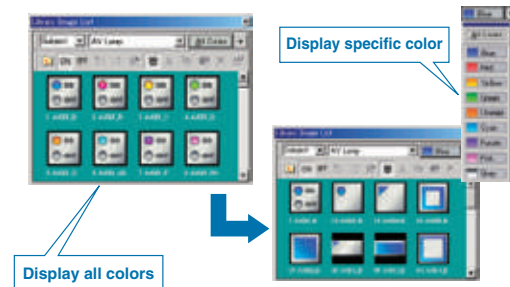

Display all colors

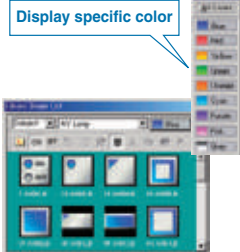

Display specific color

## Selecting screens from a thumbnail list improves your work efficiency

GOT1000  
GRAPHIC OPERATION TERMINAL

### Screen image list

- Screen image list displays all base screens and window screens, and allows users to copy or delete screens and change the screen numbers. Double-click on a thumbnail image to edit the screen.



Easy screen call settings by drag & drop!

## Display of actual GOT screen

GOT1000  
GRAPHIC OPERATION TERMINAL

### Window preview

- The screen design software can display window screens (key windows, overlapping windows, superimposed windows) just as they would appear on the GOT, allowing them to be previewed.
- The key pad can be displayed just as it would appear on the GOT, allowing its position, size, and appearance etc., to be checked.



## Convenient when converting different screen size data

GOT1000  
GRAPHIC OPERATION TERMINAL

### Automatic size adjustment of direct input characters

- When changing the object size, directly entered characters are automatically adjusted according to the object size.

<Supported objects> • Touch switches, lamps



Changing the object size will automatically change the text size of the label.

\* : All figures and objects can be resized according to the GOT type to be converted. This function makes the screen size adjustment dramatically easier.

## Efficient screen creation when changing the screen size or resolution

GOT1000  
GRAPHIC OPERATION TERMINAL

### Automatic object size change

- All figures and objects can be resized according to the GOT Type to be converted. This function makes the adjustment of screen sizes a lot easier.




\* : The multiple data enlargement/reduction function is convenient for making fine adjustments to the size of objects following a screen size change.

## Enhanced functionality including F900 compatible functions (ex. Synchronized screen change)

GOT1000  
GRAPHIC OPERATION TERMINAL

### Complete conversion of GOT-F900 series data

- Changing screens is now synchronized with touch switch operations, increasing comfort of operation.

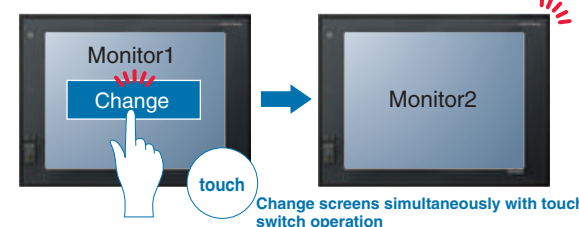


- Auto-repeat function that runs on specified intervals.

## Easily create lamps from figures

GOT1000  
GRAPHIC OPERATION TERMINAL

### Lamp attribute added to figures

- Figures can be changed into lamps by setting colors and patterns for ON and OFF states.

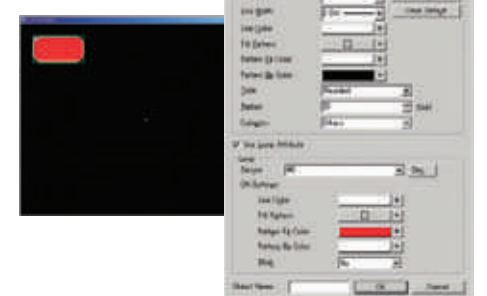


## Optimized touch area of switches

GOT1000  
GRAPHIC OPERATION TERMINAL

### Touch area fit-in function

- Optimize the touch area (valid area) of a switch according to the figure frame. The touch area can be maximized within the switch figure frame.
- A new mode is added to hide the touch area. Users can select whether to display or to hide the touch area of switches.

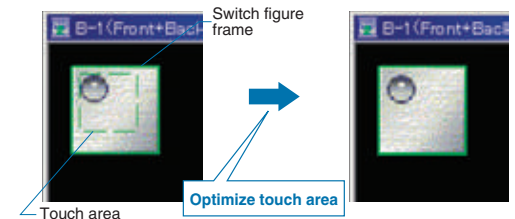


## Easy creation of piping graphics

GOT1000  
GRAPHIC OPERATION TERMINAL

### Piping figure

- Piping graphics can be created in the same way as free form lines with easy apex editing.
- Piping width, pattern, and color can be specified.
- Lamp attributes can be specified, enabling ON/OFF and blinking displays.

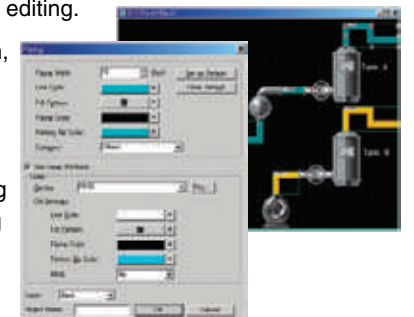

Features of Functions GOT1000 • GRAPHIC OPERATION TERMINAL



# Flexible screen design and data use functions provide smooth and comfortable operation

MELSOFT **GT Designer2** Version2


For designers

## Easy comment registration using Microsoft® Excel

GOT1000  
GRAPHIC OPERATION TERMINAL

### Comment registration

- The comments selected on Excel can be copied/cut and pasted into the comment list.
- Comments selected on the comment list can also be copied/cut and pasted into an Excel sheet.

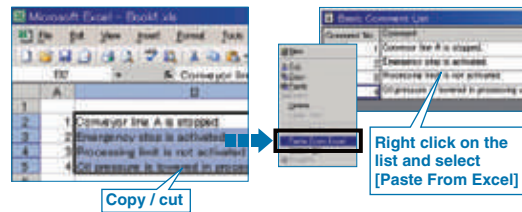


## User-friendly setting procedure puts even beginners at ease

GOT1000  
GRAPHIC OPERATION TERMINAL

### Wizard function

- When creating a new project, the GOT type, the number of colors, communication configuration and other settings can be interactively set in order.
- All the required settings on GOT can be smoothly set by using the Wizard function.

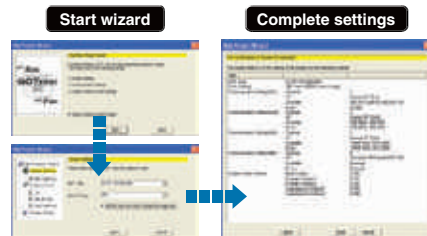

## Make the most out of existing GOT projects

GOT1000  
GRAPHIC OPERATION TERMINAL

### Backward compatibility

- GOT900 → GOT1000 compatibility  
GOT900 project data can be used with the GOT1000.
- GOT800 → GOT1000 compatibility  
GOT800 project data can be converted into data for the GOT1000 with GT Converter2.




\* : Backward compatibility does not extend to certain data and functions.

## Higher efficiency by using familiar software

GOT1000  
GRAPHIC OPERATION TERMINAL

### Improved import/export function

- Device data, range settings, device values, and comments, which have been created in a CSV/Unicode text file format, can easily be imported/exported to/from GT Designer2.
- This function is useful to import a large amount of data such as logging, advanced recipes, recipes and comments.

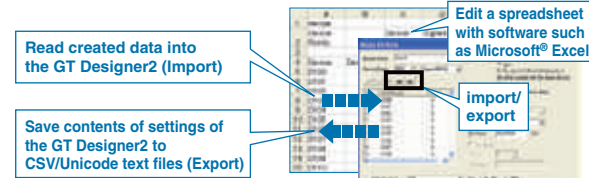


## Better project data maintenance efficiency

GOT1000  
GRAPHIC OPERATION TERMINAL

### Project data consistency check function


- Consistency checks between the GOT's project data and the personal computer project data can be performed.
- This allows project data inconsistencies to be identified, thereby reducing unnecessary uploads and downloads.

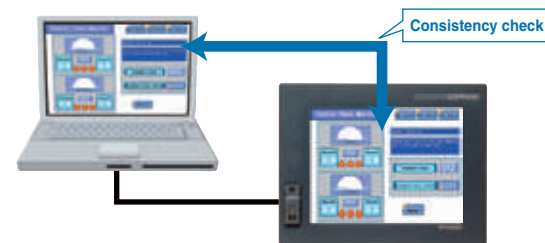

## Easy project data conversion

**GT Converter2** Version2

- This software converts project data created with older screen design software to the data for GT Designer2 (GOT1000 or GOT-A900). (Included with GT Works2 and GT Designer2)
- Supported screen design software
  - GOT800 series screen design software (SW3NIW-A8GOTP)
  - ProFace drawing software (GP-PRO/PBⅢ series)

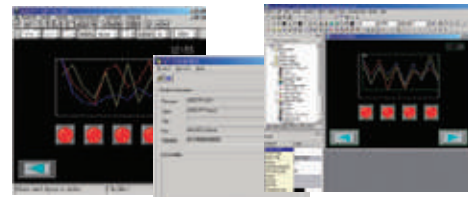

\* : Backward compatibility does not extend to certain data and functions.


## Fast and simple data transfer tool considerably improves work efficiency

GOT1000  
GRAPHIC OPERATION TERMINAL

### Data transfer tool

The data transfer tool, dedicated for project data upload/download, is included with GT Works2 and GT Designer2.

- Even in environments without screen design software, the data transfer tool can be used to download/upload GOT project data, and to upload resource data (e.g. alarm log files).

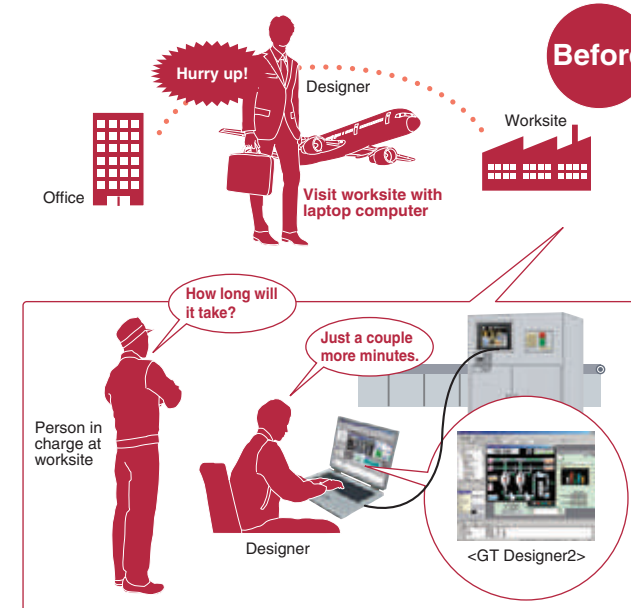

## A simple operation to create clear, sharp document images

GOT1000  
GRAPHIC OPERATION TERMINAL

### Document converter

The document converter, converting files for use with the document display function, is included with GT Works2 and GT Designer2.

- When converting documents, the image quality of the documents (brightness, contrast, sharpness) can be adjusted.
- The document converter software creates clear and sharp document images.

\* : For more details, see the document display function on page 39.  
\* : To use the document converter, Ghost Script GPL8.15 or later is needed. For more details, refer to the GT Designer2 Version 2 Screen Design Manual.

- Even at worksites without screen design software, or when a sudden problem occurs, data can easily be downloaded/uploaded by operators without special training, thereby minimizing the need for dispatching software designers to the worksite.


Supported GOT model GOT1000, GOT-A900, GOT-F900, GOT800

Supported data Project data, resource data (GOT1000 only) **NEW**

\* : Advanced alarm log files (advanced alarm), alarm log files (alarm history), data log files (logging), operation log files, image files (hard copy), screen switching information files.

Supported Windows OS Windows® Vista **NEW**, Windows® XP, Windows® 2000

## After With data transfer tool

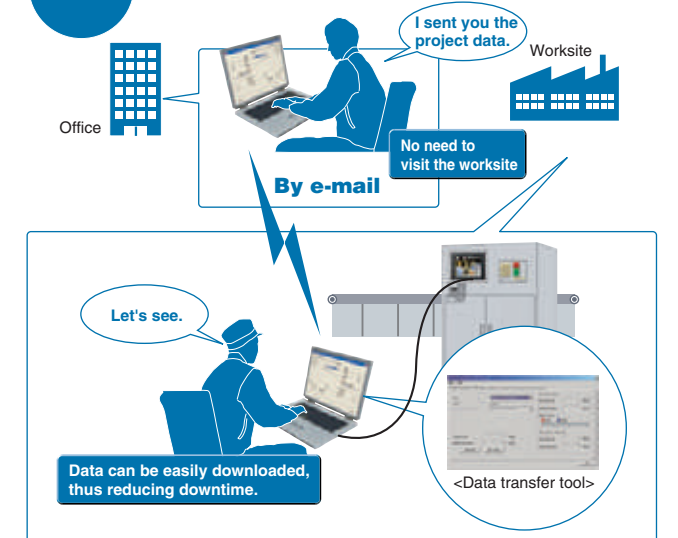

Features of Functions GOT1000 • GRAPHIC OPERATION TERMINAL



# Time-saving debugging and simulation software

For designers



## MELSOFT GT Simulator2 Version2

GT Simulator2 helps designers debug projects by simulating GOT operations on a personal computer.

### Debugging from a single personal computer

- GT Simulator2 can be used in combination with a sequence program simulated by GX Simulator\*, allowing debugging to be performed in an intuitive manner from a single personal computer.
- The GT Simulator2 screen debugging function permits screen editing in GT Designer2 with the results immediately verifiable in GT Simulator2, thereby greatly reducing debugging man-hours.
- The touch switch input is simulated by clicking the mouse. In addition to monitoring devices, GT Simulator2 can be used to check stored data such as system alarms, script error information, and alarm history.


Quick and easy debugging without the GOT main unit.

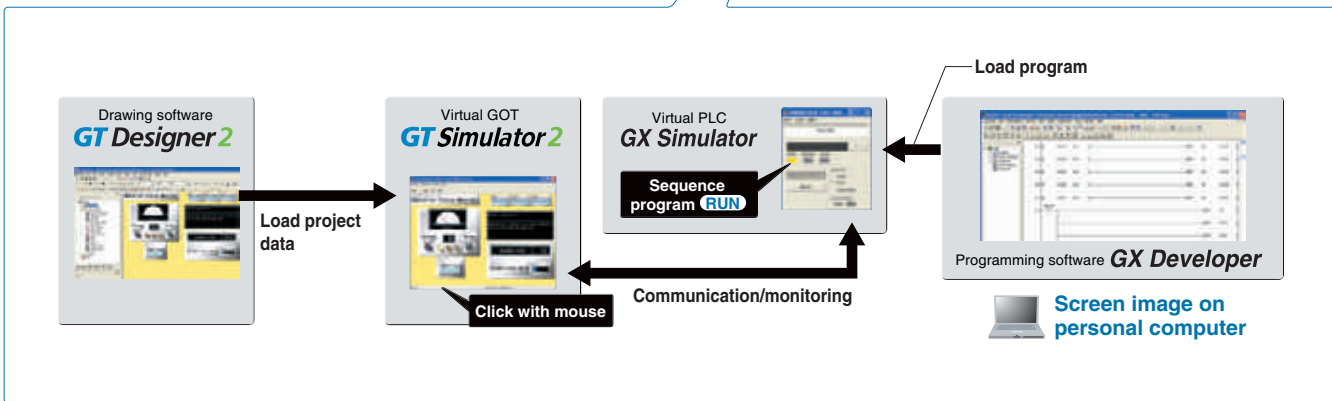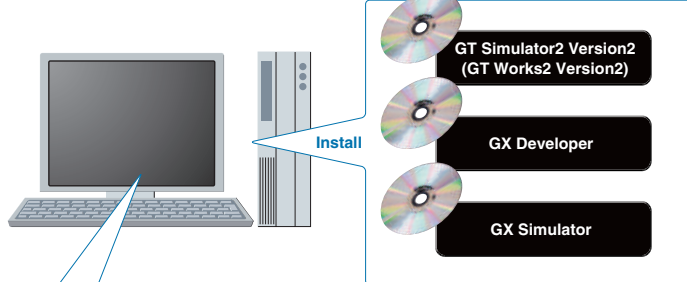

### Debugging is possible by connection with a PLC, without actual GOT operation required

- Debugging can be performed using a direct CPU connection between a personal computer (GT Simulator2) and a Mitsubishi or Omron PLC, without an actual GOT unit.

Connectable PLC	PLC ⇄ Personal computer connection
Mitsubishi PLC (Q*/QnA/A/FX series)	CPU direct connection RS-232, RS-422
Mitsubishi CNC (MELDAS C6/C64)	CPU direct connection RS-232
OMRON PLC	CPU direct connection RS-232

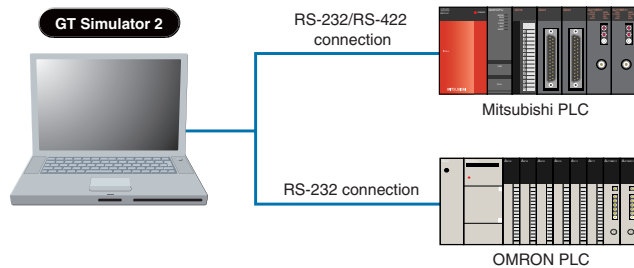

### Powerful support of customer specifications, compatibility checks and document creation

- While observing the operation image, the customer's screen specifications can be arranged without actual unit operation.
- Screen snapshots can be printed and saved as BMP/JPEG files which are extremely useful when creating specifications and operation manuals.

\*: The following products are not yet supported: Q02UCPU, Q03UDCPU, Q04UDHCPU, Q06UDHCPU.



# Quick response and useful standard functions provide users with comfortable operation

For operators

## Dramatically improved GOT total response

GOT1000 GRAPHIC OPERATION TERMINAL

Drawing, computing, communication; a triad of high-speed response functions.

The GOT1000 series offers faster response in drawing, computing and communication, reducing monitoring and operation stress.

### High-speed drawing

Equipped with an ultra high-speed graphics chip (GT15 only)

- High-speed drawing of figures and characters is made possible by using the specially developed graphics chip specifically for the GOT1000 series.
- Sharp and quick drawing of complex, layered component screens, and detailed photographic data in 65536 colors.

### High-speed computing

GT11: Equipped with 64-bit RISC processor  
GT15: Equipped with 64-bit super-scalar RISC processor

- Ultra-high performance processing power to satisfy the most complex and demanding of applications.

### High-speed communication

- Greatly improved response performance.
- High-speed RS-232 communication (max. 115.2 kbps).
- GT15 high-speed communication is possible by bus connection. GT11 high-speed communication is now also possible by bus connection.
- High-speed communication is possible for connections with both Mitsubishi and third party PLCs.


\*: For connectable PLC models, see the List of connectable models, starting on page 52.

## Customized dialog windows showing custom messages to operators

GOT1000 GRAPHIC OPERATION TERMINAL

### Dialog window function

- Instead of using system dialogs (e.g. input error at numerical input), users can customize dialogs to display help on user operations or troubleshooting messages when alarms occur.
- With templates such as icons and an OK button, users can easily create dialogs with the wizard function. Touch switches, numeric displays, comment displays and figures can also be utilized.

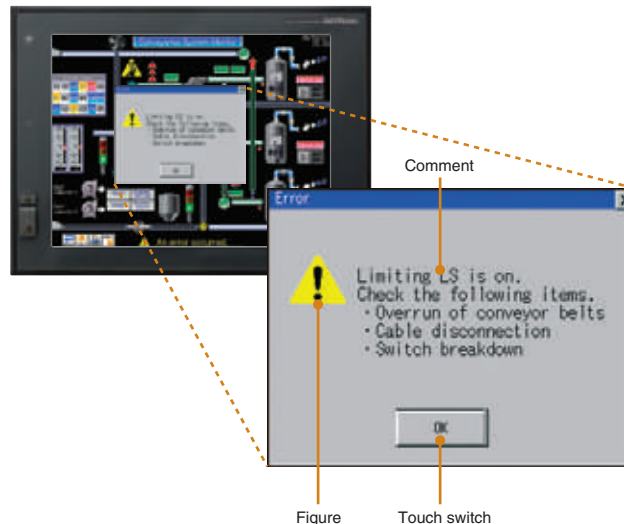

## Easy switching between different languages to globalize your production site

GOT1000 GRAPHIC OPERATION TERMINAL

### Display in different world languages

- The Unicode2.1 compatible standard font, high-quality font, and TrueType font display sharp and attractive characters in all languages.
- Correctly display Simplified Chinese and Traditional Chinese characters\*.
- Allows the creation of elaborate, high-quality screens that are both attractive and easy to understand.



- The language displayed on the GOT main unit utility screen can be set to Japanese, English, Chinese (Simplified/Traditional\*), Korean (Hangul), or German.




\*: Traditional Chinese can be displayed only on GT15. Now the optional function board (GT15-FNB) is not required. For more details, see Notes for Use on page 63.

### Response comparison with conventional GOT series

GOT-900  
GOT1000 Approx. 4 times faster response

### GT15 response performance comparison

[Using MELSEC Q series] Conventionally As of Feb. 2007

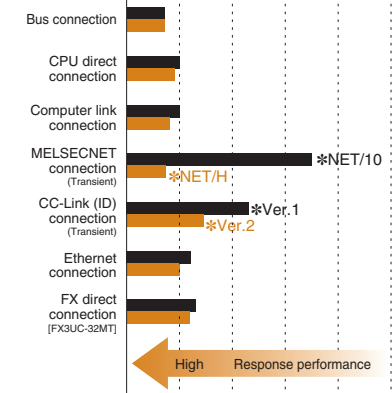

The monitor screen includes about 250 points of word devices.



# To minimize production man-hours, the GOT provides user with worksite-required functions

For initial startup & adjustment operators

## Easy data transmission without opening the cabinet


GOT1000  
GRAPHIC OPERATION TERMINAL

### Equipped with front USB interface


- The front USB interface allows a programming cable to be connected without having to open the cabinet.
- Data transmission using the USB interface greatly reduces the time required for startup and adjustment.
- When secured by the provided screw, the USB port cover complies with the IP67f standard\*. (The screw can easily be tightened with a coin.)

\* : Compliance cannot be guaranteed in all customer environments.

#### Comparison of project data downloading time

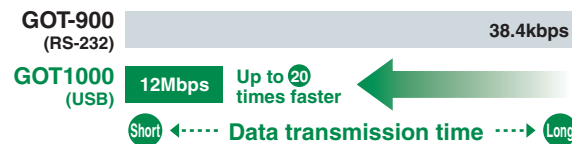

\* : To connect the GOT to a personal computer, use the dedicated USB cable. For more details, see Product List on page 72.

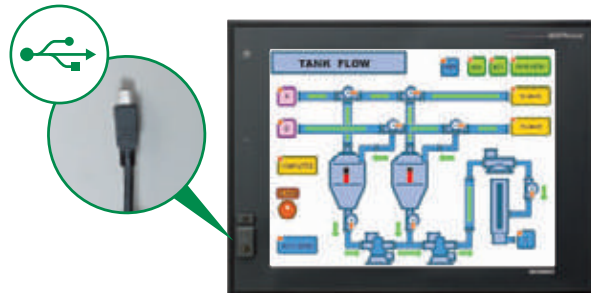

With USB cable



Standard item IP67f (with IP67f-rated port cover installed)

## Sequence program and parameters can easily be modified at the worksite

GOT1000  
GRAPHIC OPERATION TERMINAL


### FA transparent function

- Sequence program debugging, startup, and adjustment can be performed via the GOT's front USB interface.
- There is no need to open the cabinet and change cable connections. (Operation is also possible via the RS-232 interface.)
- When multiple FA devices are connected, the communication target can be changed on the GOT main unit using the multi-channel function.

#### Supported software\*

- GX Developer  
Q/QnA/A/FXCPU, motion controller (A series)
- GX Configurator  
Intelligent function module for the Q series (AD/DA/SC/CT/TC/TI/FL/PT/AS)
- PX Developer  
Process CPU (Q12PHCPU/Q25PHCPU)  
Redundant CPU (Q12PRHCPU/Q25PRHCPU)
- MT Developer  
Motion controller (Q series)
- MR Configurator  
Q172HCPU(-T)/Q173HCPU(-T)+MR-J3-□B (SSCNETIII)
- FR Configurator  
FREQROL A700/F700

\* : The version of the software depends on the system configuration.

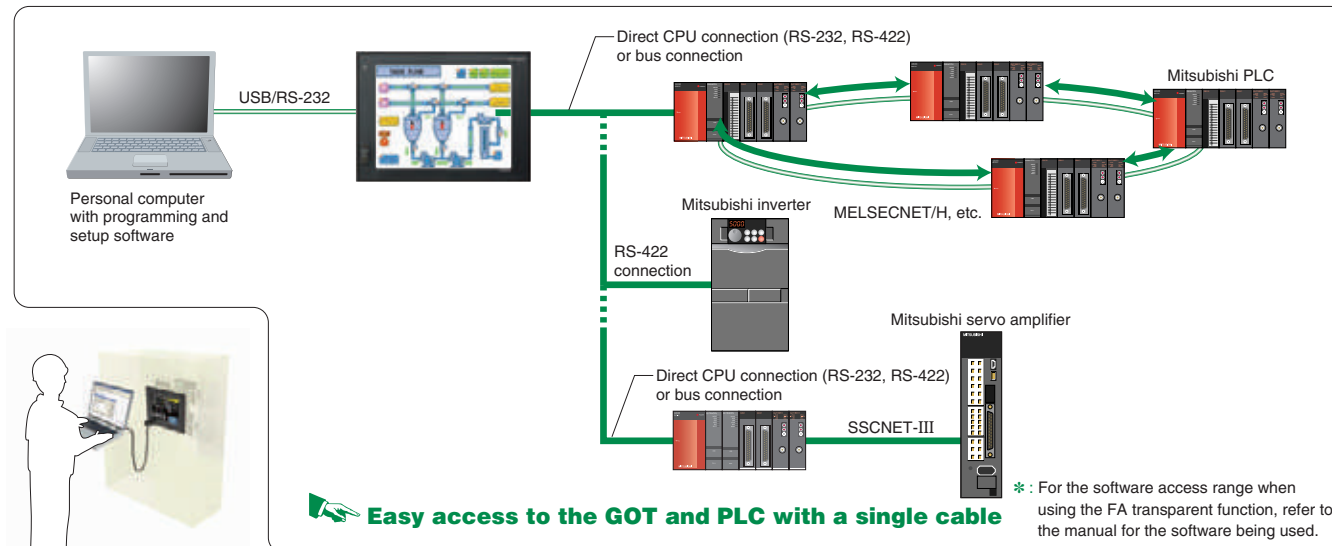



## Project data can be maintained from a remote location

GOT1000  
GRAPHIC OPERATION TERMINAL

### High-speed uploading/downloading via Ethernet

- Project data can be uploaded and downloaded\* from your personal computer to a GOT terminal from a remote site via Ethernet.

#### Comparison of project data downloading time

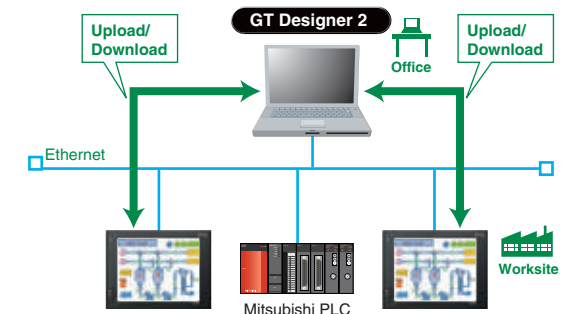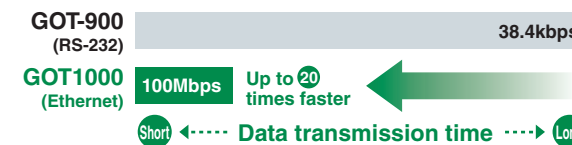

\* : Ethernet communication unit (GT15-J71E71-100) must be installed on the GOT main unit where basic functions have also been installed.


## For GOT data transmissions & a variety of external connections

GOT1000  
GRAPHIC OPERATION TERMINAL

### Standard-item RS-232 interface

- Both the GT15 and GT11 have RS-232 interfaces located in convenient positions (bottom and side respectively) for cable connection. The GT11 also has a RS-422 interface.
- RS-232 interface is used for FA device connection, data transmission and bar-code reader connection, etc.

#### Comparison of project data downloading time

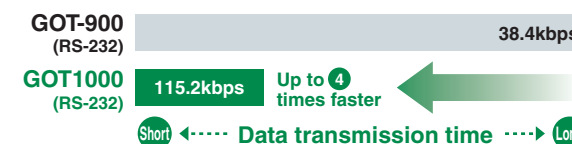


\* : To connect GOT and a personal computer, use the dedicated RS-232 or RS-422 cable. For more details, see Product List on page 72.

## Multi-purpose CF card interface for functions such as data transmission and alarm storage

GOT1000  
GRAPHIC OPERATION TERMINAL

### Multi-purpose CF card interface

- All models are equipped with a CF card interface standard.
- The CF card interface permits rapid GOT data transmission even when the GOT is not connected to a personal computer by cable.
- When using multiple GOT units, a single CF card enables a quick GOT setup procedure simply by copying the data to each GOT unit.

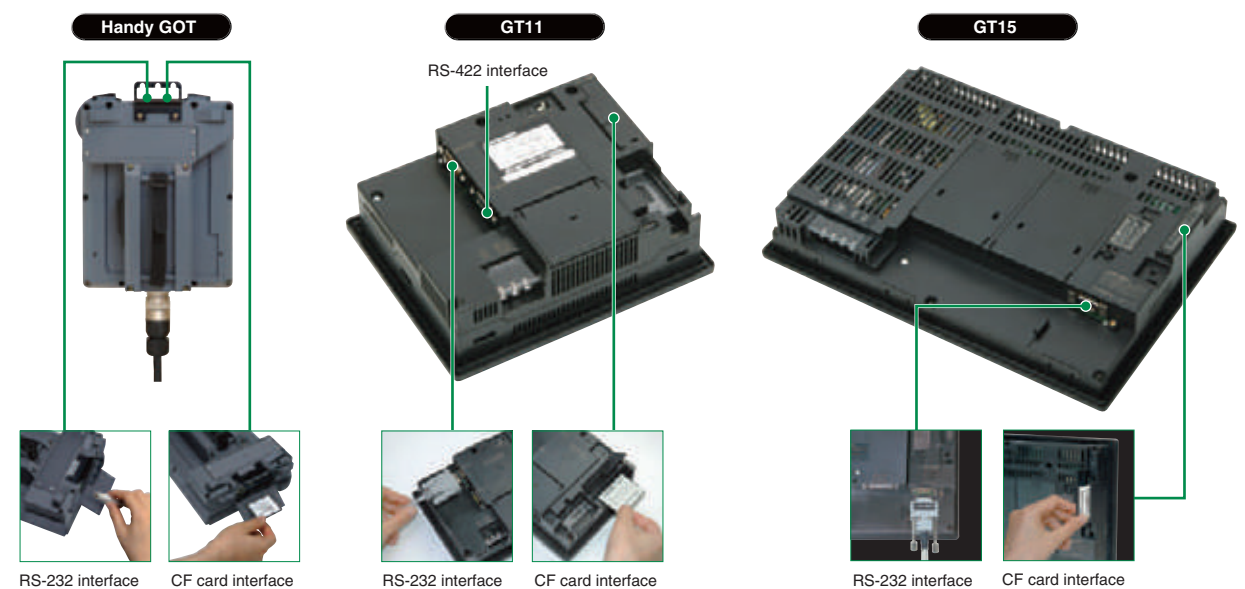

\* : The above image is GT115□-Q□BD.



# Error detection and recovery through the GOT's Alarm Function with advanced features

For maintenance personnel

Accurate communication minimizes machine downtime even during an alarm


GT15

GOT1000  
GRAPHIC OPERATION TERMINAL

## Advanced alarm

### Advanced alarm features

- 1 A wider monitoring range protects even large-scale systems
- 2 Rapid detection and corrective action for a wide array of alarms
- 3 Easy-to-understand error displays for the operator
- 4 Improved system alarms
- 5 Support in identifying alarm causes

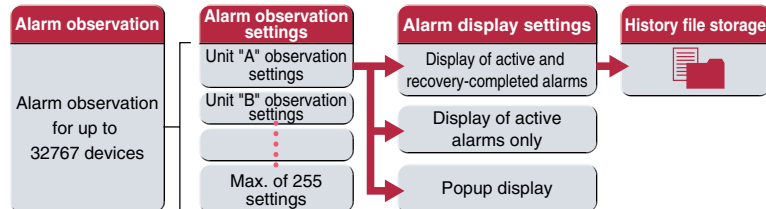

#### 1 A wider monitoring range protects even large-scale systems

- Alarm observation is possible for up to 32767 devices with a maximum of 255 alarm observation setting groups.
- Three types of alarm displays can be specified for a single alarm observation setting.
- Up to 32767 alarms can be saved in the alarm history.
- Batch display of large amounts of alarm information in large-scale systems, and unit-specific classification for easy management.

#### 2 Rapid detection and corrective action for a wide array of alarms

##### Four-step alarm notification

- Alarm occurrence conditions can be divided into 4 steps and conveyed to the operator in an easy-to-understand, step-by-step format.

##### For example,

**STEP1:** Alarms by line (upper step)


**STEP2:** Alarms by unit (middle step)

**STEP3:** Alarm content (general step)

**STEP4:** Troubleshooting (detail step)

When multiple alarms occur, the above format permits the operator to quickly organize and identify the alarm conditions (what happened and where), resulting in effective troubleshooting.

- The contents of the 4 steps shown above can be freely defined to suit the application in question, with switching between the step displays performed by the step switching device or by touch-screen operation.

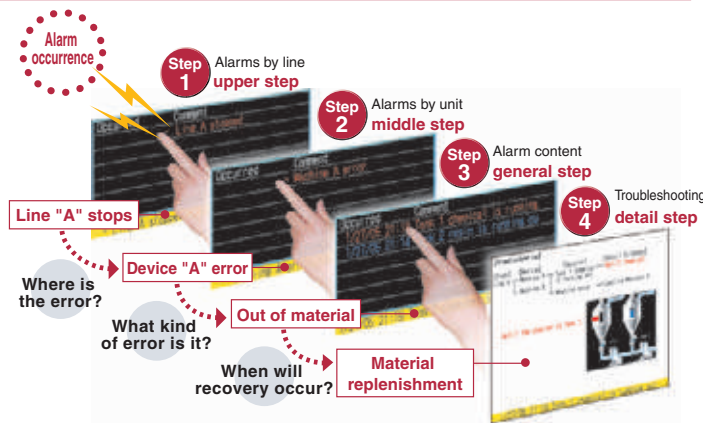

### Group-specific & level-specific displays

- Alarms can be classified by group and level, with only the specified alarms being displayed.
- This makes it easy to identify the locations and types of alarms even when many alarms have occurred, and permits higher priority alarms to be handled first, resulting in a speedy system recovery.

Alarm	Group	Level	Group
M0	Transport G	Mid-level	Transport G alarm display
M1	Transport G	Mid-level	
M2	Transport G	Mid-level	
M3	Transport G	Mid-level	
M4	Transport G	Major	Transport G major alarm display
M5	Process G	Major	
M6	Process G	Minor	Minor alarm display
M7	Process G	Minor	
M8	Process G	Minor	
M9	Process G	Minor	

Combination of level & group

#### By group:

Alarms are divided into groups (e.g. transport unit group, processing unit group), with alarms displayed only for the specified groups.

#### By level:

Alarms are divided into levels (major, mid-level, minor), with only the specified level alarms displayed.

#### Combination of group & level:

Only the specified group and level alarms are displayed.

### 3 Easy-to-understand display

- The use of colors and popups produce easily recognizable alarm displays.
- Ensuring that alarms are not overlooked and that the alarm contents are understood, results in a speedy system recovery.

#### Display subject switching

Display switching can display only active alarms or all contents.

#### Comment display color


Comment display colors can be specified for each alarm status (occurred, restored, and checked) and for each level and group, etc.

#### Sorting

A sorting function permits the display order to be changed such as date & time, level, group, alarm status, occurrence count, and downtime.

#### Cursor display color

The cursor display color can be specified. Alarm displays are harder to miss, and the freedom of screen design has been increased.

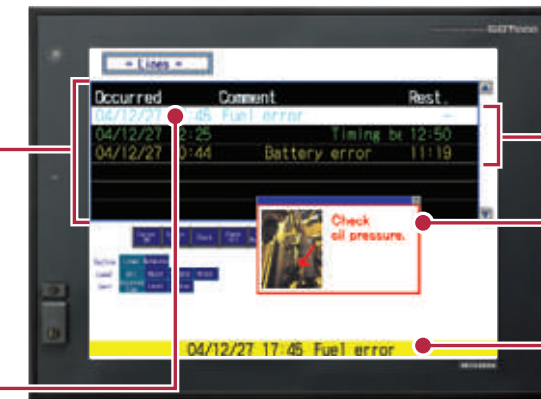

#### Floating alarm display

Permits the entire text of long comments which cannot be contained in the display area to be read.

#### Details display

JPEG images can be displayed in the details display area.

#### Alarm popup display

A popup display format ensures that user alarms and system alarms are not missed. The background color can be specified.

### 4 Improved system alarms

- The PLC/GOT/Network monitoring subject can be specified in advance, with only those specified alarms being displayed.
- It can be set so that only the active alarms are displayed. Alarm history display and history file storage are also possible.

Display various documents on the GOT at the worksite

GT15

GOT1000  
GRAPHIC OPERATION TERMINAL

## Document display function

- When a system error occurs, referring to recovery methods in check lists and/or manuals on the GOT can reduce downtime.
- Even if there is no personal computers at the worksite, operation guidance and work instructions can be displayed on the GOT.

- Pages can be changed, scrolled through, enlarged or reduced, and multi-page documents can be displayed.
- Document converter\* is used to format documents to be displayed and save them to CF cards as JPEG files.
- Documents created by applications such as Microsoft® Word can be used, reducing the man-hours of screen design.
- Supported file format: doc, xls, ppt, pdf, jpg, bmp
- The brightness and contrast of difficult to read documents can be adjusted when the documents are converted with the document converter to allow for better viewing on the GOT.



### Display of documents and manuals on the GOT can reduce downtime.

[Required devices] • Optional function board (GT15-QFNB (□M) or GT15-MESB48M) • CF card  
For more details, see Notes for Use on page 63.

\*: For more details, see Document converter on page 33.



# GOT provides complete traceability for safe and secure operation


For maintenance personnel

## Smooth operation from the collection of various data to storage of time-series data

GT15

### Logging function

- Collecting data from temperature controllers and other units with the GOT can reduce the load on the PLC.
- Up to 250 devices per setting and 32 settings per project can be set.
- Collected data can be used for record and analytical purposes when being saved to a CF card.
- Files can be saved in the GOT dedicated binary file, CSV or Unicode text file formats.

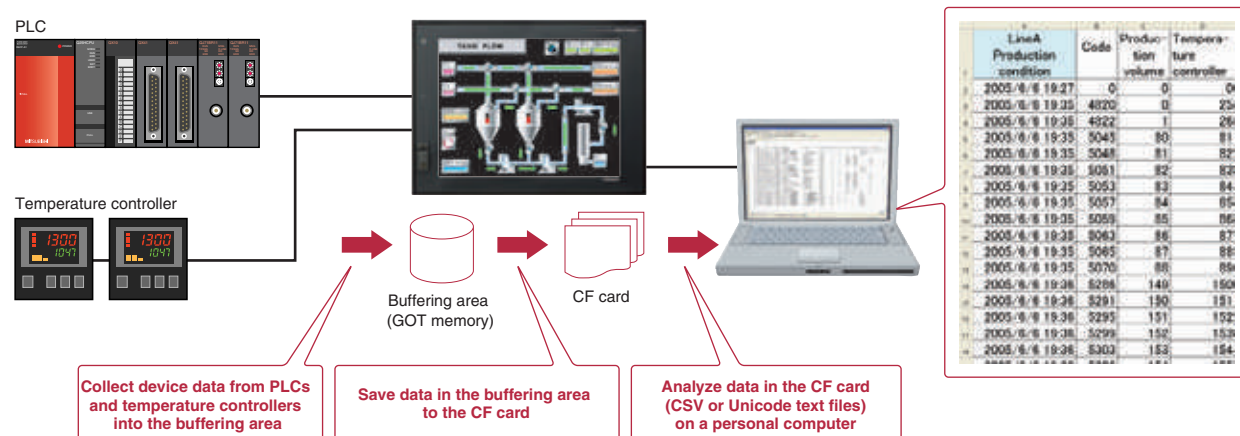


Now the optional function board (GT15-FNB) is not required. For more details, see Notes for Use on page 63.

## Easy-to-read logging data in a graphical display

GT15

### Historical trend graph

- Data collected by the logging function can be displayed in a time-series graph from a CF card as well as from the buffering area.
- The data collected by the logging function can be displayed in graph form; the past data can be displayed simply by touching a scroll switch.
- Enabling the cursor displays the device value and time of the cursor position, and allows for enlargement or reduction of scale.
- Up to 32 data devices can be displayed in a graph; up to 8 graphs can be added to a screen.

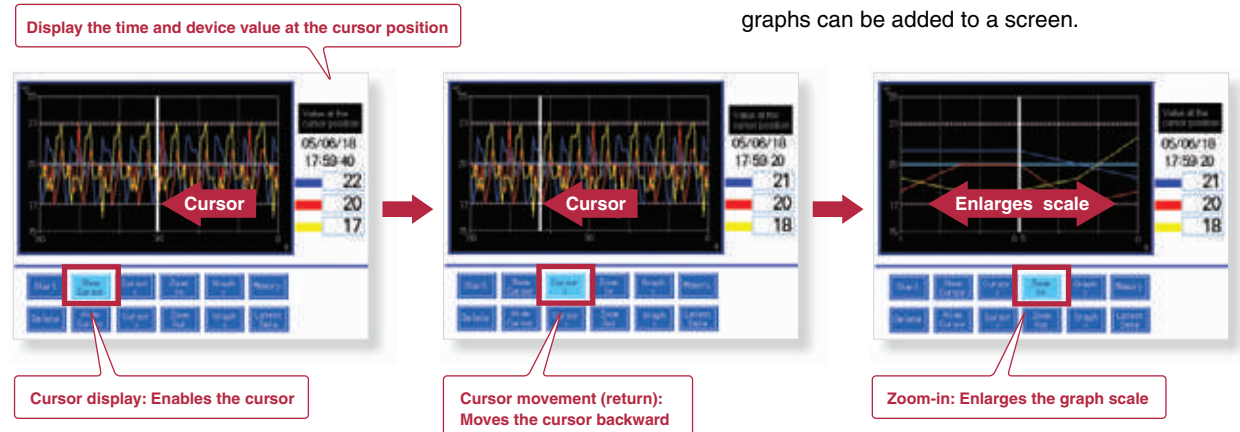

Now the optional function board (GT15-FNB) is not required. For more details, see Notes for Use on page 63.


\* : Logging function settings are required to use historical trend graph.

## Enhanced security system by password control

GT15


### Operator authentication function

- When starting up the GOT or switching screens, a login screen appears to authenticate the operator name and password. The display and operation screen depends on the operator logged-in so that security is strengthened.

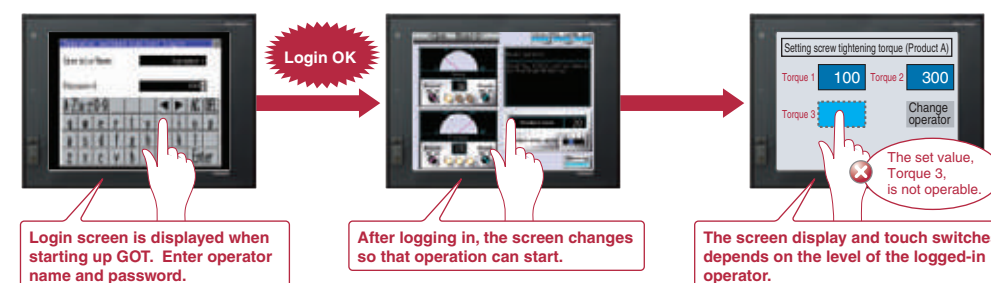

Setting the level (authority) of operation and display for each operator can strengthen security and prevent operation errors.

Combined with the operation log function, who, what, when, and how the operator operated can be recorded.  
\* : See Operation log function section.

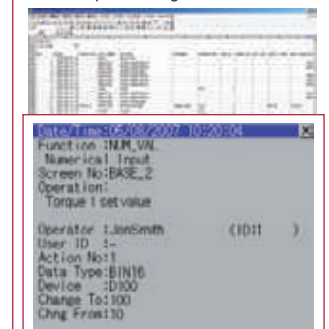


Example :  
Jon Smith changed the Numerical Input (D100) value from 10 to 100 on base screen 2.

## Helpful for identification and analysis of problem causes

GT15

### Operation log function

- Operations performed by operators on the GOT can be recorded with respect to time.
- When problems occur (e.g. system error), users can confirm when and how the operations were performed by referring to the operation log, using it to specify and analyze the cause of error.

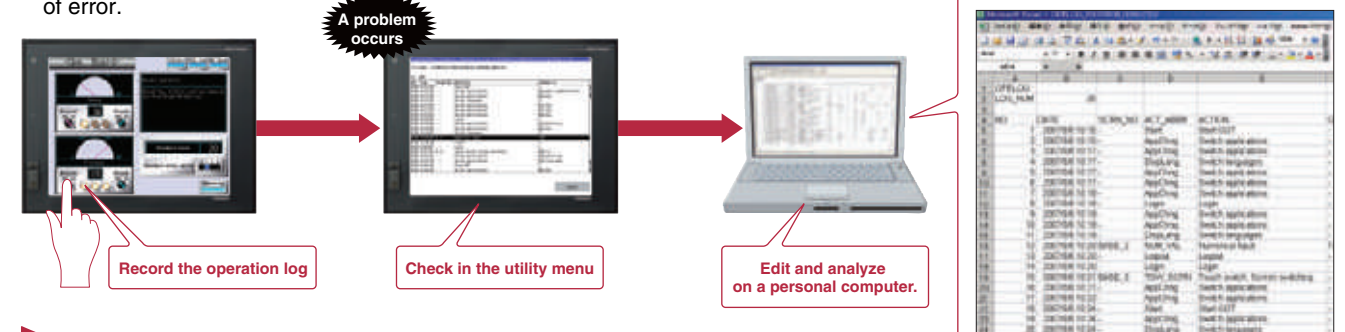

Refer to the operation log file, and investigate the problem cause.

[Required devices] • CF card  
Now the optional function board (GT15-FNB) is not required. For more details, see Notes for Use on page 63.



# Functions designed to support maintenance work significantly reduces downtime!

For maintenance personnel

## Back up important sequence programs to be safe and secure in case of an emergency


GT 15

### Backup/restoration function

- <Objective data> Programs, parameters, device comments, device initial value data, file registers **NEW**, etc.
- <Objective model> MELSEC Q-Series (excluding Q12PRH / Q25PRHCPU), Q-Series motion controllers (SV13 / SV22 only) **NEW** CNC C70
- <Usable connection type> Bus connection, CPU direct connection, computer link connection, Ethernet connection (host only)

#### Example of use ①

In case of PLC CPU failure, users can quickly replace the faulty device and restore the system by using previously backed up data.

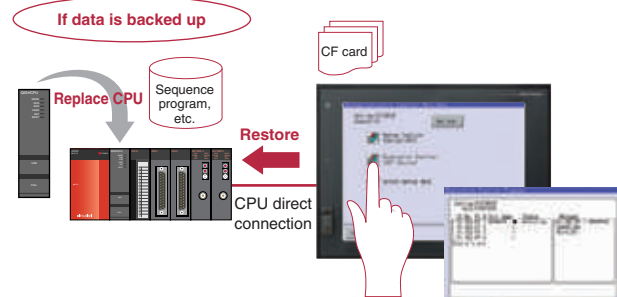


- The sequence program and parameter data of the PLC CPU and motion controller can be backed up to the CF card in the GOT.
- Automatic backups are possible by using a trigger device, or by specifying the time and day. **NEW**
- Users can perform batch operation to restore the data to the PLC CPU or motion controller.

The backup data conversion tool is shipped with GT Works2 / GT Designer2.

#### Example of use ②

When a problem occurs, or when the PLC CPU program is updated, the sequence program data can be transferred, analyzed, and corrected without requiring an experienced engineer, increasing time and cost efficiency.

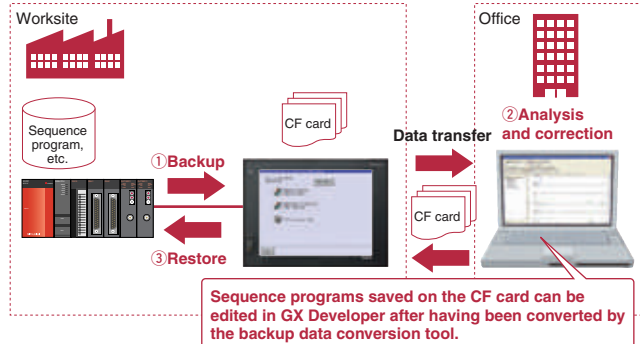

Sequence programs saved on the CF card can be edited in GX Developer after having been converted by the backup data conversion tool.

PLC CPU programs can be easily changed without a personal computer at the worksite or any previous GX Developer knowledge.

[Required device] • CF card \* : When replacing the PLC CPU, the restoration function may not be available depending on the system configuration and connection type.

## Easy-to recognize backlight state

GOT1000 GRAPHIC OPERATION TERMINAL

### Color-coded front face LED

- The color of the LED on the front of the GOT unit indicates whether the backlight is OFF or has expired.

[Power LED: Color-coded message]

Green ON	When normal power is being supplied	Orange/green blinking	When backlight life has expired
Orange ON	When in screen-save mode	OFF	When power is not being supplied

## For planned commodity maintenance

GT 15

### Maintenance time notification function

- The backlight ON time is automatically monitored, and the operator is notified when maintenance is required. This facilitates scheduled maintenance and prevents system malfunctions.

<Subject to be monitored>

Backlight, display area, touch keys, and built-in flash memory

**Warning! Backlight needs replacement soon.**

[Required devices] • Battery  
Now the optional function board (GT15-FNB) is not required. For more details, see Notes for Use on page 63.




## Convenient method for minor program changes onsite

GOT1000 GRAPHIC OPERATION TERMINAL

### List editor for A/List editor for FX

- MELSEC-A series, FX series PLC sequence programs can be edited in a list format (instruction word).
- Permits minor program changes onsite, even without peripheral devices.
- The GT15 permits sequence program editing while viewing the ladder circuit (combined with the circuit monitor function).

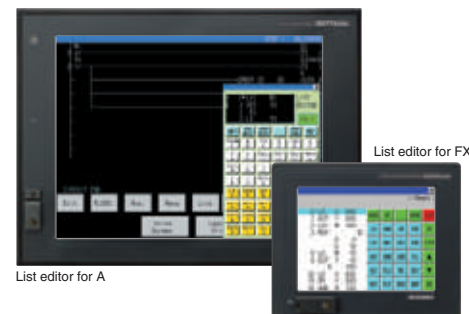

Now the optional function board (GT15-FNB/GT11-50FNB) is not required. For more details, see Notes for Use on page 63.

## PLC device monitoring/changes

GOT1000 GRAPHIC OPERATION TERMINAL

### System monitor function

- Mitsubishi PLC CPU devices can be monitored and changed.
- Monitoring can be performed by selecting the device to be monitored, or by specifying the initial device.
- The current values and setting values of the timer (T) and counter (C) can be changed.
- The buffer memory (BM) of a special function unit can be monitored and changed.
- The display format (decimal/hexadecimal) and the device comment display status (on/off) can be switched.

\* : Function restrictions apply when using the following CPUs. Q02UCPU, Q03UDCPU, Q04UDHCPU, Q06UDHCPU, Q172DCPU, Q173DCPU, Q173NCCPU, CRnQ-700

## Easy adjustment of Q series motion controller

GOT1000 GRAPHIC OPERATION TERMINAL

### Q series motion monitor function

- Up to 3 Q-type motion controllers can be used on a single base, with monitoring and parameter settings possible.

<Objective models>

- Q172D/Q173DCPU
- Q172(N)/Q173(N)CPU
- Q172H/Q173HCPU

\* : Supported only if the Q series motion controller CPU has SV13/SV22 OS version. Moreover, available functions of the Q series motion monitor vary according to the CPU type.



## Easy-to-understand display of buffer memory values and I/O information

GOT1000 GRAPHIC OPERATION TERMINAL

### Intelligent unit monitor function

- Buffer memory values of intelligent function units and the ON/OFF status of I/O units can be monitored and changed.
- When a QCPU (Q mode) is in use, the CPU operating status and existing errors can be monitored by PLC diagnosis.

\* : Supported by GT15 series XGA/SVGA/VGA models.



Now the optional function board (GT15-FNB) is not required. For more details, see Notes for Use on page 63.

## At-a-glance monitoring of MELSECNET network status

GOT1000 GRAPHIC OPERATION TERMINAL

### Network monitor function

- Network status of the MELSECNET/H, MELSECNET/10 and MELSECNET II can be monitored on a dedicated screen.
- Communication line and information from the host and other stations can be monitored to check the communication status.



## Easy startup and adjustment of servo amplifier

GOT1000 GRAPHIC OPERATION TERMINAL

### Servo amplifier monitor function

- In a system which outputs pulse strings, the GOT can be connected to a servo amplifier in a serial connection to perform the following operations: setting up, monitoring, alarm display, diagnosis, parameter setting, and test operations.

- When multiple servo amplifiers are connected, monitor screens can be easily switched on a GOT by specifying station numbers.

\* : Available monitoring functions vary according to the servo amplifier type.



## Save space and cost when no dedicated display device is required

GOT1000 GRAPHIC OPERATION TERMINAL

### CNC monitor function / CNC data I/O function

#### CNC monitor function

- Connecting to a CNC (C70, C6 / C64) enables functions such as position display and alarm diagnosis, and allows tool offset parameters to be set.

#### CNC data I/O function

- This function can be used to copy and delete CNC C70 work programs, parameters, etc.

[Required device] • CF card

\* : Supported by GT15 series XGA and SVGA models.





# Extensive FA device compatibility reduces your maintenance work

For maintenance personnel

## GOT Ladder Monitor Function is greatly improved with One-Touch Ladder Jump function

GT15

### Ladder monitor function


MELSEC Q/QnA/A/FX series PLC sequence programs can be monitored in a circuit diagram (ladder format).

#### Wide monitoring range

- Not only the PLCs connected to the GOT, but also the PLC of other stations, multiple CPUs, multiple programs in the CPU, and local devices (Q series only) can be monitored.

#### One-Touch Ladder Jump function (Q/QnA series)

- By setting a program name and coil number of the PLC to a touch switch, the relative ladder circuit block can be displayed directly.

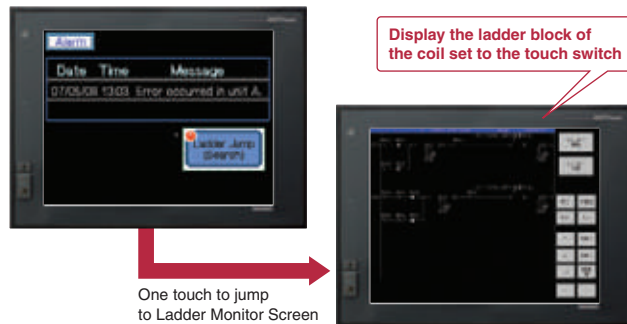


- For the touch switch, users can set the PLC station No., CPU No., program name, and coil No. The touch switch will then display the corresponding ladder blocks within the multiple programs that are contained in the PLCs connected to the GOT, other station PLCs, and multiple CPUs. Local devices can be monitored for the Q series PLC.

#### Other useful functions

- Device values and timer (T) / counter (C) set values can be changed while viewing the change points on the Ladder Monitor. **Version upgrade**
- When a problem occurs, the alarm history can be displayed and a back-tracking ladder search can be performed to find the contact which triggered the alarm. **<Defect search>**

#### Example of defect search (when error indicator light [Y30] is on)

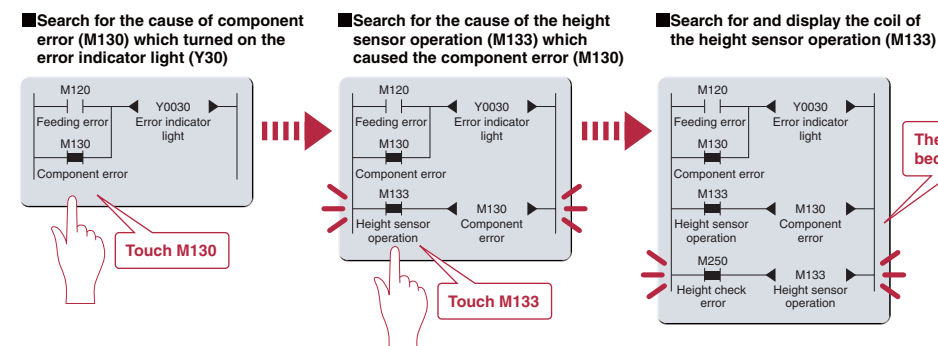

Since the cause of operation halts and interlocks can be checked, unexpected problems can be detected quickly.

[Required devices] To use Q/QnA Ladder Monitor Function, the optional function board GT15-QFNB (□M) or GT15-MESB48M is required. Now the optional function board (GT15-FNB) is not required to use the Ladder Monitor Function for A series. For more details, see Notes for Use on page 63.




\* : Ladder Monitor Function is supported by GT15 series XGA/SVGA/VGA models.

#### Device comments are stored in GOT CF card (Q/QnA series)

- Since the comment data of sequence programs can be stored in the GOT CF card to be displayed in the Ladder Monitor screen, the memory capacity of the PLC is greatly saved.
- Device comments in the sequence programs written in Korean (Hangul) characters can also be displayed.

#### How to use One-Touch Ladder Jump function

- Select [SP Function]-[Ladder Monitor] from the touch switch property dialog.

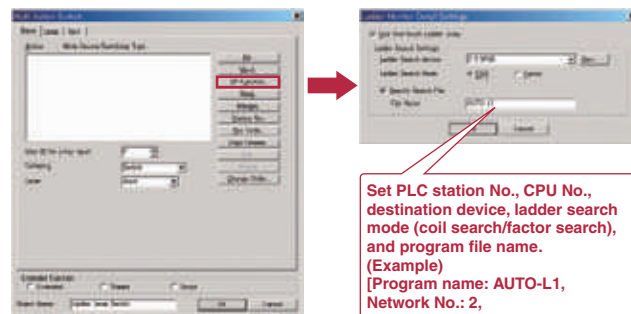

## Monitor SFC programs on GOT to make troubleshooting even easier

GT15


### SFC monitor function

Coming soon

MELSEC Q series PLC SFC programs (MELSAP3, MELSAP-L) can be monitored in a graphical format.


#### Easy monitoring of the program's progress

- SFC charts can be displayed from user-created screens or the utility menu. In user-created screens, setting program names and block numbers to touch switches makes it possible to jump to the relevant SFC programs, simply by touching the switches.
- Active steps are highlighted, and SFC programs can automatically be scrolled along with the progress of running programs, allowing quick and easy monitoring of the program status.

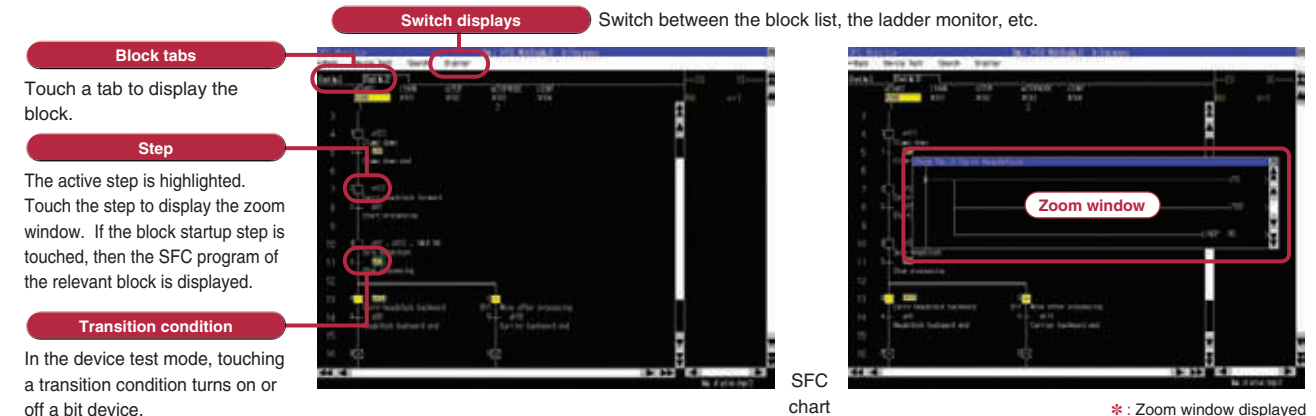

#### An array of displays permits the program's overall status to be seen at a glance

- The overall status of a program is easily grasped by using various lists, even when the program has numerous blocks and steps.

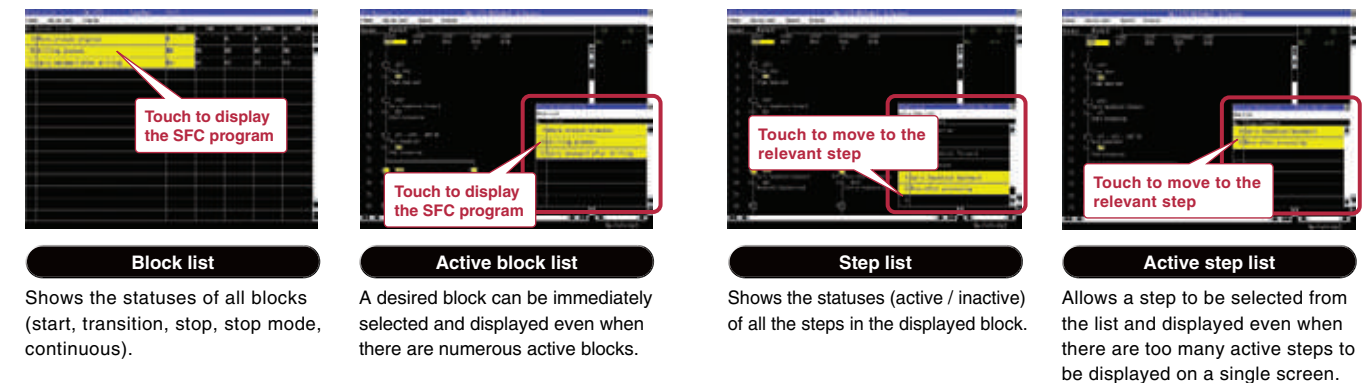

#### Easy device tests

- Device tests can be performed from the SFC program or the block list. By turning on and off the transition condition devices, it is possible to provide a convenient way to execute active steps as a test.

[Required devices] Requires an optional function board (GT15-QFNB□M or GT15-MESB48M) and a CF card.

#### <SFC (Sequential Function Chart)>

SFC programs express the equipment operation sequences in a flowchart format, making them easy to create and understand, even when created by someone else.

- Block: Indicates each process in the line.
- Step: A unit to indicate the operation of the equipment that exists in each process. The more detailed controls are programmed in ladder programs.
- Active block: Indicates the block where operation is currently in progress.
- Active step: Indicates the step where operation is currently in progress.

\* : Supported by the GT15 Series XGA / SVGA / VGA models.


\* : Not supported by the Q02UCPU, Q03UDCPU, Q04UDHCPU, Q06UDHCPU.



Portable and wearable Handy terminal can also be mounted on a wall or a machine

# Handy GOT

## GT1155HS-QSBD/GT1150HS-QLBD

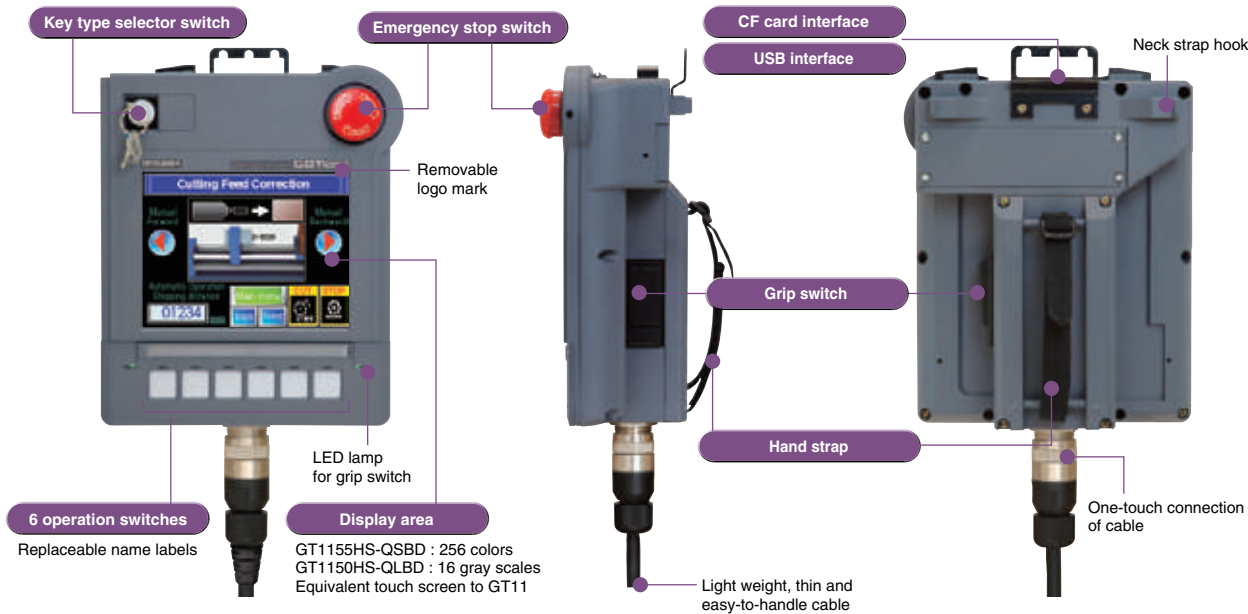

### Display area equivalent to GT11

- The GT1155HS-QSBD has a 256-color display; the GT1150HS-QLBD has a 16 degree gray scale display.

### Key type selector switch

- Restricts access of certain operations (manual/auto switching, mode selection, setup change, etc.) to authorized operators.

### Emergency stop switch using two break contacts

- Improved safety by using two break contacts connected in series, either of which can execute a stop command when being switched off.

### Grip switch

- The three position (OFF-ON-OFF) switch can be connected to external devices as a dead-man switch. The grip switch can be used for immediate execution of a command to stop a machine.

### 6 operation switches

- When wired directly to external devices, these switches can be used as pushbutton switches to operate and stop various machines. The operation switch name labels can be changed freely.
- The control panel is equipped with 6 LED lamps (green) for the operation confirmation of each of these switches.

### CF card interface

- The CF card interface enables quick GOT data transfer.

### USB interface

- The USB interface permits fast data transfer between GT Designer2 and the GOT.

### RS-232 interface

- An RS-232 interface is provided for the GOT data transfer when the USB interface is not used.

### RS-232/RS-422 communication

- Either RS-232 or RS-422 can be selected for communication with connected devices.

### Optional devices

- Emergency stop switch guard (GT11H-50ESCOV)
- Connector conversion box for Handy GOT
- CF card
- Optional function board (GT11-50FNB)
- Replacement battery (GT11-50BAT)
- External connection cable
- Personal computer connection cable (RS-232 cable/USB cable)
- Protective sheet

# Experience the colors of the compact GOT lineup

## GT10

### GT1030


### GT1020

- The 3-color LED backlight offers users a variety of display backgrounds.
- Two selectable wide screen sizes: 4.5" model with 288 × 96 pixel resolution, and 3.7" model with 160 × 64 pixel resolution.
- The high-brightness LCD offers clear imaging even under external lighting conditions.
- Thin in depth, and conforming to the protective structure IP67f standard.




## GT1030 Wide and creative visual solutions

- 4.5" type: 3-color LED (green/orange/red) type • GT1030-LBD (RS-422 connection) • GT1030-LBD2 (RS-232 connection)  
3-color LED (white/pink/red) type • GT1030-LBDW (RS-422 connection) • GT1030-LBDW2 (RS-232 connection)

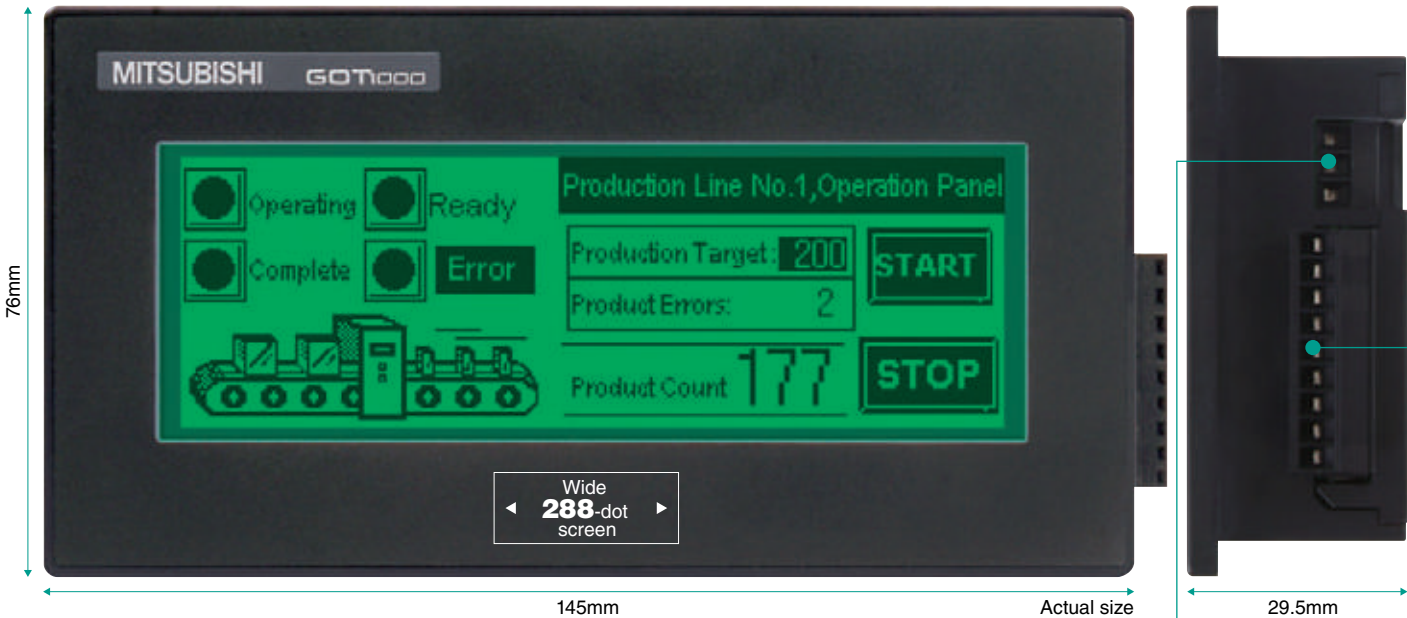

## GT1020 Super-small display

- 3.7" type: 3-color LED (green/orange/red) type  
• GT1020-LBD (RS-422 connection) • GT1020-LBD2 (RS-232 connection) • GT1020-LBL (RS-422 connection, 5VDC power supply)  
3-color LED (white/pink/red) type  
• GT1020-LBDW (RS-422 connection) • GT1020-LBDW2 (RS-232 connection) • GT1020-LBLW (RS-422 connection, 5VDC power supply)

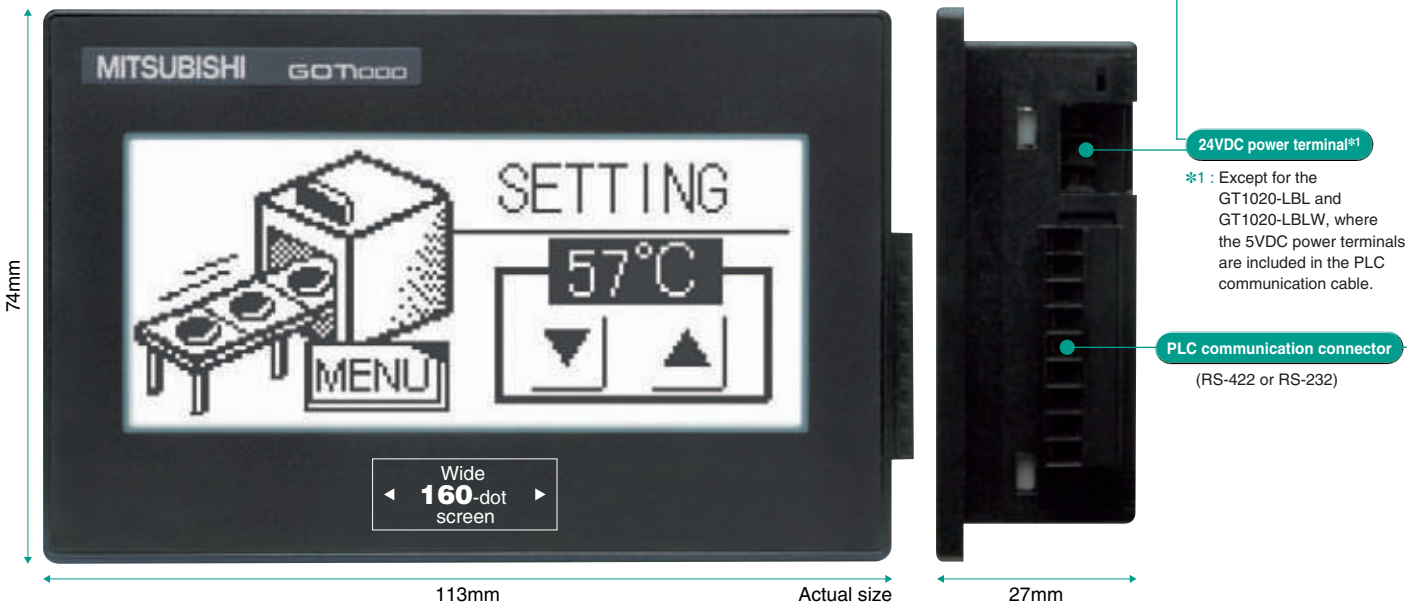



# The usability of a GOT1000 condensed into a compact body

## Flexible screen layout

GT1030  
GT1020



- The use of the matrix type touch panel enables simultaneous two-point press.
  - Matrix type touch panel
  - Minimum unit of touch key size: 16 × 16 dots
  - Maximum number of touch keys: 50/screen



- Due to the high resolution of the analog touch panel, touch switches can be placed with up to 1 pixel accuracy.
  - Analog touch panel
  - Min. unit of touch key size: 2 × 2 dots
  - Maximum number of touch keys: 50/screen


## Wide, high-resolution LCD screen

GT1030


- The resolution has been improved while keeping the same panel cut size as our F930GOT. (1.2 times higher resolution than the F930)



- Resolution: 240 × 80

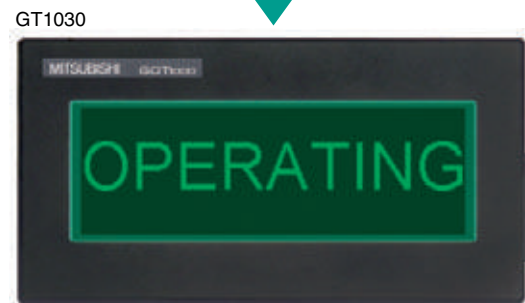


- Resolution: 288 × 96

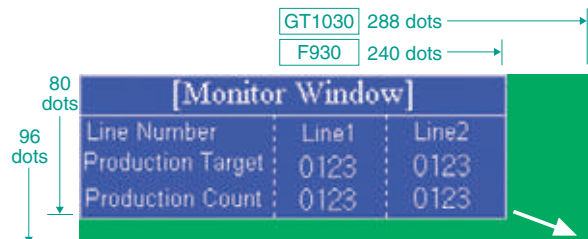

## Versatile mounting


GT1030  
GT1020

- Both horizontal and vertical mounting available to meet the needs of different application.

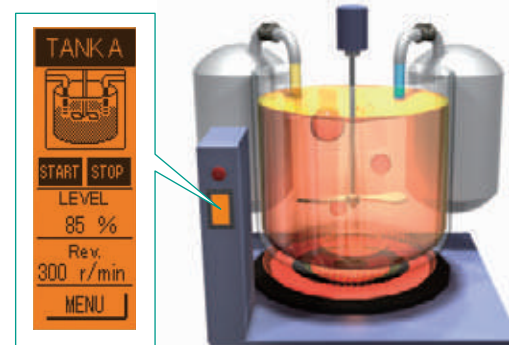

## Thin and interchangeable panel cut size

GT1030  
GT1020

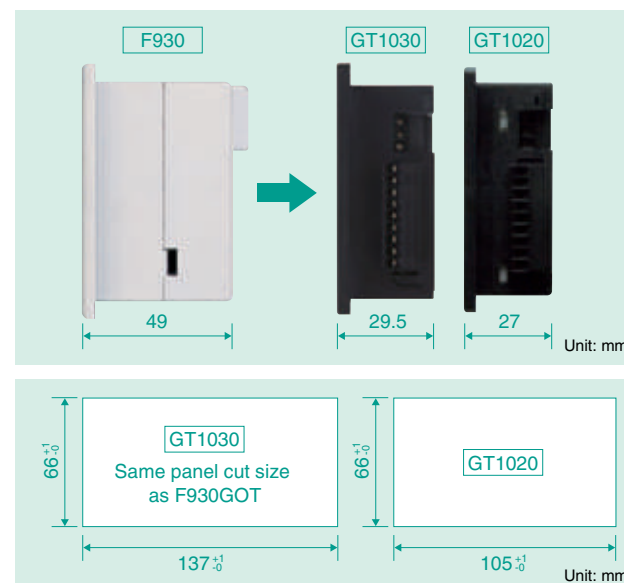

## Choose your font!

GT1030  
GT1020

- A variety of fonts are available including the standard type set and Windows® type set.
- When Windows® fonts are selected, italic, underline and underlined italic are also available.

\*1: Standard fonts cannot be changed.  
\*2: Fonts in user's personal computer where GT Designer2 is installed.



Font type	Size	Font name	GT1030	GT1020
Standard*1	6 × 8 dots	Gothic	○	○
	12 dots	Gothic	○	—
	16 dots	Gothic	○	○
High quality	12 dots	Gothic/Mincho	○	○
	16 dots	Gothic/Mincho	○	○
TrueType		Gothic/Mincho	○	○
Windows® type		*2	○	○

## Power supply and communication

GT1020


- The 5VDC type GOT draws power through the FX programming port communication cable. Additional power supply not needed.



## Simple set-up of language switching windows

GT1030  
GT1020


- Language switching windows can be easily created allowing one language to be switched to another, for example English to Japanese.
- Up to 10 languages can be switched per comment group. Window switching can take place not only for languages but also for different applications.

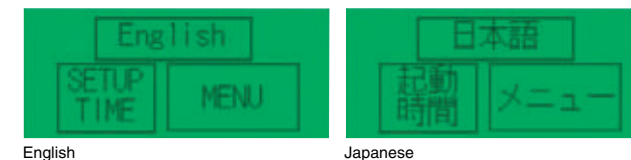

## Transparent mode

GT1030  
GT1020

- Through the personal computer communication connector on the back of the GOT, users can debug, modify and test sequence programs.

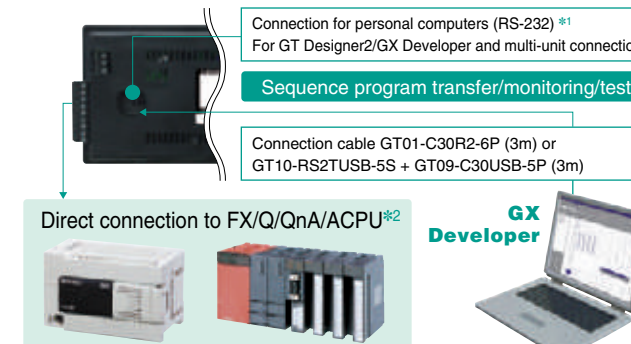

\*1: When two GT10 series units are connected, this connector is available to communicate with the second GT10 unit.  
\*2: GT1020-LBL and GT1020-LBLW can only be connected to the FX PLC.

## Alternative start-up screen

GT1030  
GT1020

- Users can set-up alternative images to be displayed when the GOT starts up.

\*: Bitmap images only.



## Character from all over the world for people all over the world

GT1030  
GT1020

- GT10 series can display a number of languages for a variety of countries and areas.

Compatible with  
Unicode 2.1

## Functionality of the GOT1000 series in a compact design


GT1030  
GT1020

- Recipe function included  
The GOT has a built-in memory for up to 4000 points (corresponding to 16-bit word devices) of recipe data. Using this memory the GOT can transfer a range of values to/from the PLC.
- Communication drivers
  - Pre-installed OS: The OS of the GOT is installed before shipment from the factory.
  - Communication driver: The communication driver installed before shipment is provided for the FX Series PLC. To connect Q/QnA/A Series PLC or a microcomputer board or third party PLC, you have to install the required communication driver available using GT Designer2.
- Screen saver and alarm function

## Multi-unit connection for high cost performance

GT1030  
GT1020

- Up to two units of GT10 can be connected in serial.

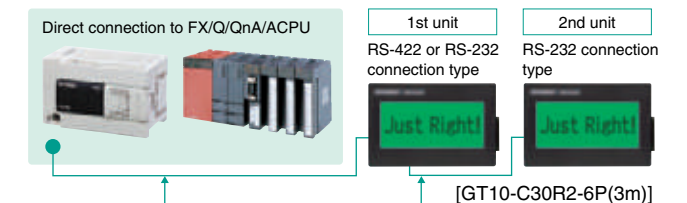

[RS-422 or RS-232 connection] [RS-232 connection]  
\*: When two GT10 units are connected, transparent functionality is disabled.

## Trouble free

- The GT10 series uses an LED backlight for high reliability that does not require replacement. [GT1030](#) [GT1020](#)
- The GT10 series is equipped with a flash ROM, therefore it does not require a battery. [GT1020](#)
- Major functionality (For more information, see the corresponding manual.)

Features	◎ Screen data: up to 1024 base screens + 3 types of key windows ◎ Font: Gothic (size: 6 × 8 dots, 16 dots [12 dots available only on GT1030], high quality, TrueType, Windows fonts) ◎ Screen switching function, screen call, language switching function, password protection, system information, connected equipment setting and startup logo
Figure drawing	◎ Straight line, continuous straight line, rectangle, polygon, chamfered rectangle, circle, ellipse, arc, elliptical arc, circular sector, elliptical sector ◎ Scale display ◎ Painting ◎ Image type (BMP/DXF)
Object	◎ Comment registration (basic comment/comment group) ◎ Object registration ◎ Data calculation function ◎ Offset function ◎ Security function ◎ Lamp display ◎ Touch key ◎ Numerical display/input ◎ ASCII display/input ◎ Clock display (GT1030: built-in clock, GT1020: linked to PLC clock) ◎ Comment display ◎ Alarm list/alarm history ◎ Parts display ◎ Panel meter ◎ Trend graph/line graph/bar graph/statistical band graph/statistical circle graph ◎ State monitoring function ◎ Recipe function (4000 points) ◎ Time action function



# Use your personal computer as a GOT



Screen data created by GT Designer2 Version2 can be used without conversion.  
GT SoftGOT1000 is an HMI software which offers the GOT1000 functions on personal computers and panel computers.


## Remote monitoring over the factory LAN

- Conditions at the production sites can be monitored from a remote location.

Multiple instances of GT SoftGOT1000 can run on a single personal computer.

Reduce cost by minimizing the system recovery time

Upon occurrence of problems, the status of on-site equipment can be quickly monitored from your office. This reduces the time for an initial diagnosis.

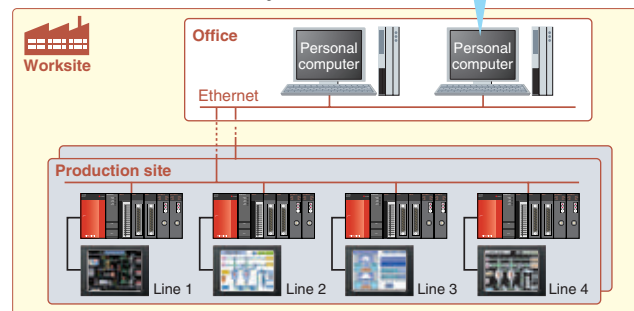


## Connection with MELSEC instrumentation

- GT SoftGOT1000 and PX Developer monitoring tools can be connected to easily establish an instrumentation monitoring system.

### PX Developer face plate and other tools

Tools for monitoring, operating and tuning loop control tags. (The display position can be specified.)

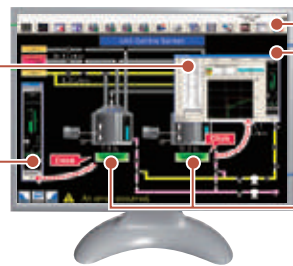

### PX Developer monitoring tool bar

Clicking on buttons executes various operations such as starting up the GT SoftGOT1000 and switching base screens.

### GT SoftGOT1000 base screen

Make your desktop into a graphic monitoring window by displaying the GT SoftGOT1000 base screen in full-screen mode and sending the window to the back of the screen.

### GT SoftGOT1000 touch switch/object

Clicking on touch switches and objects displays various screens of PX Developer monitoring tools. (The display position can be specified.)

## Improved usability

- Internal device interface functions: By using internal device interface functions, user-created applications can read/write data from/to the GOT internal devices. Furthermore, it is possible to link data to user applications such as a data logger in order to develop advanced systems that can run in cooperation with applications.  
<Development environment of user applications>  
Microsoft® Visual C++ (Version.6.0), Microsoft® Visual Basic (Version.6.0)

- Startup of other applications: In full-screen mode, other applications can be started with touch switches on the monitor screen of the GT SoftGOT1000.

- Full-screen display: The whole monitoring screen can be displayed in full-screen by hiding the title bar and the menu bar. Moreover, the screen size can be freely changed from other applications. **NEW**

- When the GT SoftGOT1000 display size is smaller than the resolution setting, scrolling is possible to display the full GT SoftGOT1000 screen.

## GT SoftGOT1000 (English version) operating environment

Item	Description	
	With DOS/V personal computer	With PC CPU module
Personal computer	PC/AT compatible PC on which Windows®2000, Windows®XP, or Windows Vista® operates.	CONTEC PC CPU unit (PPC-852-21B, PPC-852-21G, PPC-852-22F)*7
OS	Microsoft® Windows®2000 Professional Operating System (English version)*2 #4 Microsoft® Windows®XP Professional Operating System (English version)*3 #4 #9 Microsoft® Windows®XP Home Edition Operating System (English version)*3 #4 #9 Microsoft® Windows®XP Embedded Operating System (English version)*3 #4 #9 <b>NEW</b> Microsoft® Windows Vista® Ultimate Operating System (English version)*3 #4 #9 <b>NEW</b> Microsoft® Windows Vista® Enterprise Operating System (English version)*3 #4 #9 <b>NEW</b> Microsoft® Windows Vista® Business Operating System (English version)*3 #4 #9 <b>NEW</b> Microsoft® Windows Vista® Home Premium Operating System (English version)*3 #4 #9 <b>NEW</b> Microsoft® Windows Vista® Home Basic Operating System (English version)*3 #4 #9 <b>NEW</b>	
CPU	Other than Microsoft® Windows®Vista: Pentium® 300MHz or higher Microsoft® Windows®Vista: 800MHz or higher (1GHz or higher recommended)	
Required memory	Other than Microsoft® Windows®Vista: 128MB or more Microsoft® Windows®Vista: 512MB or more (1GB or more recommended)	
Free hard disk space*1	For installation (product only): 250MB or more	
Disk drive	CD-ROM disk drive	
Display colors	65536 colors or more	
Display	Display usable on the above OS, which have a resolution of VGA (640 × 480 dots) or higher	
Software	When creating or editing project data: GT Designer2*5 When using with PX Developer : PX Developer Version 1.14Q or later GT Designer2 Version 2.47Z or later	
Hardware*6	GT15-SGTKEY-U (License key (for USB port)) GT15-SGTKEY-P (License key (for parallel port))	GT15-SGTKEY-U (License key (for USB port))
Other	Internet Explorer Ver. 5.0 or higher must be installed. Mouse, keyboard, printer and CD-ROM drive usable with the above OS	

## Specifications

Item	
Resolution (dots)	640 × 480, 800 × 600, 1024 × 768, 1280 × 1024, 1600 × 1200
Display colors	65536 colors
Memory capacity	57MB
Connection configuration*10	Bus connection*11, CPU direct connection, computer link connection, MELSECNET connection, Ethernet connection

- \*1: Use of GT Designer2 and PX Developer requires additional vacant memory space. For these space requirements, refer to the GT Designer2 Version 2 Basic Operation/Data Transfer Manual, and to the PX Developer Operation Manual (Monitor Tool). Additional memory space is also required when using user-created applications.
- \*2: Administrator authority is required to install GT SoftGOT1000.
- \*3: Administrator authority is required to install and operate GT SoftGOT1000.
- \*4: "Compatibility mode," "user account," "desktop appearance (font)" and "remote desktop" are not supported.
- \*5: GT Designer2 and GT SoftGOT1000 must be installed from the same GT Works2 / GT Designer2.
- \*6: The PC must be equipped with a USB port to use the GT15-SGTKEY-U. The PC must be equipped with a parallel port (Centronics printer connector) to use the GT15-SGTKEY-P.
- \*7: For CONTEC PC CPU unit, refer to the manual for the PC CPU module.
- \*8: Use is possible only when PPC-852-226 is preinstalled.
- \*9: Supported only by a 32-bit OS.
- \*10: The required devices vary depending on the connection configuration.
- \*11: Connectable only when using a PC CPU unit.

## GT SoftGOT1000 Connectable Device List

### [PLCs/motion controllers]

#### Mitsubishi PLCs and motion controllers

Series	Model name	Connection configuration				
		CPU direct connection	Computer link	MELSECNET/H*11	MELSECNET/10*10	Ethernet
MELSEC-Q series (Q mode)	Q00JCPU					
	Q00CPU*3					
	Q01CPU*3					
	Q02CPU*3					
	Q02HCPU*3					
	Q06HCPU*3					
	Q12HCPU*3					
	Q25HCPU*3					
	Q12HPCPU					
	Q25PHCPU					
Redundant system (main base)	Q12PRHCPU					
	Q25PRHCPU					
Redundant system (extension base)	Q12PRHCPU	×	×		×	
	Q25PRHCPU	×	×		×	
MELSECNET/H remote I/O station	Q02UCPU					
	Q03UDCPU					
	Q04UDHCPU					
	Q05UDHCPU					
	QJ72P2S-2S					
	QJ72LP2SG					
	QJ72BR15					
	Q02CPU-A					
	Q02HCPU-A					
	Q06HCPU-A					
MELSEC-QnA series (QnACPU type)	Q2ACPU-S1					
	Q3ACPU					
	Q4ACPU					
	Q4ARCPU					
MELSEC-QnA series (QnASCPU type)	Q2ASCPU					
	Q2ASCPU-S1					
	Q2ASHCPU					
	Q2ASHCPU-S1					
MELSEC-A series (AnCPU type)*10	A2UCPU					
	A2UCPU-S1					
	A3UCPU					
	A4UCPU					
	A2ACPU					
	A2ACPU-P21					
	A2ACPU-P21-S1					
	A2ACPU-P21-S1					
	A3ACPU					
	A3ACPU-P21					
	A3ACPU-P21-S1					
	A1NCPUR21					
	A1NCPUR21					
	A1NCPUR21					
	A2NCPUR21					
	A2NCPUR21					
	A2NCPUR21					
	A2NCPUR21-S1					
	A2NCPUR21-S1					
	A3NCPUR21					
MELSEC-A series (AnSCPU type)*10	A2USCPU					
	A2USCPU-S1					
	A1SCPU					
	A1SCPU-C24-R2					
	A1SHCPU					
	A2SCPU					
	A2SCPU-S1					
	A2SHCPU					
	A2SHCPU-S1					
	A1SJCPU					
MELSEC-A series*10	A0J2HCPU					
	A0J2HCPU-P21					
	A0J2HCPU-P21					
	A0J2HCPU-DC24					
	A2CCPU					
	A2CCPU-P21					
	A2CCPU-P21					
	A2CCPU-C24					
	A2CCPU-C24-PRF					
	A2CJCPU-S3					
Motion controller CPU (Q series)	A1FXCPU					
	Q172CPU					
	Q173CPU					
	Q172CPUN					
	Q173CPUN					
	Q172HCPU					
	Q173HCPU					
	Q172DCPU					
	Q173DCPU					
	A273UCPU					
Motion controller CPU (A series/large type)	A273HCPU					
	A273HCPU-S3					
	A273UCPU					
	A273UCPU-S3					
	A171SCPU					
	A171SCPU-S3					
	A171SCPU-S3N					
	A171SHCPU					
	A171SHCPUN					
	A172SHCPU					
Motion controller CPU (A series/small type)	A172SHCPUN					
	A173UHCPU					
	A173UHCPU-S1					
	FX0S					
	FX0N					
	FX1S					
	FX1N					
	FX1NC					
	FX2N					
	FX2NC					
MELSEC-FX series	FX3U					
	FX3UC					
	FX0S					
	FX0N					
	FX1S					
	FX1N					
	FX1NC					
	FX2N					
	FX2NC					
	FX3U					

- \*1: Connection configuration for network type MELSECNET/H mode and MELSECNET/H extension mode (PC-to-PC net).
- \*2: Connection configuration for network type MELSECNET/10 mode (PC-to-PC net). (Including the case where the mode is switched from MELSECNET/H to MELSECNET/10 (PC-to-PC net))
- \*3: For multi-CPU configuration, use the CPU function version B or later.
- \*4: When using a computer link module for A series or an Ethernet module with QnACPU, GT SoftGOT1000 cannot monitor the module.
- \*5: Use the PLC CPU and MELSECNET/H network module function version B or later.
- \*6: Use the driver (SW00NC-MNET-H) of version K or later for the MELSECNET/H board.

## Modules usable when connected with Mitsubishi PLCs

### For computer link connection\*1

CPU series	Serial communication module/computer link module
MELSEC-Q series (Q mode)	QJ71C24(-R2)/QJ71C24N(-R2)/QJ71CMO
MELSEC-Q series (A mode)	A1SJ71UC24(-R2)/A1SJ71C24-R2
MELSEC-QnA series	AJ71QC24(-R2)/AJ71QC24N(-R2)/A1SJ71QC24(-R2)/A1SJ71QC24N(-R2)
MELSEC-A series	AJ71C24-S8/AJ71UC24/A1SJ71C24-R2/A1SJ71UC24-R2

\*1: Only RS-232C communication is possible.

### For MELSECNET/H and MELSECNET/10 connection

Use a network unit applicable to the network board used for GT SoftGOT1000. The network boards that can be used with GT SoftGOT1000 are shown below. • Q80BD-J71BR11 (coaxial loop) • Q80BD-J71LP21-25 (optical loop) • Q80BD-J71LP21G (optical loop)

### For Ethernet connection

CPU series	Ethernet module
MELSEC-Q series (Q mode)	QJ71E71-100/QJ71E71-B5/QJ71E71-B2/QJ71E71
MELSEC-QnA series	AJ71OE71N3-T/AJ71OE71N-B5/AJ71OE71N-B2/AJ71OE71N-T/AJ71OE71N-B5T/AJ71OE71N-B2T/AJ71OE71N3-T/AJ71OE71N-B5T/AJ71OE71N-B2T/AJ71OE71N-T/AJ71OE71N-B5T/AJ71OE71N-B2T/AJ71OE71N-T
	AJ71OE71N3-T/AJ71OE71N-B5/AJ71OE71N-B2/AJ71OE71N-T/AJ71OE71N-B5T/AJ71OE71N-B2T/AJ71OE71N-T/AJ71OE71N-B5T/AJ71OE71N-B2T/AJ71OE71N-T
	AJ71OE71N3-T/AJ71OE71N-B5/AJ71OE71N-B2/AJ71OE71N-T/AJ71OE71N-B5T/AJ71OE71N-B2T/AJ71OE71N-T/AJ71OE71N-B5T/AJ71OE71N-B2T/AJ71OE71N-T
	AJ71OE71N3-T/AJ71OE71N-B5/AJ71OE71N-B2/AJ71OE71N-T/AJ71OE71N-B5T/AJ71OE71N-B2T/AJ71OE71N-T/AJ71OE71N-B5T/AJ71OE71N-B2T/AJ71OE71N-T
MELSEC-Q series (A mode)/A series motion controller CPU*1	AJ71E71N3-T/AJ71E71N-B5/AJ71E71N-B2/AJ71E71N-T/AJ71E71N-B5T/AJ71E71N-B2T/AJ71E71N-T/AJ71E71N-B5T/AJ71E71N-B2T/AJ71E71N-T

\*1: Only the device ranges within AnACPU specifications are supported.

### Third party PLCs

Manufacturer	Model name	Connection configuration			
		CPU direct connection (RS-232C)	Computer link (RS-232C)	Ethernet	
OMRON	Micro PLC				
	CPM2A				
	C200HX				
	C200HG				
	CQM1				
	CQM1H				
	CS1H				
	CS1G				
	CS1D				
	CJ1H				
Yaskawa Electric	Small-size PLC				
	CJ1M				
	CJ1M				
	CV500				
	CV1000				
	CV2000				
	CVM1				
	GL120				
	GL130				
	GL60S				
Yokogawa Electric	Large-size PLC				
	GL70H				
	CP-9200SH				
	CP-9300MS				
	MP920				
	MP930				
	MP940				
	PROGIC-8				
	CP-9200 (H)				
	MP2200				

## Modules usable when connected with PLCs made by Yaskawa Electric Corporation

### For computer link connection

MEMOBUS module/communication module	JAMSC-IF60, JAMSC-IF61, CP-217IF, 217IF-01, 217IF, 218IF-01
-------------------------------------	---

### For Ethernet connection

Communication module	218IF, 218IF-01
----------------------	-----------------

## Modules usable when connected with PLCs made by Yokogawa Electric Corporation

### For Ethernet connection

Ethernet interface module	F3LE01-5T, F3LE11-0T, F3LE12-0T
---------------------------	---------------------------------

## [CNCs] Mitsubishi CNCs

Series	Model name	Connection configuration			
		CPU direct connection	Computer link	MELSECNET/H*11	MELSECNET/10*10
CNC C70	Q173NCCPU				
	FCA C6				
MELDAS C6/C64	FCA C6				
	FCA C64				

## Usable units when connected to MELDAS C6 / C64

### For Ethernet connection

CPU series	Ethernet module
MELDAS C6/C64	FCU6-EX875



Mitsubishi PLCs/motion controllers

A wide selection of Mitsubishi PLCs and motion controllers are supported.

Series	Model name	Connection configuration									
		GT15/GT11							GT10		
		Bus connection *2 *3	CPU direct connection	Computer link	MELSECNET/H *1	MELSECNET/10 *1 *4	CC-Link (ID) *1 *5	CC-Link (via G4) *6	Ethernet *1	CPU direct connection	Computer link *2
MELSEC-Q series (Q mode)	Q00JCPU	○ *8									
	Q00CPU *7										
	Q01CPU *7										
	Q02CPU *7										
	Q02HCPU *7										
	Q06HCPU *7										
	Q12HCPU *7										
	Q25HCPU *7										
	Q12PHCPU										
	Q25PHCPU										
Redundant system (main base)	Q12PRHCPU	×	○	×	○	○	○	○			
	Q25PRHCPU										
Redundant system (extension base)	Q12PRHCPU	×	×	○	×	○	○	○			
	Q25PRHCPU				×	×					
MELSECNET/H remote I/O station	Q02UCPU									×	×
	Q03UDCPU										
	Q04UDHCPU										
	Q06UDHCPU										
MELSEC-Q series (A mode)	QJ72LP25-25	×	○	○	×	×	×	×			
	QJ72LP25G										
	QJ72BR15										
MELSEC-QnA series (QnACPU type)	Q02CPU-A	×	○	○	×	○	○	×	○	○	×
	Q02HCPU-A										
	Q2ACPU										
	Q2ACPU-S1										
MELSEC-QnA series (QnACPU type)	Q2ACPU										
	Q2ACPU-S1										
	Q2ASHCPU										
	Q2ASHCPU-S1										
MELSEC-A series (AnACPU type)	A2UCPU										
	A2UCPU-S1										
	A3UCPU										
	A4UCPU										
	A2ACPU										
	A2ACPU-P21										
	A2ACPU-P21										
	A2ACPU-S1										
	A2ACPU-P21-S1										
	A2ACPU-P21-S1										
MELSEC-A series (AnACPU type)	A3ACPU										
	A3ACPU-P21										
	A3ACPU-P21										
	A1NCPUR21										
	A1NCPUR21										
	A2NCPUR21										
	A2NCPUR21										
	A2NCPUR21-S1										
	A2NCPUR21-S1										
	A3NCPUR21										
	A3NCPUR21										

- \*1 : Supported only by the GT15.
- \*2 : Supported only by the GT15, GT11□-Q□BDQ and GT115□-Q□BDA.
- \*3 : When connecting multiple GOTs, note that the following GOT models cannot be used together: GOT1000 series, GOT-A900 series, GOT800 series and A77GOT.
- \*4 : When MELSECNET/H is used in NET/10 mode, the GOT terminal cannot be connected directly to a remote I/O station.
- \*5 : CC-Link (ID): Connected as CC-Link (intelligent device station)
- \*6 : CC-Link (via G4): Connected to a CC-Link system via AJ65BT-G4-S3 or AJ65BT-R2N
- \*7 : When using A series computer link (C24 modules) or an Ethernet module with QnACPU, only the device ranges within AnACPU specifications are supported.
- The following devices cannot be monitored:
- Devices that have been newly added to the QnACPU
  - Latch relay (L) and step relay (S)
  - (In the QnACPU, the latch relay (L) and step relay (S) are separate devices from the internal relay (M), but the internal relay is nonetheless accessed when either the latch relay or step relay is specified.)
  - File register (R)
- \*7 : Use CPU function version B or later in a multi-CPU system.
- \*8 : When using a bus extension connector box, it must be installed on an extension base. (It cannot be installed on the main base.)
- \*9 : Use function version B or later for the CPU and MELSECNET/H network unit.
- \*10 : In Q4ARCPU redundant system, GOT must be connected via bus connection to the last stage's redundant system extension base A68RB version B or later.
- \*11 : Computer link unit software version U or later must be used for the A2SCPU, A2SHCPU, A1SHCPU, A1SJHCPU, A0J2HCPU, A171SHCPU and A172SHCPU computer link connections.
- A0J2-C214-S1 (dedicated computer link unit for A0J2HCPU) cannot be used.

Series	Model name	Connection configuration									
		GT15/GT11							GT10		
		Bus connection *2 *3	CPU direct connection	Computer link	MELSECNET/H *1	MELSECNET/10 *1 *4	CC-Link (ID) *1 *5	CC-Link (via G4) *6	Ethernet *1	CPU direct connection	Computer link *2
MELSEC-A series (AnACPU type)	A2USCPU										
	A2USCPU-S1										
	A2USHCPU-S1										
	A1SCPU										
	A1SCPU-C24-R2										
	A1SHCPU										
	A2SCPU										
	A2SCPU-S1										
	A2SHCPU										
	A2SHCPU-S1										
MELSEC-A series (AnACPU type)	A1SJCPU										
	A1SJCPU-S3										
	A1SJHCPU										
	A0J2HCPU										
	A0J2HCPU-P21										
	A0J2HCPU-P21										
	A0J2HCPU-DC24										
	A2CCPU										
	A2CCPU-P21										
	A2CCPU-P21										
MELSEC-A series (AnACPU type)	A2CCPU-P21										
	A2CCPU-P21										
	A2CCPU-P21										
	A2CCPU-P21										
	A2CCPU-P21										
	A2CCPU-P21										
	A2CCPU-P21										
	A2CCPU-P21										
	A2CCPU-P21										
	A2CCPU-P21										
Motion controller CPU (Q series)	Q172CPU										
	Q173CPU										
	Q172CPUN										
	Q173CPUN										
	Q172HCPU										
	Q173HCPU										
	Q172DCPU										
	Q173DCPU										
	A273UCPU										
	A273UHCPU										
Motion controller CPU (A series) (large type)	A273UHCPU-S3										
	A373UCPU										
	A373UCPU-S3										
	A171SCPU										
	A171SCPU-S3										
	A171SCPU-S3N										
	A171SHCPU										
	A171SHCPUN										
	A172SHCPU										
	A172SHCPUN										
MELSEC-FX series	A173UHCPU										
	A173UHCPU-S1										
	FX0S										
	FX0N										
	FX1S										
	FX1N										
	FX1NC										
	FX2N										
	FX2NC										
	FX3U										

- \*12 : Only the following software version or later can be used to write data to the AnNCPU(S1), A2SCPU, A0J2HCPU and A2CCPU. Earlier versions cannot be used.
- AnNCPU(S1) : Version L or later for CPUs with link, and version H or later for CPUs without link
  - A2SCPU : Version H or later
  - A0J2HCPU (with/without link) : Version E or later
  - A0J2HCPU-DC24 : Version B or later
  - A2CCPU : Version H or later
- \*13 : Cannot connect to bus if an extension base is connected.
- \*14 : Use of SV13, SV22 or SV43 requires a motion controller with the following OS version installed.
- SW6RN-SV13□ : 00H or later (00E or later in the case of bus connection or CPU direct connection with Q172CPU or Q173CPU)
- SW6RN-SV22□ : 00H or later (00E or later in the case of bus connection or CPU direct connection with Q172CPU or Q173CPU)
- SW6RN-SV43□ : 00B or later
- \*15 : Only a USB interface is available on the Q172HCPU, Q173HCPU, Q172DCPU and Q173DCPU.
- The Q172HCPU, Q173HCPU, Q172DCPU and Q173DCPU can be accessed via RS-232 of the QCPU of a multi-CPU system.
- \*16 : Use a unit with the following Serial No.
- Q172CPU Serial No. K\*\*\*\*\* or later
- Q173CPU Serial No. J\*\*\*\*\* or later
- \*17 : Use a unit with the following Serial No.
- Q172CPU Serial No. N\*\*\*\*\* or later
- Q173CPU Serial No. M\*\*\*\*\* or later
- \*18 : When an expansion base is used, use A168B.

- \* : Applicable GOT varies depending on the connection destination.
- GT15 ... When connected via RS-232 : All models (Use the built-in interface of the GOT main unit.)
- When other than RS-232 : All models (Bus connection and network connection are enabled by mounting a communication unit on the GOT main unit.)
- GT11 ... When connected via RS-422 : GT115□-Q□BD
- When using bus connection : GT115□-Q□BDQ, GT115□-Q□BDA
- GT10 ... When connected via RS-232 : GT1030-LBD2/LBDW2, GT1020-LBD2/LBDW2
- When connected via RS-422 : GT1030-LBD/LBDW, GT1020-LBD/LBDW, GT1020-LBL/LBLW
- (The GT1020-LBL/LBLW can be used only with the MELSEC-FXCPU.)

The GOT1000 series allows connection to Mitsubishi PLCs and a variety of other FA devices.

Modules usable when connected with Mitsubishi PLCs

For computer link connection

CPU series	Serial communication module/computer link module*1			
	Model	CH1	CH2	
MELSEC-Q series (Q mode)	QJ71C24	RS-232	RS-422/485	
	QJ71C24-R2	RS-232	RS-232	
	QJ71C24N	RS-232	RS-422/485	
	QJ71C24N-R2	RS-232	RS-232	
	MELSECNET/H remote I/O station	RS-422/485	RS-422/485	
MELSEC-Q series (A mode)	QJ71CMO	Modular connector	RS-232	
	A1SJ71UC24-R2	RS-232	RS-232	
	A1SJ71UC24-R4	RS-422/485	RS-422/485	
	AJ71QC24	RS-232	RS-422/485	
	AJ71QC24-R2	RS-232	RS-232	
MELSEC-QnA series	AJ71QC24-R4	RS-422	RS-422/485	
	AJ71QC24N	RS-232	RS-422/485	
	AJ71QC24N-R2	RS-232	RS-232	
	AJ71QC24N-R4	RS-422	RS-422/485	
	A1SJ71QC24	RS-232	RS-422/485	
	A1SJ71QC24-R2	RS-232	RS-422/485	
	A1SJ71QC24N	RS-232	RS-422/485	
	A1SJ71QC24N-R2	RS-232	RS-232	
	A1SJ71QC24N1	RS-232	RS-422/485	
	A1SJ71QC24N1-R2	RS-232	RS-232	
	AJ71UC24	RS-232	RS-422/485	
	A1SJ71UC24-R2	RS-232	RS-232	
	A1SJ71UC24-R4	RS-422/485	RS-422/485	
	AJ71UC24	RS-232	RS-422/485	
	A1SJ71UC24-R2	RS-232	RS-422/485	
MELSEC-A series Motion controller CPU (A series)	A1SJ71C24-R4	RS-422/485	RS-422/485	
	A1SJ71C24-R2	RS-232	RS-232	
	A1SCPU-C24-R2	RS-232	RS-232	
	A2CCPU-C24	RS-232	RS-422/485	
	A2CCPU-C24	RS-232	RS-422/485	

- \*1 : RS-485 communication is not possible; therefore, A0J2-C214-S1 is unusable.
- When using A series computer link (C24 modules) with QnACPU, only the device ranges within AnACPU specifications are supported.
- The following devices cannot be monitored:
- Devices that have been newly added to the QnACPU
  - Latch relay (L) and step relay (S)
  - (In the QnACPU, the latch relay (L) and step relay (S) are separate devices from the internal relay (M), but the internal relay is nonetheless accessed when either the latch relay or step relay is specified.)
  - File register (R)
- \*2 : With function version A, either CH1 or CH2 can be connected.
- \*3 : Only CH2 can be connected.
- \*4 : Either CH1 or CH2 can be connected.
- \*5 : When connecting to A1SHCPU, A2SCPU(S1), A2SHCPU(S1), A1SJHCPU, A0J2HCPU, A171SHCPU(N) or A172SHCPU(N), use computer link module software version U or later.
- \*6 : Computer link module/serial communication module operate within the range of devices available on AnACPU. (R devices cannot be used.)
- \*7 : GT10 cannot be used.

For Ethernet connection

CPU series	Ethernet module*1				
MELSEC-Q series (Q mode)	QJ71E71-100	QJ71E71-B5	QJ71E71-B2	QJ71E71	
MELSEC-QnA series	AJ71QE71N3-T	AJ71QE71N-T	AJ71QE71-B5	A1SJ71QE71N-B2	A1SJ71QE71-B5
	AJ71QE71N-B5	AJ71QE71N-B5T	A1SJ71QE71N3-T	A1SJ71QE71N-T	A1SJ71QE71-B2
	AJ71QE71N-B2	AJ71QE71	A1SJ71QE71N-B5	A1SJ71QE71N-B5T	
MELSEC-Q series (A mode)	AJ71E71N3-T	AJ71E71N-T	A1SJ71E71N3-T	A1SJ71E71N-T	A1SJ71E71-B5-S3
MELSEC-A series	AJ71E71N-B5	AJ71E71N-B5T	A1SJ71E71N-B5	A1SJ71E71N-B5T	A1SJ71E71-B2-S3
Motion controller CPU (A series)	AJ71E71N-B2	AJ71E71-S3	A1SJ71E71N-B2		



**The GOT1000 series allows connection to Mitsubishi PLCs and a variety of other FA devices.**

The GOT can be connected with third party PLCs through RS-232 communication at up to 115.2kbps or Ethernet.





- \*#1: GT10 cannot be connected.
- \*#2: The GOT cannot be connected to the CQM1-CPU11 because it does not have an RS-232C interface.
- \*#3: RS-422 or RS-232C is selectable.
- \*#4: RS-232C/RS-422 converter (TXU-2051) is required.
- \*#5: Connection to the DH485 network via an adapter (1770-KF3) is possible.
- \*#6: Connection to the DH485 requires a C-Series or later CPU. (B-Series and earlier models do not support the DH485 protocol.)
- \*#7: A one-to-one connection requires a D-Series or later CPU. (C-Series and earlier models do not support the DF1 half-duplex format.)
- \*#8: EtherNet/IP (PCCP protocol) is supported.
- \*#9: Only GT15 is applicable.
- \*#10: GT10 is applicable only to the following models :  
CP-9200H, MP920, MP930, MP940, MP2200, MP2300.
- \*#11: Only MODBUS®/TCP connection is supported. Ethernet connection is not supported.

* Applicable GOT varies depending on the connection destination.	
GT15 ...	When connected via RS-232 When other than RS-232
	<ul style="list-style-type: none"> <li>All models (Use the built-in interface of the GOT main unit.)</li> <li>All models (Bus connection and network connection are enabled by mounting a communication unit on the GOT main unit.)</li> </ul>
GT11 ...	When connected via RS-232 or RS-422
	<ul style="list-style-type: none"> <li>When using bus connection</li> </ul>
GT10 ...	When connected via RS-232 When connected via RS-422
	<ul style="list-style-type: none"> <li>GT115□□□□BD</li> <li>GT115□□□□BDQ, GT115□□□□BDA</li> <li>GT1030-LBD2/LBDW2, GT1020-LBD2/LBDW2</li> <li>GT1030-LBD/LBW, GT1020-LBD/LBW, GT1020-LBL/LBLW (The GT1020-LBL/LBLW can be used only with the MELSEC-FXCPU.)</li> </ul>

■ Modules usable when connected with third party computer link and Ethernet modules

## Temperature controllers/indicating controllers

The GOT can be used to log data, set parameters and display alarms.

Manufacturer		Model name	GT15/GT11/GT10				
			Computer link connection		CPU direct connection		Ethernet connection 
			RS-422	RS-232	RS-422	RS-232	
Siemens AG		SIMATIC S7-200 Series	×	×	×		×
		SIMATIC S7-300 Series					
		SIMATIC S7-400 Series					

### Serial link and Ethernet modules

Manufacturer		RS-422	RS-232	Ethernet
Fuji Electric FA Components & Systems	RS-232C interface card	—	NV1L-RS2	—
	RS-232C/485 interface capsule	FFK120A-C10	FFK120A-C10	
	General interface module	NC1L-RS4 FFU120B	NC1L-RS2 FFU120B	
Matsushita Electric Works Computer communication unit		AFPX-COM3	AFP2462 AFP3462 AFP5462 AFPX-COM1 AFPX-COM2 AFPX-COM4	—
Yaskawa Electric MEMOBUS module/ communication module		JAMSC-120NOM27100 JAMSC-IF612 217IF 217IF-01	JAMSC-IF60 JAMSC-IF61 CP-217IF 217IF 217IF-01 218IF-01	218IF 218IF-01
Yokogawa Electric Personal computer link module/ Ethernet interface module		LC02-0N F3LC11-2N	LC01-0N LC02-0N F3LC01-1N F3LC11-1N F3LC11-1F F3LC12-1F	F3LE01-5T F3LE11-0T F3LE12-0T
Allen-Bradley (RockwellAutomation,Inc.) EtherNet/IP communication module		—	—	175E-ENBT
Schneider Electric SA Ethernet unit		—	—	TSX ETY 4102 TSX ETY 5102 140 NOE 771 00 140 NOE 771 10 140 NWM 100 00

\*#1: Supported only by GT15. Use GT15-RS4-TE. The GT15-RS4-RS is not applicable.

\*#2: If the temperature controller/indicating controller is designed for RS-485, use the RS-232/RS-485 converter supplied by the manufacturer.

\*#3: If the temperature controller/indicating controller is designed for RS-422, use the RS-232/RS-422 converter supplied by the manufacturer.

\*#4: Only indicating controllers with RS-232 serial communication function can be connected.

\*#5: Use a communication extension module (Z-COM).

\*#6: Use a communication extension module (Z-COM) depending on the temperature controller system configuration

\*#7: Select a model name that supports the MODBUS® communication function.









## Specifications

### GT11/GT10

#### General specifications

Item		Specification				
Operating ambient temperature	Display	0 to 50°C*5				
	Other than display	0 to 55°C (horizontal installation), 0 to 50°C (vertical installation)*5				
Storage ambient temperature		-20°C to 60°C				
Operating ambient humidity*1		10 to 90%RH, no condensation				
Storage ambient humidity*1		10 to 90%RH, no condensation				
Vibration resistance	Conforming to JIS B 3502 and IEC 61131-2		Frequency	Acceleration	Half amplitude	Sweep count
		Under intermittent vibration	5 to 9Hz	—	3.5mm	10 times in each of X, Y and Z directions
			9 to 150Hz	9.8m/s <sup>2</sup>	—	
		Under continuous vibration	5 to 9Hz	—	1.75mm	
			9 to 150Hz	4.9m/s <sup>2</sup>	—	
Impact resistance		Conforming to JIS B 3502 and IEC 61131-2 (147m/s <sup>2</sup> , 3 times in each of X, Y and Z directions)				
Operating atmosphere		No corrosive gas				
Operating altitude*2		2000m or less				
Installation location		In control panel*6				
Overvoltage category*3		Ⅱ or lower				
Contamination level*4		2 or less				
Cooling method		Self-cooling				

\*1 : Water bulb temperature for STN display type must be 39°C or lower.

\*2 : Do not operate or store the GOT unit in pressurized environments where the pressure exceeds the 0m elevation atmospheric pressure, as this could result in abnormal operation.

\*3 : Assuming that the device is connected at some point between a public power distribution network and local system equipment. Category Ⅱ applies to devices that are supplied with power from fixed equipment. The surge withstand voltage is 2500V for devices with ratings up to 300V.

\*4 : Index that indicates the level of foreign conductive matter in the operating environment of device. Contamination level 2 denotes contamination by non-conductive matter only, though momentary conductivity may occur due to occasional condensation.

\*5 : 0 to 40°C for GT115□□HS

\*6 : Excluding GT115□□HS

#### Performance specifications

Item		Specification							
		GT1155-QTBD	GT1155-QSBD	GT1150-QLBD	GT1155HS-QSBD	GT1150HS-QLBD	GT1155-QTBDQ GT1155-QTBDA	GT1155-QSBDQ GT1155-QSBDA	GT1150-QLBDQ GT1150-QLBDA
Display	Type	TFT color LCD	STN color LCD	STN monochrome (black and white) LCD	STN color LCD	STN monochrome (black and white) LCD	TFT color LCD	STN color LCD	STN monochrome (black and white) LCD
	Screen size	5.7"							
	Resolution	QVGA:320 × 240 [dots]							
	Display size	115(W) × 86(H) [mm] (in horizontal display mode)				115(W) × 86(H) [mm]		115(W) × 86(H) [mm] (in horizontal display mode)	
	Number of displayed characters	16-dot standard font: 20 chars. × 15 lines (2-byte)				12-dot standard font: 26 chars. × 20 lines (2-byte) (in horizontal display mode)			
	Display colors	256 colors		monochrome (black and white) 16 gray scale	256 colors	monochrome (black and white) 16 gray scale	256 colors		monochrome (black and white) 16 gray scale
	View angle	Right/left: 70°, Up: 70°, Down: 50° (in horizontal display mode)	Right/left: 50°, Up: 50°, Down: 60° (in horizontal display mode)	Right/left: 45°, Up: 20°, Down: 40° (in horizontal display mode)	Right/left: 50°, Up: 50°, Down: 60°	Right/left: 45°, Up: 20°, Down: 40°	Right/left: 70°, Up: 70°, Down: 50° (in horizontal display mode)	Right/left: 55°, Up: 65°, Down: 70° (in horizontal display mode)	Right/left: 45°, Up: 20°, Down: 40° (in horizontal display mode)
	Contrast adjustment	16-step adjustment					16-step adjustment		
	Intensity	400 [cd/m <sup>2</sup> ]	350 [cd/m <sup>2</sup> ]	220 [cd/m <sup>2</sup> ]	350 [cd/m <sup>2</sup> ]	220 [cd/m <sup>2</sup> ]	400 [cd/m <sup>2</sup> ]	380 [cd/m <sup>2</sup> ]	220 [cd/m <sup>2</sup> ]
	Intensity adjustment	8-step adjustment							
Life	Approx. 50,000 hours (operating ambient temperature: 25°C)								
Backlight		Cold-cathode fluorescent tube (not replaceable), with backlight OFF detection function. Backlight off time and screen save time can be set.							
	Life*1	Approx. 75,000 hours or more		Approx. 54,000 hours or more		Approx. 54,000 hours or more		Approx. 75,000 hours or more	
Touch panel		(Time for display intensity reaches 50% at operating ambient temperature of 25°C)							
	Type	Matrix resistive type							
	Number of touch keys	300 keys/screen (matrix consisting of 15 lines × 20 columns)							
	Key size	Min. 16 × 16 [dots] (per key)							
	No. of simultaneous touch points	Max. 2 points							
Memory	Life	1,000,000 times or more (operating force 0.98N or less)							
	C drive*2	3MB built-in flash memory (for saving project data, OS)							
	Life (No. of writings)	100,000 times							
Battery	D drive	Built-in SRAM, 512 Kbytes (battery backup)							
		GT11-50BAT type lithium battery							
	Backed up data	Clock data, alarm history and recipe data							
	Life	Approx. 5 years (operating ambient temperature: 25°C)							
Built-in interface	Bus	-					1ch for OCPU (Q mode)/motion controller CPU (Q series) or 1ch for QnA/ACPU/motion controller CPU (A series) Application: For bus connection of PLC		
	RS-422	RS-422, 1ch, Transmission speed: 115200/ 57600/38400/19200/9600/4800 bps, Connector shape: D-sub 9-pin (female) Application: Communication with connected devices			-		-		
	RS-422/232	-			RS-422/232, 1ch, (Select one when using.) Transmission speed: 115200/ 57600/38400/19200/9600/4800 bps, Connector shape: Round type, 32-pin (male) Application: Communication with connected devices		-		
	RS-232	RS-232, 1ch, Transmission speed: 115200/ 57600/38400/19200/9600/4800 bps, Connector shape: D-sub 9-pin (male) Application: Communication with connected devices, connection to personal computer (project data upload/download, OS installation, FA transparent function)			RS-232, 1ch, Transmission speed: 115200/ 57600/38400/19200/9600/4800 bps, Connector shape: Mini-DIN 9-pin (female) Application: Connection to personal computer (project data upload/download, OS installation, FA transparent function)		RS-232, 1ch, Transmission speed: 115200/ 57600/38400/19200/9600/4800 bps, Connector shape: D-sub 9-pin (male) Application: Connection to barcode reader, personal computer (project data upload/download, OS installation, FA transparent function)		
	USB	USB (full speed: 12 Mbps), device 1ch Application: Connection to personal computer (project data upload/download, OS installation, FA transparent function)							
	CF card	Compact flash slot, 1ch, Connector shape: TYPE I Application: Data transfer and storage							
	Optional function board	1ch for optional function board installation					(Optional function board in main unit)		
Buzzer output		Single tone (tone length adjustable)							
Protective construction		JEM1030 Front: IP67*3 In panel: IP2X				JEM1030 Front: IP65*4			
External dimensions (without USB port cover)		164(W) × 135(H) × 56(D) [mm]				176(W) × 220(H) × 93(D) [mm]			
Panel cut dimensions		153(W) × 121(H) [mm]				153(W) × 121(H) [mm]			
Weight		0.7 [kg] (excl. fittings)				1.0 [kg] (main unit only)		0.9 [kg] (excl. fittings)	
Applicable software packages	Screen design software	GT Designer2 Version 2.73B or later							
	Simulation software	GT Simulator2 Version 2.73B or later							

\*1 : Using the GOT screen save/backlight OFF functions prevents screen burn-in and extends the backlight life.

\*2 : The built-in memory is a ROM that permits overwriting of new data without having to delete the existing data.

\*3 : Conforms to the IP67 (JEM1030) standard when the USB port cover is installed. (The USB interface conforms to IP2X (JEM1030) when a USB cable is connected.) However, this does not guarantee protection in all users' environments.

\*4 : This does not guarantee protection in all users' environments. The specification is not applied when the interface protective cover and rear face protective cover are removed.

#### Power supply specifications

Item	Specification								
	GT1155-QTBD GT1155-QSBD GT1155HS-QSBD	GT1150-QLBD GT1150HS-QLBD	GT1155-QTBDQ GT1155-QTBDA	GT1155-QSBDQ GT1155-QSBD A	GT1150-QLBDQ GT1150-QLBDA	GT1030-LBD GT1030-LBD2 GT1030-LBDW GT1030-LBDW2	GT1020-LBD GT1020-LBD2 GT1020-LBDW GT1020-LBDW2	GT1020-LBL GT1020-LBLW	
Input power supply voltage	24VDC (+10%, -15%), ripple voltage of 200mV or less							5VDC (±5%), supplied from PLC communication cable	
Input frequency	—								
Input maximum voltampere	—								
Power consumption	9.84W or less (410mA/24VDC)	9.36W or less (390mA/24VDC)	11.16W or less (465mA/24VDC)	9.72W or less (405mA/24VDC)	7.92W or less (330mA/24VDC)	2.2W or less (90mA/24VDC)	1.9W or less (80mA/24VDC)	1.1W or less (220mA/5VDC)	
With backlight off	4.32W or less (180mA/24VDC)			5.04W or less (210mA/24VDC)		1.7W or less (70mA/24VDC)		1.2W or less (50mA/24VDC)	0.6W or less (120mA/5VDC)
Inrush current	15A or less (2ms, at max. load)		26A or less (4ms, at max. load)			18A or less(26.4VDC) 1ms		13A or less(26.4VDC) 1ms	—
Permissible instantaneous failure time	Within 5ms		Within 10ms			Within 5ms			—
Noise resistance	Noise width 1μs, and noise frequency 30 to 100Hz, by noise simulator with noise voltage 1000Vp-p		Noise width 1μs, and noise frequency 25 to 60Hz, by noise simulator with noise voltage 500Vp-p			Noise width 1μs, and noise frequency 30 to 100Hz, by noise simulator with noise voltage 1000Vp-p			—
Withstand voltage	500VAC for 1 minute between power supply terminal and ground for 1 minute							—	
Insulation resistance	10MΩ or higher with an insulation resistance tester (500VDC between power supply terminal and ground)							—	
Applicable wire size	0.75 to 2 [mm <sup>2</sup> ]*1					0.14 to 1.0mm <sup>2</sup> (twisted wire), 0.14 to 1.5mm <sup>2</sup> (solid wire)			—
Clamp terminal	Clamp terminals for M3 screw RAV1.25-3, V2-N3A, FV2-N3A*1					Al2.5-6BU, Al0.34-6TQ and Al0.5-6WH (made by Phoenix Contact)			—
Tightening torque (terminal block's terminal screws)	0.5 to 0.8 [N·m]*1					0.22 to 0.25 [N·m]			—
Grounding	—					Class D grounding (100Ω or less) When the unit cannot be grounded, ground it to the panel.			—

\* : Excluding GT115□□HS

#### Performance specifications


Item		Specification							
		GT1030-LBD	GT1030-LBDW	GT1030-LBD2	GT1030-LBDW2	GT1020-LBD GT1020-LBL	GT1020-LBDW GT1020-LBLW	GT1020-LBD2	GT1020-LBDW2
Display	Type	STN monochrome (black and white) LCD							
	Screen size	4.5"				3.7"			
	Resolution	288 × 96 [dots] (in horizontal mode)				160 × 64 [dots] (in horizontal mode)			
	Display size	109.42(W) × 35.98(H) [mm] (in horizontal mode)				86.4(W) × 34.5(H) [mm] (in horizontal mode)			
	Number of displayed characters	16-dot standard font: 36 chars. × 6 lines (1-byte) or 18 chars. × 6 lines (2-byte) (in horizontal mode)				16-dot standard font: 20 chars. × 4 lines (1-byte) or 10 chars. × 4 lines (2-byte) (in horizontal display mode)			
	Display colors	Monochrome (black and white)							
	View angle	Right/left: 30°, Up: 20°, Down: 30° (in horizontal display mode)							
	Contrast adjustment	16-step adjustment							
	Intensity	200 [cd/m <sup>2</sup> ] (in green)	300 [cd/m <sup>2</sup> ] (in white)	200 [cd/m <sup>2</sup> ] (in green)	300 [cd/m <sup>2</sup> ] (in white)	200 [cd/m <sup>2</sup> ] (in green)	300 [cd/m <sup>2</sup> ] (in white)	200 [cd/m <sup>2</sup> ] (in green)	300 [cd/m <sup>2</sup> ] (in white)
Intensity adjustment	8-step								
Life*1	Approx. 50,000 hours (Time after which display contrast reaches 20% at operating ambient temperature of 25°C)								
Backlight	Color	3-color LED (green, orange and red) (replacement not needed)	3-color LED (white, pink and red) (replacement not needed)	3-color LED (green, orange and red) (replacement not needed)	3-color LED (white, pink and red) (replacement not needed)	3-color LED (green, orange and red) (replacement not needed)	3-color LED (white, pink and red) (replacement not needed)	3-color LED (green, orange and red) (replacement not needed)	3-color LED (white, pink and red) (replacement not needed)
	Function	Status (on/blinking/off) control is possible. Screen save time can be set.							
Touch panel	Type	Matrix resistive type				Analog resistive type			
	Number of touch keys	Max. 50 keys/screen				—			
	Key size	Min. 16 × 16 [dots] (per key)				Min. 2 × 2 [dots] (per key)			
	No. of simultaneous touch points	Max. 2 points				Simultaneous pressing of more than one key is impossible (If there is a switch near the center of the pressed keys, the switch may function.)			
	Life	1,000,000 times or more (operating force 0.98N or less)							
Memory	User memory*2	Built-in flash ROM for saving project data (1.5 Mbytes or less), OS				Built-in flash ROM for saving project data (512 Kbytes or less), OS, alarm history, recipe data			
	Life (No. of writings)	100,000 times							
Battery	Backed up data	GT11-50BAT type lithium battery				—			
	Life	Clock data, alarm history and recipe data				—			
Built-in interface	Life	Approx. 5 years (operating ambient temperature: 25°C)							
	For communication with PLC	RS-422, 1ch, Transmission speed: 115200/57600/38400/19200/9600/4800 bps, Connector shape: Connector terminal block, 9-pin Application: Communication with PLC	RS-232, 1ch, Transmission speed: 115200/57600/38400/19200/9600/4800 bps, Connector shape: Connector terminal block, 9-pin Application: Communication with PLC	RS-422, 1ch, Transmission speed: 115200/57600/38400/19200/9600/4800 bps, Connector shape: Connector terminal block, 9-pin Application: Communication with PLC	RS-422, 1ch, Transmission speed: 115200/57600/38400/19200/9600/4800 bps, Connector shape: Connector terminal block, 9-pin Application: Communication with PLC	RS-232, 1ch, Transmission speed: 115200/57600/38400/19200/9600/4800 bps, Connector shape: Connector terminal block, 9-pin Application: Communication with PLC	RS-232, 1ch, Transmission speed: 115200/57600/38400/19200/9600/4800 bps, Connector shape: Connector terminal block, 9-pin Application: Communication with PLC	RS-232, 1ch, Transmission speed: 115200/57600/38400/19200/9600/4800 bps, Connector shape: Connector terminal block, 9-pin Application: Communication with PLC	RS-232, 1ch, Transmission speed: 115200/57600/38400/19200/9600/4800 bps, Connector shape: Connector terminal block, 9-pin Application: Communication with PLC
	For communication with personal computer	RS-232, 1ch Transmission speed: 115200/57600/38400/19200/9600/4800 bps, Connector shape: Mini DIN 6-pin (female) Application: Communication with personal computer (project data upload/download, OS installation, transparent function)							
Buzzer output		Single tone (tone length adjustable/none)							
Protective construction*4		Conforming to IP67f (JEM1030) (front panel)							
External dimensions		145(W) × 76(H) × 29.5(D) [mm]				113(W) × 74(H) × 27(D) [mm]			
Panel cut dimensions		137(W) × 66(H) [mm]				105(W) × 66(H) [mm]			
Weight		0.3 [kg] (excl. fittings)				0.2 [kg] (excl. fittings)			
Screen design software		GT Designer2 Version 2.73B or later							



## GOT main unit

### External dimensions

(Unit: mm)

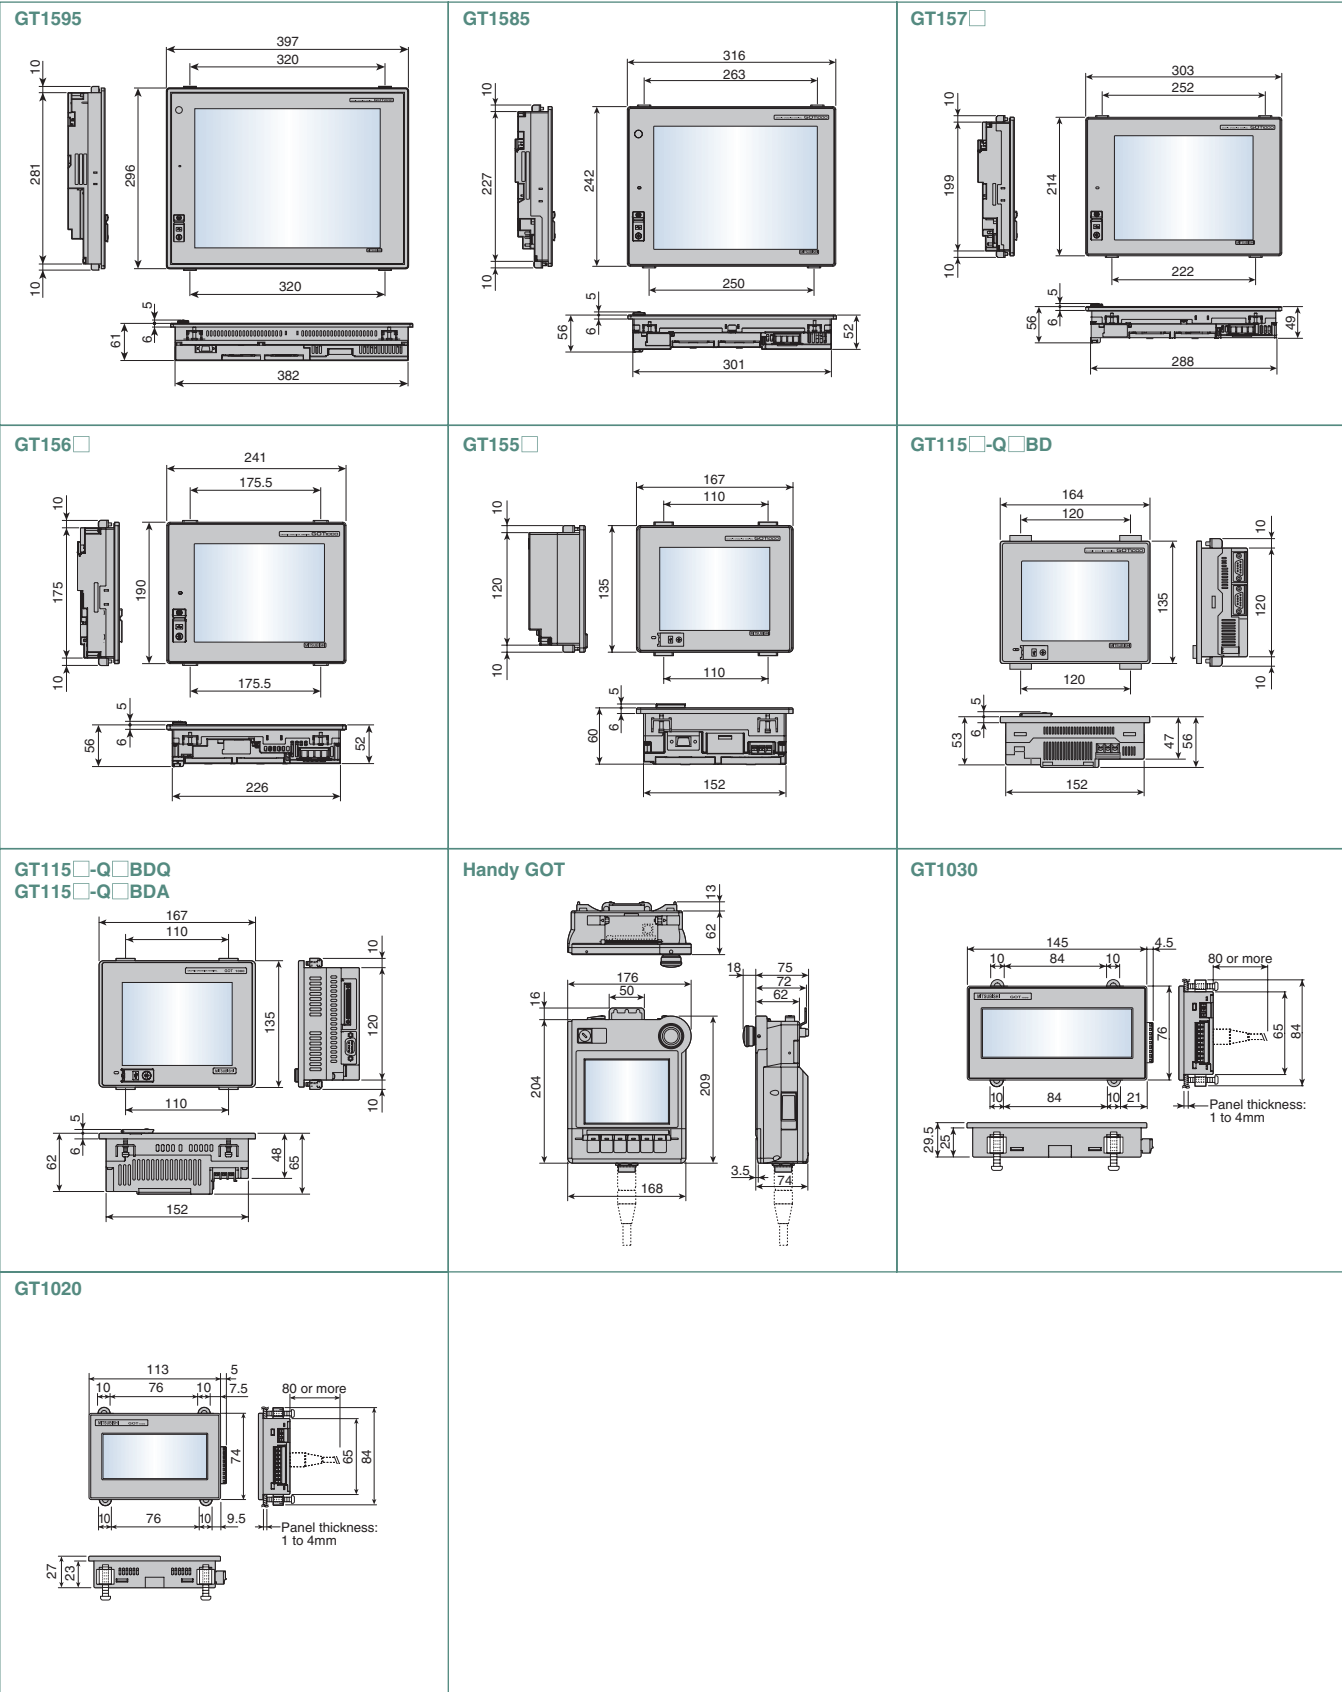

### Panel cut dimensions


#### When GOT is installed

(Unit: mm)

Screen size	Type of GOT main unit	A	B
15"	GT1595	383.5	282.5
12.1"	GT1585 <sup>*1</sup>	302	228
10.4"	GT157 <sup>*2</sup>	289	200
8.4"	GT156 <sup>*3</sup>	227	176
5.7"	GT155 <sup>*3</sup>	153	121
5.7"	GT115 <sup>*3</sup>	137	66
4.5"	GT1030	105	66

<sup>\*1</sup> : Same dimensions as A985GOT(-V)  
<sup>\*2</sup> : Same dimensions as A975/970GOT(-B)  
<sup>\*3</sup> : Same dimensions as F940GOT  
<sup>\*4</sup> : For GT10, the tolerances are +1/0.

For compatibility with GOT900 series, see "Backward compatibility" (page 63).

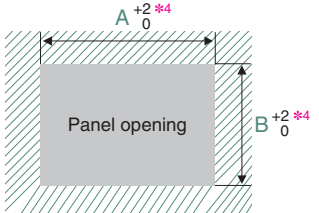

#### When CF card extension unit (mounting unit on control panel) is installed

Type	A	B
GT15-CFEX-C08SET	94.0	33.0

#### Cautions when installing and uninstalling

When installing the CF card extension unit on the control panel, make sure that the extension unit does not interfere with the extension unit cable or the CF card interface of GOT. Place the CF card extension unit at a distance of 25mm or more from GOT. For installation locations, see the GT15 User's Manual.

### Product installation interval

Keep the following distances between the GOT and structural objects and other devices.

#### GT15

(Unit: mm)

Item	GT1595	GT1585	GT157	GT156	GT155
GOT only					
When bus connection unit is installed	50 or more (20 or more)		50 or more (31 or more)	50 or more (36 or more)	65 or more
When serial communication unit is installed					
When RS-422 conversion unit is installed	50 or more	51 or more	68 or more	73 or more	—
When Ethernet communication unit is installed					50 or more (40 or more)
When CC-Link communication unit is installed (GT15-J61BT13)					50 or more (32 or more)
When MELSECNET/H communication unit (coaxial) is installed	50 or more (20 or more)	50 or more (24 or more)	50 or more (38 or more)	50 or more	72 or more
When MELSECNET/H communication unit (optical) is installed					50 or more (20 or more) <sup>*1</sup>
When printer unit is installed	50 or more (20 or more)		50 or more (31 or more)	50 or more (36 or more)	50 or more
When video input unit is installed	—	50 or more (20 or more) <sup>*2</sup>	—	—	—
RGB input unit					
Video/RGB input unit	—	50 or more (20 or more) <sup>*3</sup>	—	—	—
RGB output unit					
CF card unit					
CF card extension unit	50 or more (20 or more)		50 or more (31 or more)	50 or more (36 or more)	65 or more
External input/output unit					
Audio output unit					
A					
B			80 or more (20 or more)		
C (When CF card is not used)			50 or more (20 or more)		
D (When CF card is used)			50 or more (20 or more)		100 or more
E			50 or more (20 or more)		100 or more (20 or more)

<sup>\*1</sup> : The distance varies depending on the cable to be used. For details, consult the closest Mitsubishi Electric System & Service office.  
The values in the table are given for your reference.  
<sup>\*2</sup> : The distances required when the coaxial cable 3C-2V (JIS C 3501) is used.  
<sup>\*3</sup> : The distance varies depending on the cable to be used. When the bending radius of the cable is larger than the indicated value, keep a space appropriate to the bending radius.

Dimensions shown in parentheses apply when there are no devices nearby (contactor, etc.) which produce radiated noise or heat. Even with these dimensions, however, the ambient temperature must never exceed 55°C. Depending on the unit and cable being used, a cable length longer than the dimension A (dimension D for GT10) shown above may be required.

#### GT11

(Unit: mm)

GOT main unit	A, D	B	C	E
GT1155	50 or more	80 or more <sup>*1</sup>	50 or more <sup>*2</sup>	100 or more
GT1150	50 or more	80 or more	100 or more	100 or more (20 or more)


<sup>\*1</sup> : 50 or more (20 or more) in the case of vertical installation  
<sup>\*2</sup> : 80 or more (20 or more) in the case of vertical installation

#### GT10

(Unit: mm)

GOT main unit	A	B	C	D	E
GT1030	50 or more	50 or more	50 or more	50 or more	50 or more
GT1020	50 or more (20 or more) <sup>*1</sup>	50 or more (20 or more)	50 or more (20 or more)	50 or more	50 or more (20 or more) <sup>*2</sup>



<sup>\*1</sup> : 50 or more when an RS-232C/USB conversion adapter is used  
<sup>\*2</sup> : 80 or more when a personal computer connection cable is used or when a personal computer RS-232C interface is used for connecting multiple GOTs  
50 or more when an RS-232C interface is used for using an RS-232C/USB conversion adapter

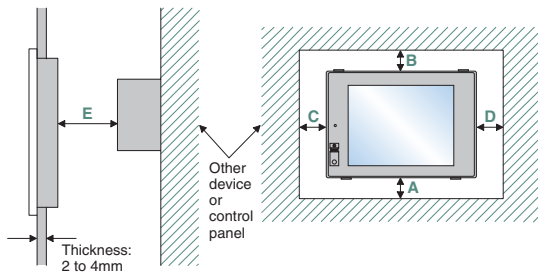

### Bus connection cables

Cable model name	Cable length	External dimensions
GT15-QC-B	0.6, 1.2, 3, 5, 10m	Fig. 1
GT15-QC-BS	15, 20, 25, 30, 35m	Fig. 1
GT15-C-NB	1.2, 3, 5m	Fig. 2
GT15-AC-B	0.6, 1.2, 3, 5m	Fig. 3
GT15-A370C-B-S1	1.2, 2.5m	Fig. 4
GT15-A370C-B	1.2, 2.5m	Fig. 5
GT15-A1SC-B	0.7, 1.2, 3, 5m	Fig. 6
GT15-A1SC-NB	0.45, 0.7, 3, 5m	Fig. 7
GT15-C-EXSS-1 <sup>*1</sup>	10.6, 20.6, 30.6m	Figs 8 and 9
GT15-EXCNB	0.5m	Fig. 8
GT15-C-BS	0.7, 1.2, 3, 5, 10, 20, 30m	Fig. 9
GT15-J2C10B	1m	Fig. 10

<sup>\*1</sup> : GT15-C-EXSS-1 is a set consisting of GT15-EXCNB and GT15-C-BS. (See Fig. A.)

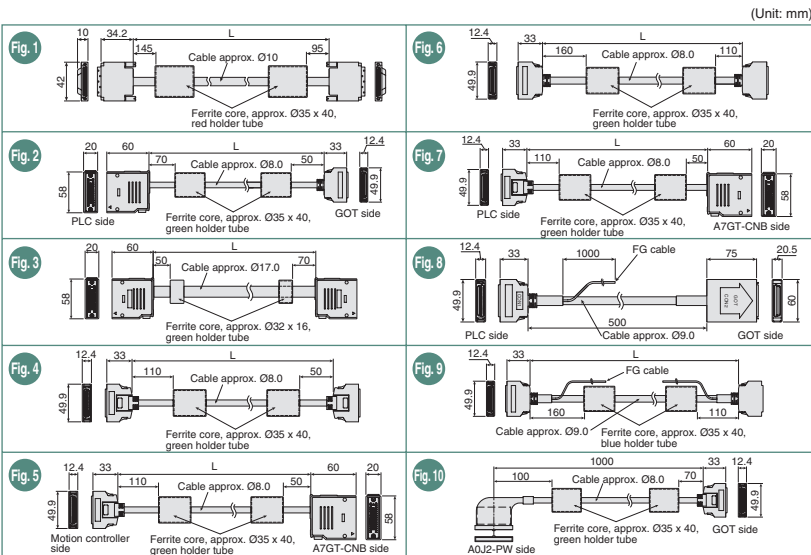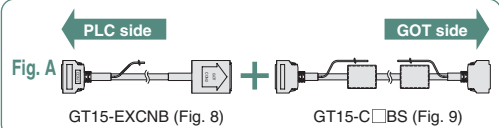

(Unit: mm)






External dimensions

RS-422 cables

Cable model name	Cable length	External dimensions
GT01-C30R4-25P	3m	Fig. 11
GT01-C□R4-25P	10, 20, 30m	Fig. 12
GT01-C□R4-8P	1, 3, 10, 20, 30m	Fig. 13
GT10-C□R4-8P	1, 3, 10, 20, 30m	Fig. 14
GT10-C□R4-25P	3, 10, 20, 30m	Fig. 15

RS-232 cables

Cable model name	Cable length	External dimensions
GT01-C30R2-6P	3m	Fig. 16
GT01-C30R2-9S	3m	Fig. 17
GT01-C30R2-25P	3m	Fig. 18
GT10-C30R2-6P	3m	Fig. 19

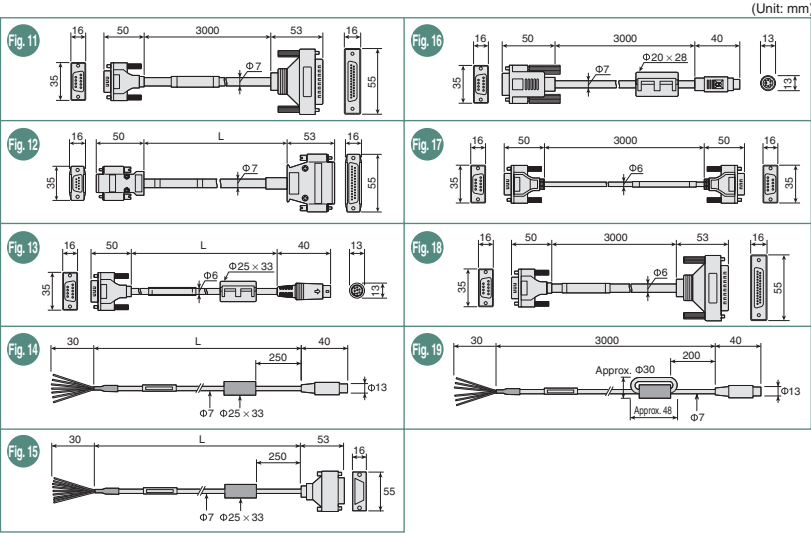

Communication units/optional units

Communication units/bus extension connector boxes

Product name			Model name	External dimensions
Bus connection unit	Standard model of bus connection unit for QCPU (Q mode)/motion controller CPU (Q Series)	1ch	GT15-QBUS	Fig. 20
		2ch	GT15-QBUS2	Fig. 21
	Standard model of bus connection unit for QnA/ACPU/motion controller CPU (A Series)	1ch	GT15-ABUS	Fig. 20
		2ch	GT15-ABUS2	Fig. 21
	Thin model of bus connection unit for QCPU (Q mode)/motion controller CPU (Q Series)	1ch	GT15-75QBUSL	Fig. 22
		2ch	GT15-75QBUS2L	Fig. 22
	Thin model of bus connection unit for QnA/ACPU/motion controller CPU (A Series)	1ch	GT15-75ABUSL	Fig. 22
		2ch	GT15-75ABUS2L	Fig. 22
Serial communication unit	RS-232 serial communication unit (D-sub 9-pin (male))	GT15-RS2-9P		Fig. 23
	RS-422/485 serial communication unit (D-sub 9-pin (female))	GT15-RS4-9S		Fig. 23
	RS-422/485 serial communication unit (terminal block)	GT15-RS4-TE		Fig. 24
RS-422 conversion unit	RS-232-->RS-422 conversion unit (9-pin)	GT15-RS2T4-9P		Fig. 25
	RS-232-->RS-422 conversion unit (25-pin)	GT15-RS2T4-25P		Fig. 25
Bus extension connector box		A9GT-QCNCB		Fig. 26
Bus connector conversion box		A7GT-CNB		Fig. 27
MELSECNET/H communication unit	Optical loop unit	GT15-J71LP23-25		Fig. 28
		GT15-J71BR13		Fig. 29
CC-Link communication unit		Intelligent device station unit		Fig. 30
Ethernet communication unit		GT15-J71E71-100		Fig. 31

Optional units

Product name	Model name	External dimensions
Printer unit	GT15-PRN	Fig. 32
Video input unit	GT15V-75V4	Fig. 33
RGB input unit	GT15V-75R1	Fig. 33
Video/RGB input unit	GT15V-75V4R1	Fig. 33
RGB output unit	GT15V-75ROUT	Fig. 33
CF card unit	GT15-CFCD	Fig. 34
CF card extension unit	GT15-CFEX-C08SET	Fig. 35
Audio output unit	GT15-SOUT	Fig. 36
External input/output unit	GT15-DIO	Fig. 37
Handy GOT connector conversion box	GT11H-CNB-37S	Fig. 38


\*1 : The connector shape varies depending on the model.

\*2 : Dimensions A to D for each communication unit

Model name	A	B	C	D
GT15-QBUS	2.5	12	31.5	—
GT15-QBUS2	2.5	11	29	33.5
GT15-ABUS	4.5	15	29.5	—
GT15-ABUS2	4.5	11	31	31

\*3 : Dimension X when GOT is installed  
1 mm smaller when a CF card unit is mounted.

	1st	2nd	3rd
15" and 10.4"	21	42.5	64.5
12.1"	18	39.5	61.5
8.4" and 5.7"	23	44.5	66.5





\*4 : Dimension A for each communication unit

Model name	A
GT15-75QBUSL	2.5
GT15-75QBUS2L	2.5
GT15-75ABUSL	4
GT15-75ABUS2L	4

\*5 : Dimension X when GOT is installed

	15" and 10.4"	12.1"	8.4" and 5.7"
	8	5	10

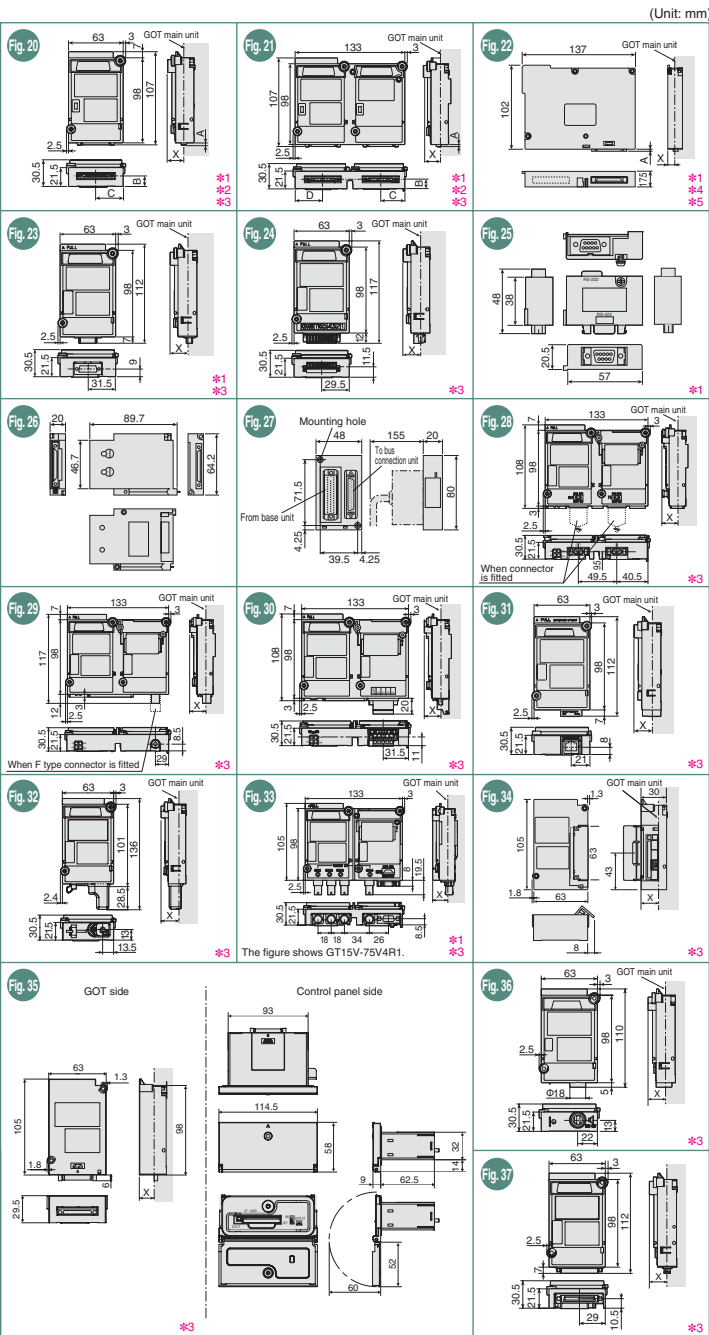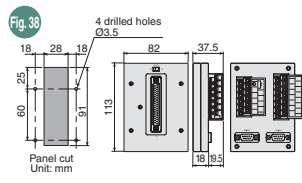

Notes for use

CF card & optional function board selection <GT15/GT11>

When using the GT15

When using optional functions & extended functions

To use the optional functions marked with \*3 shown in Table A, the GT15-QFNB(□M) or GT15-MESB48M must be mounted.

To use the optional functions marked with \*6 shown in Table A, the GT15-MESB48M must be mounted.

Since the following GOT model has a built-in optional function board (GT15-FNB), it is unnecessary to mount an optional function board to use the optional functions other than \*3 and \*6.

•GT15: Version D or later\*

\* To activate the built-in optional function board in the GOT, it is necessary to install the basic OS, GT Designer2 version 2.55H or later, in the GOT.

Note that installation of the OS for some functions will decrease the free space in the user area.

Check the user area size necessary for the optional function OS and extended function OS in Table A. If the free space in the user area is insufficient, select an optional function board with expansion memory (GT15-QFNB□M or GT15-MESB48M).

Selection according to required space in user area

If the total amount of data to be stored in the user area exceeds the standard memory capacity\*1, mount a CF card and an optional function board with expansion memory (GT15-QFNB□M or GT15-MESB48M).

Selecting optional function boards with expansion memory

Select an optional function board with expansion memory with a larger capacity than [total amount of data to be stored in the user area] - [standard memory capacity].\*2

The following data is stored in the user area. For more details on the data amount, see the GT Designer2 Version2 Basic Operation /Data Transfer Manual.

- Project data •Extended function OS •Optional function OS
- Special data •2nd and subsequent communication drivers •Buffering data

Selecting a CF card

• When the standard monitor OS is booted from the C drive

Select a CF card with a larger capacity than the total amount of data to be stored in the user area.\*2

• When the standard monitor OS is booted from the A drive

Select a CF card with a larger capacity than the total amount of data to be stored in the user area + the total capacity of standard monitor OS, standard font and first communication driver (6 MB in total)\*2.\*3

\* The user area is not affected.

The CF card can be used for the following GT15 functions.

- Data transfer (usable also on GT11) •Advanced recipe •Historical trend graph
  - Parts movement •Advanced alarm •Recipe (usable also on GT11) •Parts display
  - Hardcopy •Alarm history (usable also on GT11) •Logging •Report\*
  - Memory expansion\* •Operation log\* •Document display\* •Backup/restoration\*
  - Ladder monitor •CNC data input/output function\* •Start from CF card\*
- A CF card is always required to use the functions marked with asterisk (\*).

Restriction on writing OS

When the standard monitor OS is booted from the C drive

Even if an optional function board with expansion memory is used in the GOT, the total capacity of the second and following communication drivers, extended function OS and optional function OS must not exceed the capacity of the user area in the C drive.

When the standard monitor OS is booted from the A drive

When an optional function board with expansion memory is used in the GOT, the total capacity of the second and following communication drivers, extended function OS, optional function OS, project data and special data can be increased to up to the maximum total capacity that is obtained by mounting an optional function board with expansion memory on the GOT (standard memory capacity\*1 + expansion memory capacity (up to 48 MB)).

When using the GT11

When using optional functions

Since the following GOT models have a built-in optional function board (GT11-50FNB), it is unnecessary to mount an optional function board to use optional functions shown in Table A.

- GT115□-Q□BDQ •GT115□HS-Q□BD: Version B or later
- GT115□-Q□BDA •GT115□-Q□BD: Version C or later

Backward compatibility

Project data

GT Designer → GT Designer2 compatibility \*

Project data created in GT Designer can be used in GT Designer2.

GOT900 series → GOT1000 series compatibility \*

Using data from the GOT-A900 series

The GOT900 series project data can be used on the GOT1000 series.

Using data from the GOT-F900 series

The GOT-F900 series project data can be used on the GOT1000 series.

For the details, see the Project Data Conversion Summary (JY997D1761).

\*Some data and functions cannot be used on the GOT1000 series.

[ Table A ]

Function		User area size to be used (KB)	
		GT15	GT11
Extended functions	Barcode	84	*5
	RFID	166	*5
	System monitor	746	*5
	Report	235	None
	Printer	1104	None
	Operation log (device name conversion library)	800	None
	Stroke font support function	400	None
	Stroke basic font (Japanese)	2160	None
	Stroke basic font (Japanese) (with Hangeul)	3175	None
	Stroke basic font (Chinese, Simplified)	1474	None
	Stroke basic font (Chinese, Simplified) (with Hangeul)	2016	None
	Video display	512	None
	RGB display	512	None
	Backup/restoration	820	None
	Operator authentication	784	None
Optional functions	Audio output	200	None
	External I/O, operation panel	100	None
	CNC data	437	None
	CNC data input/output	437	None
	input/output	100	None
	GOT platform library	100	None
	Device data transfer	100	None
	Maintenance time notification	*4	None
	Multi-channel*3	*4	None
	Standard font (Chinese, Simplified)	1280	None
	Standard font (Chinese, Traditional)	1920	None
	Standard font (Japanese)	1280	None
	Stroke font (Japanese)	1037	None
	Stroke font (Chinese, Simplified)	1248	None
	Stroke font (Chinese, Traditional)	1680	None
Optional functions	Operation log	1218	None
	Document display*3	2048	None
	Kana-Kanji conversion	1223	None
	Historical trend graph*7	*4	None
	Logging	740	None
	Recipe	100	*5
	Advanced recipe	1241	None
	Object script	360	None
	Ladder monitor	MELSEC-A ladder monitor 523	None
		MELSEC-FX ladder monitor 592	None
		MELSEC-Q/QnA ladder monitor*3 1082	None
	A list editor	MELSEC-A list editor 1058	*5
	FX list editor	MELSEC-FX list editor 1058	*5
	Intelligent unit monitor	384	None
	Network monitor	324	None
Optional functions	Q motion monitor	607	None
	Servo amplifier monitor	524	None
	CNC monitor	588	None
	Gateway	Gateway (server, client) 100	None
		Gateway (mail) 100	None
		Gateway (FTP) 64	None
	MES interface*6	3196*6	None

\*1 : The standard memory capacity (built-in flash memory in C drive) varies depending on the model. For the details, see Specifications (page 56).

\*2 : Approximate standard

\*3 : GT15-QFNB(□M) or GT15-MESB48M is required to use the multi-channel function, MELSEC-Q/QnA ladder monitor function and document display function.

\*4 : Installation of the optional function OS is not required.

\*5 : Requires installation of the optional function OS and extended function OS, but does not use the user area.

\*6 : Use GT15-MESB48M for the MES interface function.  
821KB out of the expansion memory (48MB) of GT15-MESB48M will be used for operation of the MES interface function.

\*7 : It is necessary to specify the logging function and install the optional function OS (logging) in advance.

Cables

- For details on using the GOT900 series bus connection cables, RS-422 cables and RS-232 cables with the GOT1000 series, see Technical Bulletin No.GOT-A-0009.
- The bus connection cables, RS-422 cables and RS-232 cables for the GOT1000 series cannot be used for the GOT900 series.

Panel cut dimensions

GOT900 series → GOT1000 series compatibility

- The A985GOT(-V) and GT1585, A975/970GOT(-B) and GT157□, and F940GOT and GT155□/GT115□ have the same panel cut dimensions, respectively. Therefore, it is not necessary to change the mounting hole size.
- Although the A95□ differ in panel cut dimensions from the GT155□, GT115□-Q□BDQ and GT115□-Q□BDA, the former model can be replaced with any of the latter ones without changing the mounting hole size.



## To use the multi-channel function <GT15>

The multi-channel function is designed to connect and monitor multiple FA devices by mounting multiple communication units on a single GOT unit or by using the standard interface (built in RS-232 interface).

### Acceptable combinations

The following connection combinations can be used for the multi-channel function.

- ① Bus connection or network connection\*<sup>1</sup> + serial connection\*<sup>2</sup>
- ② Serial connection only

- \*<sup>1</sup> : Network connections include the following connection configurations.
- MELSECNET/H connection • MELSECNET/10 connection • CC-Link connection
  - Ethernet connection • MODBUS®/TCP connection
- \*<sup>2</sup> : Serial connections include the following connection configurations.
- CPU direct connection • Computer link connection • CC-Link connection (via G4)
  - Microcomputer connection • Third party PLC connection
  - Temperature controller connection • Inverter connection • Servo amplifier connection
  - CNC connection (CPU direct connection)

		GT1595/GT1585 GT157□/GT156□	GT155□	Description
(1)	Number of connectable channels	Up to 4 channels	Up to 2 channels	The number of communication ports (communication units and standard interfaces) for use for communication on GOT. • Only one channel per one GOT can be connected in bus connection and network connection. • When the Ethernet communication unit is used for other functions than communication with the connected device * <sup>3</sup> , the unit is not included in the number of connected channels. • When the standard interface is used to connect with a peripheral device * <sup>4</sup> , the interface is not included in the number of connected channels. ☞ See "Calculation of current consumed by units <G15>" (page 65).
	Number of mountable units	Up to 5 units	Up to 3 units	The number of units that can be mounted on the extension unit interfaces 1 and 2 of GOT. • More than one serial communication unit * <sup>5</sup> of the same model can be mounted. • Optional units are included in the number of units. • RS-422 conversion units are not included in the number of units. • It is necessary to calculate the total current consumed by the units to be mounted. ☞ See "Calculation of current consumed by units <G15>" (page 65).
(2)	Number of mounting stages	Up to 3 stages (2 slots)	Up to 3 stages (1 slot)	The number of mounting stages that units can be stacked on the extension unit interfaces 1 and 2 of GOT. • Units that occupy two slots * <sup>6</sup> * <sup>7</sup> must be mounted on the first stage. • When any units in * <sup>7</sup> is used, mount the unit on the first stage, then mount other units on the second or subsequent stages. • Units in * <sup>8</sup> cannot be stacked on other units. Mount any of the units on the first stage. ☞ See "External dimensions" (page 60) and "Mounting units on the GOT side interface <GT15>" (page 64).

- \*<sup>3</sup> : Ethernet download function, gateway function, MES interface function and MODBUS®/TCP connection
- \*<sup>4</sup> : Barcode function, RFID function, FA transparent function, OS installation and project data download
- \*<sup>5</sup> : GT15-RS2-9P, GT15-RS4-9S and GT15-RS4-TE

- \*<sup>6</sup> : GT15-QBUS2, GT15-ABUS2, GT15-J71LP23-25, GT15-J71BR13, GT15-J61BT13
- \*<sup>7</sup> : GT15V-75V4, GT15V-75R1, GT15V-75V4R1, GT15V-75ROUT
- \*<sup>8</sup> : GT15-75QBUSL, GT15-75QBUS2L, GT15-75ABUSL, GT15-75ABUS2L, GT15-75J71LP23-Z, GT15-75J71BR13-Z, GT15-75J61BT13-Z


### Communication driver

A communication driver must be installed for each of the connection configuration. Communication drivers for the second and subsequent channels will be installed in the user area.

### Optional function board

To use the multi-channel function, an optional function board with expansion memory is necessary. Use the optional function board GT15-QFNB(□M) or GT15-MESB48M. GT15-FNB cannot be used.

## Mounting units on the GOT side interface <GT15>

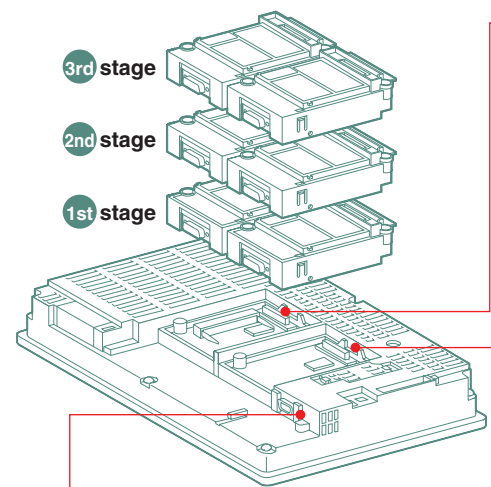

### Standard interface (built-in RS-232 interface)

The interface can establish a serial connection with connected devices and peripheral devices, such as a barcode reader.

### Extension unit interface 1

### Extension unit interface 2 (GT155□ has the extension unit interface 1 only)

Up to 3 communication units and optional units can be mounted on each extension unit interface.

**Mount a unit that occupies two slots on the first stage.**  
However, when any of the following units are used, mount the unit on the first stage, then mount other units on the second and subsequent stages.

- GT15V-75V4, GT15V-75R1, GT15V-75V4R1 and GT15V-75ROUT  
(Only one of these units can be mounted on the GT1585V or GT1575V.)

The following units must not be stacked on other units. Mount any of them on the first stage.


- GT15-75QBUSL, GT15-75QBUS2L, GT15-75ABUSL, GT15-75ABUS2L
- GT15-75J71LP23-Z, GT15-75J71BR13-Z, GT15-75J61BT13-Z  
(GT155□ must not be used.)

### Instructions for mounting and removing the GT15-CFCD

- An extension unit cannot be mounted on a CF card unit.  
When extension units are mounted, mount the CF card unit on the last stage.
- When mounting a CF card unit on the extension interface 1 (left), ensure that the number of extension units mounted on the extension interface 2 (right) is smaller than the number on the extension interface 1 (left). Otherwise, the CF card cannot be inserted or removed.
- Remove the CF card unit in the designated direction (△PULL) to prevent damage to the connector.

### Unit occupying two slots

Ex.: GT15-QBUS2



## Calculation of current consumed by units <GT15>

When using multiple units and a barcode reader, the total current consumed by the units, barcode reader, and RFID controller must be less than the current that can be supplied by GOT. Design the system using the following values so that the total current is within the range of the current supply capacity of the GOT.

### (1) Current that can be supplied by the GOT

GOT model	Current supply capacity (A)
GT1595	2.13
GT1585 (incl. GT1585V)	1.74
GT157□ (incl. GT1575V)	2.2
GT156□	2.2
GT155□	1.3


### (2) Current used by units, barcode reader and RFID controller

Unit model	Consumed current (A)	Unit model	Consumed current (A)
GT15-QBUS, GT15-QBUS2, GT15-75QBUSL, GT15-75QBUS2L	0.275 * <sup>1</sup>	GT15-J61BT13	0.56
GT15-ABUS, GT15-ABUS2, GT15-75ABUSL, GT15-75ABUS2L	0.12	Barcode reader	* <sup>2</sup>
GT15-RS2-9P	0.29	GT15-PRN	0.09
GT15-RS4-9S	0.33	GT15V-75V4R1, GT15V-75V4, GT15V-75R1	0.2 * <sup>1</sup>
GT15-RS4-TE	0.3	GT15V-75ROUT	0.11
GT15-RS2T4-9P	0.098	GT15-CFCD	0.07
GT15-J71E71-100	0.224	GT15-CFEX-C08SET	0.15
GT15-J71LP23-25	0.56	GT15-SOUT	0.08
GT15-J71BR13	0.77	GT15-DIO	0.1
		RFID controller	* <sup>2</sup>

- \*<sup>1</sup> : The current consumed by a single unit is as follows. However, calculation of current in terms of multi-channel function, use the above value.
- GT15-QBUS, GT15-QBUS2, GT15-75QBUSL, GT15-75QBUS2L ..... 0.44A
  - GT15V-75V4R1 ..... 0.95A
  - GT15V-75V4 ..... 0.7A
  - GT15V-75R1 ..... 0.91A
- \*<sup>2</sup> : When using a barcode reader or a RFID controller to which the power is supplied from the standard interface, add the current to be used by the barcode reader and RFID controller at 5VDC. (Maximum less than 0.3A)

### (3) Calculation example

When GT15-J71BR13, GT-RS4-9S (3 units), GT15-J71E71-100 (for gateway function) and a barcode reader (consuming 0.12A) are connected to GT1575

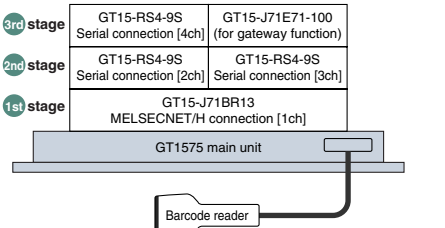

Current supply capacity of GOT (A)	Total current to be consumed (A)
2.2	0.77+0.33+0.33+0.33+0.224+0.12=2.104

Since the total current is within the current supply capacity of the GOT, the units can be used.

## GT Designer2 (English version) operating environment

Item	Description
Personal computer	PC/AT compatible machine on which Windows® operates
OS	Microsoft® Windows®98 Operating System (English version)* <sup>1</sup> Microsoft® Windows® Millennium Edition Operating System (English version)* <sup>2</sup> Microsoft® WindowsNT® Workstation 4.0 Operating System (English version)* <sup>1</sup> * <sup>3</sup> Microsoft® Windows® 2000 Professional Operating System (English version)* <sup>1</sup> * <sup>4</sup>
CPU	Pentium® 200MHz or higher
Required memory	64MB or more
Free hard disk space	For installation: 600MB or more
Disk drive	For operation: 100MB or more
Display colors	CD-ROM disk drive
Display* <sup>5</sup>	High color (16 bits) or more
Other	Resolution 800 × 600 dots or more Internet Explorer version 5.0 or later must be installed. Mouse, keyboard, printer and CD-ROM drive that can be used on the above OS

- \*<sup>1</sup> : To install GT Designer2, administrator authority is required.
- \*<sup>2</sup> : To install and use GT Designer2, administrator authority is required.
- \*<sup>3</sup> : To install GT Designer2, administrator authority is required.
- To use GT Designer2, an account higher than the standard user is required.
- To use GT Designer2 in cooperation with another application, if an administrator account is used to run the application then use an administrator account to run GT Designer2.
- \*<sup>4</sup> : The following functions are not supported.
- Compatible Mode • Fast User Switching • Desktop Theme (Font) Change • Remote Desktop
- \*<sup>5</sup> : Only the 32-bit OS is applicable.
- \*<sup>6</sup> : To use the MES interface function, the display must have a resolution of 1024x768 dots or more.
- \*<sup>7</sup> : The following language versions are also applicable: Chinese (Simplified/Traditional), Korean, German versions.

## GT Simulator2 (English version) operating environment

Item	Description																
Personal computer	PC/AT compatible machine on which Windows® operates																
OS	Microsoft® Windows®98 Operating System (English version) Microsoft® Windows® Millennium Edition Operating System (English version) Microsoft® WindowsNT® Workstation 4.0 Operating System (English version)* <sup>2</sup> * <sup>3</sup> Microsoft® Windows® 2000 Professional Operating System (English version)* <sup>3</sup>																
CPU	Pentium® 200MHz or higher																
Required memory	64MB or more																
Free hard disk space* <sup>1</sup>	For installation (product only) : 250MB or more For operation (product + manual): 400MB or more For operation : 200MB or more																
Disk drive	CD-ROM disk drive																
Display colors	For GT15 simulator: 65536 colors For GT11 simulator: 256 colors																
Display	Resolution 800 × 600 dots or more (to use full-screen display function: resolution 1024 × 768 dots or more)																
For creation/editing of project data	GT Designer2* <sup>6</sup> GX Simulator version 5 or later* <sup>7</sup>																
For use of GX Simulator	<table> <tr> <th>PLC CPU to be simulated</th><th>Software version</th></tr> <tr> <td>QCPU (A mode), ACPU, motion controller CPU</td><td>Version 5A or later</td></tr> <tr> <td>QCPU (Q mode) (excl. Q00J, Q00 and Q01CPU), QnACPU, FXCPU</td><td>Version 5E or later</td></tr> <tr> <td>Q00JCPU, Q00CPU, Q01CPU</td><td>Version 6.00A or later</td></tr> <tr> <td>Q12PHCPU, Q25PHCPU</td><td>Version 6.10L or later</td></tr> <tr> <td>Q12PRHCPU, Q25PRHCPU</td><td>Version 6.20W or later</td></tr> <tr> <td>FX3uc series</td><td>Version 6.20W or later</td></tr> <tr> <td>FX3u series</td><td>Version 7.08J or later</td></tr> </table>	PLC CPU to be simulated	Software version	QCPU (A mode), ACPU, motion controller CPU	Version 5A or later	QCPU (Q mode) (excl. Q00J, Q00 and Q01CPU), QnACPU, FXCPU	Version 5E or later	Q00JCPU, Q00CPU, Q01CPU	Version 6.00A or later	Q12PHCPU, Q25PHCPU	Version 6.10L or later	Q12PRHCPU, Q25PRHCPU	Version 6.20W or later	FX3uc series	Version 6.20W or later	FX3u series	Version 7.08J or later
PLC CPU to be simulated	Software version																
QCPU (A mode), ACPU, motion controller CPU	Version 5A or later																
QCPU (Q mode) (excl. Q00J, Q00 and Q01CPU), QnACPU, FXCPU	Version 5E or later																
Q00JCPU, Q00CPU, Q01CPU	Version 6.00A or later																
Q12PHCPU, Q25PHCPU	Version 6.10L or later																
Q12PRHCPU, Q25PRHCPU	Version 6.20W or later																
FX3uc series	Version 6.20W or later																
FX3u series	Version 7.08J or later																

- \*<sup>1</sup> : To use GT Designer2, GX Developer and GX Simulator, additional free space is required.
- \*<sup>2</sup> : Use WindowsNT® Workstation 4.0 with Service Pack3 or later installed.
- \*<sup>3</sup> : To install GT Simulator2, administrator authority is required.
- \*<sup>4</sup> : To install and use GT Simulator2, administrator authority is required.
- \*<sup>5</sup> : The following functions are not supported.
- Compatible Mode • Fast User Switching • Desktop Theme (Font) Change • Remote Desktop
- \*<sup>6</sup> : Use GT Designer2 in the GT Works2 containing GT Simulator2.
- \*<sup>7</sup> : Use GT Simulator2, GX Developer and GX Simulator of the same language version.
- \*<sup>8</sup> : Only the 32-bit OS is applicable.





Function list

Category	Function*1	Optional function board*2	Extended optional function OS installation*2	Other necessary devices*3	Details page	Model																GT SoftGOT 1000 Version2*4
						GT15								GT11		GT10*4						
						GT1595 -XTB XGA 15"	GT1585(V) -STB SVGA 12.1"	GT1575(V) -STB SVGA 10.4"	GT1575 -VTB VGA 10.4"	GT157 -VNB VGA 10.4"	GT1565 -VNB VGA 8.4"	GT1562 -VNB VGA 8.4"	GT155 -BD VGA/QVGA 5.7"	GT115 -BD QVGA 5.7"	GT115 -BD QVGA 5.7"	GT115 HS-Q BD QVGA*4 5.7"	GT1030 -LBD(W)/2 4.5"	GT1020 -LBD(W)/2 3.7"				
Connection configuration	Bus connection					●	●	●	●	●	●	●	●	—	●	—	—	—	—	—		
	CPU direct connection					●	●	●	●	●	●	●	●	●	●	●	●	●	●	●		
	Computer link connection					●	●	●	●	●	●	●	●	●	—	●	●	●	●	●		
	MELSECNET/H connection				P.52~	●	●	●	●	●	●	●	●	—	—	—	—	—	—	●		
	MELSECNET/10 connection					●	●	●	●	●	●	●	●	—	—	—	—	—	—	●		
	CC-Link connection (ID station/via G4)					●	●	●	●	●	●	●	●	Via G4 only	—	Via G4 only	●	●	Via G4 only	—		
	Ethernet connection					●	●	●	●	●	●	●	●	—	—	—	—	—	—	●		
	Third party PLC connection					●	●	●	●	●	●	●	●	●	—	—	—	—	—	●		
	Microcomputer connection					●	●	●	●	●	●	●	●	●	—	—	—	—	—	—		
	MODBUS®/TCP connection					●	●	●	●	●	●	●	●	●	—	—	—	—	—	—		
	Temperature controller connection					●	●	●	●	●	●	●	●	●	—	—	—	—	—	—		
Inverter connection				P.24, 52~	●	●	●	●	●	●	●	●	—	—	—	—	—	—	—			
Servo amplifier connection					●	●	●	●	●	●	●	●	—	—	—	—	—	—	—			
CNC connection (C6/C64)	CPU direct connection					●	●	●	●	●	●	●	●	●	—	—	—	—	—	●		
	MELSECNET/10 connection					●	●	●	●	●	●	●	●	—	—	—	—	—	—	—		
	CC-Link (ID station) connection					●	●	●	●	●	●	●	●	—	—	—	—	—	—	—		
	Ethernet connection					●	●	●	●	●	●	●	●	—	—	—	—	—	—	●		
Hardware specifications	Standard memory capacity					9MB	9MB	9MB	9MB	5MB	9MB	5MB	9MB	3MB	3MB	3MB	1.5MB	512KB	57MB			
	Total memory capacity when using optional memory (standard + optional)	Required		CF card	P.22, 56~	Up to 57MB	Up to 57MB	Up to 57MB	Up to 57MB	Up to 53MB	Up to 57MB	Up to 53MB	Up to 57MB	—	—	—	—	—	—	—		
	Display colors	65536 colors					●	●	●	●	—	—	—	—	—	—	—	—	—	—	●	
		4096 colors					—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
		256 colors					—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
		16 colors					—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
	Resolution	Monochrome (black/white) 16 gray scales				P.56~	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
		Monochrome (black/white) 2 colors					—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
		1600 × 1200 dots					—	—	—	—	—	—	—	—	—	—	—	—	—	—	●	
		1280 × 1024 dots					—	—	—	—	—	—	—	—	—	—	—	—	—	—	●	
	Built-in interface	1024 × 768 dots (XGA)					●	—	—	—	—	—	—	—	—	—	—	—	—	—	●	
		800 × 600 dots (SVGA)					—	●	●	—	—	—	—	—	—	—	—	—	—	—	●	
		640 × 480 dots (VGA)					—	—	—	●	●	●	—	—	—	—	—	—	—	—	●	
		320 × 240 dots (QVGA)					—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
		288 × 96 dots					—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
		160 × 64 dots					—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
		RS-232 interface					●	●	●	●	●	●	●	●	●	●	●	●	●	●	—	
		RS-422 interface				P.36~	*5	*5	*5	*5	*5	*5	*5	—	●	—	—	—	—	—	—	
		RS-422/232 interface				P.56~	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
		Bus interface					—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
		USB interface					●	●	●	●	●	●	●	●	●	●	●	●	●	●	—	
CF card interface					●	●	●	●	●	●	●	●	●	●	●	—	—	—	—			
Optional function board interface					●	●	●	●	●	●	●	●	●	●	●	—	—	—	—			
Extension unit interface				P.56~	2ch	2ch	2ch	2ch	2ch	2ch	2ch	1ch	—	—	—	—	—	—	—			
Video/RGB interface					—	GT1585V only	GT1575V only	—	—	—	—	—	—	—	—	—	—	—	—			
Other	Vertical display					—	—	—	—	—	—	—	—	●	●	—	●	●	—	—		
	Clock function			(Battery)	P.56~	●	●	●	●	●	●	●	●	●	●	●	●	●	*9	●		
	Buzzer output					●	●	—	—	—	—	—	—	—	—	—	—	—	—	—		
	Human sensor					●	●	—	—	—	—	—	—	—	—	—	—	—	—	—		
	Printer	Required		Printer unit	P.24	●	●	●	●	●	●	●	●	—	—	—	—	—	—	●		
	CF card unit (CF card extension unit)			CF card unit/CF card extension unit		●	●	●	—	—	—	●	—	—	—	—	—	—	—	—		
	Sound output	Required		Sound output unit	P.25	●	●	●	●	●	●	●	—	—	—	—	—	—	—	●		
	External input/output	Required		External input/output unit		●	●	●	●	●	●	●	—	—	—	—	—	—	—	—		
	Video input/RGB input/RGB output	Required		Video/RGB unit		—	GT1585V only	GT1575V only	—	—	—	—	—	—	—	—	—	—	—	—		
	Backlight OFF detection function				P.42	●	●	●	●	●	●	●	●	●	●	●	—	—	—	—		
	Protective structure				P.56~	●	●	●	●	●	●	●	●	●	●	●	●	●	—	—		
Main unit functions	Boot OS installation			(CF card)	P.36~	●	●	●	●	●	●	●	●	●	●	—	—	—	—	—		
	Start from CF card	Required		(CF card)	P.22	●	●	●	●	●	●	●	—	—	—	—	—	—	—	—		
	OS installation			(CF card)		●	●	●	●	●	●	●	●	●	●	—	—	—	—	—		
	Project data download/upload			(CF card)	P.36~	●	●	●	●	●	●	●	—	—	—	—	—	—	—	●		
	Resource data upload			(CF card)		●	●	●	●	●	●	●	●	●	●	●	●	●	●	—		
	FA transparent function					●	●	●	●	●	●	●	●	●	●	*6	●	●	—	—		
	Multi-channel function	Required			P.26	Up to 4ch	Up to 4ch	Up to 4ch	Up to 4ch	Up to 4ch	Up to 4ch	Up to 4ch	Up to 2ch	—	—	—	—	—	—	—		
Screen design	Gateway function	Required		(CF card)		●	●	●	●	●	●	●	—	—	—	—	—	—	—	—		
	MES interface function	Required		(CF card)	P.27	●	●	●	●	●	●	●	—	—	—	—	—	—	—	—		
	Base screen					●	●	●	●	●	●	●	●	●	●	●	●	●	●	—		
	Superimposed window display					●	●	●	●	●	●	●	●	●	●	●	●	●	●	—		
	Overlap window display					●	●	●	●	●	●	●	●	●	●	●	●	●	●	—		
	Dialog window display				P.35	●	●	●	●	●	●	●	●	●	●	●	—	—	—	—		
	Supported image data format					●	●	●	●	●	●	●	—	—	—	—	—	—	—	—		
	BMP image display					●	●	●	●	●	●	●	●	●	●	●	●	●	●	—		
	JPEG image display					●	●	●	●	●	●	●	—	—	—	—	—	—	—	—		
	DXF data					●	●	●	●	●	●	●	●	●	●	●	●	●	—	—		
	IGES data					●	●	●	●	●	●	●	●	●	●	●	●	●	—	—		

Category	Function*1		Optional function board*2	Extended optional function OS installation*2	Other necessary devices*2	Details page	Model																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
							GT15								GT11				GT10*4		GT SoftGOT 1000 Version2*4																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
							GT1595 -XTB 15"	GT1585(V) -STB 12.1"	GT1575(V) -STB 10.4"	GT1575 -VTB 10.4"	GT157 -VNB 10.4"	GT1565 -VTB 8.4"	GT1562 -VNB 8.4"	GT155 BD 5.7"	GT115 -O 5.7"	GT115 -O 5.7"	GT115 -O 5.7"	GT1030 -LB(W)/2 4.5"	GT1020 -LB(W)/2 3.7"																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																														
Screen design	Specifications	Standard fonts (basic)	Japanese, Japanese (supporting European languages), Chinese (Simplified), Chinese (Traditional, supporting European languages)				P.35	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	





## GT1595 - XTBA

\* For inquiries relating to products which conform to UL, cUL, and CE directives, please contact your local sales office.

Model name			Screen size [resolution]	Display	Display colors (number of colors)		Power supply	Memory size	Remarks
GT15	GT1595	GT1595-XTBA	15" XGA	TFT color LCD	65536 colors		100-240VAC	9MB	—
		GT1595-XTBD	[1024 × 768 dots]	(high brightness, wide viewing angle)			24VDC		
	GT1585	GT1585V-STBA	12.1" SVGA [800 × 600 dots]	TFT color LCD	65536 colors	100-240VAC	9MB	Applicable for Video/RGB	
		GT1585V-STBD		(high brightness, wide viewing angle)		24VDC			
		GT1585-STBA		TFT color LCD		100-240VAC			
		GT1585-STBD		(high brightness, wide viewing angle)		24VDC			
	GT157	GT1575V-STBA	10.4" SVGA [800 × 600 dots]	TFT color LCD	65536 colors	100-240VAC	9MB	Applicable for Video/RGB	
		GT1575V-STBD		(high brightness, wide viewing angle)		24VDC			
		GT1575-STBA		TFT color LCD		100-240VAC			
		GT1575-STBD		(high brightness, wide viewing angle)		24VDC			
		GT1575-VTBA	10.4" VGA [640 × 480 dots]	TFT color LCD	65536 colors	100-240VAC	9MB	—	
		GT1575-VTBD		(high brightness, wide viewing angle)		24VDC			
		GT1575-VNBA		TFT color LCD		100-240VAC			
		GT1575-VNBD	10.4" VGA [640 × 480 dots]	TFT color LCD	256 colors	100-240VAC	5MB	—	
		GT1575-VNBD		24VDC					
		GT1572-VNBA		100-240VAC					
	GT1572-VNBD	TFT color LCD	24VDC	5MB	—				
	GT156	GT1565-VTBA	8.4" VGA [640 × 480 dots]	TFT color LCD	65536 colors	100-240VAC	9MB	—	
		GT1565-VTBD		(high brightness, wide viewing angle)		24VDC			
		GT1562-VNBA		TFT color LCD	16 colors	100-240VAC	5MB		
		GT1562-VNBD				24VDC			
	GT155	GT1555-VTBD	5.7" VGA [640 × 480 dots]	TFT color LCD	65536 colors	24VDC	9MB	—	
		GT1555-QTBD	(high brightness, wide viewing angle)						
GT1555-QSBD		5.7" QVGA	STN color LCD	4096 colors					
GT1550-QLBD		[320 × 240 dots]	STN monochrome LCD	Monochrome (black/white) 16 gray scales					
GT11	GT1155	GT1155-QTBD	5.7" QVGA [320 × 240 dots]	TFT color LCD	256 colors	24VDC	3MB	—	
		GT1155-QTBDQ						Dedicated to Q bus connection	
		GT1155-QTBDA						Dedicated to A bus connection	
		GT1155-QSBD		—					
		GT1155-QSBDQ		Dedicated to Q bus connection					
		GT1155-QSBDQ		Dedicated to A bus connection					
	GT1150	GT1150-QLBD	STN monochrome LCD	Monochrome (black/white) 16 gray scales	—	Dedicated to Q bus connection			
		GT1150-QLBDA					Dedicated to A bus connection		
	Handy GOT	GT1155HS-QSBD	STN color LCD	256 colors	—				
		GT1150HS-QLBD	STN monochrome LCD	Monochrome (black/white) 16 gray scales					
GT10	GT1030	GT1030-LBD	4.5" [288 × 96 dots]	STN monochrome LCD	Monochrome (black/white)	3-color LED	24VDC	1.5MB	Dedicated to RS-422 connection
		GT1030-LBD2				(green, orange, red)			Dedicated to RS-232 connection
		GT1030-LBDW				3-color LED			Dedicated to RS-422 connection
		GT1030-LBDW2				(white, pink, red)			Dedicated to RS-232 connection
	GT1020	GT1020-LBD	3.7" [160 × 64 dots]	STN monochrome LCD	Monochrome (black/white)	3-color LED	24VDC	512KB	Dedicated to RS-422 connection
		GT1020-LBD2				(green, orange, red)			Dedicated to RS-232 connection
		GT1020-LBL				5VDC			Dedicated to RS-422FX connection
		GT1020-LBDW				3-color LED			24VDC
	GT1020-LBDW2				3-color LED	24VDC		Dedicated to RS-232 connection	
	GT1020-LBLW							5VDC	Dedicated to RS-422FX connection

- \*1: The unit cannot be used stacked on other units.
- \*2: The unit may not be able to be used depending on the connection destination. See List of Connectable Models (page 55).
- \*3: The unit cannot be used when connecting to temperature controllers/indicating controllers via RS-485 (2-wire type).
- \*4: The unit cannot be used with the GT155□.

\*6 : Includes unit to be installed on the control panel, unit to be installed on the GOT, and connection cable (0.8m).

**\*7 :** To use GT SoftGOT1000, a license key for GT SoftGOT1000 is necessary for each personal computer.





Product list

Options

Product name	Model name	Specifications	Applicable model			
			GT15	GT11	Handy GOT	GT10
Backlight	GT15-90XLTT	Backlight	For GT1595-XTB□	○	—	—
	GT15-80SLTT		For GT1585V-STB□/GT1585-STB□	○	—	—
	GT15-70SLTT		For GT1575-STB□*1	○	—	—
	GT15-70VLT		For GT1575V-STB□/GT1575-VTB□/GT1575-STB□*2	○	—	—
	GT15-70VLTN		For GT1575-VNB□/GT1572-VNB□	○	—	—
	GT15-60VLT		For GT1565-VTB□	○	—	—
Optional function board	GT15-60VLTN		For GT1562-VNB□	○	—	—
	GT15-FNB	Optional function board	(No expansion memory)	○	—	—
	GT15-QFNB		(No expansion memory)	○	—	—
	GT15-QFNB16M		+ 16MB expansion memory	○	—	—
	GT15-QFNB32M		+ 32MB expansion memory	○	—	—
	GT15-QFNB48M		+ 48MB expansion memory	○	—	—
Protective sheet	GT15-MESB48M	Optional function board	+ 48MB expansion memory	○	—	—
	GT11-50FNB		—	○*3	○	—
	GT15-90PSCB	Protective sheet for 15" screen	Clear, 5 sheets	○	—	—
	GT15-90PSGB		Antiglare, 5 sheets	○	—	—
	GT15-90PSCW		Clear (frame: white), 5 sheets	○	—	—
USB environmentally-protective cover	GT15-90PSGW	Protective sheet for 12.1" screen	Antiglare (frame: white), 5 sheets	○	—	—
	GT15-80PSCB		Clear, 5 sheets	○	—	—
	GT15-80PSGB		Antiglare, 5 sheets	○	—	—
Protective cover for oil*5	GT15-80PSCW	Protective sheet for 10.4" screen	Clear (frame: white), 5 sheets	○	—	—
	GT15-80PSGW		Antiglare (frame: white), 5 sheets	○	—	—
	GT15-60PSCB		Clear, 5 sheets	○	—	—
Emergency stop switch guard	GT15-60PSGB	Protective sheet for 8.4" screen	Antiglare, 5 sheets	○	—	—
	GT15-60PSCW		Clear (frame: white), 5 sheets	○	—	—
	GT15-60PSGW		Antiglare (frame: white), 5 sheets	○	—	—
Stand	GT15-50PSCB	Protective sheet for 5.7" screen (for GT15)	Clear, 5 sheets	○	—	—
	GT15-50PSGB		Antiglare, 5 sheets	○	—	—
	GT15-50PSCW		Clear (frame: white), 5 sheets	○	—	—
CF card	GT15-50PSGW	Protective sheet for 5.7" screen (for GT11)	Antiglare (frame: white), 5 sheets	○	—	—
	GT11-50PSCB		Clear, 5 sheets	—	○	—
	GT11-50PSGB		Antiglare, 5 sheets	—	○	—
Memory card adapter	GT11-50PSCW	Protective sheet for 5.7" screen (for Handy GOT)	Clear (frame: white), 5 sheets	—	○	—
	GT11H-50PSC		Clear, 5 sheets	—	—	○
	GT10-30PSCB		Clear, 5 sheets	—	—	○
Attachment	GT10-30PSGB	Protective sheet for 4.5" screen (for GT1030)	Antiglare, 5 sheets	—	—	○
	GT10-30PSCW		Clear (frame: white), 5 sheets	—	—	○
	GT10-30PSGW		Antiglare (frame: white), 5 sheets	—	—	○
Battery	GT10-20PSCB	Protective sheet for 3.7" screen (for GT1020)	Clear, 5 sheets	—	—	○
	GT10-20PSGB		Antiglare, 5 sheets	—	—	○
	GT10-20PSCW		Clear (frame: white), 5 sheets	—	—	○
Attachment	GT10-20PSGW	Environmentally-protective cover for USB interface on main unit front panel (for replacement)	Antiglare (frame: white), 5 sheets	—	—	○
	GT15-UICOV		For 15", 12.1", 10.4" and 8.4"	○	—	—
	GT11-50UCOV		For 5.7"	○	○	—
Attachment	GT05-90PCO	Protective cover for oil for 15" screen	—	○	—	—
	GT05-80PCO		—	○	—	—
	GT05-70PCO		—	○	—	—
	GT05-60PCO		—	○	—	—
	GT05-50PCO		—	○	○	—
	GT11H-50ESCOV	For mis-operation prevention of emergency stop switch	—	—	○	—
Attachment	GT15-90STAND	Stand for 15" type	—	○	—	—
	GT15-80STAND	Stand for 12.1" type	—	○	—	—
	GT15-70STAND	Stand for 8.4"/10.4" type	—	○	—	—
Attachment	GT05-50STAND	Stand for 5.7" type	—	○	○	—
	GT05-MEM-32MC	32MB flash ROM	—	○	○	○
	GT05-MEM-64MC	64MB flash ROM	—	○	○	○
Attachment	GT05-MEM-128MC	128MB flash ROM	—	○	○	○
	GT05-MEM-256MC	256MB flash ROM	—	○	○	○
Attachment	GT05-MEM-ADPC	CF card → memory card (TYPE II) conversion adapter	—	○	○	○
	GT15-70ATT-98	Attachment for 10.4" type	A985GOT*6	○	—	—
	GT15-70ATT-87		A870GOT-SWS A870GOT-TWS A8GT-70GOT-TB A8GT-70GOT-SW A8GT-70GOT-TW A8GT-70GOT-SB	→ GT157□	○	—
	GT15-60ATT-97		A97□GOT	○	—	—
	GT15-60ATT-96		A960GOT	○	—	—
	GT15-60ATT-87		A870GOT-EWS A77GOT-EL-S5 A8GT-70GOT-EW A77GOT-EL-S3 A8GT-70GOT-EB A77GOT-EL	→ GT156□	○	—
Attachment	GT15-60ATT-77	Attachment for 8.4" type	A77GOT-CL-S5 A77GOT-L-S5 A77GOT-CL-S3 A77GOT-L-S3 A77GOT-CL A77GOT-L	→ GT155□	○	—
	GT15-50ATT-95W		A956WGOT	→ GT115□	○	○
	GT15-50ATT-85		A85□GOT	○	○	—
	GT15-BAT	Battery for backup of clock data and maintenance time notification data	—	○	—	—
	GT11-50BAT	Battery for backup of clock data, alarm history and recipe data (for replacement)	—	—	○	○*4

\*1 : Function version B or earlier  
\*2 : Function version C or later  
\*3 : Excluding GT115□-Q□BDQ and GT115□-Q□BDA  
\*4 : GT1030 only  
\*5 : Check if the oil resistant cover can be used in an actual use environment before use.  
When using the oil resistant cover, the front USB interface and human sensor cannot be used.  
\*6 : Including the GP250□ and GP260□ manufactured by Pro-face.

Manuals

Manual title	Contents	Catalog No.
GT Designer2 Version2 Basic Operation/Data Transfer Manual <for GOT1000 Series>	Basic software installation, basic screen design techniques, and data transfer to a terminal	SH-080529ENG
GT Designer2 Version2 Screen Design Manual <for GOT1000 Series>	Programming manual, including instruction for objects, specifications	SH-080530ENG
GOT1000 Series Connection Manual	System configurations and procedure to create customized cables	SH-080532ENG
GOT1000 Series Extended Function/Optional Functions Manual	Information on extended functions and optional functions available to GOT	SH-080544ENG
GOT1000 Series Gateway Function Manual	Specifications, system configurations and setting procedures for Gateway function	SH-080545ENG
GOT1000 Series MES Interface Function Manual	Specifications, system configurations and setting procedures for MES interface function	SH-080654ENG
GT15 User's Manual	GT15 general specification overview, parts and settings, external dimensions, mounting, wiring, optional interfaces	SH-080528ENG
GT11 User's Manual	GT11 general specification overview, parts and settings, external dimensions, mounting, wiring, optional interfaces	JY997D17501A
Handy GOT User's Manual	Handy GOT general specification overview, parts and settings, external dimensions, wiring, optional interfaces, in addition to explanations of utility, system configurations, and cable fabrication	JY997D20101A
GT10 User's Manual	GT10 general specification overview, parts and settings, external dimensions, mounting, wiring, optional interfaces	JY997D24701
GT SoftGOT1000 Version2 Operation Manual	GT SoftGOT1000 screen configuration, functions and operating procedures	SH-080602ENG
GT Simulator2 Version2 Operation Manual	GT Simulator2 specifications and operating instructions	SH-080546ENG
GT Converter2 Version2 Operation Manual	GT Converter2 operating instructions	SH-080533ENG

Cables

Product name		Model name	Cable length	Third party products*1	Application	Applicable model*2				
						GT15	GT11	Handy GOT	GT10	
Bus connection cable for QCPU (Q mode)	QCPU extension cable GOT-to-GOT connection cable	GT15-QC06B	0.6m	○	For connection between QCPU and GOT For connection between GOT and GOT	○	○	—	—	
		GT15-QC12B	1.2m							
		GT15-QC30B	3m							
		GT15-QC50B	5m							
		GT15-QC100B	10m							
	Long-distance connection cable for QCPU GOT-to-GOT long-distance connection cable	GT15-QC150BS	15m	○	For long-distance (13.2m or more) connection between QCPU and GOT (A9GT-QCNB required) For long-distance connection between GOT and GOT	○	○	—	—	
		GT15-QC200BS	20m							
		GT15-QC250BS	25m							
		GT15-QC300BS	30m							
		GT15-QC350BS	35m							
Bus extension connector box		A9GT-QCNB	—	—	Used for QCPU long-distance (13.2m or more) bus connection	○	○	—	—	
Bus connection cable for QnA/ACPU/motion controller CPU (A series)	Large CPU extension cable	GT15-C12NB	1.2m	○	For connection between QnA/ACPU/motion controller CPU (A series, extension base) and GOT	○	○	—	—	
		GT15-C30NB	3m							
		GT15-C50NB	5m							
		GT15-AC06B	0.6m							
		GT15-AC12B	1.2m	○	For connection between QnA/ACPU/motion controller CPU (A series, extension base) and A7GT-CNB	○	○	—	—	
		GT15-AC30B	3m							
		GT15-AC50B	5m							
		Small CPU extension cable	GT15-A370C12B-S1	1.2m	○	For connection between motion controller CPU (A series, main base) and GOT	○	○	—	—
			GT15-A370C25B-S1	2.5m						
			GT15-A370C12B	1.2m	○	For connection between motion controller CPU (A series, main base) and A7GT-CNB	○	○	—	—
	GT15-A370C25B		2.5m							
	Small CPU extension cable		GT15-A1SC07B	0.7m	○	For connection between QnAS/AnSCPU/motion controller CPU (A series) and GOT	○	○	—	—
			GT15-A1SC12B	1.2m						
		GT15-A1SC30B	3m							
		GT15-A1SC50B	5m							
	Small CPU extension cable	GT15-A1SC05NB	0.45m	○	For connection between QnAS/AnSCPU/motion controller CPU (A series) and A7GT-CNB	○	○	—	—	
		GT15-A1SC07NB	0.7m							
		GT15-A1SC30NB	3m							
		GT15-A1SC50NB	5m							
	Small CPU long-distance connection cable	GT15-C100EXSS-1	10.6m	○	For long-distance (13.2m or more) connection between QnAS/AnSCPU/motion controller CPU (A series) and GOT For long-distance (13.2m or more) connection between A7GT-CNB and GOT * Set of GT15-EXCNB and GT15-C□BS	○	○	—	—	
		GT15-C200EXSS-1	20.6m							
		GT15-C300EXSS-1	30.6m							
	GOT-to-GOT connection cable	GT15-C07BS	0.7m	○	For connection between GOT and GOT	○	○	—	—	
		GT15-C12BS	1.2m							
GT15-C30BS		3m								
GT15-C50BS		5m								
GT15-C100BS		10m								
GOT-to-GOT long-distance connection cable	GT15-C200BS	20m	○	For connection between GOT and GOT	○	○	—	—		
	GT15-C300BS	30m								
	A0J2HCPU connection cable	GT15-J2C10B							1m	○
Bus connector conversion box		A7GT-CNB	—	—	Used for QnA/ACPU long-distance (13.2m or more) bus connection	○	○	—	—	
Buffer circuit cable		GT15-EXCNB	0.5m	○	Usable as GT15-C□EXSS-1 in combination with GT15-C□BS	○	○	—	—	
Ferrite core set for Q bus cable (two-pack)		GT15-QFC	—	○	Ferrite cores for replacing existing GOT-A900 bus cable with bus cable for GOT1000	○	○	—	—	
Ferrite core set for A bus cable (two-pack)		GT15-AFC	—							
RS-422 cable	QnA/A/FXCPU direct connection cable Computer link connection cable	GT01-C30R4-25P	3m	—	For connection between QnA/ACPU/motion controller CPU (A series)/FXCPU (D-sub 9-pin connector) and GOT For connection between FA-CNV□CBL and GOT For connection between serial communication unit and GOT For connection between AJ65BT-G4-S3 and GOT	○	○	*3	—	
		GT01-C100R4-25P	10m							
		GT01-C200R4-25P	20m							
		GT01-C300R4-25P	30m							
		Computer link connection cable	GT10-C30R4-25P	3m	—	For connection between QnA/FXCPU (D-sub 25-pin connector) and GOT For connection between serial communication unit (AJ71QC24(N)-R4) and GOT	—	—	—	○
			GT10-C100R4-25P	10m						
			GT10-C200R4-25P	20m						
			GT10-C300R4-25P	30m						
	Computer link connection cable	GT09-C30R4-6C	3m	○	For connection between serial communication unit and GOT For connection between computer link unit and GOT	○	○	—	—	
		GT09-C100R4-6C	10m							
		GT09-C200R4-6C	20m							
		GT09-C300R4-6C	30m							

\*1 : Items listed above are developed by Mitsubishi Electric System & Service Co., LTD., and sold through your local sales office.  
\*2 : The applicable connection configuration and cable vary depending on the GOT main unit. For more details, see the GOT1000 Series Handbook and the GOT1000 Series Connection Manual.  
\*3 : The cable can be used when the connector conversion box for the Handy GOT is used.





## Product list

### Cables

Product name		Model name	Cable length	Third party products※1	Application	Applicable model ※2				
						GT15	GT11	Handy GOT	GT10	
RS-422 cable	FXCPU direct connection cable FX communication function extension board connection cable	GT01-C10R4-8P	1m	—	For connection between FXCPU (MINI-DIN 8-pin connector) and GOT For connection between FXCPU communication function extension board and GOT	○	○	—	—	
		GT01-C30R4-8P	3m			—	—	—	○	
		GT01-C100R4-8P	10m							
		GT01-C200R4-8P	20m							
		GT01-C300R4-8P	30m							
		GT10-C10R4-8P	1m							
		GT10-C30R4-8P	3m							
		GT10-C100R4-8P	10m							
		GT10-C200R4-8P	20m							
GT10-C300R4-8P	30m									
RS-232 cable	QCPU direct connection cable Data transfer cable	GT01-C30R2-6P	3m	—	For connection between QCPU and GOT/personal computer (GT SoftGOT1000) (D-sub 9-pin) For connection between personal computer (screen design software) (D-sub 9-pin, female) and GOT (MINI-DIN 6-pin, male)	○	—		—	
		GT10-C30R2-6P	3m	—	For connection between QCPU and GOT For connection between GOT and GOT	—	—	—	○	
		GT11H-C30R2-6P	3m	—	For connector conversion box between QCPU and Handy GOT	—	—	○	—	
		FX communication function extension board connection cable, FX communication function adapter connection cable, Data transfer cable	GT01-C30R2-9S	3m	—	For connection between FXCPU communication function extension board (D-sub 9-pin connector) and GOT/personal computer (GT SoftGOT1000) (D-sub 9-pin) For connection between FXCPU communication function adapter (D-sub 9-pin connector) and GOT For connection between personal computer (screen design software) (D-sub 9-pin, female) and GOT (D-sub 9-pin, female)	○	○	—	—
	FX communication function adapter connection cable, Data transfer cable		GT01-C30R2-25P	3m	—	For connection between FXCPU communication function adapter (D-sub 25-pin connector) and GOT/personal computer (GT SoftGOT1000) (D-sub 9-pin) For connection between personal computer (screen design software) (D-sub 25-pin, male) and GOT (D-sub 9-pin, female)	○	○	—	—
			Computer link connection cable	GT09-C30R2-9P	3m	○	For connection between serial communication unit and GOT For connection between computer link unit and GOT	○	○	—
	Connector conversion box for Handy GOT		GT11H-CNB-37S	—	—	Converts D-sub 37-pin connector to terminal block and D-sub 9-pin connector	—	—	○	—
	External connection cable	FA device, power supply and operation switch connection cable	GT11H-C30-37P	3m	—	For connection between FA device connection relay cable and GOT	—	—	○	—
			GT11H-C60-37P	6m			—	—	○	—
GT11H-C100-37P			10m							
GT11H-C30			3m							
GT11H-C60			6m							
GT11H-C100	10m									
FA device connection relay cable	RS-422, power supply and operation switch connection cable	GT11H-C15R4-8P	1.5m	—	For connection between FXCPU and GOT For connection between power supply and operation switches and GOT	—	—	○	—	
		GT11H-C15R4-25P	1.5m	—	For connection between A/QnACPU and GOT For connection between power supply and operation switches and GOT	—	—	○	—	
	RS-232, power supply and operation switch connection cable	GT11H-C15R2-6P	1.5m	—	For connection between QCPU and GOT For connection between power supply and operation switches and GOT	—	—	○	—	
External I/O unit connection conversion cable		GT15-C30HTB	0.3m	○	For connection between GOT1000 (external I/O unit) and GOT-A900 external I/O interface unit connection cable (A8GT-C05TK/A8GT-C30TB/user-fabricated cable)	○	—	—	—	
USB cable	RS-232/USB conversion adapter for data transfer	GT10-RS2TUSB-5S	—	—	For connection between personal computer (USB) and GOT (RS-232) (Adapter and personal computer are connected with GT09-C30USB-5P.)	—	—	—	○	
	Data transfer cable	GT09-C30USB-5P	3m	○	For connection between personal computer and GOT For connection between QCPU (USB miniB) and personal computer (GT SoftGOT1000) For connection between printer and GOT (printer unit)	○	○	○	○	

<sup>\*1</sup> : Items listed above are developed by Mitsubishi Electric System & Service Co., LTD., and sold through your local sales office.

<sup>\*2</sup> : The applicable connection configuration and cable vary depending on the GOT main unit. For more details, see the GOT1000 Series Handbook and the GOT1000 Series Connection Manual.

### Cables for third party FA devices

Product name		Model name	Cable length	Third party products <sup>*1</sup>	GOT connection destination	Applicable model <sup>*2</sup>				
						GT15	GT11	Handy GOT	GT10	
RS-232 cable	Cable for OMRON PLC	GT09-C30R20101-9P	3m	○	PLC CPU: CQM1/CQM1H/CS1/CJ1/CV500/CV1000/CV2000/CVM1 Serial communication unit: CS1W-SCU21/CJ1W-SCU41 Communication board: C200HW-COM02/COM05/COM06 Serial communication board: CQM1-SCB41/CS1W-SCB41/CS1W-SCB21 Connection cable: CQM1-CIF01 Base mount type host link unit: C500H-LK201-V1	○	○	*3	—	
		GT09-C30R20102-25S	3m							
		GT09-C30R20103-25P	3m		PLC CPU: KV-700/1000					
	Cable for KEYENCE PLC	GT09-C30R21101-6P	3m		Multi-communication unit: KV-L20/L20R port 1					
		GT09-C30R21102-9S	3m		Multi-communication unit: KV-L20/L20R port 2					
		GT09-C30R21103-3T	3m		PLC CPU: JW-22CU/70CUH/100CUH/100CU					
	Cable for SHARP PLC	GT09-C30R20601-15P	3m		PLC CPU: JW-32CUH/33CUH					
		GT09-C30R20602-15P	3m		RS-232/RS-422 converter: TXU-2051					
	Cables for JTEKT PLC	GT09-C30R21201-25P	3m		Digital indicating controller: FCR-100/FCD-100/FCR-23A/PC-900/FIR series					
	Cable for Shinko Technos digital indicating controller	GT09-C30R21401-4T	3m		PLC CPU: T2E					
		GT09-C30R20501-9P	3m		PLC CPU: T2N					
	Cable for TOSHIBA PLC	GT09-C30R20502-15P	3m		PLC CPU: H-4010/H series board type/EH-150 series					
		GT09-C30R20401-15P	3m		Intelligent serial port module: COMM-H/COMM-2H					
	Cable for Hitachi Industrial Equipment Systems PLC	GT09-C30R20402-15P	3m		PLC CPU: H-4010/EH-150 series					
		GT09-C30R21301-9S	3m		Communication module: LQE560/LQE060/LQE160					
	Cable for Hitachi PLC	GT09-C30R21003-25P	3m		RS-232C interface card: NV1L-RS2					
					RS-232C/485 interface capsule: FFK120A-C10					
	Cable for Fuji Electric FA Components & Systems PLC	GT09-C30R20901-25P	3m		General interface module: NC1L-RS2/FFU120B					
					RS-422→232 conversion adapter: AFP8550					
	Cable for Matsushita Electric Works PLC	GT09-C30R20902-9P	3m		PLC CPU: FP2/FP2SH/FP10(S)/FP10SH/FP-M					
		GT09-C30R20903-9P	3m		Computer communication unit: AFP2462/AFP3462/AFP5462					
		GT09-C30R20904-3C	3m		PLC CPU: FP1-C24C/C40C					
		GT09-C30R20201-9P	3m		PLC CPU: FP1-C16CT/C32CT					
	Cable for Yaskawa Electric PLC	GT09-C30R20201-9P	3m		PLC CPU: PROGIC-8/MP-920/MP-930					
		GT09-C30R20202-15P	3m		PLC CPU: PROGIC-8					
		GT09-C30R20203-9P	3m		PLC CPU: CP-9300MS MEMOBUS module: CP-217F (when connected to CN1)					
		GT09-C30R20204-14P	3m		PLC CPU: MP-940					
GT09-C30R20205-25P		3m	MEMOBUS module: CP-217IF (when connected to CN2) Yokogawa Electric personal computer module: LC01-0N/LC02-0N							

### Cables for third party FA devices

Product name		Model name	Cable length	Third party products*1	GOT connection destination	Applicable model*2			
						GT15	GT11	Handy GOT	GT10
RS-232 cable	Cable for Yokogawa Electric PLC	GT09-C30R20301-9P	3m	○	CPU port/D-sub 9-pin conversion cable: KM10-0C	○	○	*3	—
		GT09-C30R20302-9P	3m		Personal computer module: F3LC11-1N/F3LC11-1F/F3LC12-1F/F3LC11-2N				
		GT09-C30R20304-9S	3m		Converter: ML2-□				
	Cable for Allen-Bradley (Rockwell Automation, Inc.) PLC	GT09-C30R20701-9S	3m		PLC CPU: SL500 series Converter: 1761-NET-AIC				
	Cable for Siemens AG PLC	GT09-C30R20801-9S	3m		HMI adapter				
RS-422 cable	Cable for OMRON PLC	GT09-C30R40101-9P	3m	○	PLC CPU: CV500/CV1000/CV2000/CVM1 Serial communication unit: CJ1W-SCU41 Serial communication board: CQM1-SCB41/CS1W-SCB41	○	○	*3	—
		GT09-C100R40101-9P	10m		Base mount type host link unit: C200H-LK202-V1/C500H-LK201-V1 Communication board: C200HW-COM03/COM06				
		GT09-C200R40101-9P	20m						
		GT09-C300R40101-9P	30m						
		GT09-C30R40102-9P	3m						
		GT09-C100R40102-9P	10m		Communication board: CP1W-CIF11				
		GT09-C200R40102-9P	20m						
		GT09-C30R40102-9P	30m						
		GT09-C30R40103-5T	3m						
		GT09-C100R40103-5T	10m		Multi-communication unit: KV-L20/L20R port 2				
		GT09-C200R40103-5T	20m						
		GT09-C300R40103-5T	30m						
	GT09-C30R41101-5T	3m	PLC CPU: JW-22CU/70CUH/100CUH/100CU						
	GT09-C100R41101-5T	10m							
	GT09-C200R41101-5T	20m							
	GT09-C300R41101-5T	30m							
	Cable for KEYENCE PLC	GT09-C30R40601-15P	3m		PLC CPU: JW-32CUH/33CUH				
		GT09-C100R40601-15P	10m						
		GT09-C200R40601-15P	20m						
		GT09-C300R40601-15P	30m						
		GT09-C30R40602-15P	3m		Link unit: JW-21CM/10CM/ZW-10CM				
		GT09-C100R40602-15P	10m						
		GT09-C200R40602-15P	20m						
		GT09-C300R40602-15P	30m						
		GT09-C30R40603-6T	3m		PLC CPU: PC3J/PC3JL Communication module: PC/CMP2-LINK				
		GT09-C100R40603-6T	10m						
		GT09-C200R40603-6T	20m						
		GT09-C300R40603-6T	30m						
	Cable for JTEKT PLC	GT09-C30R41201-6C	3m		PLC CPU: T2/T3/T3H/model3000(S3)				
		GT09-C100R41201-6C	10m						
		GT09-C200R41201-6C	20m						
		GT09-C300R41201-6C	30m						
	Cable for TOSHIBA PLC	GT09-C30R40501-15P	3m		PLC CPU: T2E/model2000(S2)				
		GT09-C100R40501-15P	10m						
		GT09-C200R40501-15P	20m						
		GT09-C300R40501-15P	30m						
		GT09-C30R40502-6C	3m		PLC CPU: T2N				
		GT09-C100R40502-6C	10m						
		GT09-C200R40502-6C	20m						
		GT09-C300R40502-6C	30m						
		GT09-C30R40503-15P	3m		Intelligent serial port module: COMM-H/COMM-2H				
		GT09-C100R40503-15P	10m						
		GT09-C200R40503-15P	20m						
		GT09-C300R40503-15P	30m						
	Cable for Hitachi Industrial Equipment Systems PLC	GT09-C30R40401-7T	3m		PLC CPU: LQP510 Communication module: LQE565/LQE165				
		GT09-C100R40401-7T	10m						
		GT09-C200R40401-7T	20m						
		GT09-C300R40401-7T	30m						
	Cable for Hitachi PLC	GT09-C30R41301-9S	3m		RS-232C/485 interface capsule: FFK120A-C10 General interface module: NC1L-RS4/FFU120B				
		GT09-C100R41301-9S	10m						
GT09-C200R41301-9S		20m							
GT09-C300R41301-9S		30m							
Cable for Fuji Electric FA Components & Systems PLC	GT09-C30R41001-6T	3m	MEMOBUS module: JAMSC-120NOM27100/JAMSC-IF612						
	GT09-C100R41001-6T	10m							
	GT09-C200R41001-6T	20m							
	GT09-C300R41001-6T	30m							
Cable for Yaskawa Electric PLC	GT09-C30R40201-9P	3m	PLC CPU: MP940						
	GT09-C100R40201-9P	10m							
	GT09-C200R40201-9P	20m							
	GT09-C300R40201-9P	30m							
	GT09-C30R40202-14P	3m	Personal computer link module: F3LC11-2N						
	GT09-C100R40202-14P	10m							
	GT09-C200R40202-14P	20m							
Cable for Yokogawa Electric	PLC	GT09-C30R40301-6T	3m	Personal computer link module: LC02-0N					
		GT09-C100R40301-6T	10m						
		GT09-C200R40301-6T	20m						
		GT09-C300R40301-6T	30m						
		GT09-C30R40302-6T	3m	Temperature controller: GREEN series					
		GT09-C100R40302-6T	10m						
		GT09-C200R40302-6T	20m						
		GT09-C300R40302-6T	30m						
	Temperature controller	GT09-C30R40303-6T	3m	Temperature controller: UT2000 series					
		GT09-C100R40303-6T	10m						
		GT09-C200R40303-6T	20m						
		GT09-C300R40303-6T	30m						
		GT09-C30R40304-6T	3m						
		GT09-C100R40304-6T	10m						
		GT09-C200R40304-6T	20m						
		GT09-C300R40304-6T	30m						





## WARRANTY

Please confirm the following product warranty details before using this product.

## 1. Gratis Warranty Term and Gratis Warranty Range

If any faults or defects (hereinafter "Failure") found to be the responsibility of Mitsubishi occurs during use of the product within the gratis warranty term, the product shall be repaired at no cost via the sales representative or Mitsubishi Service Company. However, if repairs are required onsite at domestic or overseas location, expenses to send an engineer will be solely at the customer's discretion. Mitsubishi shall not be held responsible for any re-commissioning, maintenance, or testing on-site that involves replacement of the failed module.

### [Gratis Warranty Term]

The gratis warranty term of the product shall be for one year after the date of purchase or delivery to a designated place. Note that after manufacture and shipment from Mitsubishi, the maximum distribution period shall be six (6) months, and the longest gratis warranty term after manufacturing shall be eighteen (18) months. The gratis warranty term of repair parts shall not exceed the gratis warranty term before repairs.

**[Gratis Warranty Range]**

- (1) The range shall be limited to normal use within the usage state, usage methods and usage environment, etc., which follow the conditions and precautions, etc., given in the instruction manual, user's manual and caution labels on the product.
- (2) Even within the gratis warranty term, repairs shall be charged for in the following cases.
  1. Failure occurring from inappropriate storage or handling, carelessness or negligence by the user. Failure caused by the user's hardware or software design.
  2. Failure caused by unapproved modifications, etc., to the product by the user.
  3. When the Mitsubishi product is assembled into a user's device, Failure that could have been avoided if functions or structures, judged as necessary in the legal safety measures the user's device is subject to or as necessary by industry standards, had been provided.
  4. Failure that could have been avoided if consumable parts (battery, backlight, fuse, etc.) designated in the instruction manual had been correctly serviced or replaced.
  5. Failure caused by external irresistible forces such as fires or abnormal voltages, and Failure caused by force majeure such as earthquakes, lightning, wind and water damage.
  6. Failure caused by reasons unpredictable by scientific technology standards at time of shipment from Mitsubishi.
  7. Any other failure found not to be the responsibility of Mitsubishi or that admitted not to be so by the user.

## **2. Onerous repair term after discontinuation of production**

- (1) Mitsubishi shall accept onerous product repairs for seven (7) years after production of the product is discontinued.  
Discontinuation of production shall be notified with Mitsubishi Technical Bulletins, etc.
- (2) Product supply (including repair parts) is not available after production is discontinued.

### 3. Overseas service

Overseas, repairs shall be accepted by Mitsubishi's local overseas FA Center. Note that the repair conditions at each FA Center may differ.

#### **4. Exclusion of loss in opportunity and secondary loss from warranty liability**

Regardless of the gratis warranty term, Mitsubishi shall not be liable for compensation to damages caused by any cause found not to be the responsibility of Mitsubishi, loss in opportunity, lost profits incurred to the user by Failures of Mitsubishi products, special damages and secondary damages whether foreseeable or not, compensation for accidents, and compensation for damages to products other than Mitsubishi products, replacement by the user, maintenance of on-site equipment, start-up test run and other tasks.

## **5. Changes in product specifications**

The specifications given in the catalogs, manuals or technical documents are subject to change without prior notice.

## 6. Product application

- (1) In using the Mitsubishi graphic operation terminal, the usage conditions shall be that the application will not lead to a major accident even if any problem or fault should occur in the graphic operation terminal device, and that backup and fail-safe functions are systematically provided outside of the device for any problem or fault.
- (2) The Mitsubishi graphic operation terminal has been designed and manufactured for applications in general industries, etc. Thus, applications in which the public could be affected such as in nuclear power plants and other power plants operated by respective power companies, and applications in which a special quality assurance system is required, such as for Railway companies or Public service purposes shall be excluded from the graphic operation terminal applications. In addition, applications in which human life or property that could be greatly affected, such as in aircraft, medical applications, incineration and fuel devices, manned transportation equipment for recreation and amusement, and safety devices, shall also be excluded from the graphic operation terminal range of applications. However, in certain cases, some applications may be possible, providing the user consults the local Mitsubishi representative outlining the special requirements of the project, and providing that all parties concerned agree to the special circumstances, solely at our discretion.

Microsoft Windows, Windows NT, Windows Vista are registered trademarks of Microsoft Corporation in the United States and other countries.

Adobe and Acrobat Reader are registered trademarks of Adobe Systems Incorporated.

Pentium and Celeron are registered trademarks of Intel Corporation in the United States and other countries.

Ethernet is a trademark of Xerox Co., Ltd. in the United States.

MODBUS is a trademark of Schneider Electric SA.

Other company and product names herein are either trademarks or registered trademarks of their respective owners.



## Memo





Memo

Handwriting practice lines consisting of 20 horizontal dashed lines.



Memo

Handwriting practice lines consisting of 20 horizontal dashed lines.



# Mitsubishi Graphic Operation Terminal

## Precautions for Choosing the Products

This catalog explains the typical features and functions of the GOT1000 series HMI and does not provide restrictions and other information on usage and module combinations.

When using the products, always read the user's manuals of the products.

Mitsubishi will not be held liable for damage caused by factors found not to be the cause of Mitsubishi; machine damage or lost profits caused by faults in the Mitsubishi products; damage, secondary damage, accident compensation caused by special factors unpredictable by Mitsubishi; damages to products other than Mitsubishi products; and to other duties.

## For safe use

- To use the products given in this catalog properly, always read the related manuals before starting to use them.
- The products within this catalog have been manufactured as general-purpose parts for general industries and have not been designed or manufactured to be incorporated into any devices or systems used in purpose related to human life.
- Before using any product for special purposes such as nuclear power, electric power, aerospace, medicine or passenger movement vehicles, consult with Mitsubishi.
- The products within this catalog have been manufactured under strict quality control. However, when installing the product where major accidents or losses could occur if the product fails, install appropriate backup or failsafe functions in the system.

Country/Region	Sales office	Tel/Fax
USA	Mitsubishi Electric Automation Inc. 500 Corporate Woods Parkway Vernon Hills, IL 60061, USA	Tel : +1-847-478-2100 Fax : +1-847-478-0327
Brazil	MELCO-TEC Rep. Com.e Assessoria Tecnica Ltda. Av.Paulista, 1.439 - Edificio Mario Wallace S.Cochrane 7 andar - Conj.72 e 74 - Bairro Bela Vista - Sao Paulo / SP, Brazil	Tel : +55-11-3285-1840 Fax : +55-11-3284-8848
Germany	Mitsubishi Electric Europe B.V. German Branch Gothaer Strasse 8 D-40880 Ratingen, Germany	Tel : +49-2102-486-0 Fax : +49-2102-486-1120
UK	Mitsubishi Electric Europe B.V. UK Branch Travellers Lane, Hatfield, Herts., AL10 8XB, UK	Tel : +44-1707-276100 Fax : +44-1707-278695
Italy	Mitsubishi Electric Europe B.V. Italian Branch VIALE COLLEONI 7 - 20041 Agrate Brianza (Milano), Italy	Tel : +39-39-60531 Fax : +39-39-6053312
Spain	Mitsubishi Electric Europe B.V. Spanish Branch Carretera de Rubi 76-80 08190 Sant Cugat del Valles, Barcelona, Spain	Tel : +34-93-565-3131 Fax : +34-93-589-1579
France	Mitsubishi Electric Europe B.V. French Branch 25 Boulevard des Bouvets, F-92741 Nanterre Cedex, France	Tel : +33-1-5568-5568 Fax : +33-1-5568-5757
South Africa	Circuit Breaker Industries LTD Private Bag 2016, ZA-1600 Isando, South Africa	Tel : +27-11-928-2000 Fax : +27-11-392-2354
Hong Kong	Mitsubishi Electric Automation (Hong Kong) Ltd. 10th Floor, Manulife Tower, 169 Electric Road, North Point, Hong Kong	Tel : +852-2887-8870 Fax : +852-2887-7984
China	Mitsubishi Electric Automation (Shanghai) Ltd. 4/F Zhi Fu Plazz, No.80 Xin Chang Road, Shanghai, 200003 China	Tel : +86-21-6121-2460 Fax : +86-21-6121-2424
Taiwan	Setsuyo Enterprise Co., Ltd. 6F., No.105 Wu-Kung 3rd.RD, Wu-Ku Hsiang, Taipei Hsine, Taiwan	Tel : +886-2-2299-2499 Fax : +886-2-2299-2509
Korea	Mitsubishi Electric Automation Korea Co., Ltd. [Sales] 3F, 1480-6, Gayang-Dong, Gangseo-Gu, Seoul, 157-200, Korea [Service] B1F, 2F, 1480-6, Gayang-Dong, Gangseo-Gu, Seoul, 157-200, Korea	Tel : +82-2-3660-9552 Fax : +82-2-3664-8372/8335 Tel : +82-2-3660-9607 Fax : +82-2-3664-0475
Singapore	Mitsubishi Electric Asia Pte, Ltd. 307 Alexandra Road #05-01/02, Mitsubishi Electric Building Singapore 159943	Tel : +65-6470-2480 Fax : +65-6476-7439
Thailand	Mitsubishi Electric Automation (Thailand) Co., Ltd. Bang-Chan Industrial Estate No.111, Soi Serithai 54, T.Kannayao, A.Kannayao, Bangkok 10230, Thailand	Tel : +66-2-906-3238 Fax : +66-2-906-3239
Indonesia	Indonesia P.T. Autoteknindo SUMBER MAKMUR Muara Karang Selatan Block A/Utara No.1 Kav. No.11 Kawasan Industri/Pergudangan Jakarta-Utara 14440, Indonesia	Tel : +62-21-663-0833 Fax : +62-21-663-0832
India	Messung Systems Pvt, Ltd. Electronic Sadan III Unit No15, M.I.D.C Bhosari, Pune-411026, India	Tel : +91-20-2712-3130 Fax : +91-20-2712-8108
Australia	Mitsubishi Electric Australia Pty. Ltd. 348 Victoria Road, Rydalmere, NSW 2116, Australia	Tel : +61-2-9684-7777 Fax : +61-2-9684-7245



## MITSUBISHI ELECTRIC CORPORATION

HEAD OFFICE: TOKYO BUILDING, 2-7-3 MARUNOUCHI, CHIYODA-KU, TOKYO 100-8310, JAPAN  
NAGOYA WORKS: 1-14, YADA-MINAMI 5, HIGASHI-KU, NAGOYA, JAPAN

When exported from Japan, this manual does not require application to the Ministry of International Trade and Industry for service transaction permission.