


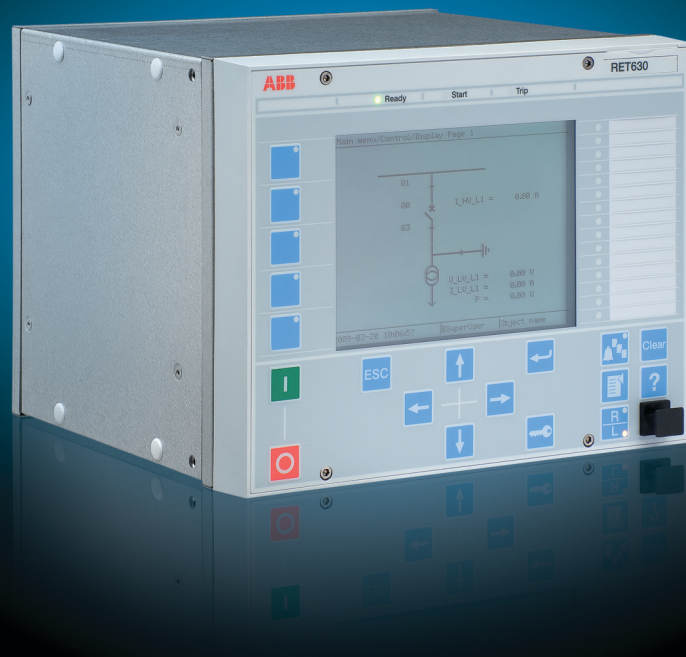

Relion® 630 series

Transformer Protection and Control RET630 Product Guide

Contents

1. Description.....	3	15. Access control.....	13
2. Application.....	3	16. Inputs and outputs.....	13
3. Preconfigurations.....	5	17. Communication.....	14
4. Protection functions.....	8	18. Technical data.....	15
5. Control.....	10	19. Front panel user interface.....	52
6. Measurement.....	10	20. Mounting methods.....	52
7. Disturbance recorder.....	11	21. Selection and ordering data.....	54
8. Event log.....	11	22. Accessories.....	57
9. Disturbance report.....	12	23. Tools.....	58
10. Circuit-breaker monitoring.....	12	24. Supported ABB solutions.....	60
11. Trip-circuit supervision.....	12	25. Terminal diagrams.....	60
12. Self-supervision.....	12	26. References.....	65
13. Fuse failure supervision.....	12	27. Functions, codes and symbols.....	65
14. Current circuit supervision.....	12	28. Document revision history.....	68

Disclaimer

The information in this document is subject to change without notice and should not be construed as a commitment by ABB Oy. ABB Oy assumes no responsibility for any errors that may appear in this document.

© Copyright 2009 ABB Oy.

All rights reserved.

Trademarks

ABB and Relion are registered trademarks of ABB Group. All other brand or product names mentioned in this document may be trademarks or registered trademarks of their respective holders.

1. Description

RET630 is a comprehensive transformer management IED for protection, control, measuring and supervision of power transformers, unit and step-up transformers including power generator-transformer blocks in utility and industry power distribution networks. RET630 is a member of ABB's Relion® product family and a part of its 630 protection and control product series characterized by functional scalability and flexible configurability. RET630 also features necessary control functions constituting an ideal solution for transformer bay control. The supported communication protocols including IEC 61850 offer seamless connectivity to various station automation and SCADA systems.

2. Application

RET630 provides main protection for two-winding power transformers and power generator-transformer blocks. Two pre-defined configurations to match your typical transformer protection and control specifications are available. The pre-defined configurations can be used as such or easily adapted or extended with freely selectable add-on functions, by means of which the IED can be fine-tuned to exactly satisfy the specific requirements of your present application.

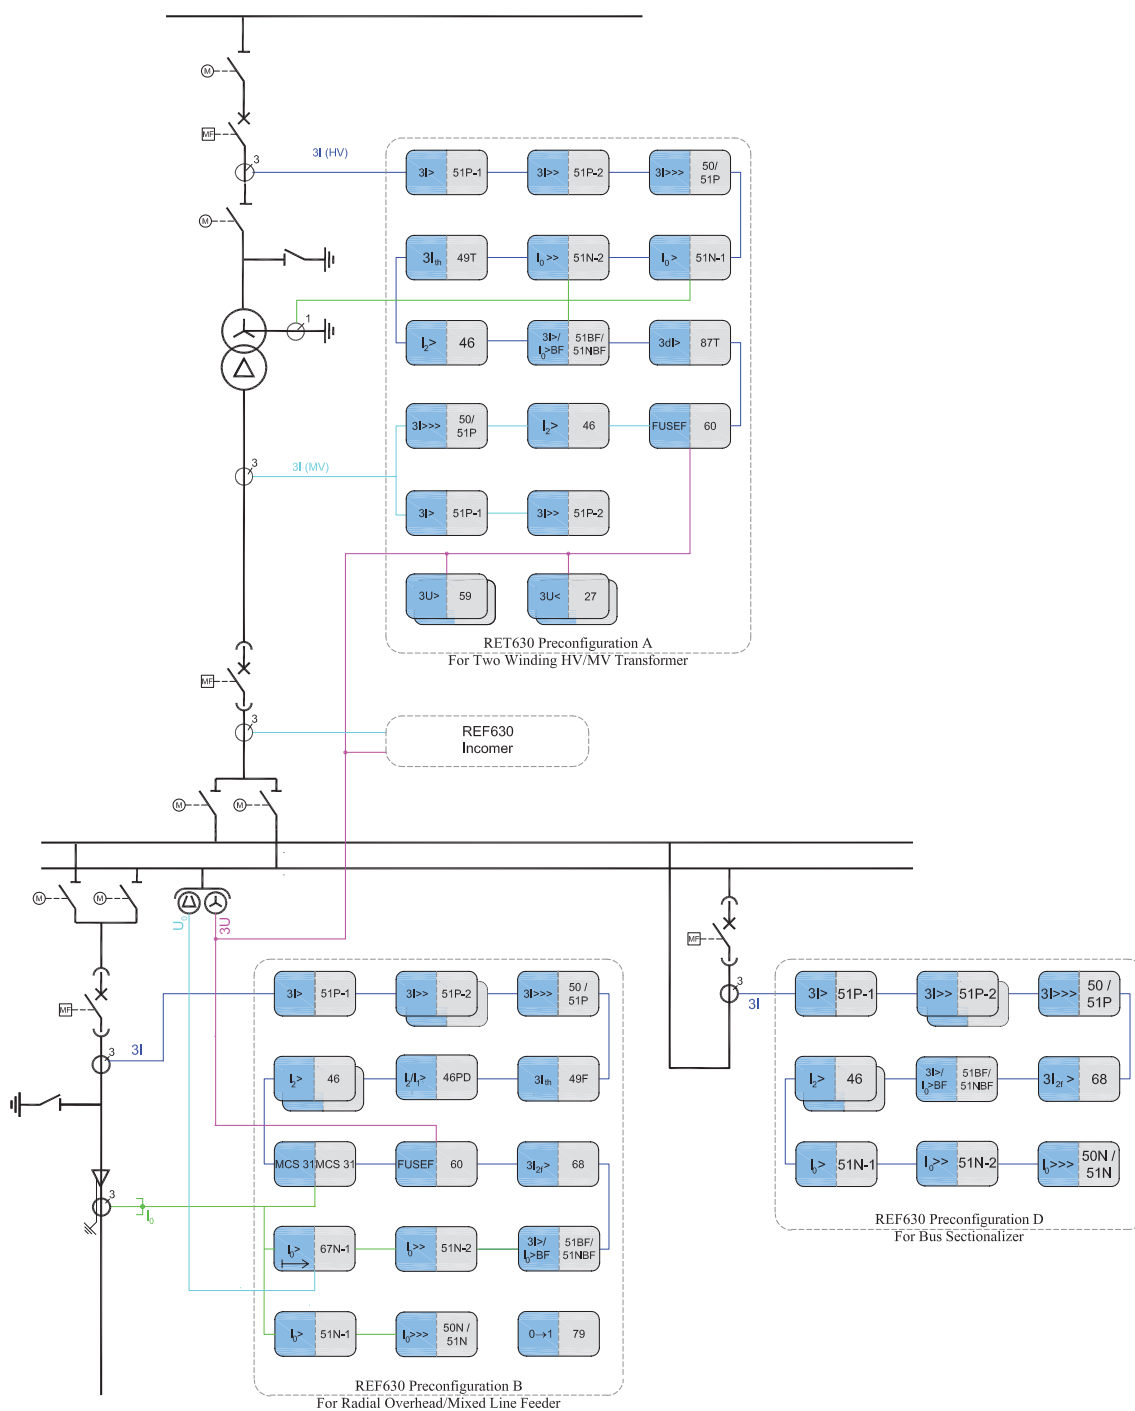


Figure 1. RET630 and REF630 IEDs applied for the incoming feeder and primary switchgear in a double busbar arrangement. The RET630 with preconfiguration A is used for protection and control of the power transformer, the REF630 with preconfiguration B protects and controls the outgoing feeder and the REF630 with preconfiguration D is used for the bus sectionalizer.

3. Preconfigurations

The 630 series IEDs are offered with optional factory-made application preconfigurations. The preconfigurations contribute to faster commissioning and less engineering of the IED. The preconfigurations include default functionality typically needed for a specific application. Each preconfiguration is adaptable using the Protection and Control IED Manager PCM600. By adapting the preconfiguration the IED can be configured to suit the particular application.

The adaptation of the preconfiguration may include adding or removing of protection, control and other functions according to the specific application, changing of the default parameter settings, configuration of the

default alarms and event recorder settings including the texts shown in the HMI, configuration of the LEDs and function buttons, and adaptation of the default single-line diagram.

In addition, the adaptation of the preconfiguration always includes communication engineering to configure the communication according to the functionality of the IED. The communication engineering is done using the communication configuration function of PCM600.

If none of the offered preconfigurations fulfill the needs of the intended area of application the 630 series IEDs can also be ordered without any preconfiguration. This option enables full flexibility to configure the IED from the ground up.

Table 1. RET630 preconfigurations

Description	Preconfiguration		
	A		
Preconfiguration A for two-winding HV/MV transformer	A		
Preconfiguration B for two-winding HV/MV transformer, including numerical REF protection		B	
Number of instances available			N

Table 2. Supported functions

Functionality	A	B	N
Protection			
Three-phase non-directional overcurrent, low stage, LV side	1	1	2
Three-phase non-directional overcurrent, low stage, HV side	1	1	
Three-phase non-directional overcurrent, high stage, LV side	1	1	2
Three-phase non-directional overcurrent, high stage, HV side	1	1	
Three-phase non-directional overcurrent, instantaneous stage, LV side	1	1	2
Three-phase non-directional overcurrent, instantaneous stage, HV side	1	1	
Three-phase directional overcurrent, low stage	-	-	2
Three-phase directional overcurrent, high stage	-	-	1
Non-directional earth fault, low stage, LV side	-	1	2
Non-directional earth fault, low stage, HV side	1	1	
Non-directional earth fault, high stage, LV side	-	1	2
Non-directional earth fault, high stage, HV side	1	1	
Directional earth fault, low stage	-	-	2
Directional earth fault, high stage	-	-	1
Stabilised restricted earth fault, LV side	-	1	2
Stabilised restricted earth fault, HV side	-	1	
High-impedance-based restricted earth-fault protection	-	-	2
Negative-sequence overcurrent, LV side	1	1	4
Negative-sequence overcurrent, HV side	1	1	
Three-phase inrush-current detector	-	-	1
Thermal overload for transformers	1	1	1
Three-phase overvoltage, LV side	2	2	2
Three-phase undervoltage, LV side	2	2	2
Positive-sequence overvoltage ¹⁾	-	-	2
Positive-sequence undervoltage ¹⁾	-	-	2
Negative-sequence overvoltage ¹⁾	-	-	2
Residual overvoltage	-	-	3
Frequency gradient	-	-	6
Overfrequency	-	-	3

Table 2. Supported functions, continued

Functionality	A	B	N
Underfrequency	-	-	3
Transformer differential protection for two-winding transformers	1	1	1
Circuit-breaker failure, HV side	1	1	2
Tripping logic, LV side	1	1	2
Tripping logic, HV side	1	1	
Control			
Bay control	1	1	1
Interlocking interface	4	4	10
Circuit breaker/disconnector control	4	4	10
Circuit breaker	1	1	2
Disconnector	3	3	8
Local/remote switch interface	-	-	1
Synchrocheck	-	-	1
Supervision and monitoring			
Circuit-breaker condition monitoring, HV side	1	1	2
Fuse failure supervision	1	-	1
Current-circuit supervision, LV side	-	-	2
Current-circuit supervision, HV side	-	-	
Trip-circuit supervision	2	2	3
Tap position indication	-	-	1
Energy monitoring	1	1	1
Generic measured values	-	-	3
Measured value limit supervision	-	-	9
Station battery supervision	-	-	1
Measurement			
Three-phase current, LV side	1	1	2
Three-phase current, HV side	1	1	
Three-phase voltage, phase-to-phase	1	1	1
Three-phase voltage, phase-to-earth	1	1	1
Residual current measurement	2	2	2

Table 2. Supported functions, continued

Functionality	A	B	N
Residual voltage measurement	-	-	1
Sequence-current measurement	-	-	1
Sequence-voltage measurement	-	-	1
Power monitoring with P, Q, S, power factor, frequency	1	1	1
Metering			
Pulse counter for energy metering	-	-	4
Disturbance recorder function			
Analog channels 1-10 (samples)	1	1	1
Analog channel 11-20 (samples)	-	-	1
Analog channel 21-30 (samples)	-	-	1
Analog channel 31-40 (calc val)	-	-	1
Binary channels 1-16	1	1	1
Binary channels 17-32	1	1	1
Binary channels 33-48	1	1	1
Binary channels 49-64	1	1	1

1) Optional functions, to be specified at ordering

4. Protection functions

RET630 features transformer differential protection with instantaneous and stabilized stages to provide fast and selective protection for phase-to-phase, winding interturn and bushing short-circuits including most phase-to-earth faults. Besides second harmonic restraint an advanced waveform-based blocking algorithm ensures stability at transformer energization and fifth harmonic restraint ensures stability at moderate overexcitation.

Sensitive restricted earth-fault protection (REF) completes the overall differential protection to detect even single phase-to-earth faults close to the earthing point of the

transformer. Either the conventional high-impedance scheme or a numerical low-impedance scheme can be selected for protection of the windings. If the low-impedance REF protection is used neither stabilizing resistors nor varistors are needed and as a further benefit the transforming ratio of the earthing point current transformers can differ from those of the phase current transformers. Due to its unit protection character the REF protection does not need any time grading, and therefore a fast protection operating time can be achieved.

The IED also incorporates thermal overload protection to prevent an accelerated aging of the transformer isolation. Multiple stages of short-circuit, phase-overcurrent, negative-phase-sequence and earth-fault back-up protection are separately available for both

windings. Earth-fault protection based on the measured or calculated residual overvoltage is also available.

To detect reversed power flow or circulating currents at parallel power transformers

RET630 also offers directional overcurrent protection. Further, overfrequency and underfrequency protection, overvoltage and undervoltage protection and circuit-breaker failure protection are provided.

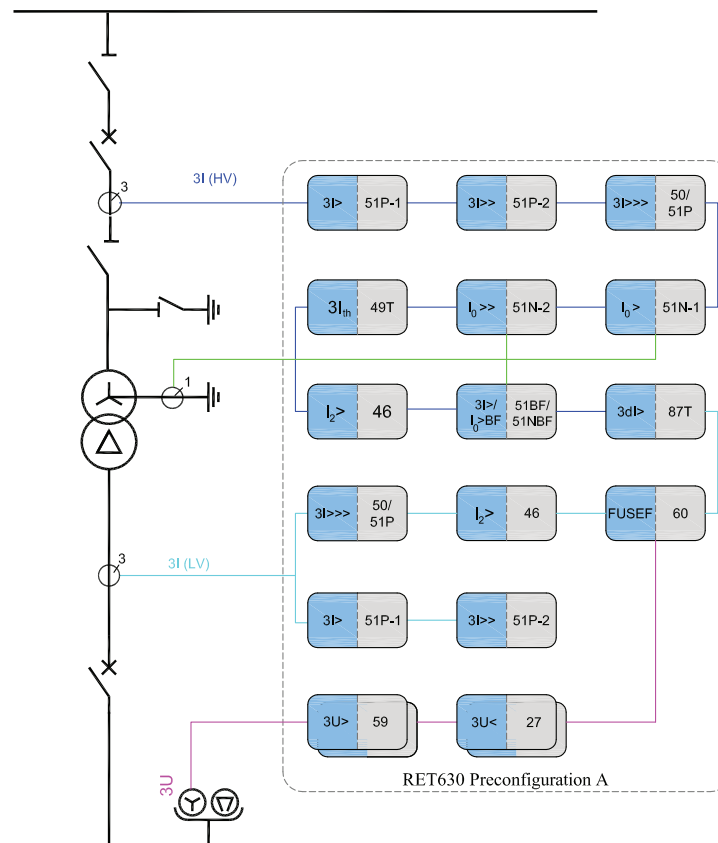


Figure 2. Protection function overview of preconfiguration A

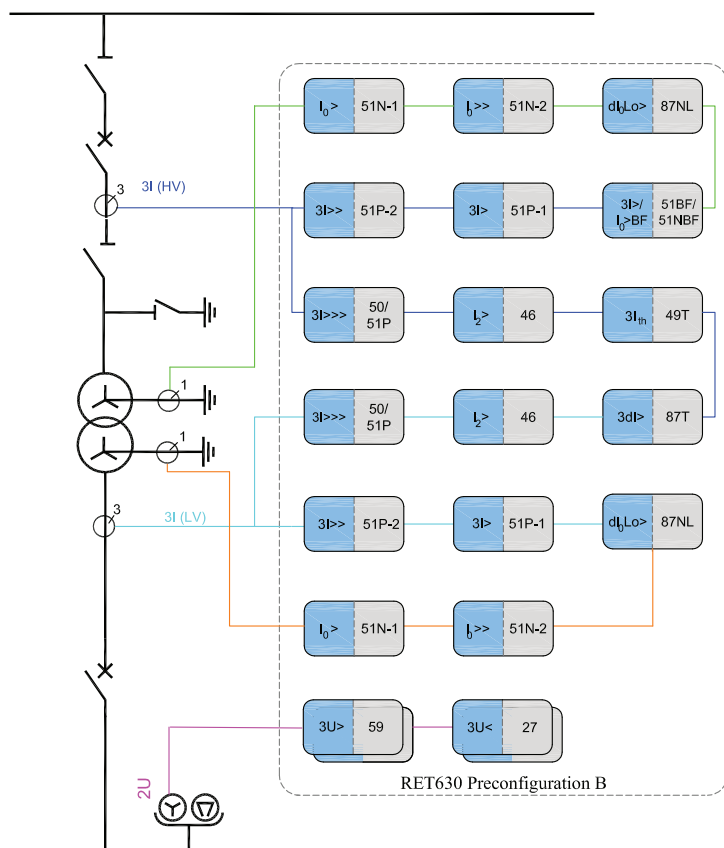


Figure 3. Protection function overview of preconfiguration B

5. Control

The IED incorporates local and remote control functions. The IED offers a number of freely assignable binary inputs/outputs and logic circuits for establishing bay control and interlocking functions for circuit breakers and motor operated switch-disconnectors. The IED supports both single and double busbar substation busbar layouts. The number of controllable primary apparatuses depends on the number of available inputs and outputs in the selected configuration. Besides conventional hardwired signaling also GOOSE messaging according to IEC 61850-8-1 can be used for signal interchange between IEDs to obtain required interlockings.

Further, the IED incorporates a synchro-check function to ensure that the voltage, phase angle and frequency on either side of an open circuit breaker satisfy the conditions for safe interconnection of two networks.

6. Measurement

The IED continuously measures the high voltage (HV) side and the low-voltage (LV) side phase currents and the neutral current(s) of the protected transformer. Further, it measures the positive and negative sequence currents on both sides. The IED also measures phase-to earth or phase-to-phase

voltages, positive and negative sequence voltages and the residual voltage. In addition, the IED monitors active, reactive and apparent power, the power factor, power demand value over a user-selectable pre-set time frame as well as cumulative active and reactive energy of both directions.

System frequency and the temperature of the transformer are also calculated. Cumulative and averaging calculations utilize the non-volatile memory available in the IED. Calculated values are also obtained from the protection and condition monitoring functions of the IED.

The values measured are accessed locally via the front-panel user interface of the IED or remotely via the communication interface of the IED. The values are also accessed locally or remotely using the web-browser based user interface.

7. Disturbance recorder

The IED is provided with a disturbance recorder featuring up to 40 analog and 64 binary signal channels. The analog channels can be set to record the waveform of the currents and voltage measured. The analog channels can be set to trigger the recording when the measured value falls below or exceeds the set values. The binary signal channels can be set to start a recording on the rising or the falling edge of the binary signal. The binary channels are set to record external or internal IED signals, for example the start or operate signals of the protection functions, or external blocking or control signals. Binary IED signals such as a protection start or trip signal, or an external IED control signal over a binary input can be set to trigger the recording. In addition, the disturbance recorder settings include pre and post triggering times.

The disturbance recorder can store up to 100 recordings. The number of recordings may vary depending on the length of the

recording and the number of signals included. The disturbance recorder controls the Start and Trip LEDs on the front-panel user interface. The operation of the LEDs is fully configurable enabling activation when one or several criteria, i.e. protection function starting or tripping, are fulfilled.

The recorded information is stored in a non-volatile memory and can be uploaded for subsequent fault analysis.

8. Event log

The IED features an event log which enables logging of event information. The event log can be configured to log information according to user pre-defined criteria including IED signals. To collect sequence-of-events (SoE) information, the IED incorporates a non-volatile memory with a capacity of storing 1000 events with associated time stamps and user definable event texts. The non-volatile memory retains its data also in case the IED temporarily loses its auxiliary supply. The event log facilitates detailed pre- and post-fault analyses of faults and disturbances.

The SoE information can be accessed locally via the user interface on the IED front panel or remotely via the communication interface of the IED. The information can further be accessed, either locally or remotely, using the web-browser based user interface.

The logging of communication events is determined by the used communication engineering protocol and the communication engineering. The communication events are automatically sent to station automation and SCADA systems once the required communication engineering has been done.

9. Disturbance report

The disturbance report includes information collected during the fault situation. The report includes general information such as recording time, pre-fault time and post fault time. Further, the report includes pre-fault magnitude, pre-fault angle, fault magnitude and fault angle trip values. By default, the disturbance reports are stored in a non-volatile memory. The numerical disturbance report can be accessed via the local front panel user interface. A more comprehensive disturbance report with waveforms is available using PCM600.

10. Circuit-breaker monitoring

The condition monitoring functions of the IED constantly monitors the performance and the condition of the circuit breaker. The monitoring comprises the spring charging time, SF₆ gas pressure, the travel-time and the inactivity time of the circuit breaker.

The monitoring functions provide operational CB history data, which can be used for scheduling preventive CB maintenance.

11. Trip-circuit supervision

The trip-circuit supervision continuously monitors the availability and operability of the trip circuit. It provides open-circuit monitoring both when the circuit breaker is in its closed and in its open position. It also detects loss of circuit-breaker control voltage.

12. Self-supervision

The IED's built-in self-supervision system continuously monitors the state of the IED hardware and the operation of the IED software. Any fault or malfunction detected will be used for alerting the operator.

Self-supervision events are saved into an internal event list which can be accessed locally via the user interface on the IED front panel. The event list can also be accessed using the web-browser based user interface or PCM600.

13. Fuse failure supervision

The fuse failure supervision detects failures between the voltage measurement circuit and the IED. The failures are detected by the negative-sequence based algorithm or by the delta voltage and delta current algorithm. Upon the detection of a failure the fuse failure supervision function activates an alarm and blocks voltage-dependent protection functions from unintended operation.

14. Current circuit supervision

Current circuit supervision is used for detecting faults in the current transformer secondary circuits. On detecting of a fault the current circuit supervision function can also activate an alarm LED and block certain protection functions to avoid unintended operation. The current circuit supervision function calculates the sum of the phase currents and compares the sum with the measured single reference current from a

core balance current transformer or from another set of phase current transformers.

15. Access control

To protect the IED from unauthorized access and to maintain information integrity the IED is provided with an authentication system including user management. Using the IED user management tool in the Protection and Control IED Manager PCM600, an individual password is assigned to each user by the administrator. Further, the user name is associated to one or more of the four available user groups: System Operator, Protection Engineer, Design Engineer and User Administrator. The user group association for each individual user enables the use of the IED according to the profile of the user group.

16. Inputs and outputs

Depending on the hardware configuration selected, the IED is equipped with six phase-current inputs (three inputs for the HV side and three inputs for the LV side) and one or two neutral-current inputs for earth-fault protection.

Depending on the selected hardware configuration the IED includes two or three voltage inputs. One of the voltage inputs can be used as a residual voltage input for

directional earth-fault protection or residual voltage protection. The voltage inputs can also be used as phase-voltage inputs for overvoltage, undervoltage and directional overcurrent protection and other voltage based protection functions.

The phase-current inputs are rated 1/5 A. Depending on the selected hardware configuration the IED is equipped with one or two alternative residual-current inputs, that is 1/5 A or 0.1/0.5 A. The 0.1/0.5 A input is normally used in applications requiring sensitive earth-fault protection and featuring a core-balance current transformer.

The voltage inputs, for either phase-to-phase voltages or phase-to-earth voltages, and the residual-voltage input cover the rated voltages 100 V, 110 V, 115 V and 120 V. The rated values of the current and voltage inputs are selected in the IED software.

In addition, the binary input thresholds are selected by adjusting the IED's parameter settings. The threshold voltage can be set separately for each binary input.

The enhanced scalability of the 6U variant IEDs are intended for optimized medium voltage metal-clad switchgear applications where additional binary inputs and outputs are often required.

All binary input and output contacts are freely configurable using the signal matrix of the application configuration function in PCM600. Please refer to the Input/output overview tables, the selection and ordering data, and the terminal diagrams for more detailed information about the inputs and outputs.

Table 3. Analog input options

Analog input configuration	CT (1/5 A)	CT sensitive (0.1/0.5 A)	VT
AA	7	-	3
AB	8	-	2
AC	7	1	2

Table 4. Binary input/output options for 4U variants

Binary input options	BI	BO
Default	14	9
With one optional binary I/O module	23	18
With two optional binary I/O modules	32	27

Table 5. Binary input/output options for 6U variants

Binary input options	BI	BO
Default	14	9
With one optional binary I/O module	23	18
With two optional binary I/O modules	32	27
With three optional binary I/O modules	41	36
With four optional binary I/O modules	50	45

17. Communication

The IED supports the new IEC 61850 substation automation standard including horizontal GOOSE communication as well as the well-established DNP3 (TCP/IP) protocol. All operational information and controls are available through these protocols.

Disturbance files are accessed using the IEC 61850 protocol. Disturbance files are available to any Ethernet based application in the standard COMTRADE format. Further, the IED sends and receives binary signals from other IEDs using the IEC 61850-8-1 GOOSE profile. The IED meets the GOOSE performance requirements for tripping applications in distribution substations, as defined by the IEC 61850 standard. The IED interoperates with other IEC 61850 compliant IEDs, tools and systems and simultaneously reports events to five different clients on the

IEC 61850 station bus. For a system using DNP3 over TCP/IP, events can be sent to four different masters.

All communication connectors, except for the front port connector, are placed on integrated communication modules. The IED is connected to Ethernet-based communication systems via the RJ-45 connector (10/100BASE-TX) or the fibre-optic multimode LC connector (100BASE-FX).

The IED supports SNTP, DNP3 and IRIG-B time synchronization methods with a time-stamping resolution of 1 ms.

Ethernet based:

- SNTP (Simple Network Time Protocol)
- DNP3

With special time synchronization wiring:

- IRIG-B (Inter-Range Instrumentation Group - Time Code Format B)

Table 6. Supported communication interface and protocol alternatives

Interfaces/Protocols¹⁾	Ethernet 100BASE-TX RJ-45	Ethernet 100BASE-FX LC
IEC 61850	•	•
DNP3	•	•

• = Supported

1) Please refer to the Selection and ordering data chapter for more information

18. Technical data

Table 7. Dimensions

Description	Type	Value
Width	half 19"	220 mm
Height	half 19"	177 mm (4U) 265.9 mm (6U)
Depth	half 19"	249.5 mm
Weight	half 19" box	6.2 kg (4U) 5.5 kg (6U) ¹⁾
	half 19" LHMI	1.0 kg (4U)

1) Without LHMI

Table 8. Power supply

Description	Type 1	Type 2
U _{aux} nominal	100, 110, 120, 220, 240 V AC, 50 and 60 Hz	48, 60, 110, 125 V DC
	110, 125, 220, 250 V DC	
U _{aux} variation	85...110% of U _n (85...264 V AC)	80...120% of U _n (38.4...150 V DC)
	80...120% of U _n (88...300 V DC)	
Maximum load of auxiliary voltage supply	35 W	
Ripple in the DC auxiliary voltage	Max 15% of the DC value (at frequency of 100 Hz)	
Maximum interruption time in the auxiliary DC voltage without resetting the IED	50 ms at U _{aux}	
Power supply input must be protected by an external miniature circuit breaker	For example, type S282 UC-K	

Table 9. Energizing inputs

Description		Value	
Rated frequency		50/60 Hz	
Operating range		Rated frequency $\pm$ 5 Hz	
Current inputs	Rated current, I_n	0.1/0.5 A ¹⁾	1/5 A ²⁾
	Thermal withstand capability:		
	• Continuously	4 A	20 A
	• For 1 s	100 A	500 A
	• For 10 s	25 A	100 A
	Dynamic current withstand:		
Voltage inputs	• Half-wave value	250 A	1250 A
	Input impedance	<100 m Ω	<20 m Ω
	Rated voltage	100 V/ 110 V/ 115 V/ 120 V (Parametrization)	
	Voltage withstand:		
	• Continuous	425 V	
	• For 10 s	450 V	
	Burden at rated voltage	<0.05 VA	

1) Residual current

2) Phase currents or residual current

Table 10. Binary inputs

Description	Value
Operating range	Maximum input voltage 300 V DC
Rated voltage	24...250 V DC
Current drain	1.6...1.8 mA
Power consumption/input	<0.3 W
Threshold voltage	15...221 V DC (parametrizable in the range in steps of 1% of the rated voltage)

Table 11. Signal output and IRF output

IRF relay change over - type signal output relay	
Description	Value
Rated voltage	250 V AC/DC
Continuous contact carry	5 A
Make and carry for 3.0 s	10 A
Make and carry 0.5 s	15 A
Breaking capacity when the control-circuit time constant $L/R < 40$ ms, at $U < 48/110/220$ V DC	≤ 0.5 A/ ≤ 0.1 A/ ≤ 0.04 A
Minimum contact load	100 mA at 24 V AC/DC

Table 12. Power output relays, with or without TCS function

Description	Value
Rated voltage	250 V AC/DC
Continuous contact carry	8 A
Make and carry for 3.0 s	15 A
Make and carry for 0.5 s	30 A
Breaking capacity when the control-circuit time constant $L/R < 40$ ms, at $U < 48/110/220$ V DC	≤ 1 A/ ≤ 0.3 A/ ≤ 0.1 A
Minimum contact load	100 mA at 24 V AC/DC

Table 13. Power output relays with TCS function

Description	Value
Control voltage range	20...250 V DC
Current drain through the supervision circuit	~1.0 mA
Minimum voltage over the TCS contact	20 V DC

Table 14. Ethernet interfaces

Ethernet interface	Protocol	Cable	Data transfer rate
LAN/HMI port (X0) ¹⁾	-	CAT 6 S/FTP or better	100 MBits/s
LAN1 (X1)	TCP/IP protocol	Shielded twisted pair CAT 5e cable with RJ-45 connector or fibre-optic cable with LC connector	100 MBits/s

1) Only available for the external HMI option.

Table 15. Fibre-optic communication link

Wave length	Fibre type	Connector	Permitted path attenuation ¹⁾	Distance
1300 nm	MM 62.5/125 µm glass fibre core	LC	<8 dB	2 km

1) Maximum allowed attenuation caused by connectors and cable together

Table 16. X4/IRIG-B interface

Type	Protocol	Cable
Screw terminal, pin row header	IRIG-B	Shielded twisted pair cable Recommended: CAT 5, Belden RS-485 (9841- 9844) or Alpha Wire (Alpha 6222-6230)

Table 17. Serial rear interface

Type	Counter connector ¹⁾
Serial port (X9)	Optical ST connector or optical snap-in connector

1) For future use

Table 18. Degree of protection of flush-mounted IED

Description	Value
Front side	IP 40
Rear side, connection terminals	IP 20

Table 19. Degree of protection of the LHMI

Description	Value
Front and side	IP 42

Table 20. Environmental conditions

Description	Value
Operating temperature range	-25...+55°C (continuous)
Short-time service temperature range	-40...+85°C (<16h) Note: Degradation in MTBF and HMI performance outside the temperature range of -25...+55°C
Relative humidity	<93%, non-condensing
Atmospheric pressure	86...106 kPa
Altitude	up to 2000 m
Transport and storage temperature range	-40...+85°C

Table 21. Environmental tests

Description	Type test value	Reference
Dry heat test (humidity <50%)	• 96 h at +55°C • 16 h at +85°C	IEC 60068-2-2
Cold test	• 96 h at -25°C • 16 h at -40°C	IEC 60068-2-1
Damp heat test, cyclic	• 6 cycles at +25...55°C, humidity 93...95%	IEC 60068-2-30
Storage test	• 96 h at -40°C • 96 h at +85°C	IEC 60068-2-48

Table 22. Electromagnetic compatibility tests

Description	Type test value	Reference
100 kHz and 1 MHz burst disturbance test • Common mode • Differential mode	2.5 kV 1.0 kV	IEC 61000-4-18 IEC 60255-22-1, level 3
Electrostatic discharge test • Contact discharge • Air discharge	8 kV 15 kV	IEC 61000-4-2 IEC 60255-22-2, level 4 IEEE C37.90.3
Radio frequency interference tests • Conducted, common mode OK • Radiated, pulse-modulated • Radiated, amplitude-modulated	10 V (emf), f=150 kHz...80 MHz 10 V/m, f=900 MHz 20 V/m (rms), f=80...1000 MHz 10 V/m, f=80...2700 MHz	IEC 61000-4-6 IEC 60255-22-6, level 3 ENV 50204 IEC 60255-22-3 IEEE C37.90.2-2004 IEC 61000-4-3 IEC 60255-22-3
Fast transient disturbance tests • All ports	4 kV	IEC 61000-4-4 IEC 60255-22-4, class A
Surge immunity test • Binary inputs • Communication • Other ports	2 kV line-to-earth, 1kV line-to-line 1 kV line-to-earth 4 kV line-to-earth, 2 kV line-to-line	IEC 61000-4-5 IEC 60255-22-5, level 4/3
Power frequency (50 Hz) magnetic field • 1...3 s	1000 A/m	IEC 61000-4-8, level 5

Table 22. Electromagnetic compatibility tests, continued

Description	Type test value	Reference
• Continuous	300 A/m	
Power frequency immunity test	300 V rms	IEC 60255-22-7, class A IEC 61000-4-16
• Common mode	150 V rms	
• Differential mode		
Voltage dips and short interruptions	30%/10 ms 40%/200 ms 60%/100 ms 60%/1000 ms 70%/500 ms >95%/5000 ms	IEC 60255-11 IEC 61000-4-11
Electromagnetic emission tests		EN 55011, class A IEC 60255-25
• Conducted, RF-emission (mains terminal) OK		
0.15...0.50 MHz	< 79 dB(μV) quasi peak < 66 dB(μV) average	
0.5...30 MHz	< 73 dB(μV) quasi peak < 60 dB(μV) average	
• Radiated RF -emission		
30...230 MHz	< 40 dB(μV/m) quasi peak, measured at 10 m distance	
230...1000 MHz	< 47 dB(μV/m) quasi peak, measured at 10 m distance	

Table 23. Insulation tests

Description	Type test value	Reference
Dielectric tests: • Test voltage	2 kV, 50 Hz, 1 min 500 V, 50 Hz, 1min, communication	IEC 60255-5
Impulse voltage test: • Test voltage	5 kV, unipolar impulses, waveform 1.2/50 μ s, source energy 0.5 J 1 kV, unipolar impulses, waveform 1.2/50 μ s, source energy 0.5 J, communication	IEC 60255-5
Insulation resistance measurements • Isolation resistance	>100 M Ω , 500 V DC	IEC 60255-5
Protective bonding resistance • Resistance	<0.1 Ω (60 s)	IEC 60255-27

Table 24. Mechanical tests

Description	Reference	Requirement
Vibration tests (sinusoidal)	IEC 60068-2-6 (test Fc) IEC 60255-21-1	Class 1
Shock and bump test	IEC 60068-2-27 (test Ea shock) IEC 60068-2-29 (test Eb bump) IEC 60255-21-2	Class 1
Seismic test	IEC 60255-21-3 (method A)	Class 1

Table 25. Product safety

Description	Reference
LV directive	2006/95/EC
Standard	EN 60255-27 (2005) EN 60255-6 (1994)

Table 26. EMC compliance

Description	Reference
EMC directive	2004/108/EC
Standard	EN 50263 (2000) EN 60255-26 (2007)

Table 27. RoHS compliance

Description
Complies with RoHS directive 2002/95/EC

Protection functions

Table 28. Three-phase non-directional overcurrent protection (PHxPTOC)

Characteristic		Value
Operation accuracy		At the frequency $f = f_n$
	PHLPTOC	$\pm 1.5\%$ of the set value or $\pm 0.002 \times I_n$
	PHHPTOC and PHIPTOC	$\pm 1.5\%$ of set value or $\pm 0.002 \times I_n$ (at currents in the range of $0.1 \dots 10 \times I_n$) $\pm 5.0\%$ of the set value (at currents in the range of $10 \dots 40 \times I_n$)
Start time ¹⁾²⁾	PHIPTOC: $I_{\text{Fault}} = 2 \times \text{set Start value}$	Typical: 17 ms (± 5 ms)
	$I_{\text{Fault}} = 10 \times \text{set Start value}$	Typical: 10 ms (± 5 ms)
	PHHPTOC: $I_{\text{Fault}} = 2 \times \text{set Start value}$	Typical: 19 ms (± 5 ms)
	PHLPTOC: $I_{\text{Fault}} = 2 \times \text{set Start value}$	Typical: 23 ms (± 15 ms)
Reset time		< 45 ms
Reset ratio		Typical 0.96
Retardation time		< 30 ms
Operate time accuracy in definite time mode		$\pm 1.0\%$ of the set value or ± 20 ms
Operate time accuracy in inverse time mode		$\pm 5.0\%$ of the theoretical value or ± 20 ms ³⁾
Suppression of harmonics		RMS: No suppression DFT: -50dB at $f = n \times f_n$, where $n = 2, 3, 4, 5, \dots$ Peak-to-Peak: No suppression P-to-P+backup: No suppression

- 1) Set *Operate delay time* = 0,02 s, *Operate curve type* = IEC definite time, *Measurement mode* = default (depends on stage), current before fault = $0.0 \times I_n$, $f_n = 50$ Hz, fault current in one phase with nominal frequency injected from random phase angle, results based on statistical distribution of 1000 measurements
- 2) Includes the delay of the signal output contact
- 3) Includes the delay of the heavy-duty output contact

Table 29. Three-phase non-directional overcurrent protection (PHxPTOC) main settings

Parameter	Function	Value (Range)	Step
Start Value	PHLPTOC	0.05...5.00 pu	0.01
	PHHPTOC	0.10...40.00 pu	0.01
	PHIPTOC	0.10...40.00 pu	0.01
Time multiplier	PHLPTOC	0.05...15.00	0.05
	PHHPTOC	0.05...15.00	0.05
Operate delay time	PHLPTOC	0.04...200.00 s	0.01
	PHHPTOC	0.02...200.00 s	0.01
	PHIPTOC	0.02...200.00 s	0.01
Operating curve type ¹⁾	PHLPTOC	Definite or inverse time Curve type: 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 17, 18, 19	
	PHHPTOC	Definite or inverse time Curve type: 1, 3, 5, 9, 10, 12, 15, 17	
	PHIPTOC	Definite time	

1) For further reference please refer to the Operating characteristics table

Table 30. Three-phase directional overcurrent protection (DPHxPDOC)

Characteristic		Value
Operation accuracy	DPHLPDOC	At the frequency $f = f_n$ Current: $\pm 1.5\%$ of the set value or $\pm 0.002 \times I_n$ Voltage: $\pm 1.5\%$ of the set value or $\pm 0.002 \times U_n$ Phase angle: $\pm 2^\circ$
	DPHHPDOC	Current: $\pm 1.5\%$ of the set value or $\pm 0.002 \times I_n$ (at currents in the range of $0.1 \dots 10 \times I_n$) $\pm 5.0\%$ of the set value (at currents in the range of $10 \dots 40 \times I_n$) Voltage: $\pm 1.5\%$ of the set value or $\pm 0.002 \times U_n$ Phase angle: $\pm 2^\circ$
Start time ¹⁾²⁾	$I_{\text{Fault}} = 2.0 \times \text{set } \textit{Start value}$	Typical: 24 ms (± 15 ms)
Reset time		< 40 ms
Reset ratio		Typical 0.96
Retardation time		< 35 ms
Operate time accuracy in definite time mode		$\pm 1.0\%$ of the set value or ± 20 ms
Operate time accuracy in inverse time mode		$\pm 5.0\%$ of the theoretical value or ± 20 ms ³⁾
Suppression of harmonics		RMS: No suppression DFT: -50dB at $f = n \times f_n$, where $n = 2, 3, 4, 5, \dots$ Peak-to-Peak: No suppression P-to-P+backup: No suppression

- 1) *Measurement mode* = default (depends of stage), current before fault = $0.0 \times I_n$, $f_n = 50$ Hz, fault current in one phase with nominal frequency injected from random phase angle, results based on statistical distribution of 1000 measurements
- 2) Includes the delay of the signal output contact
- 3) Maximum *Start value* = $2.5 \times I_n$, *Start value* multiples in range of 1.5 to 20

Table 31. Three-phase directional overcurrent protection (DPHxPDOC) main settings

Parameter	Function	Value (Range)	Step
Start value	DPHxPDOC	0.05...5.00 pu	0.01
Time multiplier	DPHxPDOC	0.05...15.00	0.05
Operate delay time	DPHxPDOC	0.04...200.00 s	0.01
Directional mode	DPHxPDOC	1 = Non-directional 2 = Forward 3 = Reverse	
Characteristic angel	DPHxPDOC	-179...180 deg	1
Operating curve type ¹⁾	DPHLPDOC	Definite or inverse time Curve type: 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 17, 18, 19	
	DPHHPDOC	Definite or inverse time Curve type: 1, 3, 5, 9, 10, 12, 15, 17	

1) For further reference please refer to the Operating characteristics table

Table 32. Non-directional earth-fault protection (EFxPTOC)

Characteristic		Value
Operation accuracy		At the frequency $f = f_n$
	EFLPTOC	$\pm 1.5\%$ of the set value or $\pm 0.001 \times I_n$
	EFHPTOC and EFIPTOC	$\pm 1.5\%$ of set value or $\pm 0.002 \times I_n$ (at currents in the range of $0.1 \dots 10 \times I_n$) $\pm 5.0\%$ of the set value (at currents in the range of $10 \dots 40 \times I_n$)
Start time ¹⁾²⁾	EFIPTOC: $I_{\text{Fault}} = 2 \times \text{set Start value}$	Typical 12 ms (± 5 ms)
	EFHPTOC: $I_{\text{Fault}} = 2 \times \text{set Start value}$	Typical 19 ms (± 5 ms)
	EFLPTOC: $I_{\text{Fault}} = 2 \times \text{set Start value}$	Typical 23 ms (± 15 ms)
Reset time		< 45 ms
Reset ratio		Typical 0.96
Retardation time		< 30 ms
Operate time accuracy in definite time mode		$\pm 1.0\%$ of the set value or ± 20 ms
Operate time accuracy in inverse time mode		$\pm 5.0\%$ of the theoretical value or ± 20 ms ³⁾
Suppression of harmonics		RMS: No suppression DFT: -50dB at $f = n \times f_n$, where $n = 2, 3, 4, 5, \dots$ Peak-to-Peak: No suppression

- 1) *Operate curve type* = IEC definite time, *Measurement mode* = default (depends on stage), current before fault = $0.0 \times I_n$, $f_n = 50$ Hz, earth-fault current with nominal frequency injected from random phase angle, results based on statistical distribution of 1000 measurements
- 2) Includes the delay of the signal output contact
- 3) Maximum *Start value* = $2.5 \times I_n$, *Start value* multiples in range of 1.5 to 20

Table 33. Non-directional earth-fault protection (EFxPTOC) main settings

Parameter	Function	Value (Range)	Step
Start value	EFLPTOC	0.010...5.000 pu	0.005
	EFHPTOC	0.10...40.00 pu	0.01
	EFIPTOC	0.10...40.00 pu	0.01
Time multiplier	EFLPTOC	0.05...15.00	0.05
	EFHPTOC	0.05...15.00	0.05
Operate delay time	EFLPTOC	0.04...200.00 s	0.01
	EFHPTOC	0.02...200.00 s	0.01
	EFIPTOC	0.02...200.00 s	0.01
Operating curve type ¹⁾	EFLPTOC	Definite or inverse time Curve type: 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 17, 18, 19	
	EFHPTOC	Definite or inverse time Curve type: 1, 3, 5, 9, 10, 12, 15, 17	
	EFIPTOC	Definite time	

1) For further reference please refer to the Operating characteristics table

Table 34. Directional earth-fault protection (DEFxPDEF)

Characteristic		Value
Operation accuracy	DEFLPDEF	At the frequency $f = f_n$ Current: $\pm 1.5\%$ of the set value or $\pm 0.002 \times I_n$ Voltage $\pm 1.5\%$ of the set value or $\pm 0.002 \times U_n$ Phase angle: $\pm 2^\circ$
	DEFHPDEF	Current: $\pm 1.5\%$ of the set value or $\pm 0.002 \times I_n$ (at currents in the range of $0.1 \dots 10 \times I_n$) $\pm 5.0\%$ of the set value (at currents in the range of $10 \dots 40 \times I_n$) Voltage: $\pm 1.5\%$ of the set value or $\pm 0.002 \times U_n$ Phase angle: $\pm 2^\circ$
Start time ¹⁾²⁾	DEFHPDEF and DEFLPTDEF: $I_{\text{Fault}} = 2 \times \text{set } \textit{Start value}$	Typical 54 ms (± 15 ms)
Reset time		< 40 ms
Reset ratio		Typical 0.96
Retardation time		< 30 ms
Operate time accuracy in definite time mode		$\pm 1.0\%$ of the set value or ± 20 ms
Operate time accuracy in inverse time mode		$\pm 5.0\%$ of the theoretical value or ± 20 ms ³⁾
Suppression of harmonics		RMS: No suppression DFT: -50dB at $f = n \times f_n$, where $n = 2, 3, 4, 5, \dots$ Peak-to-Peak: No suppression

- 1) Set *Operate delay time* = 0.06 s, *Operate curve type* = IEC definite time, *Measurement mode* = default (depends on stage), current before fault = $0.0 \times I_n$, $f_n = 50$ Hz, earth-fault current with nominal frequency injected from random phase angle, results based on statistical distribution of 1000 measurements
- 2) Includes the delay of the signal output contact
- 3) Maximum *Start value* = $2.5 \times I_n$, *Start value* multiples in range of 1.5 to 20

Table 35. Directional earth-fault protection (DEFxPDEF) main settings

Parameter	Function	Value (Range)	Step
Start Value	DEFLPDEF	0.010...5.000 pu	0.005
	DEFHPDEF	0.10...40.00 pu	0.01
Directional mode	DEFLPDEF and DEFHPDEF	1=Non-directional 2=Forward 3=Reverse	
Time multiplier	DEFLPDEF	0.05...15.00	0.05
	DEFHPDEF	0.05...15.00	0.05
Operate delay time	DEFLPDEF	0.06...200.00 s	0.01
	DEFHPDEF	0.06...200.00 s	0.01
Operating curve type ¹⁾	DEFLPDEF	Definite or inverse time Curve type: 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 17, 18, 19	
	DEFHPDEF	Definite or inverse time Curve type: 1, 3, 5, 15, 17	
Operation mode	DEFLPDEF and DEFHPDEF	1=Phase angle 2= $I_0 \sin$ 3= $I_0 \cos$ 4=Phase angle 80 5=Phase angle 88	

1) For further reference please refer to the Operating characteristics table

Table 36. Numerical stabilized low impedance restricted earth-fault protection (LREFPNDF)

Characteristic		Value
Operation accuracy		At the frequency $f = f_n$
		$\pm 1.5\%$ of the set value or $\pm 0.002 \times I_n$
Start time ¹⁾²⁾	$I_{\text{Fault}} = 2.0 \times \text{set}$ <i>Operate value</i> $I_{\text{Fault}} = 10.0 \times \text{set}$ <i>Operate value</i>	Typical 18 ms (± 5 ms) Typical 12 ms (± 5 ms)
Reset time		< 40 ms
Reset ratio		Typical 0.96
Retardation time		< 35 ms
Operate time accuracy in definite time mode		$\pm 1.0\%$ of the set value or ± 20 ms
Suppression of harmonics		DFT: -50dB at $f = n \times f_n$, where $n = 2, 3, 4, 5, \dots$

- 1) Current before fault = $0.0 \times I_n$, $f_n = 50$ Hz
2) Includes the delay of the signal output contact

Table 37. Numerical stabilized low impedance restricted earth-fault protection (LREFPNDF) main settings

Parameter	Function	Value (Range)	Step
Operate value	LREFPNDF	5...50 %	1
Restraint mode	LREFPNDF	None 2nd harmonic	-
Start value 2.H	LREFPNDF	10...50 %	1
Minimum operate time	LREFPNDF	0.040...300.000 s	0.001

Table 38. High-impedance based restricted earth-fault protection (HREFPDIF)

Characteristic		Value
Operation accuracy		At the frequency $f = f_n$
		$\pm 1.5\%$ of the set value or $\pm 0.002 \times I_n$
Start time ¹⁾²⁾	$I_{\text{Fault}} = 2.0 \times \text{set}$ <i>Operate value</i> $I_{\text{Fault}} = 10.0 \times \text{set}$ <i>Operate value</i>	Typical 22 ms (± 5 ms) Typical 15 ms (± 5 ms)
Reset time		< 40 ms
Reset ratio		Typical 0.96
Retardation time		< 35 ms
Operate time accuracy in definite time mode		$\pm 1.0\%$ of the set value or ± 20 ms

1) Current before fault = $0.0 \times I_n$, $f_n = 50$ Hz

2) Includes the delay of the signal output contact

Table 39. High-impedance based restricted earth-fault protection (HREFPDIF) main settings

Parameter	Function	Value (Range)	Step
Operate value	HREFPDIF	0.5...50.0 %	0.1
Minimum operate time	HREFPDIF	0.020...300.000 s	0.001

Table 40. Negative phase-sequence overcurrent protection (NSPTOC)

Characteristic		Value
Operation accuracy		At the frequency $f = f_n$
		$\pm 1.5\%$ of the set value or $\pm 0.002 \times I_n$
Start time ¹⁾²⁾	$I_{\text{Fault}} = 2 \times \text{set } \textit{Start value}$ $I_{\text{Fault}} = 10 \times \text{set } \textit{Start value}$	Typical 23 ms (± 15 ms) Typical 16 ms (± 15 ms)
Reset time		< 40 ms
Reset ratio		Typical 0.96
Retardation time		< 35 ms
Operate time accuracy in definite time mode		$\pm 1.0\%$ of the set value or ± 20 ms
Operate time accuracy in inverse time mode		$\pm 5.0\%$ of the theoretical value or ± 20 ms ³⁾
Suppression of harmonics		DFT: -50dB at $f = n \times f_n$, where $n = 2, 3, 4, 5, \dots$

1) *Operate curve type* = IEC definite time, negative sequence current before fault = 0.0, $f_n = 50\text{Hz}$

2) Includes the delay of the signal output contact

3) Maximum *Start value* = $2.5 \times I_n$, *Start value* multiples in range of 1.5 to 20

Table 41. Negative phase-sequence overcurrent protection (NSPTOC) main settings

Parameter	Function	Value (Range)	Step
Start value	NSPTOC	0.01...5.00 pu	0.01
Time multiplier	NSPTOC	0.05...15.00	0.05
Operate delay time	NSPTOC	0.04...200.00 s	0.01
Operating curve type ¹⁾	NSPTOC	Definite or inverse time Curve type: 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 17, 18, 19	

1) For further reference please refer to the Operating characteristics table

Table 42. Three-phase inrush current detection (INRPHAR)

Characteristic	Value
Operation accuracy	At the frequency $f = f_n$ Current measurement: $\pm 1.5\%$ of the set value or $\pm 0.002 \times I_n$ Ratio I_{2f}/I_{1f} measurement: $\pm 5.0\%$ of the set value
Reset time	+35 ms / -0 ms
Reset ratio	Typical 0.96
Operate time accuracy	+30 ms / -0 ms

Table 43. Three-phase inrush detection (INRPHAR) main settings

Parameter	Function	Value (Range)	Step
Start value (Ratio of the 2nd to the 1st harmonic leading to restraint)	INRPHAR	5...100 %	1
Operate delay time	INRPHAR	0.02...60.00 s	0.001

Table 44. Thermal overload protection, two time constants (T2PTTR)

Characteristic	Value
Operation accuracy	At the frequency $f = f_n$ Current measurement: $\pm 1.5\%$ of the set value or $\pm 0.002 \times I_n$ (at currents in the range of $0.01...4.00 \times I_n$)
Operate time accuracy ¹⁾	$\pm 2.0\%$ or ± 1000 ms

1) Overload current $> 1.2 \times$ Operate level temperature, *Current reference* > 0.50 p.u.

Table 45. Thermal overload for protection, two time constants (T2PTTR) main settings

Parameter	Function	Value (Range)	Step
Temperature rise	T2PTTR	0.0...200.0 deg	0.1
Max temperature	T2PTTR	0.0...200.0 deg	0.1
Operate temperature	T2PTTR	80.0...120.0 %	0.1
Weighting factor p	T2PTTR	0.00...1.00	0.01
Short time constant	T2PTTR	60...60000 s	1
Current reference	T2PTTR	0.05...4.00 pu	0.01

Table 46. Three-phase overvoltage protection (PHPTOV)

Characteristic		Value
Operation accuracy		At the frequency $f = f_n$
		$\pm 1.5\%$ of the set value or $\pm 0.002 \times U_n$
Start time ¹⁾²⁾	$U_{\text{Fault}} = 2.0 \times \text{set Start value}$	Typical 17 ms ($\pm 15\text{ms}$)
Reset time		< 40 ms
Reset ratio		Depends of the set <i>Relative hysteresis</i>
Retardation time		< 35 ms
Operate time accuracy in definite time mode		$\pm 1.0\%$ of the set value or ± 20 ms
Operate time accuracy in inverse time mode		$\pm 5.0\%$ of the theoretical value or ± 20 ms ³⁾
Suppression of harmonics		DFT: -50 dB at $f = n \times f_n$, where $n = 2, 3, 4, 5, \dots$

- 1) *Start value* = $1.0 \times U_n$, Voltage before fault = $0.9 \times U_n$, $f_n = 50$ Hz, overvoltage in one phase-to-phase with nominal frequency injected from random phase angle
2) Includes the delay of the signal output contact
3) Maximum *Start value* = $1.20 \times U_n$, *Start value* multiples in range of 1.10 to 2.00

Table 47. Three-phase overvoltage protection (PHPTOV) main settings

Parameter	Function	Value (Range)	Step
Start value	PHPTOV	0.05...1.60 pu	0.01
Time multiplier	PHPTOV	0.05...15.00	0.05
Operate delay time	PHPTOV	0.40...300.000 s	0.10
Operating curve type ¹⁾	PHPTOV	Definite or inverse time Curve type: 5, 15, 17, 18, 19, 20	

- 1) For further reference please refer to the Operating characteristics table

Table 48. Three phase undervoltage protection (PHPTUV)

Characteristic		Value
Operation accuracy		At the frequency $f = f_n$
		$\pm 1.5\%$ of the set value or $\pm 0.002 \times U_n$
Start time ¹⁾²⁾	$U_{\text{Fault}} = 0.9 \times \text{set } \textit{Start value}$	Typical 24 ms ($\pm 15\text{ms}$)
Reset time		< 40 ms
Reset ratio		Depends of the set <i>Relative hysteresis</i>
Retardation time		< 35 ms
Operate time accuracy in definite time mode		$\pm 1.0\%$ of the set value or ± 20 ms
Operate time accuracy in inverse time mode		$\pm 5.0\%$ of the theoretical value or ± 20 ms ³⁾
Suppression of harmonics		DFT: -50 dB at $f = n \times f_n$, where $n = 2, 3, 4, 5,$...

1) *Start value* = $1.0 \times U_n$, Voltage before fault = $1.1 \times U_n$, $f_n = 50$ Hz, undervoltage in one phase-to-phase with nominal frequency injected from random phase angle

2) Includes the delay of the signal output contact

3) Minimum *Start value* = $0.50 \times U_n$, *Start value* multiples in range of 0.90 to 0.20

Table 49. Three-phase undervoltage protection (PHPTUV) main settings

Parameter	Function	Value (Range)	Step
Start value	PHPTUV	0.05...1.20 pu	0.01
Time multiplier	PHPTUV	0.05...15.00	0.05
Operate delay time	PHPTUV	0.040...300.000 s	0.010
Operating curve type ¹⁾	PHPTUV	Definite or inverse time Curve type: 5, 15, 21, 22, 23	

1) For further reference please refer to the Operating characteristics table

Table 50. Positive-sequence overvoltage protection (PSPTOV)

Characteristic		Value
Operation accuracy		At the frequency $f = f_n$
		$\pm 1.5\%$ of the set value or $\pm 0.002 \times U_n$
Start time ¹⁾²⁾	$U_{\text{Fault}} = 1.1 \times \text{set}$ <i>Start value</i>	Typical: 29 ms (± 15 ms)
	$U_{\text{Fault}} = 2.0 \times \text{set}$ <i>Start value</i>	Typical: 24 ms (± 15 ms)
Reset time		< 40 ms
Reset ratio		Typical 0.96
Retardation time		< 35 ms
Operate time accuracy in definite time mode		$\pm 1.0\%$ of the set value or ± 20 ms
Suppression of harmonics		DFT: -50 dB at $f = n \times f_n$, where $n = 2, 3, 4, 5, \dots$

- 1) Residual voltage before fault = $0.0 \times U_n$, $f_n = 50$ Hz, residual voltage with nominal frequency injected from random phase angle
2) Includes the delay of the signal output contact

Table 51. Positive-sequence overvoltage protection (PSPTOV) main settings

Parameter	Function	Value (Range)	Step
Start value	PSPTOV	0.800...1.600 pu	0.001
Operate delay time	PSPTOV	0.040...120.000 s	0.001

Table 52. Positive sequence undervoltage protection (PSPTUV)

Characteristic		Value
Operation accuracy		At the frequency $f = f_n$
		$\pm 1.5\%$ of the set value or $\pm 0.002 \times U_n$
Start time ¹⁾²⁾	$U_{\text{Fault}} = 0.9 \times \text{set } \textit{Start value}$	Typical 28 ms ($\pm 15\text{ms}$)
Reset time		< 40 ms
Reset ratio		Typical 0.96
Retardation time		< 35 ms
Operate time accuracy in definite time mode		$\pm 1.0\%$ of the set value or ± 20 ms
Suppression of harmonics		DFT: -50 dB at $f = n \times f_n$, where $n = 2, 3, 4, 5, \dots$

1) Residual voltage before fault = $1.1 \times U_n$, $f_n = 50$ Hz, residual voltage with nominal frequency injected from random phase angle

2) Includes the delay of the signal output contact

Table 53. Positive sequence undervoltage protection (PSPTUV) main settings

Parameter	Function	Value (Range)	Step
Start value	PSPTUV	0.010...1.200 pu	0.001
Operate delay time	PSPTUV	0.040...120.000 s	0.001
Voltage block value	PSPTUV	0.01...1.0 pu	0.01

Table 54. Negative sequence overvoltage protection (NSPTOV)

Characteristic		Value
Operation accuracy		At the frequency $f = f_n$
		$\pm 1.5\%$ of the set value or $\pm 0.002 \times U_n$
Start time ¹⁾²⁾	$U_{\text{Fault}} = 1.1 \times \text{set}$ <i>Start value</i> $U_{\text{Fault}} = 2.0 \times \text{set}$ <i>Start value</i>	Typical 29 ms ($\pm 15\text{ms}$) Typical 24 ms ($\pm 15\text{ms}$)
Reset time		< 40 ms
Reset ratio		Typical 0.96
Retardation time		< 35 ms
Operate time accuracy in definite time mode		$\pm 1.0\%$ of the set value or ± 20 ms
Suppression of harmonics		DFT: -50 dB at $f = n \times f_n$, where $n = 2, 3, 4, 5, \dots$

- 1) Residual voltage before fault = $0.0 \times U_n$, $f_n = 50$ Hz, residual overvoltage with nominal frequency injected from random phase angle
 2) Includes the delay of the signal output contact

Table 55. Negative sequence overvoltage protection (NSPTOV) main settings

Parameter	Function	Value (Range)	Step
Start value	NSPTOV	0.010...1.000 pu	0.001
Operate delay time	NSPTOV	0.040...120.000 s	0.001

Table 56. Residual overvoltage protection (ROVPTOV)

Characteristic		Value
Operation accuracy		At the frequency $f = f_n$
		$\pm 1.5\%$ of the set value or $\pm 0.002 \times U_n$
Start time ¹⁾²⁾	$U_{\text{Fault}} = 1.1 \times \text{set } \textit{Start value}$	Typical 27 ms (± 15 ms)
Reset time		< 40 ms
Reset ratio		Typical 0.96
Retardation time		< 35 ms
Operate time accuracy in definite time mode		$\pm 1.0\%$ of the set value or ± 20 ms
Suppression of harmonics		DFT: -50 dB at $f = n \times f_n$, where $n = 2, 3, 4, 5, \dots$

1) Residual voltage before fault = $0.0 \times U_n$, $f_n = 50$ Hz, residual voltage with nominal frequency injected from random phase angle

2) Includes the delay of the signal output contact

Table 57. Residual overvoltage protection (ROVPTOV) main settings

Parameter	Function	Value (Range)	Step
Start value	ROVPTOV	0.010...1.000 pu	0.001
Operate delay time	ROVPTOV	0.040...300.000 s	0.001

Table 58. Frequency gradient protection (DAFRC)

Characteristic		Value
Operation accuracy		$df/dt < \pm 10$ Hz/s; ± 10 mHz/s Undervoltage blocking: $\pm 1.5\%$ of the set value or $\pm 0.002 \times U_n$
Start time ¹⁾²⁾	$\textit{Start value} = 0.05$ Hz/s $df/dt_{\text{FAULT}} = \pm 1.0$ Hz/s	Typical 110 ms (± 15 ms)
Reset time		< 150 ms
Operate time accuracy in definite time mode		$\pm 1.0\%$ of the set value or ± 30 ms
Suppression of harmonics		DFT: -50 dB at $f = n \times f_n$, where $n = 2, 3, 4, 5, \dots$

1) Frequency before fault = $1.0 \times f_n$, $f_n = 50$ Hz

2) Includes the delay of the signal output contact

Table 59. Frequency gradient protection (DAPFRC) main settings

Parameter	Function	Value (Range)	Step
Start value	DAPFRC	-10.00...10.00 Hz/s	0.01
Operate delay time	DAPFRC	0.120...60.000 s	0.001

Table 60. Overfrequency protection (DAPTOF)

Characteristic		Value
Operation accuracy		At the frequency $f = 35$ to 66 Hz
		± 0.003 Hz
Start time ¹⁾²⁾	$f_{\text{Fault}} = 1.01 \times \text{set}$ <i>Start value</i>	Typical < 190 ms
Reset time		< 190 ms
Operate time accuracy in definite time mode		$\pm 1.0\%$ of the set value or ± 30 ms
Suppression of harmonics		DFT: -50 dB at $f = n \times f_n$, where $n = 2, 3, 4, 5, \dots$

- 1) Frequency before fault = $0.99 \times f_n$, $f_n = 50$ Hz
2) Includes the delay of the signal output contact

Table 61. Overfrequency protection (DAPTOF) main settings

Parameter	Function	Value (Range)	Step
Start value	DAPTOF	35.0...64.0 Hz	0.1
Operate delay time	DAPTOF	0.170...60.000 s	0.001

Table 62. Underfrequency protection (DAPTUF)

Characteristic		Value
Operation accuracy		At the frequency $f = 35$ to 66 Hz
		± 0.003 Hz
Start time ¹⁾²⁾	$f_{\text{Fault}} = 0.99 \times \text{set}$ <i>Start value</i>	Typical < 190 ms
Reset time		< 190 ms
Operate time accuracy in definite time mode		$\pm 1.0\%$ of the set value or ± 30 ms
Suppression of harmonics		DFT: -50 dB at $f = n \times f_n$, where $n = 2, 3, 4, 5, \dots$

- 1) Frequency before fault = $1.01 \times f_n$, $f_n = 50$ Hz
2) Includes the delay of the signal output contact

Table 63. Underfrequency protection (DAPTUF) main settings

Parameter	Function	Value (Range)	Step
Start value	DAPTUF	35.0...64.0 Hz	0.1
Operate delay time	DAPTUF	0.170...60.000 s	0.001

Table 64. Transformer differential protection of two-winding transformers (TR2PTDF)

Characteristic		Value
Operation accuracy		At the frequency $f = f_n$
		$\pm 1.5\%$ of the set value or $\pm 0.002 \times I_n$
Operate time ¹⁾²⁾	Biased low stage Instantaneous high stage	Typical 35 ms (± 5 ms) Typical 17 ms (± 5 ms)
Reset time		< 30 ms
Reset ratio		Typical 0.96
Retardation time		< 35 ms
Suppression of harmonics		DFT: -50 dB at $f = n \times f_n$, where $n = 2, 3, 4, 5, \dots$

1) Current before fault = $0.0 \times I_n$, $f_n = 50$ Hz. Injected differential current = $2.0 \times$ set operate value

2) Includes the delay of the output contact value and $f_n = 50$ Hz

Table 65. Stabilized differential protection for two-winding transformers (TR2PTDF) main settings

Parameter	Function	Value (Range)	Step
Restraint mode	TR2PTDF	2.h & 5.h & wav Waveform 2.h & waveform 5.h & waveform	-
High operate value	TR2PTDF	500...3000 %	10
Low operate value	TR2PTDF	5...50 %	1
Slope section 2	TR2PTDF	10...50 %	1
End section 2	TR2PTDF	100...500 %	1
Start value 2.H	TR2PTDF	7...20 %	1
Start value 5.H	TR2PTDF	10...50 %	1
Winding 1 type	TR2PTDF	Y YN D Z ZN	-
Winding 2 type	TR2PTDF	Y YN D Z ZN	-
Zro A elimination	TR2PTDF	Not eliminated Winding 1 Winding 2 Winding 1 and 2	-
Clock number	TR2PTDF	Clk Num 0 Clk Num 1 Clk Num 2 Clk Num 4 Clk Num 5 Clk Num 6 Clk Num 7 Clk Num 8 Clk Num 10 Clk Num 11	-

Table 66. Circuit breaker failure protection (CCBRBRF)

Characteristic	Value
Operation accuracy	At the frequency $f = f_n$
	$\pm 1.5\%$ of the set value or $\pm 0.002 \times I_n$
Operate time accuracy	$\pm 1.0\%$ of the set value or ± 30 ms

Table 67. Circuit breaker failure protection (CCBRBRF) main settings

Parameter	Function	Value (Range)	Step
Current value (Operating phase current)	CCBRBRF	0.05...1.00 pu	0.05
Current value Res (Operating residual current)	CCBRBRF	0.05...1.00 pu	0.05
CB failure mode (Operating mode of function)	CCBRBRF	1=Current 2=Breaker status 3=Both	-
CB fail trip mode	CCBRBRF	1=Off 2=Without check 3=Current check	-
Retrip time	CCBRBRF	0.00...60.00 s	0.01
CB failure delay	CCBRBRF	0.00...60.00 s	0.01
CB fault delay	CCBRBRF	0.00...60.00 s	0.01

Table 68. Operation characteristics

Parameter	Values (Range)
Operating curve type	1=ANSI Ext. inv. 2=ANSI Very. inv. 3=ANSI Norm. inv. 4=ANSI Mod inv. 5=ANSI Def. Time 6=L.T.E. inv. 7=L.T.V. inv. 8=L.T. inv. 9=IEC Norm. inv. 10=IEC Very inv. 11=IEC inv. 12=IEC Ext. inv. 13=IEC S.T. inv. 14=IEC L.T. inv 15=IEC Def. Time 17=Programmable 18=RI type 19=RD type
Operating curve type (voltage protection)	5=ANSI Def. Time 15=IEC Def. Time 17=Inv. Curve A 18=Inv. Curve B 19=Inv. Curve C 20=Programmable 21=Inv. Curve A 22=Inv. Curve B 23=Programmable

Control functions

Table 69. Synchrocheck (SYNCRSYN)

Characteristic	Value
Operation accuracy	At the frequency $f = f_n$
	Voltage: $\pm 1.0\%$ or $\pm 0.002 \times U_n$
	Frequency: ± 10 mHz
	Phase angle $\pm 2^\circ$
Reset time	< 50 ms
Reset ratio	Typical 0.96
Operate time accuracy	$\pm 1.0\%$ of the set value or ± 20 ms

Measurement functions

Table 70. Three-phase current measurement (CMMXU)

Characteristic	Value
Operation accuracy	At the frequency $f = f_n$
	$\pm 0.5\%$ or $\pm 0.002 \times I_n$ (at currents in the range of $0.01 \dots 4.00 \times I_n$)
Suppression of harmonics	DFT: -50dB at $f = n \times f_n$, where $n = 2, 3, 4, 5,$... RMS: No suppression

Table 71. Three-phase voltage measurement (VPHMMXU)

Characteristic	Value
Operation accuracy	At the frequency $f = f_n$
	$\pm 0.5\%$ or $\pm 0.002 \times U_n$ (at voltages in the range of $0.01 \dots 1.15 \times U_n$)
Suppression of harmonics	DFT: -50dB at $f = n \times f_n$, where $n = 2, 3, 4, 5,$... RMS: No suppression

Table 72. Three-phase voltage measurement (VPPMMXU)

Characteristic	Value
Operation accuracy	At the frequency $f = f_n$
	$\pm 0.5\%$ or $\pm 0.002 \times U_n$ (at voltages in the range of $0.01 \dots 1.15 \times U_n$)
Suppression of harmonics	DFT: -50dB at $f = n \times f_n$, where $n = 2, 3, 4, 5,$... RMS: No suppression

Table 73. Residual current measurement (RESCMMXU)

Characteristic	Value
Operation accuracy	At the frequency $f = f_n$
	$\pm 0.5\%$ or $\pm 0.002 \times I_n$ (at currents in the range of $0.01 \dots 4.00 \times I_n$)
Suppression of harmonics	DFT: -50dB at $f = n \times f_n$, where $n = 2, 3, 4, 5,$... RMS: No suppression

Table 74. Residual voltage measurement (RESVMMXU)

Characteristic	Value
Operation accuracy	At the frequency $f = f_n$
	$\pm 0.5\%$ or $\pm 0.002 \times U_n$
Suppression of harmonics	DFT: -50dB at $f = n \times f_n$, where $n = 2, 3, 4, 5, \dots$ RMS: No suppression

Table 75. Three-phase power measurement (PWRMMXU)

Characteristic	Value
Operation accuracy	At all three currents in range $0.10 \dots 1.20 \times I_n$ At all three voltages in range $0.50 \dots 1.15 \times U_n$ At the frequency $f = f_n$ Active power and energy in range $ PF > 0.71$ Reactive power and energy in range $ PF < 0.71$
	$\pm 1.5\%$ for power (S, P and Q) ± 0.015 for power factor
Suppression of harmonics	DFT: -50dB at $f = n \times f_n$, where $n = 2, 3, 4, 5, \dots$

Table 76. Current sequence components (CSMSQI)

Characteristic	Value
Operation accuracy	At the frequency $f = f_n$
	$\pm 1.0\%$ or $\pm 0.002 \times I_n$ at currents in the range of $0.01 \dots 4.00 \times I_n$
Suppression of harmonics	DFT: -50dB at $f = n \times f_n$, where $n = 2, 3, 4, 5, \dots$

Table 77. Voltage sequence components (VSMSQI)

Characteristic	Value
Operation accuracy	At the frequency $f = f_n$
	$\pm 1.0\%$ or $\pm 0.002 \times U_n$ At voltages in range of $0.01 \dots 1.15 \times U_n$
Suppression of harmonics	DFT: -50 dB at $f = n \times f_n$, where $n = 2, 3, 4, 5, \dots$

Table 78. Energy monitoring (EPDMMTR)

Characteristic	Value
Operation accuracy	At all three currents in range $0.10 \dots 1.20 \times I_{n_n}$ At all three voltages in range $0.50 \dots 1.15 \times U_n$ At the frequency $f = f_n$ Active power and energy in range $ PF > 0.71$ Reactive power and energy in range $ PF < 0.71$
	$\pm 1.5\%$ for energy
Suppression of harmonics	DFT: -50dB at $f = n \times f_n$, where $n = 2, 3, 4, 5, \dots$

Supervision functions

Table 79. Current circuit supervision (CCRDIF)

Characteristic	Value
Operate time ¹⁾	$< 30 \text{ ms}$

1) Including the delay of the output contact.

Table 80. Current circuit supervision (CCRDIF) main settings

Parameter	Function	Values (Range)	Step
Start value	CCRDIF	$0.05 \dots 2.00 \text{ pu}$	0.01
Maximum operate current	CCRDIF	$0.05 \dots 5.00 \text{ pu}$	0.01

Table 81. Fuse failure supervision (SEQRFUF)

Characteristic	Value	
Operation accuracy	At the frequency $f = f_n$	
	Current: $\pm 1.5\%$ of the set value or $\pm 0.002 \times I_n$ Voltage: $\pm 1.5\%$ of the set value or $\pm 0.002 \times U_n$	
Operate time ¹⁾	• NPS function	$U_{\text{Fault}} = 1.1 \times \text{set Neg Seq voltage Lev}$ Typical 35 ms (± 15 ms)
		$U_{\text{Fault}} = 5.0 \times \text{set Neg Seq voltage Lev}$ Typical 25 ms (± 15 ms)
	• Delta function	$\Delta U = 1.1 \times \text{set Voltage change rate}$ Typical 35 ms (± 15 ms)
		$\Delta U = 2.0 \times \text{set Voltage change rate}$ Typical 28 ms (± 15 ms)

1) Includes the delay of the signal output contact, $f_n = 50$ Hz, fault voltage with nominal frequency injected from random phase angle

Table 82. Station battery supervision (SPVNZBAT)

Characteristic	Value
Operation accuracy	$\pm 1.0\%$ of the set value
Operate time accuracy	$\pm 1.0\%$ of the set value or ± 40 ms

19. Front panel user interface

The 630 series IEDs can be ordered with an integrated or detached front-panel user interface (HMI). The local HMI includes a large graphical monochrome LCD with a resolution of 320 x 240 pixels (width x height). The amount of characters and rows fitting the view depends on the character size as the characters' width and height may vary.

In addition, the local HMI includes dedicated open/close operating buttons and five

programmable function buttons with LED indicators. The 15 programmable alarm LEDs can indicate a total of 45 alarms. The local HMI offers full front-panel user-interface functionality with menu navigation, menu views and operational data. In addition, the local HMI can, using PCM600, be configured to show a single-line diagram (SLD). The SLD view displays the status of the primary apparatus such as circuit breakers and disconnectors, selected measurement values and busbar arrangements.

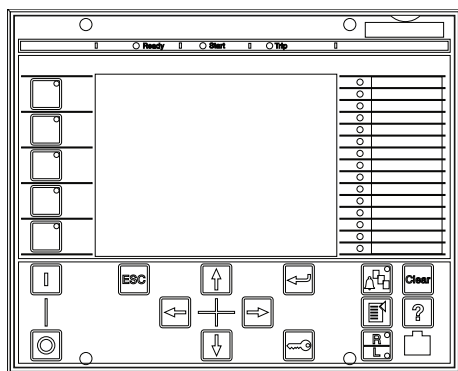


Figure 4. Local user interface

20. Mounting methods

By means of appropriate mounting accessories the standard IED case for the 630 series IEDs can be flush mounted, semi-flush mounted or wall mounted. Detachable HMI is intended for optimized mounting in medium voltage metal-clad switchgear, thus reducing wiring between the low-voltage compartment and the panel door. Further, the IEDs can be mounted in any standard 19" instrument cabinet by means of 19" rack mounting accessories.

For the routine testing purposes, the IED cases can be installed with RTXP test switches (RTXP8, RTXP18 or RTXP24) which

can be mounted side by side with the IED case in a 19" rack.

Mounting methods:

- Flush mounting
- Semi-flush mounting
- Overhead/ceiling mounting
- 19" rack mounting
- Wall mounting
- Mounting with a RTXP8, RTXP18 or RTXP24 test switch to a 19" rack
- Door mounting of the local HMI, IED case mounted in the low-voltage compartment of the switchgear

For further information regarding cut-outs and templates for different mounting options

please refer to the 630 series Installation
Manual 1MRS755958.

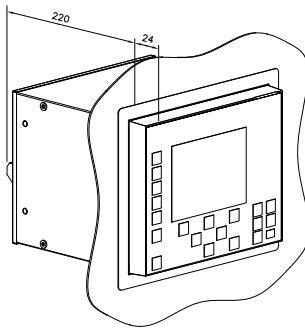
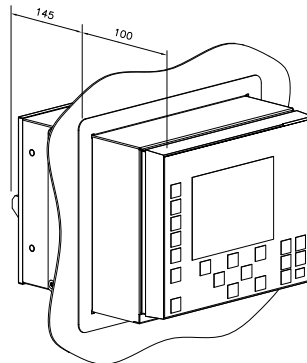


Figure 5. Flush mounting



*Figure 6. Semi-flush
mounting*

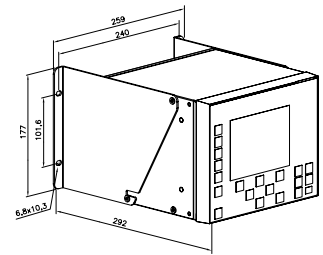
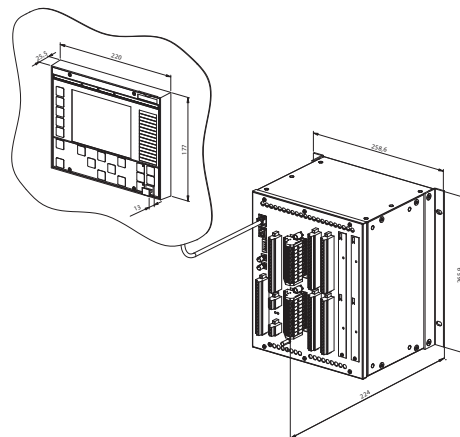


Figure 7. Wall mounting



*Figure 8. 6U half 19" unit wall mounted with
two mounting brackets and
detached LHMI*

21. Selection and ordering data

The IED type and serial number label identifies the protection and control IED. The label placed is on the side of the IED case. The IED labels include a set of smaller size

labels, one label for each module in the IED. The module labels state the type and serial number of each module.

The order number consists of a string of codes generated from the hardware and software modules of the IED. Use the ordering key information in tables to generate the order number when ordering protection and control IEDs.

#	DESCRIPTION	
1	IED	
	630 series IED, 4U half 19" housing	S
	630 series IED, 6U half 19" housing	T
2	Standard	
	IEC	B
3	Main application	
	Transformer protection and control	T

T B T B A B A E B B B Z E A N A X A

The preconfiguration determines the I/O hardware and hardware variants. Choose the digits from one of the blue preconfiguration rows below to define the correct digits for # 4-8. The example below shows preconfiguration “B” with chosen options.

T B T **B A B A E** B B B Z E A N A X A

#	DESCRIPTION		
4-8	Functional application, preconfigurations: A = Preconfiguration A for two-winding transformers B = Preconfiguration B for two-winding transformers, including numerical REF protection N = None		
	Pre-conf. # 4	Available analog inputs options # 5-6	Available binary inputs/output options # 7-8 ¹⁾
	A	AA = 7 I (I ₀ 1/5A) + 3U	AB = 23 BI + 18 BO or AC = 32 BI + 27 BO or AD ¹⁾ = 41 BI + 36 BO or AE ¹⁾ = 50 BI + 45 BO
	B	AB = 8 I (I ₀ 1/5A) + 2U	AB = 23 BI + 18 BO or AC = 32 BI + 27 BO or AD ¹⁾ = 41 BI + 36 BO or AE ¹⁾ = 50 BI + 45 BO
	N	AA = 7 I (I ₀ 1/5A) + 3U or AB = 8 I (I ₀ 1/5A) + 2U or AC = 7 I (I ₀ 1/5A) + 1 I (I ₀ 0.1/0.5A) + 2U	AA = 14 BI + 9 BO or AB = 23 BI + 18 BO or AC = 32 BI + 27 BO or AD ¹⁾ = 41 BI + 36 BO or AE ¹⁾ = 50 BI + 45 BO

¹⁾ Binary input/output options AD and AE require 6U half 19” IED housing (digit #1 = T)

T B T B A B A E **B B B** Z E A N A X A

#	DESCRIPTION	
9	Communication serial ¹⁾	
	Glass fibre (ST connector)	A
	Plastic fibre (snap-in connector)	B
10	Communication Ethernet	
	Ethernet 100BaseFX (LC)	A
	Ethernet 100BaseTX (RJ-45)	B
11	Communication protocol	
	IEC 61850	A
	IEC 61850 and DNP3 TCP/IP	B

¹⁾ For future use

T B T B A B A E B B B **Z E A N A X A**

#	DESCRIPTION	
12	Language	
	English and Chinese	Z
13	Front panel	
	Integrated local HMI	A
	Detached local HMI, 1 m cable	B
	Detached local HMI, 2 m cable	C
	Detached local HMI, 3 m cable	D
	Detached local HMI, 4 m cable	E
	Detached local HMI, 5 m cable	F
	No local HMI	N
14	Option 1	
	Phase-sequence voltage functions	A
	None	N
15	Option 2	
	None	N
16	Power supply	
	48...125 V DC	A
	110...250 V DC, 100...240 V AC	B
17	Vacant digit	
	Vacant	X
18	Version	
	Version 1.0	A

Example code: **T B T B A B A E B B B Z E A N A X A**

Your ordering code:

Digit (#)	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
Code																		

Figure 9. Ordering key for complete IEDs

22. Accessories

Table 83. Mounting accessories

Item	Order number
Flush mounting kit for one 4U half 19" housing IED	1KHL400040R0001
Semi-flush mounting kit for one 4U half 19" housing IED	1KHL400041R0001
Wall-mounting kit (cabling towards the mounting wall) for one 4U half 19" housing IED	1KHL400067R0001
Wall-mounting kit (cabling to the front) for one 4U half 19" housing IED	1KHL400039R0001
19" rack mounting kit for one 4U half 19" housing IED	1KHL400236R0001
19" rack mounting kit for two 4U half 19" housing IEDs	1KHL400237R0001
Overhead/ceiling mounting kit (with cable space) for one 4U half 19" housing IED	1KHL400038P0001
Wall-mounting kit for direct rear wall mounting (with cabling to the front) of one 6U half 19" housing IED	1KHL400079R0001
Wall-mounting kit (with cabling towards the mounting wall) for one 6U half 19" housing IED	1KHL400200R0001
Overhead/ceiling mounting kit (with cable space) for one 6U half 19" housing IED	1KHL400175R0001

Table 84. Test switch mounting accessories

Item	Order number
19" rack mounting kit for one RTXP8 test switch (the test switch is not included in the delivery)	1KHL400176R0001
19" rack mounting kit for one RTXP18 test switch (the test switch is not included in the delivery)	1KHL400177R0001
19" rack mounting kit for one RTXP24 test switch (the test switch is not included in the delivery)	1KHL400178R0001

Table 85. Connector sets

Item	Order number
Connector set for one 4U half 19" housing IED including analog input variant 7I (IO 1/5A) + 3U	2RCA023041
Connector set for one 6U half 19" housing IED including analog input variant 7I (IO 1/5A) + 3U	2RCA023042
Connector set for one 4U half 19" housing IED including analog input variant 8I (IO 1/5A) + 2U or 7I (IO 1/5A) + 1I (IO 0.1/0.5A) + 2U	2RCA023039
Connector set for one 6U half 19" housing IED including analog input variant 8I (IO 1/5A) + 2U or 7I (IO 1/5A) + 1I (IO 0.1/0.5A) + 2U	2RCA023040

23. Tools

The IED is delivered either with or without an optional factory made preconfiguration. The default parameter setting values can be changed from the front-panel user interface, the web-browser based user interface (WebHMI) or the PCM600 tool in combination with the IED specific connectivity package.

PCM600 offers extensive IED configuration functions such as IED application configuration, signal configuration, DNP3 communication configuration and IEC 61850 communication configuration including horizontal communication, GOOSE.

When the web-browser based user interface is used, the IED can be accessed either

locally or remotely using a web browser (IE 7.0 or later). For security reasons, the web-browser based user interface is disabled by default. The interface can be enabled with the PCM600 tool or from the front panel user interface. The functionality of the interface is by default limited to read-only, but can be configured to enable read and write access by means of PCM600 or the local HMI.

The IED connectivity package is a collection of software and specific IED information, which enable system products and tools to connect and interact with the IED. The connectivity packages reduce the risk of errors in system integration, minimizing device configuration and set-up times.

Table 86. Tools

Configuration and setting tools	Version
PCM600	2.1
Web-browser based user interface	IE 7.0 or later
RET630 Connectivity Package	1.0 or later

Table 87. Supported functions

Function	WebHMI	PCM600	PCM600 Engineering	PCM600 Engineering Pro
Parameter setting	•	•	•	•
Disturbance handling	•	•	•	•
Signal monitoring	•	•	•	•
Event viewer	•	•	•	•
Alarm LED viewing	•	•	•	•
Hardware configuration	-	•	•	•
Signal matrix	-	•	•	•
Graphical display editor	-	•	•	•
IED configuration templates	-	•	•	•
Communication management	-	•	•	•
Disturbance record analysis	-	•	•	•
IED user management	-	•	•	•
User management	-	•	•	•
Creating/handling projects	-	•	•	•
Graphical application configuration	-	-	•	•
IEC 61850 communication configuration, incl. GOOSE	-	-	-	•

24. Supported ABB solutions

ABB's 630 series protection and control IEDs together with the COM600 Station Automation device constitute a genuine IEC 61850 solution for reliable power distribution in utility and industrial power systems. To facilitate and streamline the system engineering ABB's IEDs are supplied with Connectivity Packages containing a compilation of software and IED-specific information including single-line diagram templates, a full IED data model including event and parameter lists. By utilizing the Connectivity Packages the IEDs can be readily configured via the PCM600 Protection and Control IED Manager and integrated with the COM600 Station Automation device or the MicroSCADA Pro network control and management system.

The 630 series IEDs offer support for the IEC 61850 standard also including horizontal GOOSE messaging. Compared with traditional hard-wired inter-device signaling, peer-to-peer communication over a switched Ethernet LAN offers an advanced and versatile platform for power system protection. Fast software-based

communication, continuous supervision of the integrity of the protection and communication system, and inherent flexibility for reconfiguration and upgrades are among the distinctive features of the protection system approach enabled by the implementation of the IEC 61850 substation automation standard.

At the substation level COM600 utilizes the logic processor and data content of the bay level IEDs to offer enhanced substation level functionality. COM600 features a web-browser based HMI providing a customizable graphical display for visualizing single line mimic diagrams for switchgear bay solutions. To enhance personnel safety, the web HMI also enables remote access to substation devices and processes. Furthermore, COM600 can be used as a local data warehouse for technical documentation of the substation and for network data collected by the IEDs. The collected network data facilitates extensive reporting and analyzing of network fault situations using the data historian and event handling features of COM600.

COM600 also features gateway functionality providing seamless connectivity between the substation IEDs and network-level control and management systems such as MicroSCADA Pro and System 800xA.

Table 88. Supported ABB solutions

Product	Version
Station Automation COM600	3.3 or later
MicroSCADA Pro	9.2 SP1 or later
RTU 560	9.5.1 or later
System 800xA	5.0 Service Pack 2

25. Terminal diagrams

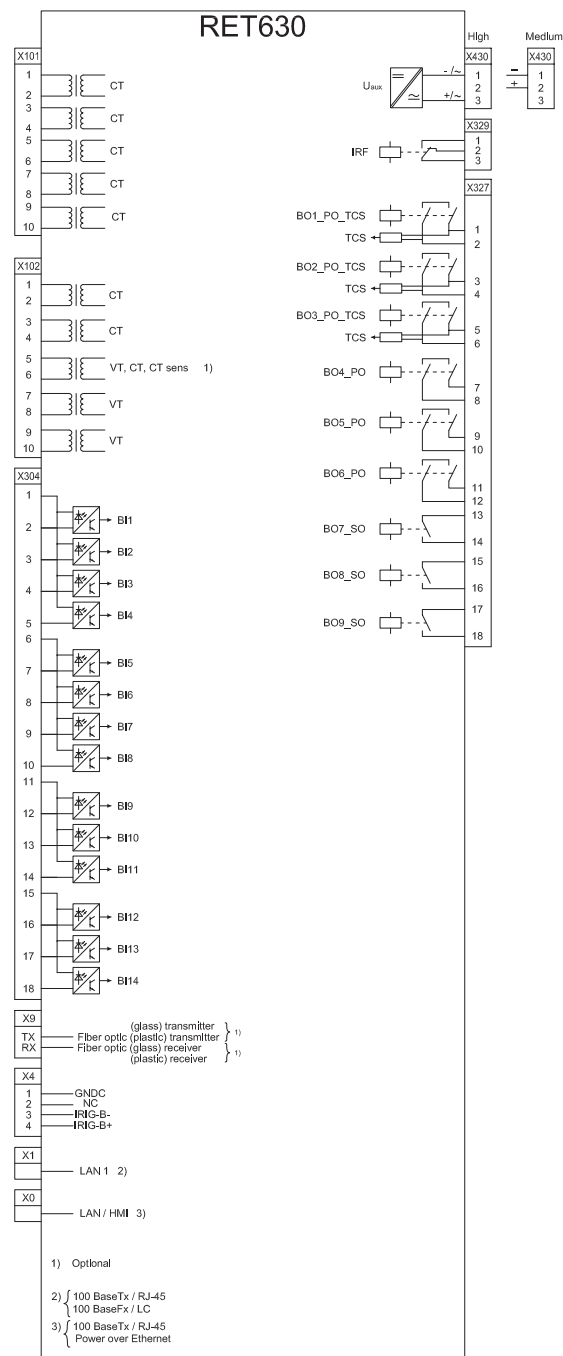


Figure 10. Terminal diagram for RET630 4U variant

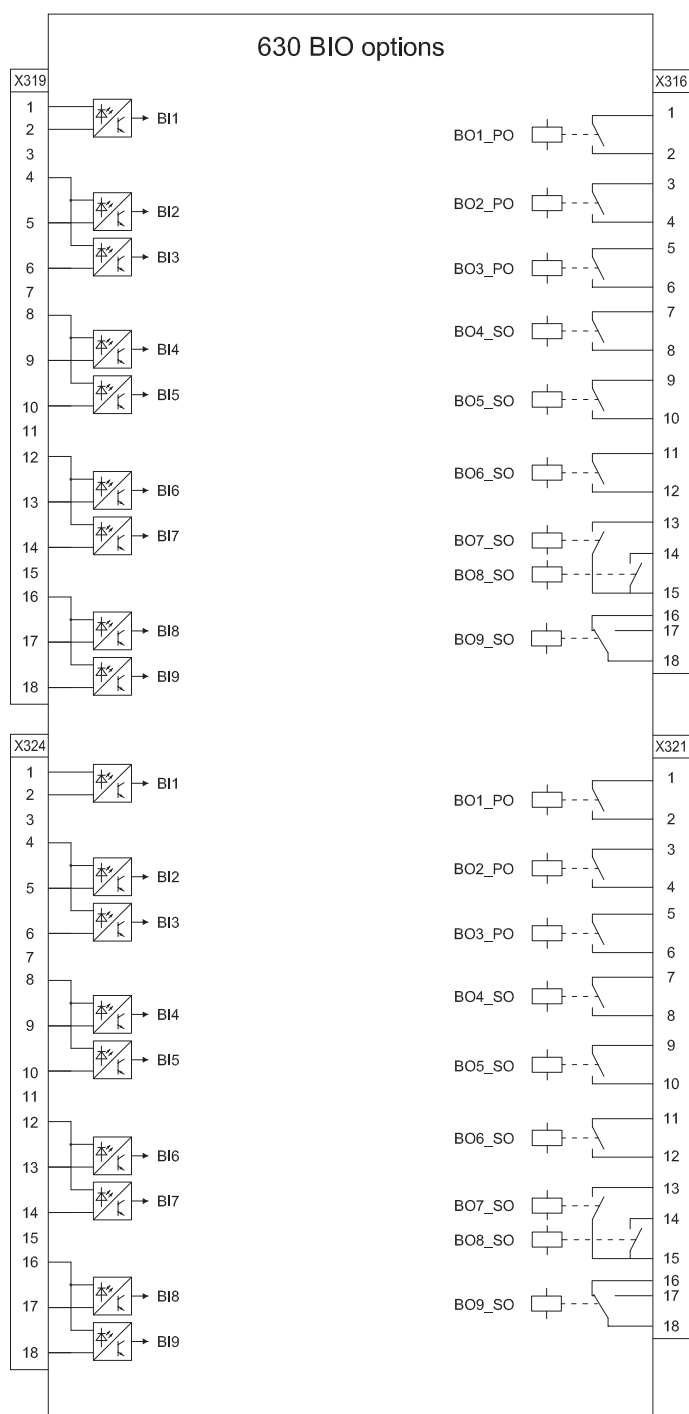


Figure 11. Terminal diagram for optional binary input/output modules for RET630 4U variant

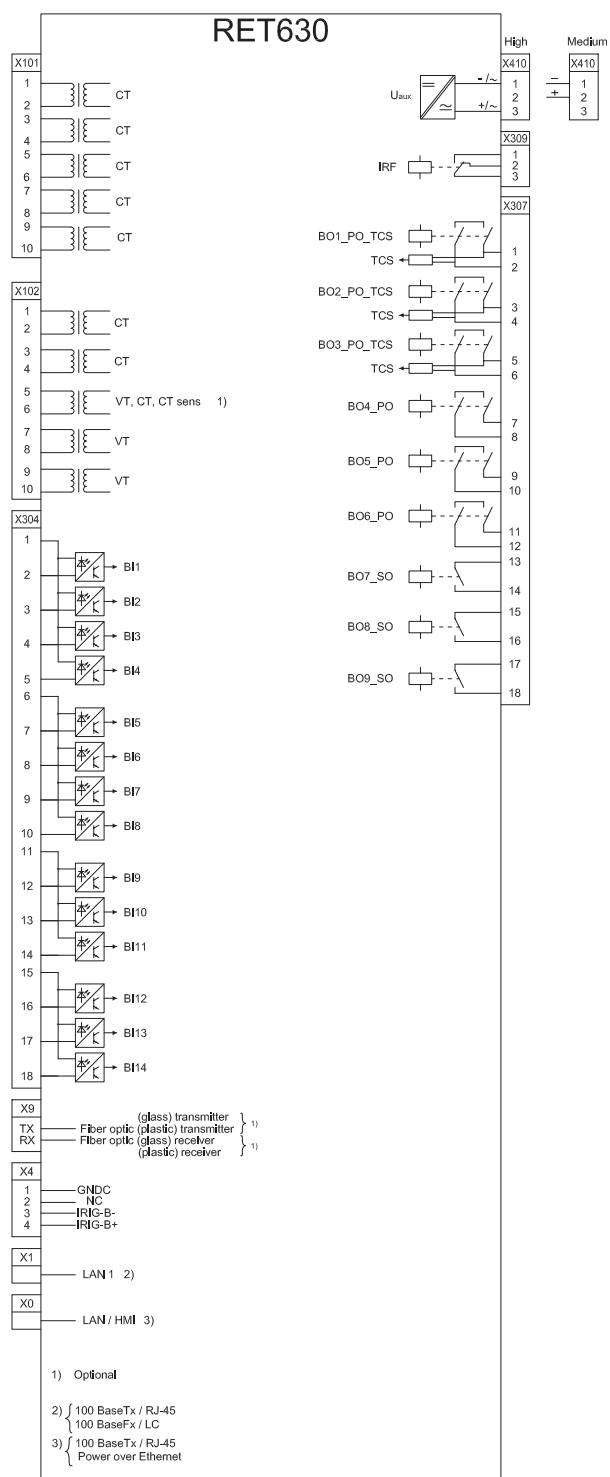


Figure 12. Terminal diagram for RET630 6U variant

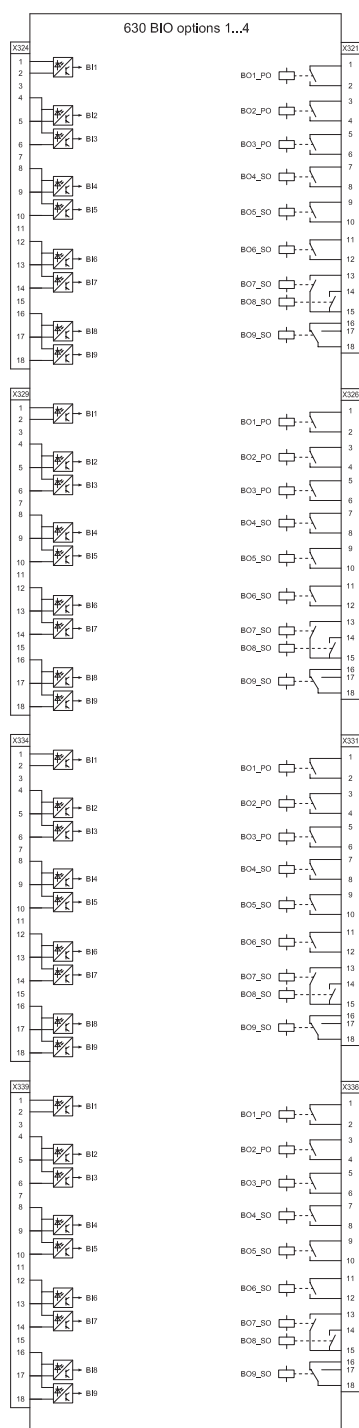


Figure 13. Terminal diagram for optional binary input/output modules for RET630 6U variant

26. References

The www.abb.com/substationautomation portal offers you information about the distribution automation product and service range.

You will find the latest relevant information on the RET630 protection IED on the [product page](#).

The download area on the right hand side of the web page contains the latest product documentation, such as technical reference manual, installation manual, operators manual, etc. The selection tool on the web page helps you find the documents by the document category and language.

The Features and Application tabs contain product related information in a compact format.

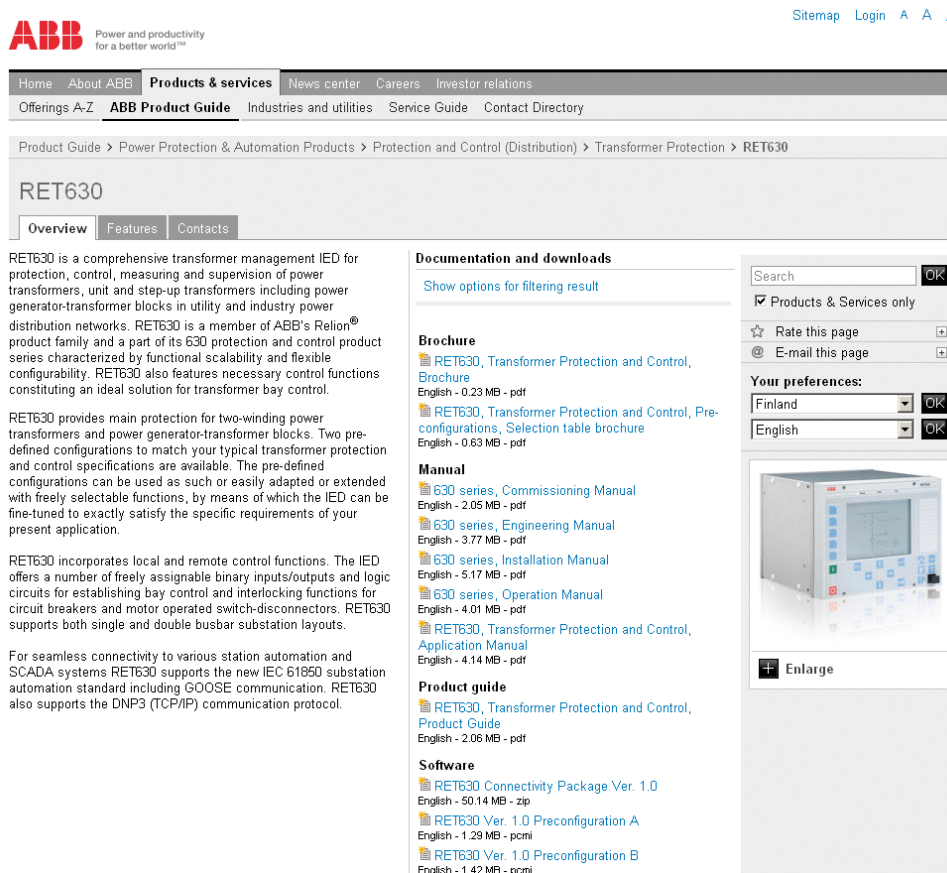


ABB Power and productivity for a better world™

Sitemap Login A A

Home About ABB **Products & services** News center Careers Investor relations

Offerings A-Z **ABB Product Guide** Industries and utilities Service Guide Contact Directory

Product Guide > Power Protection & Automation Products > Protection and Control (Distribution) > Transformer Protection > RET630

RET630

Overview Features Contacts

RET630 is a comprehensive transformer management IED for protection, control, measuring and supervision of power transformers, unit and step-up transformers including power generator-transformer blocks in utility and industry power distribution networks. RET630 is a member of ABB's Relion® product family and a part of its 630 protection and control product series characterized by functional scalability and flexible configurability. RET630 also features necessary control functions constituting an ideal solution for transformer bay control.

RET630 provides main protection for two-winding power transformers and power generator-transformer blocks. Two pre-defined configurations to match your typical transformer protection and control specifications are available. The pre-defined configurations can be used as such or easily adapted or extended with freely selectable functions, by means of which the IED can be fine-tuned to exactly satisfy the specific requirements of your present application.

RET630 incorporates local and remote control functions. The IED offers a number of freely assignable binary inputs/outputs and logic circuits for establishing bay control and interlocking functions for circuit breakers and motor operated switch-disconnectors. RET630 supports both single and double busbar substation layouts.

For seamless connectivity to various station automation and SCADA systems RET630 supports the new IEC 61850 substation automation standard including GOOSE communication. RET630 also supports the DNP3 (TCP/IP) communication protocol.

Documentation and downloads

Show options for filtering result

Brochure

- RET630, Transformer Protection and Control, Brochure
English - 0.23 MB - pdf
- RET630, Transformer Protection and Control, Pre-configurations, Selection table brochure
English - 0.63 MB - pdf

Manual

- 630 series, Commissioning Manual
English - 2.05 MB - pdf
- 630 series, Engineering Manual
English - 3.77 MB - pdf
- 630 series, Installation Manual
English - 5.17 MB - pdf
- 630 series, Operation Manual
English - 4.01 MB - pdf
- RET630, Transformer Protection and Control, Application Manual
English - 4.14 MB - pdf

Product guide

- RET630, Transformer Protection and Control, Product Guide
English - 2.06 MB - pdf

Software

- RET630 Connectivity Package Ver. 1.0
English - 50.14 MB - zip
- RET630 Ver. 1.0 Preconfiguration A
English - 1.29 MB - pcmi
- RET630 Ver. 1.0 Preconfiguration B
English - 1.42 MB - pcmi

Search OK

☒ Products & Services only

☆ Rate this page

@ E-mail this page

Your preferences:

Finland OK

English OK



Figure 14. Product page

27. Functions, codes and symbols

Table 89. Functions included in RET630

Functionality	IEC 61850	IEC 60617	ANSI
Protection			
Three-phase non-directional overcurrent, low stage	PHLPTOC	3I>	51P-1
Three-phase non-directional overcurrent, high stage	PHHPTOC	3I>>	51P-2
Three-phase non-directional overcurrent, instantaneous stage	PHIPTOC	3I>>>	50P/51P
Three-phase directional overcurrent, low stage	DPHLPDOC	3I> →	67-1
Three-phase directional overcurrent, high stage	DPHHPDOC	3I>> →	67-2
Non-directional earth fault, low stage	EFLPTOC	I ₀ >	51N-1
Non-directional earth fault, high stage	EFHPTOC	I ₀ >>	51N-2
Directional earth fault, low stage	DEFLPDEF	I ₀ > →	67N-1
Directional earth fault, high stage	DEFHPDEF	I ₀ >> →	67N-2
Stabilised restricted earth fault	LREFPNDF	dI ₀ Lo>	87NL
High-impedance-based restricted earth fault	HREFPDIF	dI ₀ Hi>	87NH
Negative-sequence overcurrent	NSPTOC	I ₂ >	46
Three-phase thermal overload for transformers	T2PTTR	3Ith>T	49T
Three-phase overvoltage	PHPTOV	3U>	59
Three-phase undervoltage	PHPTUV	3U<	27
Positive-sequence overvoltage	PSPTOV	U ₁ >	47O+
Positive-sequence undervoltage	PSPTUV	U ₁ <	47U+
Negative-sequence overvoltage	NSPTOV	U ₂ >	47O-
Residual overvoltage	ROVPTOV	U ₀ >	59G
Frequency gradient	DAPFRC	df/dt>	81R
Overfrequency	DAPTOF	f>	81O
Underfrequency	DAPTUF	f<	81U

Table 89. Functions included in RET630, continued

Functionality	IEC 61850	IEC 60617	ANSI
Transformer differential protection for two-winding transformers	TR2PTDF	3dI>T	87T
Three-phase current inrush detection	INRPHAR	3I2f>	68
Circuit-breaker failure	CCBRBRF	3I>/I ₀ >BF	51BF/51NBF
Tripping logic	TRPPTRC	I → O	94/86
Control			
Bay control	QCCBAY	CBAY	CBAY
Interlocking interface	SCILO	3	3
Circuit-breaker/disconnector control	GNRLCSWI	I ↔ O CB/DC	I ↔ O CB/DC
Circuit breaker	DAXCBR	I ↔ O CB	I ↔ O CB
Disconnector	DAXSWI	I ↔ O DC	I ↔ O DC
Local/remote switch interface	LOCREM	R/L	R/L
Synchrocheck	SYNCRSYN	SYNC	25
Supervision and monitoring			
Circuit-breaker condition monitoring	SSCBR	CBCM	CBCM
Fuse failure supervision	SEQRFUF	FUSEF	60
Current-circuit supervision	CCRDIF	MCS 3I	MCS 3I
Trip-circuit supervision	TCSSCBR	TCS	TCM
Generic measured values	MVGGIO		
Measured value limit supervision	MVEXP		
Station battery supervision	SPVNZBAT	U<>	U<>
Tap position indication	TPOSSLTC	TPOSM	84M
Energy monitoring	EPDMMTR	E	E
Measurement			
Three-phase current	CMMXU	3I	3I
Three-phase voltage, phase-to-earth voltages (RMS)	VPHMMXU	3U _{pe}	3U _{pe}
Three-phase voltage, phase-to-phase voltages (RMS)	VPPMMXU	3U _{pp}	3U _{pp}
Residual current	RESCMMXU	I ₀	I ₀
Residual voltage	RESVMMXU	U ₀	V _n

Table 89. Functions included in RET630, continued

Functionality	IEC 61850	IEC 60617	ANSI
Sequence current	CSMSQI	I ₁ ,I ₂	I ₁ ,I ₂
Sequence voltage	VSMSQI	U ₁ ,U ₂	V ₁ ,V ₂
Power monitoring with P, Q, S, power factor, frequency	PWRMMXU	PQf	PQf
Metering			
Pulse counter for energy metering	PCGGIO		
Disturbance recorder function			
Disturbance recorder	DRRDRE	DREC	DREC
Analog channels 1-10 (samples)	A1RADR	ACH1	ACH1
Analog channel 11-20 (samples)	A2RADR	ACH2	ACH2
Analog channel 21-30 (samples)	A3RADR	ACH3	ACH3
Analog channel 31-40 (calc. val.)	A4RADR	ACH4	ACH4
Binary channel 1-16	B1RBDR	BCH1	BCH1
Binary channel 17-32	B2RBDR	BCH2	BCH2
Binary channel 33-48	B3RBDR	BCH3	BCH3
Binary channel 49-64	B4RBDR	BCH4	BCH4

28. Document revision history

Document revision/ date	Product version	History
A/26.10.2009	1.0	First release
B/23.12.2009	1.0	Content updated

Contact us

ABB Oy

Distribution Automation

P.O. Box 699

FI-65101 VAASA, Finland

Phone +358 10 22 11

Fax +358 10 22 41094

www.abb.com/substationautomation