


## System module diagram

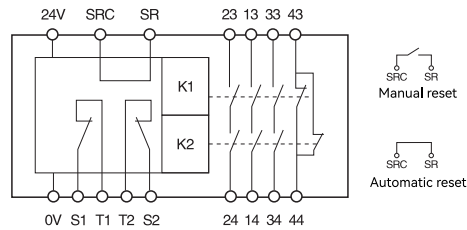

### Description of terminal functions

Power supply	Power supply positive (24VDC)	
	Power supply negative (0V)	
T1	Channel 1 signal output	Type I signal source
S1	Channel 1 safety input	Accept type I signal input, open circuit detection and channel 2 mutual detection
T2	Channel 2 signal output	Type II signal source
S2	Channel 2 safety input	Type II signal input is accepted, open circuit detection and channel 1 mutual detection
SR	Reset input (configurable manual reset or automatic reset)	Short-circuited SRS and SRC reset automatically and disconnected SRS and SRC reset manually
13/14		
23/24	NO transient safety contact	To increase the number of contacts
33/34		
43/44	NC transient safety contact	Can be used as external signal light or control other devices


## LED Description

— LED indicator status

■ Steady on ★ Flicker □ Extinguish				
Feature	Status	Power LED	Input LED	Output LED
Emergency stop / Interlock	The input connection is disconnected or abnormal	■	★ ☆	□
	The input single channel is abnormal	■	■	★ ☆
	Emergency stop press/Interlock opens	■	★ ☆	□
	Input is correct/not reset	■	■	□
	Input is correct/reset	■	■	■
	System failure	★ ☆	□	□
Light curtain / PNP switch	Input disconnected/abnormal connection	■	★ ☆	□
	Input single channel abnormality	■	■	★ ☆
	Light curtain interrupted/switch actuated	■	★ ☆	□
	Input is correct/not reset	■	■	□
	Input is correct/reset	■	■	■
	System failure	★ ☆	□	□
Two-handed switch (Valid for automatic reset only)	Input disconnected/abnormal connection	■	★ ☆	□
	Two-hand switch pressed	■	■	■
	Two-hand switch released	■	★ ☆	□
	System failure	★ ☆	□	□


## Wiring Example

### Emergency stop




1. Dual-channel emergency stop safety input with manual reset.

### Connect security door lock



### Connect to safety light curtain



3. Single-channel light curtain/PLC switch safety input with automatic reset and PLC signal output.

# Safety relays

## User Manual



Performance Level: PLE  
Safety Level: Cat. 4

EN 60947-1:2007/A2:2014  
EN 60947-5-1:2004/A1:2009  
EN ISO 13849-1:2015  
EN 62061:2005+A2:2015

Please read this instruction manual carefully before using the product and keep it properly.

### ⚠ Notice

- Please verify that the model and specifications on the product packaging and label are consistent with the order contract. Please carefully read this instruction manual before installing and using the safety relay. If you have any questions, please contact DADISICK.
- The safety relay should be installed in a control cabinet with a minimum IP54 protection rating.
- The instrument is powered by a 24V AC/DC power supply. Do not use a 220V AC power supply.
- Unauthorized disassembly or installation of the instrument is strictly prohibited to prevent instrument failure or malfunction.

## Features

- Complies with up to PLe standards of ISO 13849-1 and SIL3 standards of IEC 62061;
- Proven dual-channel safety monitoring circuit design;
- Input and output LED indicators;
- 22.5mm width for reduced installation space;
- Optional screw terminals or spring terminals for wider compatibility;
- PLC signal output.

## Product application range

### Suitable for monitoring

Emergency stop button      Safety light curtain      Safety sensor  
Safety switch                  Safety scanner                  Two-hand switch  
Safety door lock

### Forced safety output 3NO / 1NC

### Forced safety output

Injection molding machines, CNC machine tools, presses/hydraulic presses, glass machinery, filling machinery, packaging machinery, sorting machinery, woodworking machinery, papermaking machinery, intelligent forklifts, AGVs, robots, elevators, wind power, SIS systems, etc.



## Technical Parameters

Power Supply	
Power Supply	24V DC
Voltage Tolerance	+10%/-20%
Power Consumption	2.9 W
Output	
Relay safety output	3NO+1NC
	<500mA 24VDC
Relay contact capacity	
AC -1	6A/250VAC/1500VA
AC -15	4A/240VAC
DC -1	6A/24VDC/150W
DC -13	4A/24VDC
Maximum switching capacity	12A (distributed on all safety output contacts)
Contact resistance	<100mΩ
Minimum load	10mA/5V
Contact material	AgSnO2 + 0.2μmAu
General parameters	
Output fuse (external)	5A gL/gG
Release response time	<30ms (from input to output)
Input component end-of-line detection resistor (edge / mat)	1kΩ ~ 10kΩ

General parameters	
Electrical life	80000 times
Pollution level	2
Operating temperature	-25°C ~ 85°C
Operating humidity	35%~85% (no ice or condensation)
Impact withstand voltage	2.5kV
Protection level	Housing IP30, terminals IP20, recommended installation in cabinet or housing IP54 .
Storage temperature	-40°C ~ 105°C
Casing material	Flame retardant PA66
Mounting method	Standard 35mm DIN rail/spring clip
Dimensions	112mm×99.5mm×22.6mm
Weight	172g
Connection parameters	
Available cross-sections for rigid conductors	0.5~2.5mm <sup>2</sup>
Available cross-sections for flexible conductors	0.5~2.5mm <sup>2</sup>
Minimum conductor cross-section	AWG 24
Maximum conductor cross-section	AWG 12
Stripping length	8mm
Minimum tightening torque	0.5 Nm
Maximum tightening torque	0.6 Nm

## Security Certification

**Performance level:** PLe

**Security Category:** Cat.4

**Task Time:** 20 years

**Diagnostic coverage:** 99%

**Safety Integrity Level:** SIL3

**Dangerous failure rate:** 2.10E-09

**Comply standards:** ENISO 13849

**Comply standards:** ENISO 13849


**Comply standards:** ENISO 13849

**Comply standards:** ENISO 13849


**Comply standards:** EN62061:2005+A2:2015

**Comply standards:** EN62061:2005+A2:2015

## Product size

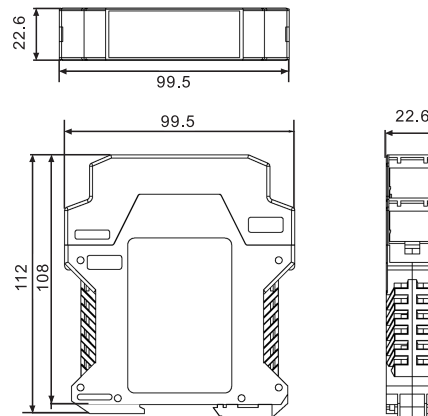

## Product Description

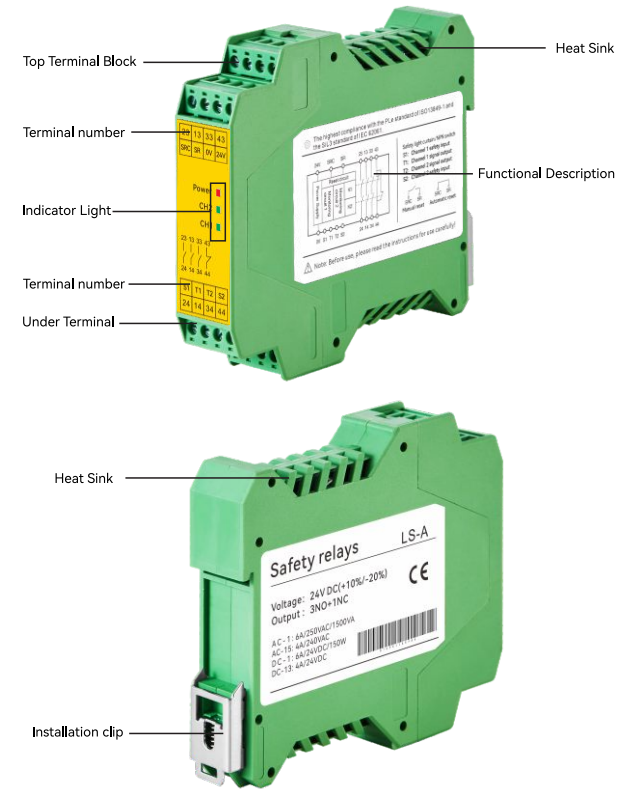

### Safety forced-off relay outputs

Three normally open momentary safety contacts (3NO)  
One normally closed momentary safety contact (1NC)

### LED indicator light

Power Indicator  
Input Status Indicator  
Output Status Indicator

### Automatic reset switch

Configurable automatic/manual reset switch.  
It can be configured to accommodate a variety of functional safety features, including emergency stop, light curtain, door lock, and two-hand switch. Safety functions remain effective even in the event of component failure.