

TECHNICAL DATA SHEET

SAFETY LIGHT CURTAIN SENSOR Emitter and Receiver **EQBT series**

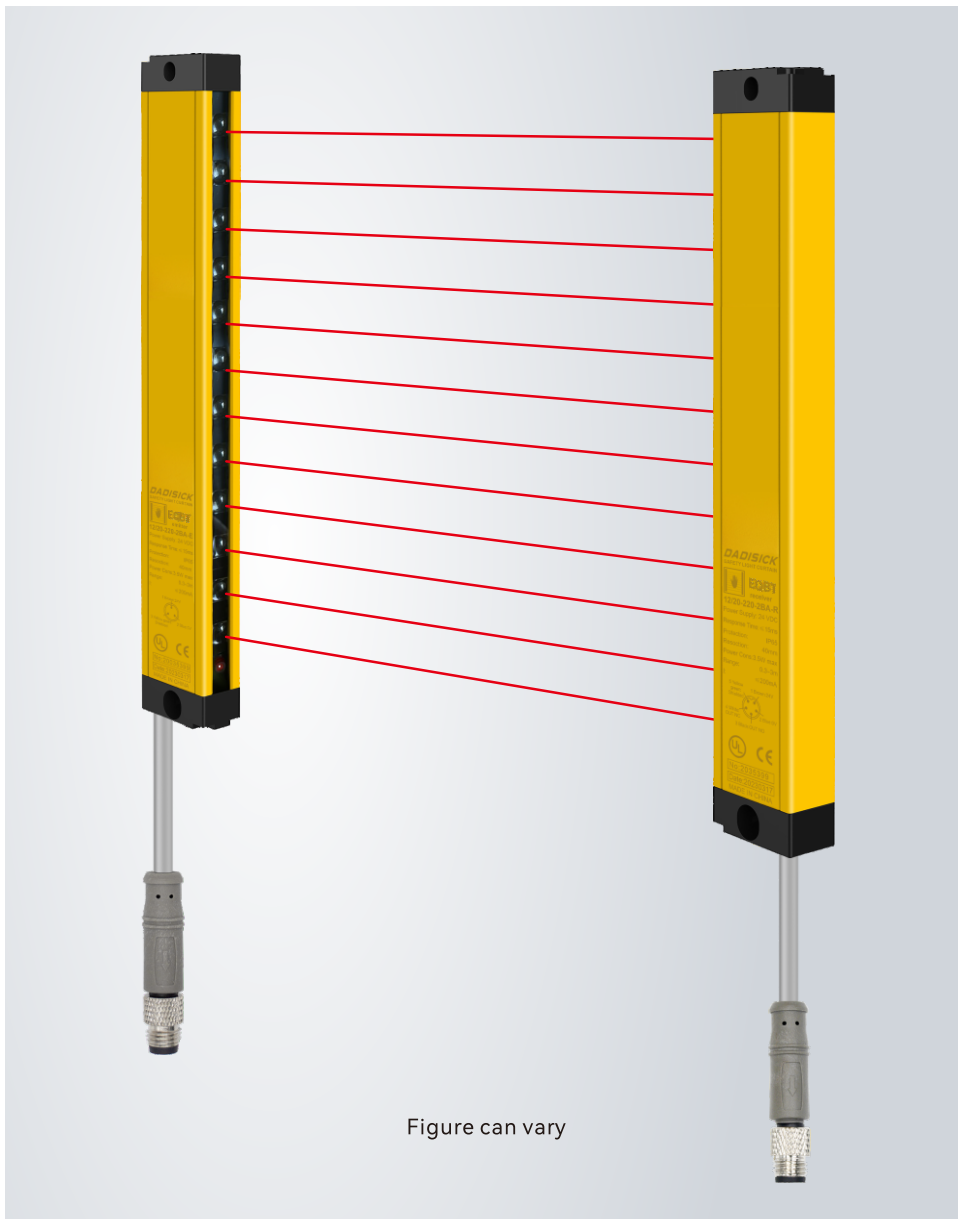


Figure can vary

Contents

- Product application
- Resolution ratio
- Technical data
- Operation and display
- Dimensioned drawings
- Electrical connection
- Wiring diagram
- Accessories



Solutions



GB/T 19001-2016

Product application

- A. Light curtain can achieve full protection for the slider can be stopped at any position on the press machine.
- B. The light curtain can only achieve upper dead point protection if the slider can not be stopped at any position on the press machine.
- C. Realize the regional protection for the industry manipulator, injection molding machines, packaging equipment, automation equipment, assembly wires and other dangerous work area.
- D. Used to detect and alarm object.


The specifications of EQBT type safety light curtain are as follows:



Resolution ratio


Depending on the usage environment and requirements, it is important to choose the appropriate beam spacing

Finger protection

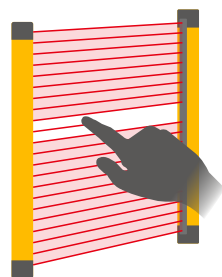

Detection capability
10/20mm
diameter

Hand protection

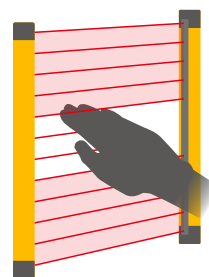

Detection capability
40mm
diameter

Technical data

Basic data of Receiver and Emitter

Standard packaging	
Product model	EQBT series
Standard configuration	One receiver, one emitter, two data lines, one right-angle rack, and one t-shaped screw
Light curtain form	Infrared radiation type
Application	Standard industrial environment

Features	
Resolution ratio	10mm, 20mm, 40mm
Check the accuracy	18mm, 28mm, 48mm
Number of beams	04、06、08、10.....200
Overall dimension	15mm*30mm*L, L is the length of emitter and receiver.
Detection distance	30-3000mm
Response time	≤15ms

Synchronization	
Consumption current	≤200mA
Output mode	2-circuit of PNP, with current of 500mA and voltage below 1.5V, polarity, short circuit and over-cutting protection
Output status	ON (receiving indicator green light)
Indicator light	Transmitter: power indicator light (red); receiver: output indicator light on (green), blackout (red)
Wavelength	850nm
Type of light	Infrared light (NIR), invisible
Function	Automatic reset


Mechanical data	
Housing material	Metal
Metal shell	Aluminium
Lens front screen material	Acrylic
Upper and lower cover materials	ABS reinforced nylon PA66+30% GF






Performance data	
Protection circuit	Short circuit protection Overvoltage protection
Supply voltage	24VDC,-20...20%
Maximum current consumption	150mA
Fuse	2A half time interval

Environmental data	
Protection grade	IP65
Resistance to ambient light	Incandescent light: illumination of light-receiving surface 3000Lx; Sunlight: illumination of light-receiving surface 10000Lx
Ambient temperature	Working temperature: - 10~+40 °C (but not frozen), storage temperature: - 25 ~+55 °C
Ambient humidity	Working time: 35~85% RH, saving time: 35~95% RH

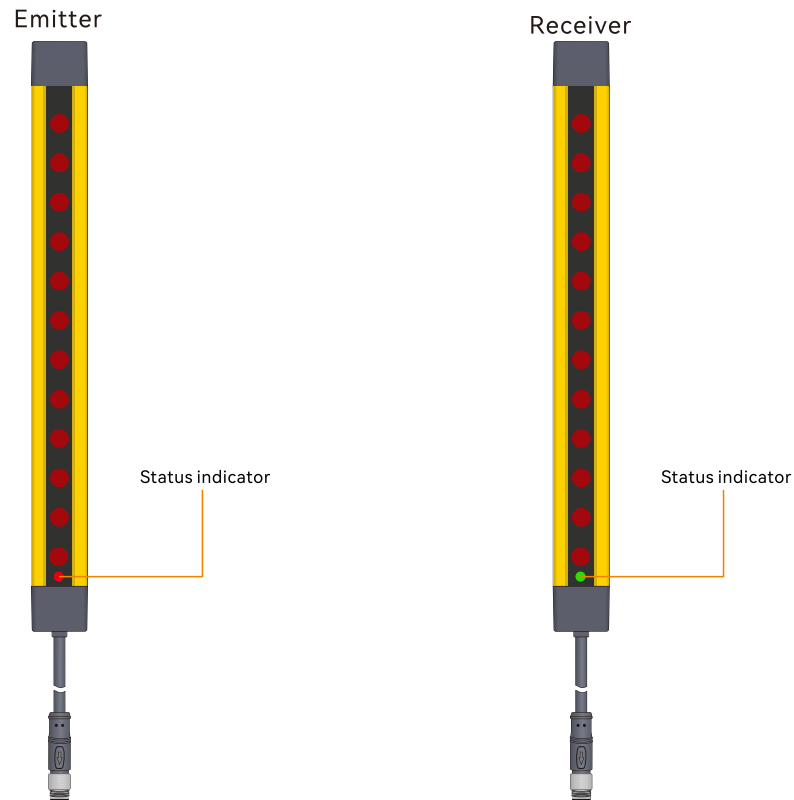Output	
Number of safe output circuits (OSSD)	2-circuit
Type	Safety circuit output circuit OSSD
Minimum switch voltage high	18V
Minimum switch voltage low	2.5V
Typical switching voltage	22.5V
Voltage type	DC
Maximum current load	380mA
Load inductance	two thousand
Load capacity	zero point three
Maximum residual current	0.2mA
Typical residual current	0.002MA
Voltage drop	1.5V
Safety switch output 1	Connection pin 4, WHITE OSSD1
Switching element	Transistor PNP
Safety switch output 2	Connection pin 3, BLACK OSSD2
Switching element	Transistor PNP
Electrical interface	
Number of interfaces	2 (receiver and emitter)
Type	Emitter with M8 connector 3-pin, Receiver with M8 connector 5-pin
Interface metal	Copper nickel plating
Plug material	GY384 gray 30P
Allowable typical conductor section	0.25mm ²
Maximum link cable	100m
Maximum allowable cable load	4.9A
Cable material	PVC
Certificate	
CE TÜV	No.E8A 104143 0001 Rev.00
ROHS certification	No.BSTDG180811032001CC
CE TYPE 4	No.ICR Polska/VC/HS221222
UL	No. 4790783741.1-S
ISO	No. HIC180327 GB/T 19001-2016 / ISO 9001:2015

Operation and display




Normal operation of light curtain	LED Indicator status	Explain
Emitter	 Red, always on	Turns on the power
	 Receiver and emitter are red	Receiver and Emitter are not aligned
Receiver	 Green	All light paths are connected
	 Red	Light path shading
	 Lights flashing	Interference or overstep detection range

Dimensioned drawings

1. EQBT 10mm series

Unit: mm

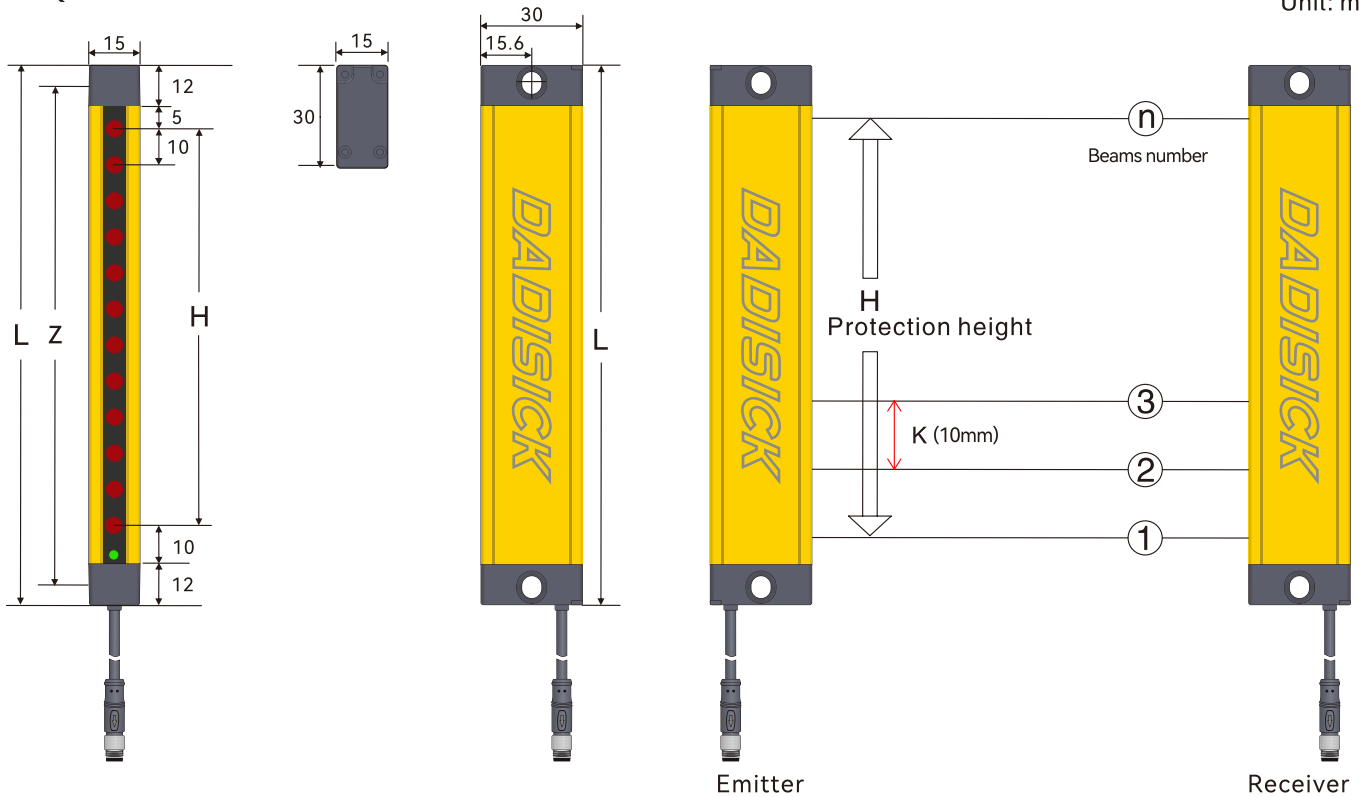

Remarks

L: Total length of light screen
 $L = 12 + 5 + H + 10 + 12$

H: Height of protected area
 $H = (n - 1) * 10$


K: Resolution ratio
 $Z = L - 11\text{mm}$

Z: Fixed hole center distance
 n: Beams number

EQBT 10mm specification list

Resolution	Light beam	Protection height (H)	Total height (L)	Product model	Signal output mode		Detection range
					Outputs	NPN / PNP	
10mm (K)	8	70	109	EQBT10-08-70	2	PNP	0.3-3m
	10	90	129	EQBT10-10-90	2	PNP	0.3-3m
	12	110	149	EQBT10-12-110	2	PNP	0.3-3m
	14	130	169	EQBT10-14-130	2	PNP	0.3-3m
	16	150	189	EQBT10-16-150	2	PNP	0.3-3m
	18	170	209	EQBT10-18-170	2	PNP	0.3-3m
	20	190	229	EQBT10-20-190	2	PNP	0.3-3m
	22	210	249	EQBT10-22-210	2	PNP	0.3-3m
	24	230	269	EQBT10-24-230	2	PNP	0.3-3m
	26	250	289	EQBT10-26-250	2	PNP	0.3-3m
	28	270	309	EQBT10-28-270	2	PNP	0.3-3m
	30	290	329	EQBT10-30-290	2	PNP	0.3-3m
	32	310	349	EQBT10-32-310	2	PNP	0.3-3m
	34	330	369	EQBT10-34-330	2	PNP	0.3-3m
	36	350	389	EQBT10-36-350	2	PNP	0.3-3m
	38	370	409	EQBT10-38-370	2	PNP	0.3-3m
	40	390	429	EQBT10-40-390	2	PNP	0.3-3m
	42	410	449	EQBT10-42-410	2	PNP	0.3-3m
	44	430	469	EQBT10-44-430	2	PNP	0.3-3m
	46	450	489	EQBT10/46-450	2	PNP	0.3-3m
48	470	509	EQBT10/48-470	2	PNP	0.3-3m	
50	490	529	EQBT10/50-490	2	PNP	0.3-3m	
52	510	549	EQBT10/52-510	2	PNP	0.3-3m	
...	2	PNP	0.3-3m
196	1950	1989	EQBT10/196-1950	2	PNP	0.3-3m	
198	1970	2009	EQBT10/198-1970	2	PNP	0.3-3m	
200	1990	2029	EQBT10/200-1990	2	PNP	0.3-3m	

2. EQBT 20mm series

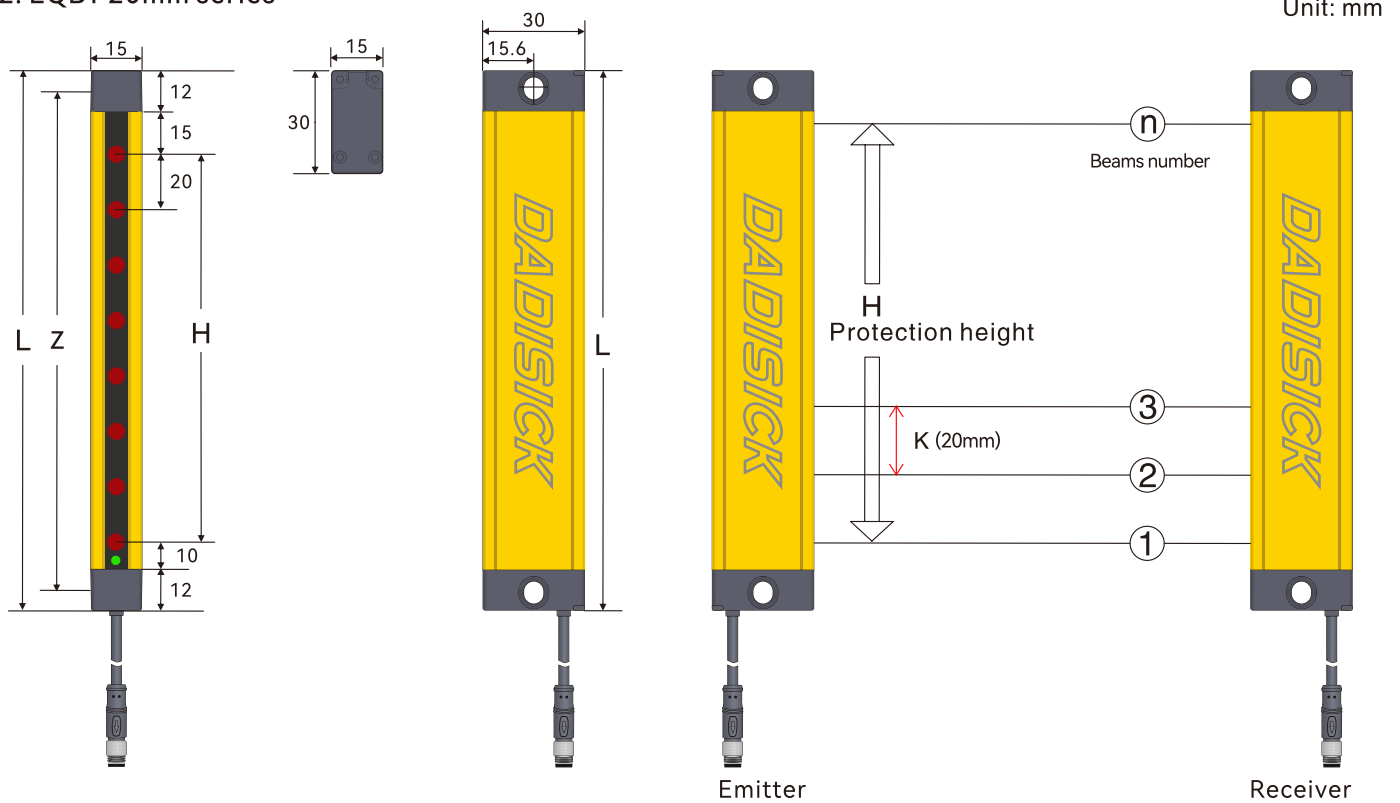

Remarks

L: Total length of light screen
 $L = 12 + 15 + H + 10 + 12$

H: Height of protected area
 $H = (n - 1) * 20$


K: Resolution ratio
 $Z = L - 11\text{mm}$

Z: Fixed hole center distance
 n: Beams number

EQBT 20mm specification list

Resolution	Light beam	Protection height (H)	Total height (L)	Product model	Signal output mode		Detection range
					Outputs	NPN / PNP	
20mm (K)	6	100	149	EQBT20-06-100	2	PNP	0.3-3m
	8	140	189	EQBT20-08-140	2	PNP	0.3-3m
	10	180	229	EQBT20-10-180	2	PNP	0.3-3m
	12	220	269	EQBT20-12-220	2	PNP	0.3-3m
	14	260	309	EQBT20-14-260	2	PNP	0.3-3m
	16	300	349	EQBT20-16-300	2	PNP	0.3-3m
	18	340	389	EQBT20-18-340	2	PNP	0.3-3m
	20	380	429	EQBT20-20-380	2	PNP	0.3-3m
	22	420	469	EQBT20-22-420	2	PNP	0.3-3m
	24	460	509	EQBT20/24-460	2	PNP	0.3-3m
	26	500	549	EQBT20/26-500	2	PNP	0.3-3m
	28	540	589	EQBT20/28-540	2	PNP	0.3-3m
	30	580	629	EQBT20/30-580	2	PNP	0.3-3m
	32	620	669	EQBT20/32-620	2	PNP	0.3-3m
	34	660	709	EQBT20/34-660	2	PNP	0.3-3m
	36	700	749	EQBT20/36-700	2	PNP	0.3-3m
	38	740	789	EQBT20/38-740	2	PNP	0.3-3m
	40	780	829	EQBT20/40-780	2	PNP	0.3-3m
	42	820	869	EQBT20/42-820	2	PNP	0.3-3m
	44	860	909	EQBT20/44-860	2	PNP	0.3-3m
46	900	949	EQBT20/46-900	2	PNP	0.3-3m	
48	940	989	EQBT20/48-940	2	PNP	0.3-3m	
50	980	1029	EQBT20/50-980	2	PNP	0.3-3m	
52	1020	1069	EQBT20/52-1020	2	PNP	0.3-3m	
...	2	PNP	0.3-3m
196	3900	3949	EQBT20/196-3900	2	PNP	0.3-3m	
198	3940	3989	EQBT20/198-3940	2	PNP	0.3-3m	
200	3980	4029	EQBT20/200-3980	2	PNP	0.3-3m	

3. EQBT 40mm series

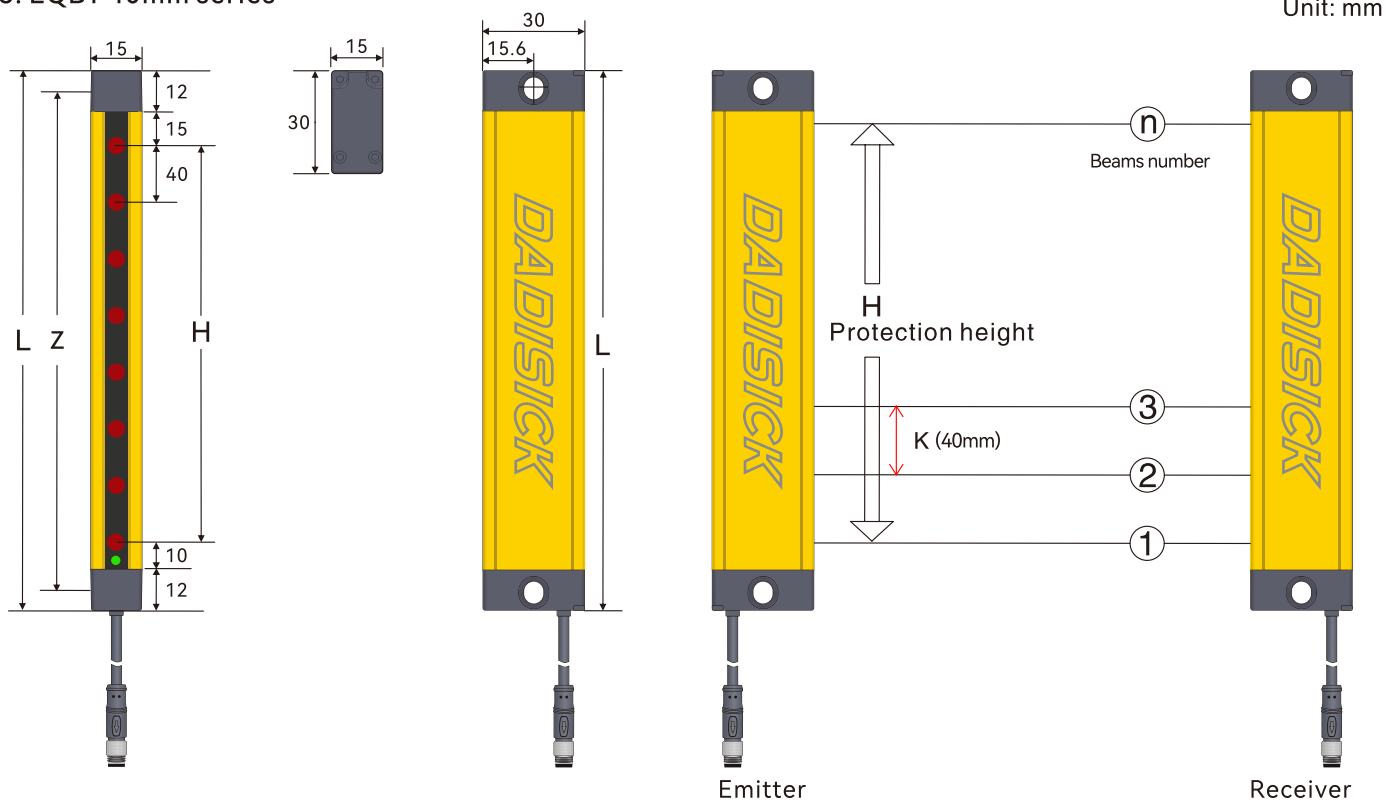

Remarks

L: Total length of light screen
 $L = 12 + 15 + H + 10 + 12$

H: Height of protected area
 $H = (n - 1) * 40$

K: Resolution ratio
 $Z = L - 11\text{mm}$


Z: Fixed hole center distance
 n: Beams number

EQBT 40mm specification list


Resolution	Light beam	Protection height (H)	Total height (L)	Product model	Signal output mode		Detection range
					Outputs	NPN / PNP	
40mm (K)	4	120	169	EQBT40/04-120	2	PNP	0.3-3m
	6	200	249	EQBT40/06-200	2	PNP	0.3-3m
	8	280	329	EQBT40/08-280	2	PNP	0.3-3m
	10	360	409	EQBT40/10-360	2	PNP	0.3-3m
	12	440	489	EQBT40/12-440	2	PNP	0.3-3m
	14	520	569	EQBT40/14-520	2	PNP	0.3-3m
	16	600	649	EQBT40/16-600	2	PNP	0.3-3m
	18	680	729	EQBT40/18-680	2	PNP	0.3-3m
	20	760	809	EQBT40/20-760	2	PNP	0.3-3m
	22	840	889	EQBT40/22-840	2	PNP	0.3-3m
	24	920	969	EQBT40/24-920	2	PNP	0.3-3m
	26	1000	1049	EQBT40/26-1000	2	PNP	0.3-3m
	28	1080	1129	EQBT40/28-1080	2	PNP	0.3-3m
	30	1160	1209	EQBT40/30-1160	2	PNP	0.3-3m
	32	1240	1289	EQBT40/32-1240	2	PNP	0.3-3m
	34	1320	1369	EQBT40/34-1320	2	PNP	0.3-3m
	36	1400	1449	EQBT40/36-1400	2	PNP	0.3-3m
	38	1480	1529	EQBT40/38-1480	2	PNP	0.3-3m
	40	1560	1609	EQBT40/40-1560	2	PNP	0.3-3m
	42	1640	1689	EQBT40/42-1640	2	PNP	0.3-3m
44	1720	1769	EQBT40/44-1720	2	PNP	0.3-3m	
46	1800	1849	EQBT40/46-1800	2	PNP	0.3-3m	
48	1880	1929	EQBT40/48-1880	2	PNP	0.3-3m	
50	1960	2109	EQBT40/50-1960	2	PNP	0.3-3m	
...	2	PNP	0.3-3m
96	3800	3849	EQBT40/96-3800	2	PNP	0.3-3m	
98	3880	3929	EQBT40/98-3880	2	PNP	0.3-3m	
100	3960	4009	EQBT40/100-3960	2	PNP	0.3-3m	

Electrical connection

Cable description:

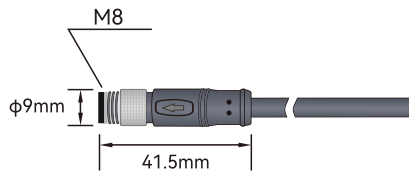

3-pin and 5-pin M8 cable connector straight
3m waterproof cable




Emitter Wiring diagram		
Pin number	Line color	Name
1	BROWN	24V DC
2	BLUE	0V
-	-	-
-	-	-
3	YELLOW	Ground wire


Receiver Wiring diagram		
Pin number	Line color	Name
1	BROWN	24V DC
2	BLUE	0V
3	BLACK	OSSD 2
4	WHITE	OSSD 1
5	YELLOW	Ground wire

1. EQBT signal output selection (actual output of transistor working normally)


NPN NO+NC

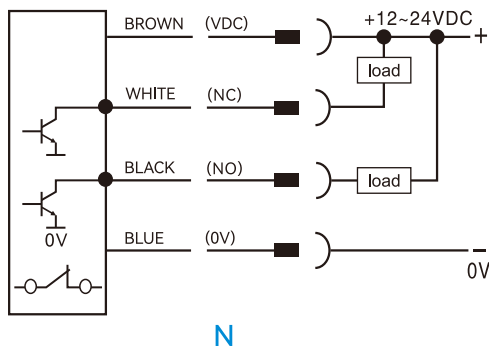


PNP NO+NC

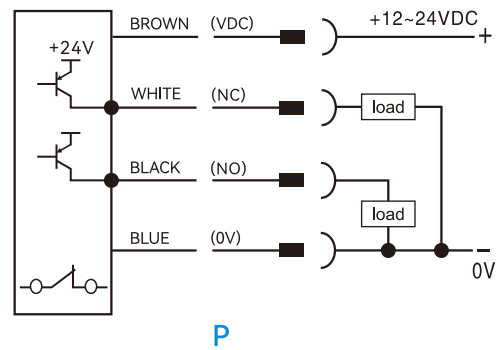


NPN NC

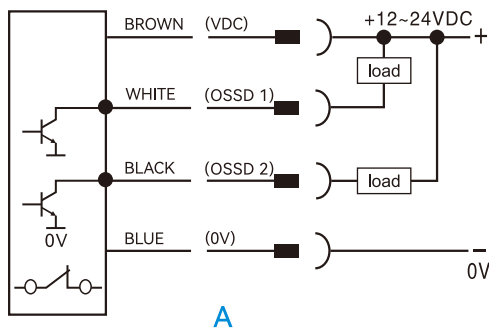


PNP NC

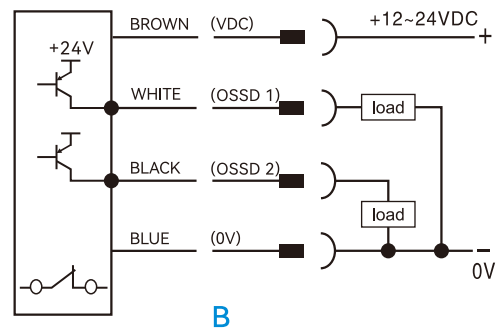


NPN NO

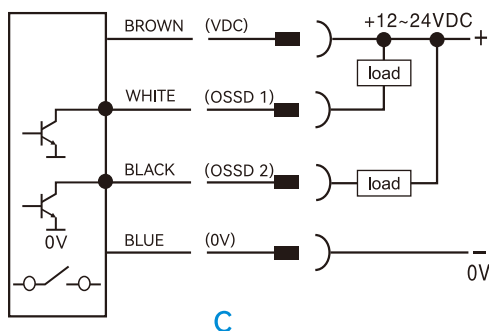

PNP NO

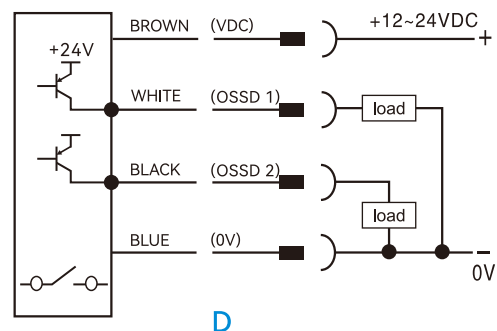


2. NPN output wiring diagram

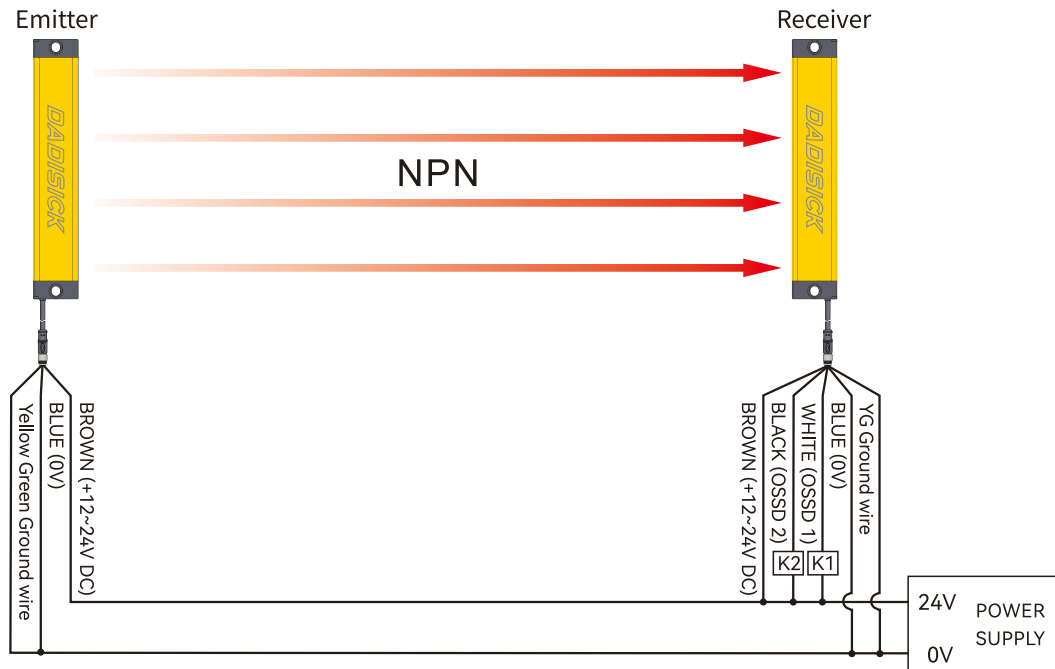



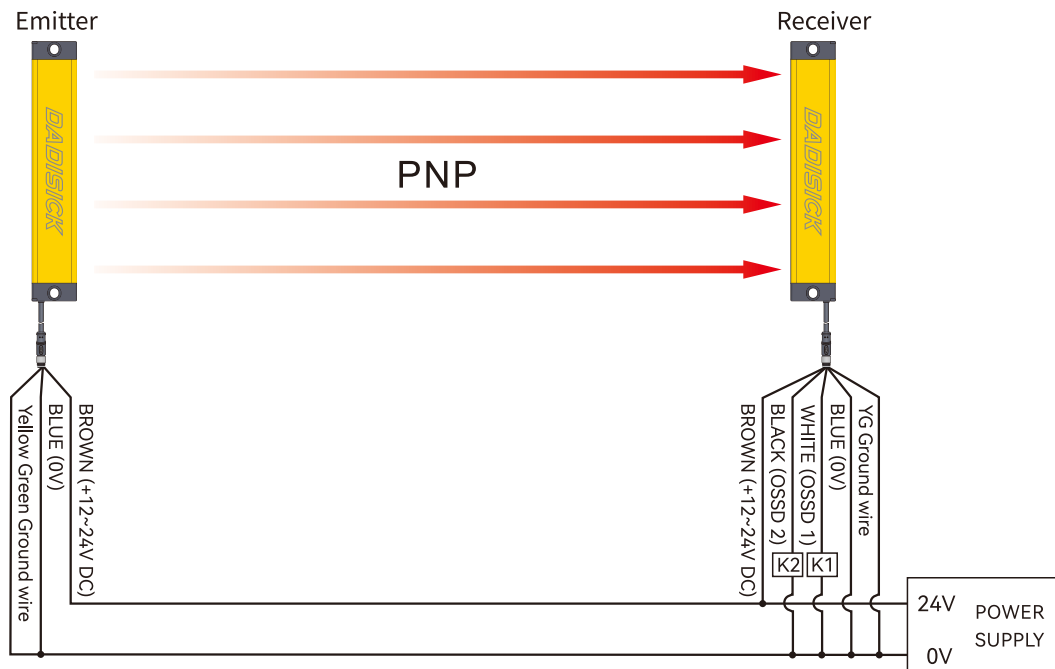

This picture is an example of NPN output wiring

3. PNP output wiring diagram




This picture is an example of PNP output wiring


4. Selection of safety light curtain controller

Name	Order separately	Model	Descriptions
Built-in controller		QET	Used to monitor the signal processing of EQBT series light curtain, and output one group of NO and one group of NC.
Safety relay		EQSRP	EQSRP safety relays have three groups of NO and one group of NC, with strong control capabilities. They are suitable for various signal monitoring in industrial places with high safety requirements, including emergency stop signals, safety door opening and closing signals, safety light curtain signals, and two-handed button signals.
Safety relay	 Multifunctional switching switch	ETer-AP	Equipped with a mode switch, it can be used for most safety components, such as light curtains, safety switches, carpet contacts, two handed switches, etc. Automatic/manual reset paddles for quick configuration. Dual channel monitoring circuit, safe and reliable.
Light curtain relay		QET-1	Output conversion between NC and NO for EQBT series light curtain.

4.1 Wiring diagram of QET built-in controller

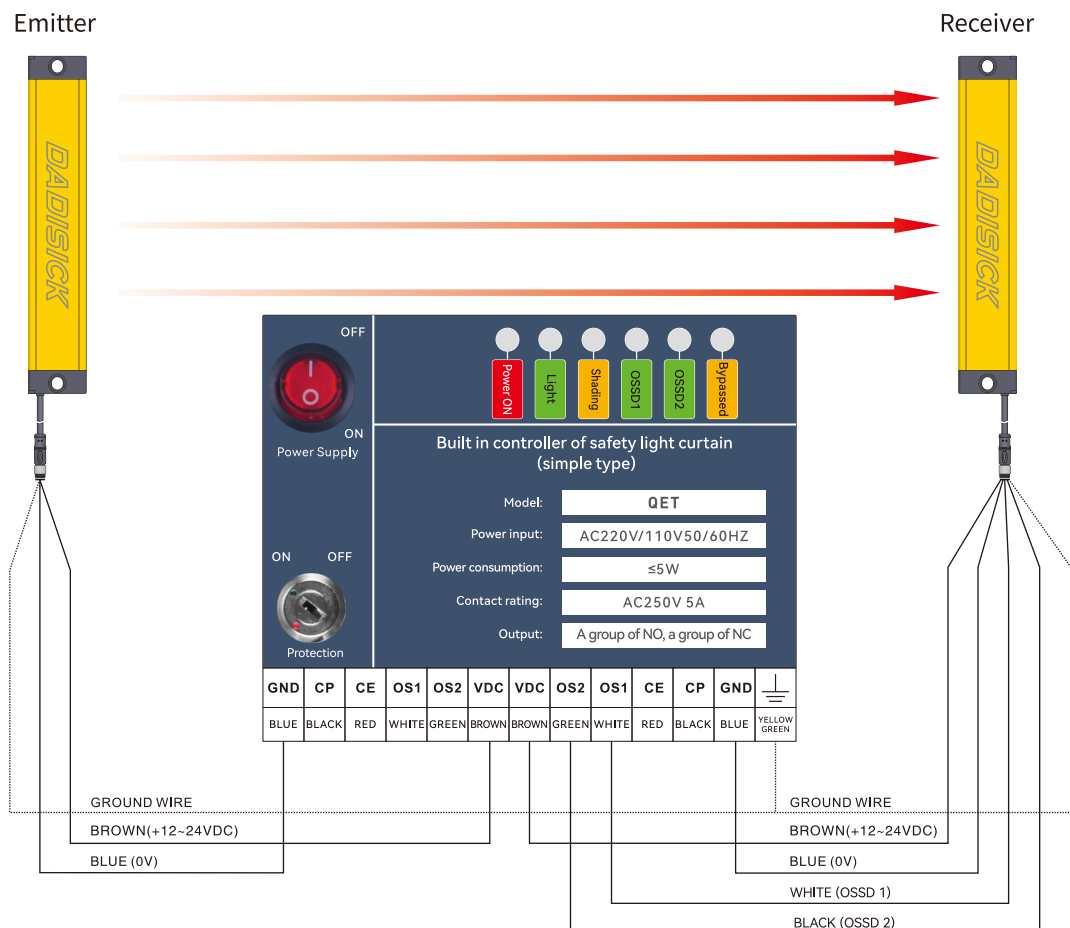


4.2 Wiring diagram of EQSRP safety relay

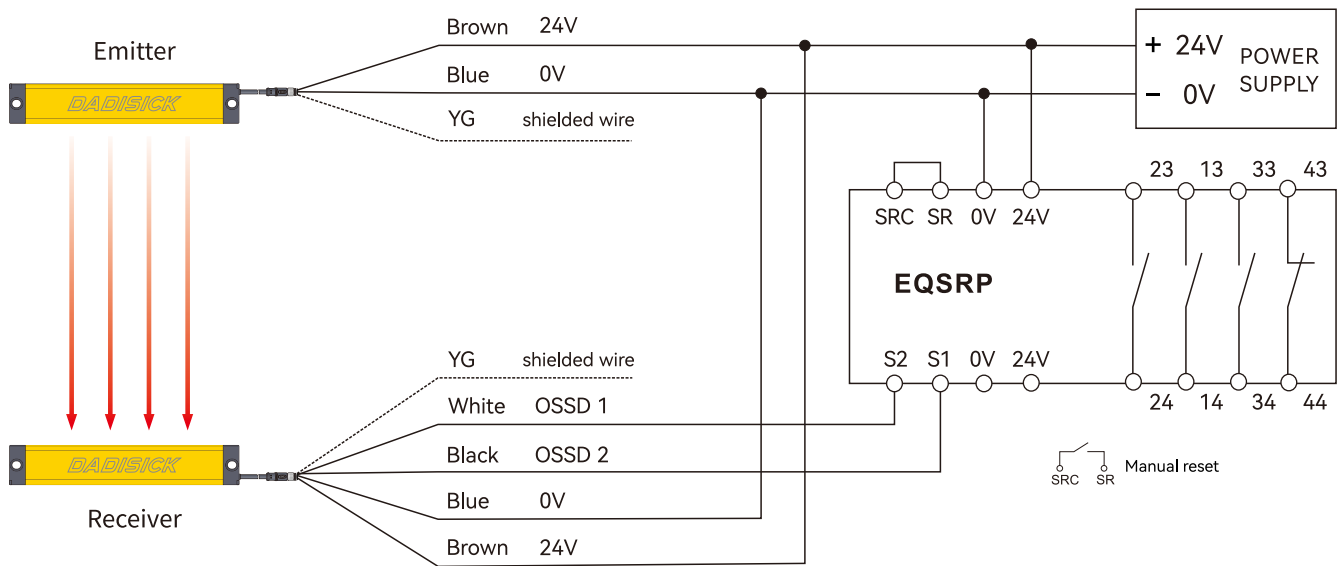


4.3 Wiring diagram of ETer-AP safety relay

Dual channel light curtain PNP switch safety input, with automatic reset and PLC signal output.

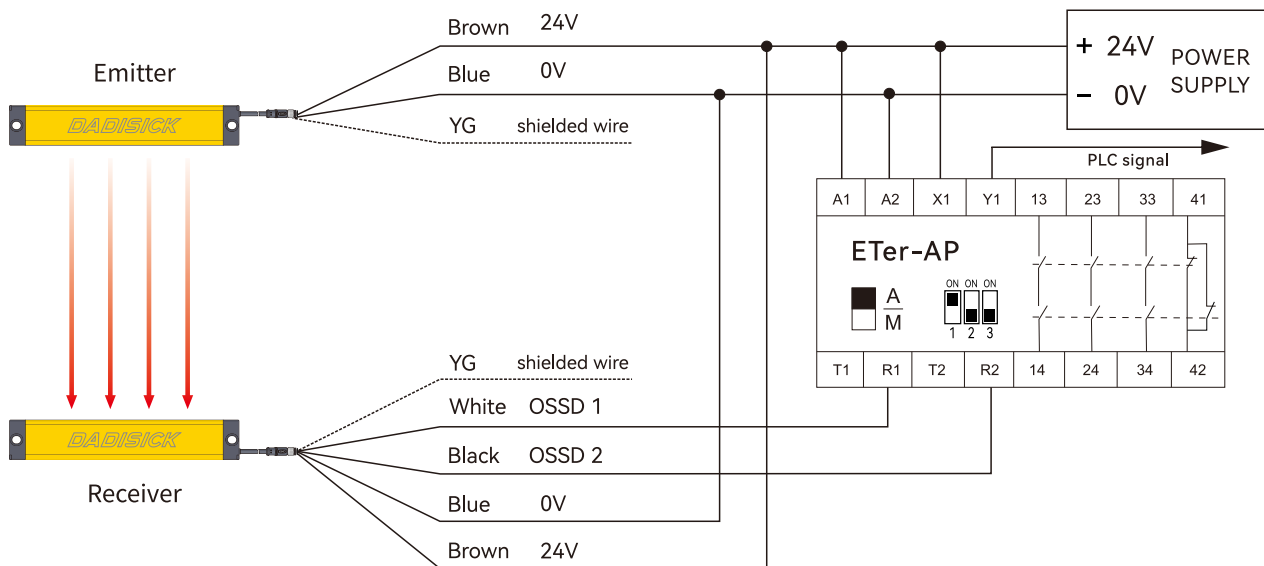


4.4 Wiring diagram of QET-1 light curtain relay

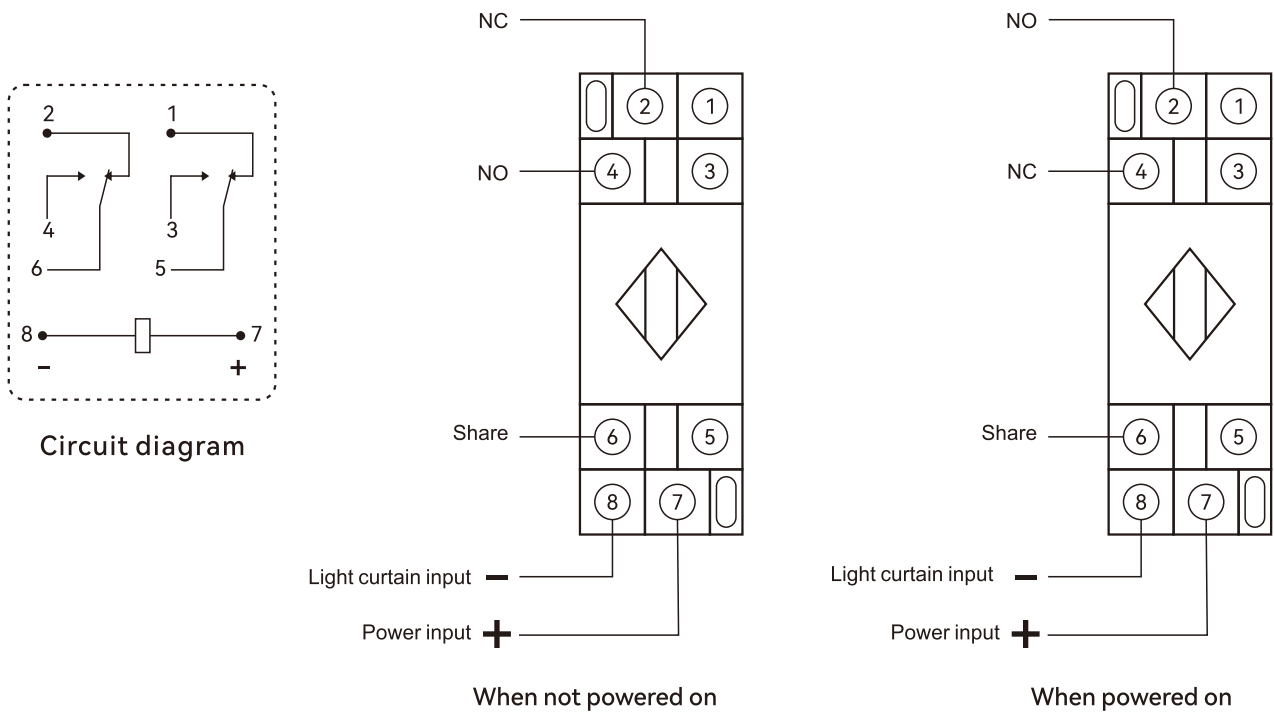


4.5 Wiring between light curtain and PLC and one-chip computer system


NPN wiring:

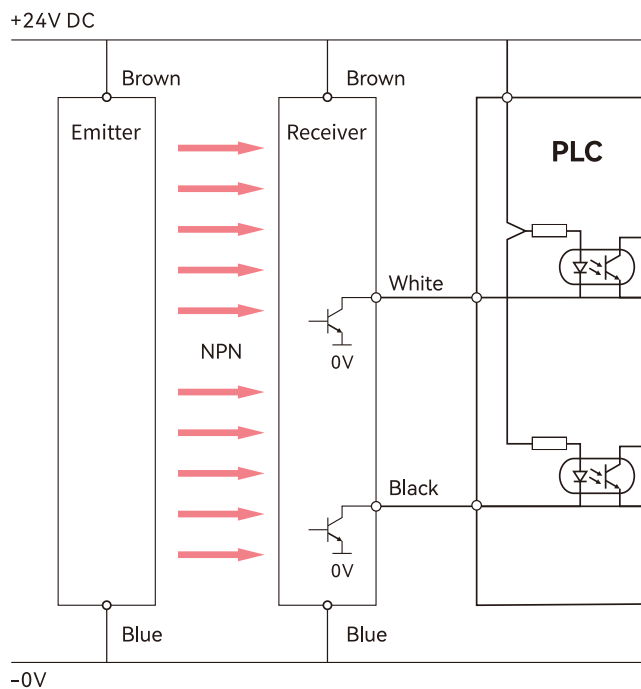

PNP wiring:

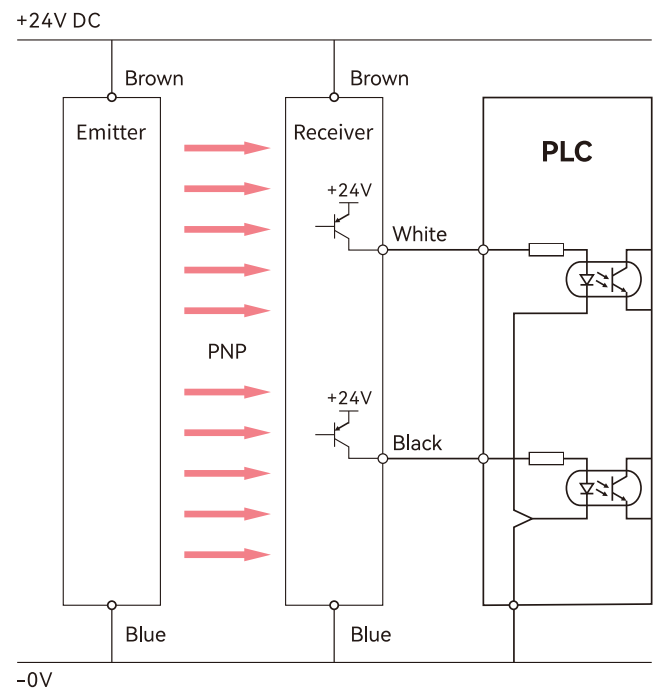

Accessories

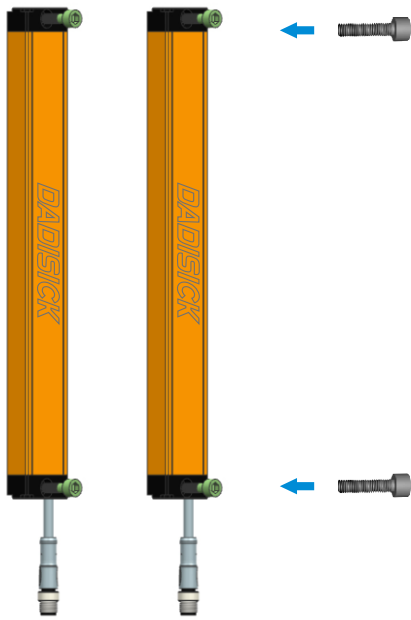

Installation method for fixing hole screws
(Original accessories)

Circular screw	Model: QBZ-01
Unit: mm	