

尺寸：80x80mm



Smart Life

Thank you for using smart doorbell camera

**Basic Parameters**

Product Name: Smart Doorbell Camera	
Pixel: 2 million pixels	PIR human detection: Supports PIR detection to wake up
Day and night conversion: dual filters automatically switch	Two-way talkback: support full-duplex real-time calls
Local storage: Micro SD card	Wireless connection: 2.4G 802.11 b / g / n
Supported platforms: Android / IOS	Audio input / output: -38dB microphone / speaker

**Component Description:**

Reset Button: Long press "reset" hole 5sec, reset success.

It is recommended to insert 8-64GB high-speed Micro SD card, otherwise it will not be able to store, view historical video and support important functions such as firmware upgrading.

Packing list: smart doorbell camera × 1, manual × 1, USB Power Cord screw accessory package × 2, battery X2


**Install APP**

Download APP: scan the QR code below to download and install. Register and login: open the "Smart Life" APP to register and login according to the prompts.




**Add The Device-Scan QR code mode**

- Make sure Wi-Fi is available and connected to the Internet.
- Connect the camera to the power, then system startup completed.
- Open "Smart Life" APP, press the '+' in the upper right corner of the main screen (Figure 01); choose "Security & Video Surveillance", click "Smart Camera" (Figure 02) to add camera; and then click "Next step" (Figure 03);

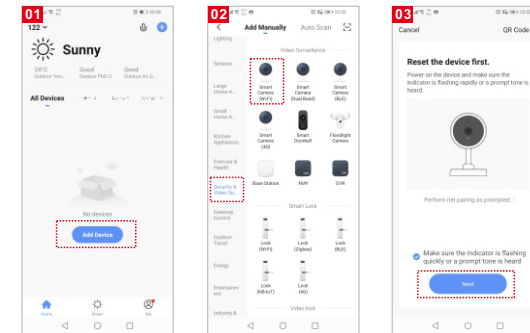


**Please note that only 2.4 GHz Wi-Fi network is supported;**


- If the mobile phone is not connected to wi-fi, please click "Connect to Wi-fi" (Figure 04);
- It will jump to the WLAN interface and connects Wi-Fi (Figure 05).
- If the phone is connected to Wi-Fi (Figure 06);

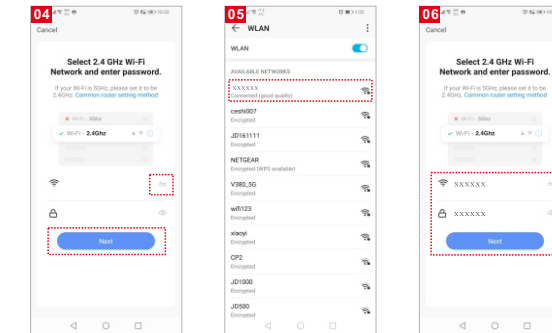

- A QR code will prompt on your screen and you need to scan it with the Smart Camera. (the camera is about 20-30 cm away from the mobile phone lens). Then click "hear the prompt sound" (Figure. 07).
- "connecting" (Figure. 08);

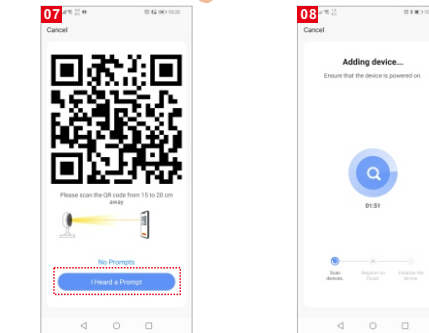


- connection completed(Figure 09), and click "Done";
- Then jump to preview interface (Figure 10)
- After closing the device preview interface, the interface returns to the APP home page. At this time, the connected device will appear on the APP home page (Figure 11). Then you can click directly to the device interface to see the monitoring situation without re-adding afterwards.

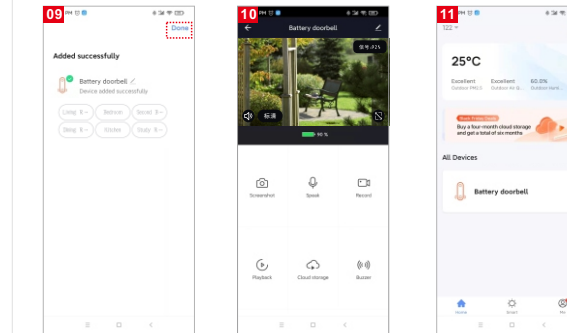


**Add The Device-AP Mode**

**First set the machine to the hot spot distribution network mode**


- Locate the RESET button on the machine and press it for about 1 second, After about 1 minute, the sound will ring and the hotspot will start successfully.

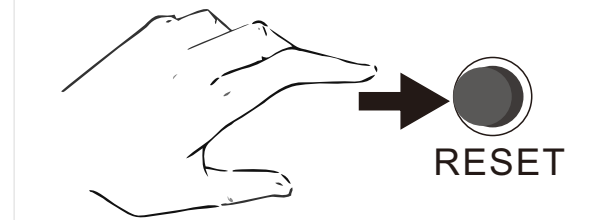



- Select "AP Mode" (Figure 12)
- Click Next (Figure 13)
- Enter the account and password that can connect to WIFI (Figure 14)

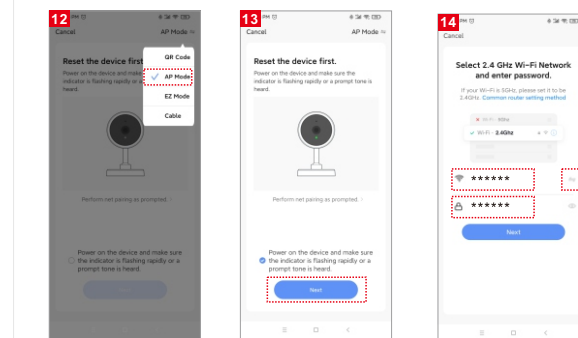

- Click "Go Connect" (Figure 15)
- Go to "Smart Life-XXXX" and click Connect (Figure 16)
- Connecting (Figure 17)

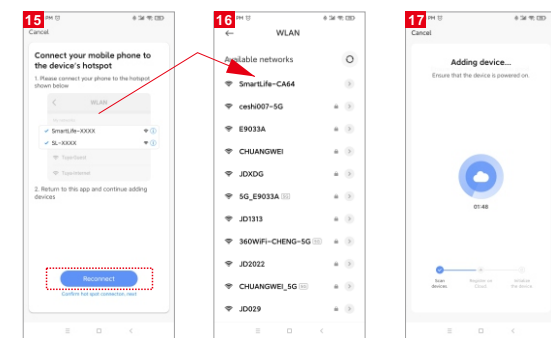

- connection completed(Figure 09), and click "Done";
- Then jump to preview interface (Figure 10)
- After closing the device preview interface, the interface returns to the APP home page (Figure 11). Then you can click directly to the device interface to see the monitoring situation without re-adding afterwards.

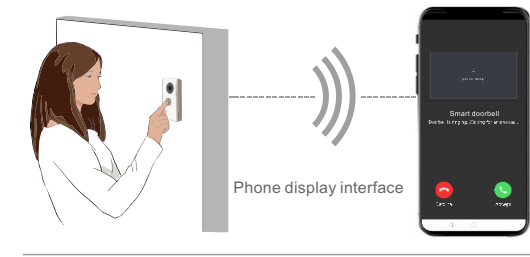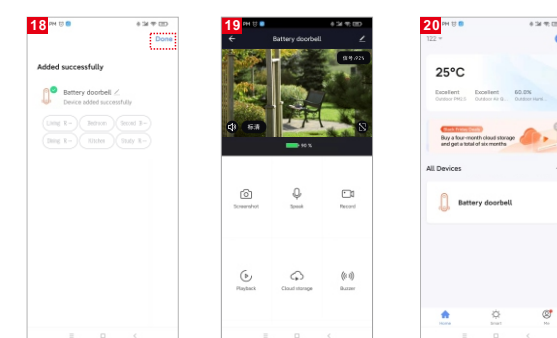

Call operation diagram

Party B: Hello  
Party B: Is anyone at home?  
Party A: Hello  
Party A: Leave home temporarily.

**Matters Need Attention**

- Try to keep away from the metal space;
- Avoid the furniture, microwave oven blocked;
- Avoid the space where the audio, video and data lines are wound, and keep the space away from them as large as possible;
- Ensure that as close as possible to the coverage of wireless Wi-Fi signals. Switching network environment;
- In the new network environment, please press the reset button about 5 seconds, then connect to the network.

**The name and content of the harmful substances in the product**

Part Name	Harmful Substance					
	Pb	Hg	Cd	Cr(VI)	PBB	PBDE
shell	○	○	○	○	○	○
Board	X	○	○	○	○	○
charger	○	○	○	○	○	○
annex	○	○	○	○	○	○

This form is based on the provisions of SJ/T 11364.

This product conforms to RoHS environmental protection requirements. At present, there is no mature technology in the world to replace or reduce the lead content in the electronic ceramics, porcelain, optical glass, steel and copper alloy.

Maintenance records: \_\_\_\_\_

Maintenance time: \_\_\_\_\_

Fault conditions: \_\_\_\_\_

Fault cause: \_\_\_\_\_

Troubleshooting: \_\_\_\_\_

Return and exchange proof: \_\_\_\_\_

Date of validity: \_\_\_\_\_

Original device ID: \_\_\_\_\_

New device ID: \_\_\_\_\_

maintenance personnel signature: \_\_\_\_\_

Maintenance Department seal: \_\_\_\_\_

Maintenance voucher of intelligent

Customer: \_\_\_\_\_ Mobile: \_\_\_\_\_

Address: \_\_\_\_\_

Model: \_\_\_\_\_ Camera ID: \_\_\_\_\_

Device store: \_\_\_\_\_ Date of purchase: \_\_\_\_\_

Store address: \_\_\_\_\_

Store contact number: \_\_\_\_\_

Maintenance voucher of intelligent

Customer: \_\_\_\_\_ Mobile: \_\_\_\_\_

Address: \_\_\_\_\_

Model: \_\_\_\_\_ Camera ID: \_\_\_\_\_

Device store: \_\_\_\_\_ Date of purchase: \_\_\_\_\_

Store address: \_\_\_\_\_

Store contact number: \_\_\_\_\_