


TECHNICAL DATA SHEET

SAFETY LIGHT CURTAIN SENSOR

Emitter: QT30/40-1160-2BD-E

Receiver: QT30/40-1160-2BD-R

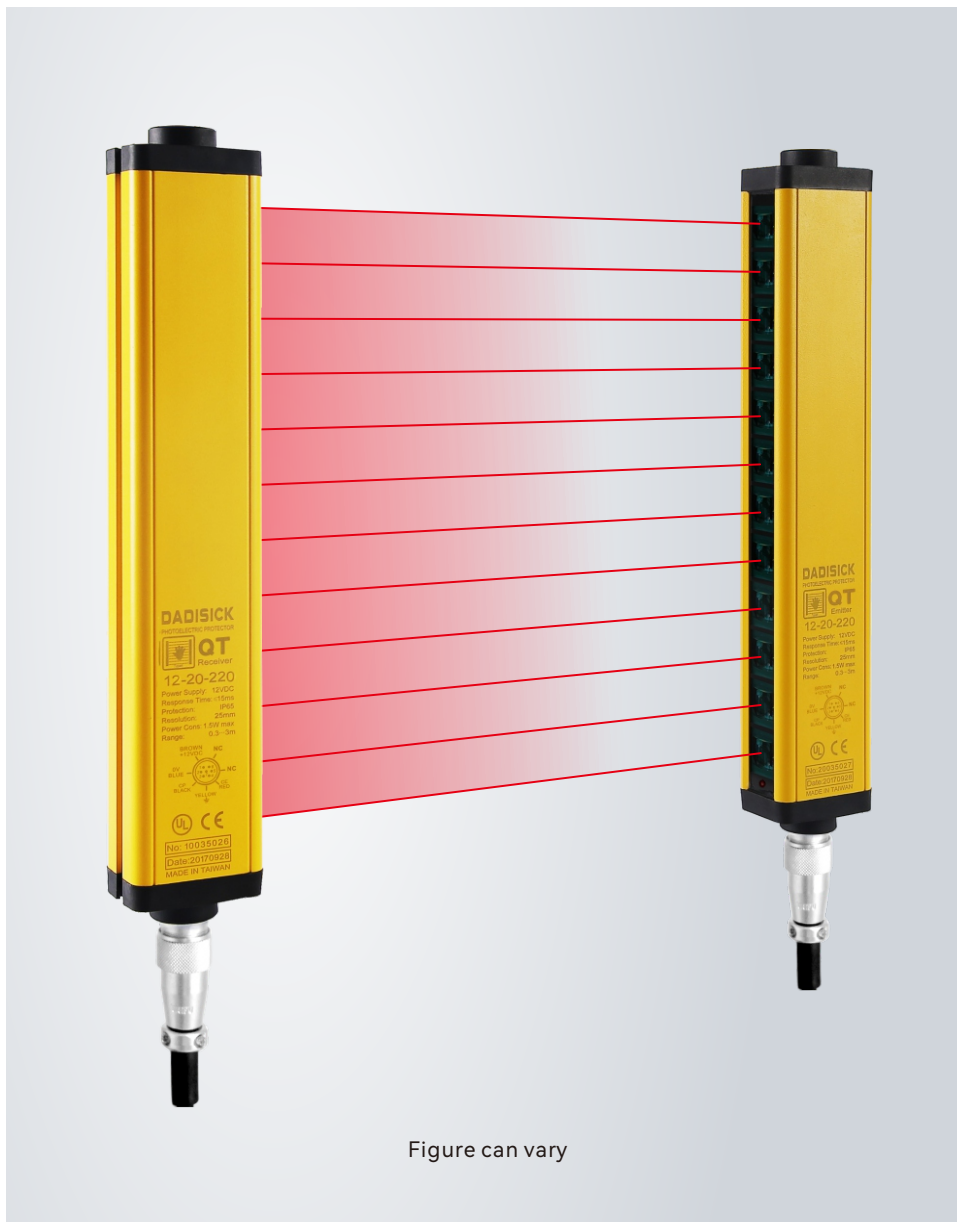

Contents

- Product application
- Technical data
- Operation and display
- Dimensioned drawings
- Electrical connection
- Wiring diagram
- Accessories



GB/T 19001-2016

Product application

- A. Light curtain can achieve full protection for the slider can be stopped at any position on the press machine.
- B. The light curtain can only achieve upper dead point protection if the slider can not be stopped at any position on the press machine.
- C. Realize the regional protection for the industry manipulator, injection molding machines, packaging equipment, automation equipment, assembly wires and other dangerous work area.
- D. Used to detect and alarm object.


Technical data

Basic data of Receiver and Emitter

Standard packaging	
Product model	QT30/40-1160-2BD-E and QT30/40-1160-2BD-R
Standard configuration	One receiver, one transmitter, two data lines, one right-angle rack, and one t-shaped screw
Light curtain form	Infrared radiation type
Application	Standard industrial environment – finger protection
Features	
Resolution ratio	40mm
Check the accuracy	48mm
Number of beams	30
Protection height	1160mm
Total height	1241mm
Detection distance	30-15000mm (Default 30-15000mm, customer service can be contacted to customize 30-45000mm.)
Response time	≤15ms
Synchronization	
Line synchronization	
Consumption current	≤200mA
Output mode	2-circuit of PNP, with current of 500mA and voltage below 1.5V, polarity, short circuit and over-cutting protection
Output status	ON (receiving indicator green light)
Indicator light	Transmitter: power indicator light (red); receiver: output indicator light on (green), blackout (red)
Wavelength	850nm
Type of light	Infrared light (NIR), invisible
Function	Automatic reset
Mechanical data	
Overall dimension	51*35*1241mm
Housing material	Metal
Metal shell	Aluminium
Lens front screen material	Acrylic
Upper and lower cover materials	ABS reinforced nylon PA66+30% GF
Environmental data	
Protection grade	IP65
Resistance to ambient light	Incandescent light: illumination of light-receiving surface 3000Lx; Sunlight: illumination of light-receiving surface 10000Lx
Ambient temperature	Working temperature: - 10~+40 °C (but not frozen), storage temperature: - 25 ~+55 °C
Ambient humidity	Working time: 35~85% RH, saving time: 35~95% RH

Performance data	
Protection circuit	Short circuit protection Overvoltage protection
Supply voltage	24VDC, -20...20%
Maximum current consumption	150mA
Fuse	2A half time interval
Output	
Number of safe output circuits (OSSD)	2-circuit
Type	Safety circuit output circuit OSSD
Minimum switch voltage high	18V
Minimum switch voltage low	2.5V
Typical switching voltage	22.5V
Voltage type	DC
Maximum current load	380mA
Load inductance	two thousand
Load capacity	zero point three
Maximum residual current	0.2mA
Typical residual current	0.002MA
Voltage drop	1.5V
Safety switch output 1	Connection pin 4, WHITE OSSD1
Switching element	Transistor PNP
Safety switch output 2	Connection pin 5, GREEN OSSD2
Switching element	Transistor PNP
Certificate	
CE TÜV	No.E8A 104143 0001 Rev.00
ROHS certification	No.BSTDG180811032001CC
CE TYPE 4	No.ICR Polska/VC/HS221214
UL	No. 4790783741.1-S
GB/T	No. HIC180327 GB/T 19001-2016 idt ISO 9001:2015

Operation and display

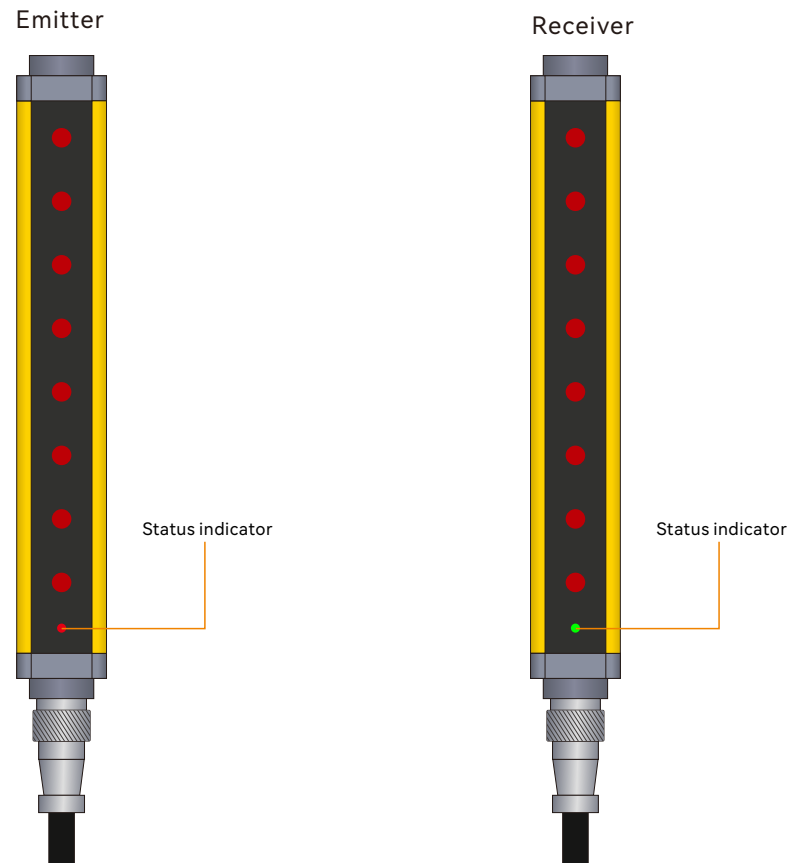


Normal operation of light curtain	LED Indicator status		Explain
Emitter		Red, always on	Turns on the power
		Receiver and emitter are red	Receiver and Emitter are not aligned
Receiver		Green	All light paths are connected
		Red	Light path shading
		Lights flashing	Interference or overstep detection range

Dimensioned drawings

QT 40mm series

Unit: mm

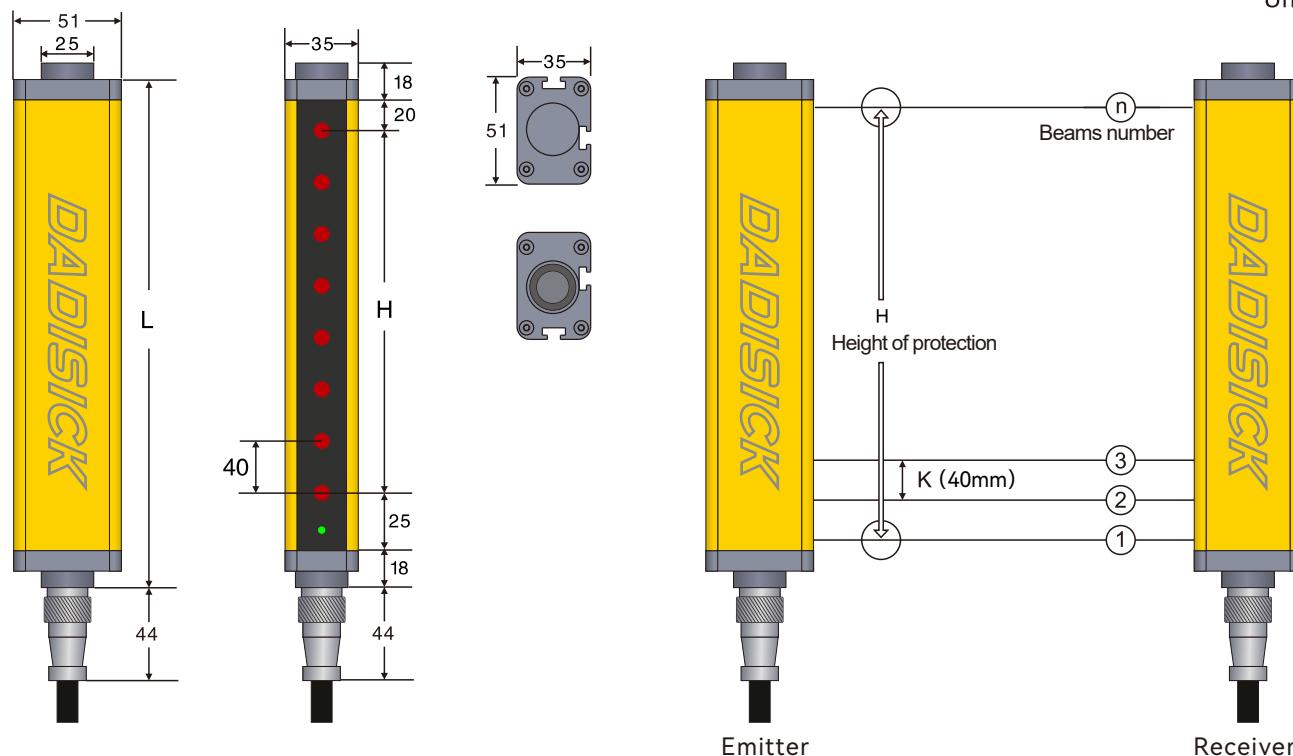

Remarks

L: Total length of light screen

H: Height of protected area

K: Resolution ratio

n: Beams number

 $L = 18 + 20 + H + 25 + 18$ $H = (n - 1) \times 40$


QT 40mm specification list

Resolution	Light beam	Protection height (H)	Total height (L)	Product model	Signal output mode		Detection range
					Two outputs	PNP output	
40mm (K)	4	120	201	QT04/40-120	2	PNP	0.3-15m
	6	200	281	QT06/40-200	2	PNP	0.3-15m
	8	280	361	QT08/40-280	2	PNP	0.3-15m
	10	360	441	QT10/40-360	2	PNP	0.3-15m
	12	440	521	QT12/40-440	2	PNP	0.3-15m
	14	520	601	QT14/40-520	2	PNP	0.3-15m
	16	600	681	QT16/40-600	2	PNP	0.3-15m
	18	680	761	QT18/40-680	2	PNP	0.3-15m
	20	760	841	QT20/40-760	2	PNP	0.3-15m
	22	840	921	QT22/40-840	2	PNP	0.3-15m
	24	920	1001	QT24/40-920	2	PNP	0.3-15m
	26	1000	1081	QT26/40-1000	2	PNP	0.3-15m
	28	1080	1161	QT28/40-1080	2	PNP	0.3-15m
	30	1160	1241	QT30/40-1160	2	PNP	0.3-15m
	32	1240	1321	QT32/40-1240	2	PNP	0.3-15m
	34	1320	1401	QT34/40-1320	2	PNP	0.3-15m
	36	1400	1481	QT36/40-1400	2	PNP	0.3-15m
	38	1480	1561	QT38/40-1480	2	PNP	0.3-15m
	40	1560	1641	QT40/40-1560	2	PNP	0.3-15m
	42	1640	1721	QT42/40-1640	2	PNP	0.3-15m
	44	1720	1801	QT44/40-1720	2	PNP	0.3-15m
	46	1800	1881	QT46/40-1800	2	PNP	0.3-15m
	48	1880	1961	QT48/40-1880	2	PNP	0.3-15m
	50	1960	2041	QT50/40-1960	2	PNP	0.3-15m
	52	2040	2121	QT52/40-2040	2	PNP	0.3-15m
	54	2120	2201	QT54/40-2120	2	PNP	0.3-15m
	56	2200	2281	QT56/40-2200	2	PNP	0.3-15m
	58	2280	2361	QT58/40-2280	2	PNP	0.3-15m
	60	2360	2441	QT60/40-2360	2	PNP	0.3-15m
	62	2440	2521	QT62/40-2440	2	PNP	0.3-15m
	64	2520	2601	QT64/40-2520	2	PNP	0.3-15m
	66	2600	2681	QT66/40-2600	2	PNP	0.3-15m
	68	2680	2761	QT68/40-2680	2	PNP	0.3-15m
	70	2760	2841	QT70/40-2760	2	PNP	0.3-15m
	72	2840	2921	QT72/40-2840	2	PNP	0.3-15m

Electrical connection

Electrical interface	
Number of interfaces	2 (receiver and transmitter)
Type	M16 connector, 7-pin
Interface metal	Copper nickel plating
Plug material	kirsite
Rated current (A)	5A
Contact DC (ACV)	Φ1*5
working voltage (ACV)	500V
pressurization (ACV)	1500V
contact resistance	5MΩ
insulation resistance	2000MΩ
Allowable typical conductor section	0.25mm²
Maximum link cable	100M
Maximum allowable carrying current	4.9A
Cable material	PVC
Shielding	shielded

Cable description:

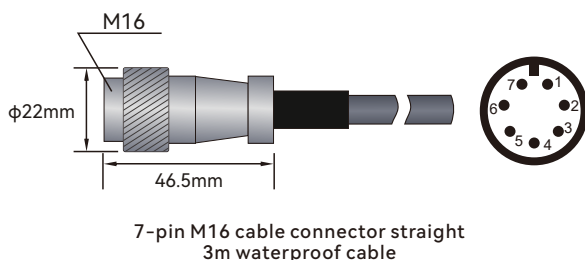


Emitter Wiring diagram		
Pin number	Line color	Name
1	BROWN	24V DC
2	BLUE	0V
3	BLACK	CP
4	WHITE	NC
5	GREEN	NC
6	RED	CE
7	YELLOW	Ground wire


Receiver Wiring diagram		
Pin number	Line color	Name
1	BROWN	24V DC
2	BLUE	0V
3	BLACK	CP
4	WHITE	OSSD1
5	GREEN	OSSD2
6	RED	CE
7	YELLOW	Ground wire

1. QT signal output selection (actual output of transistor working normally)


NPN NC

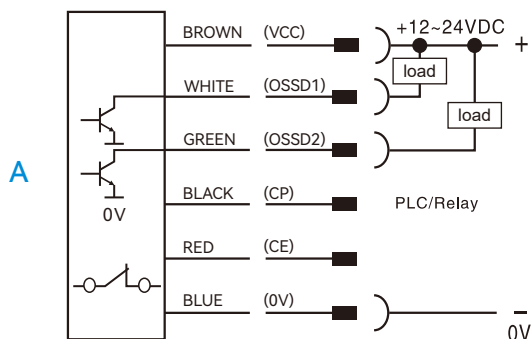


PNP NC

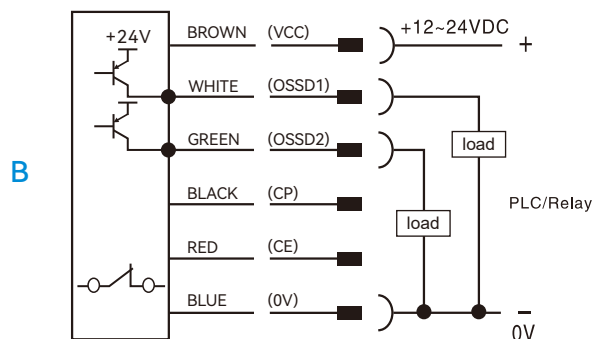


NPN NO

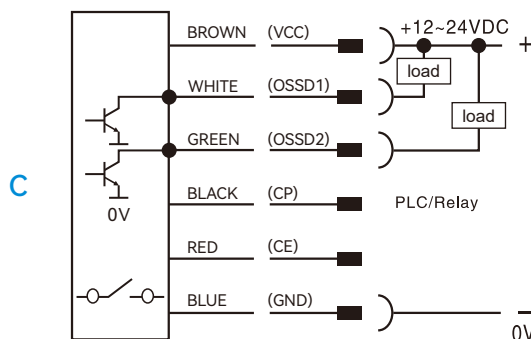

PNP NO

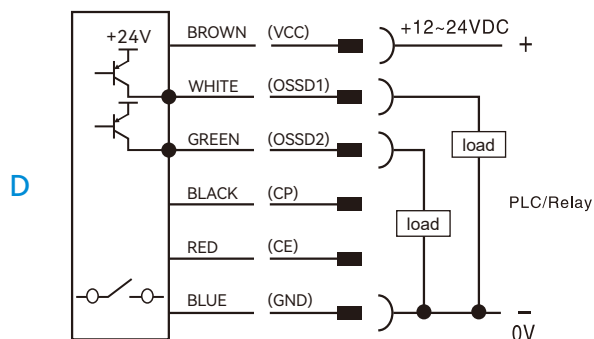


2. NPN output wiring diagram

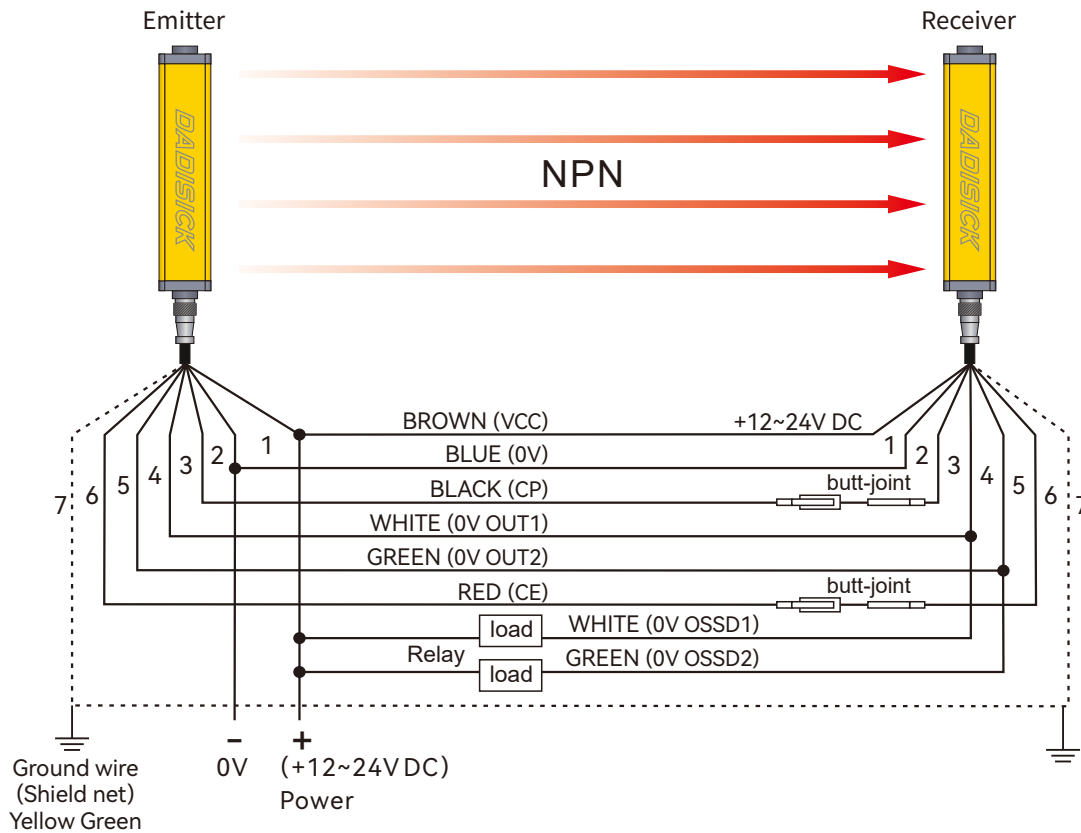

This figure is an example of NPN double output 7-pin wiring.

3. PNP output wiring diagram

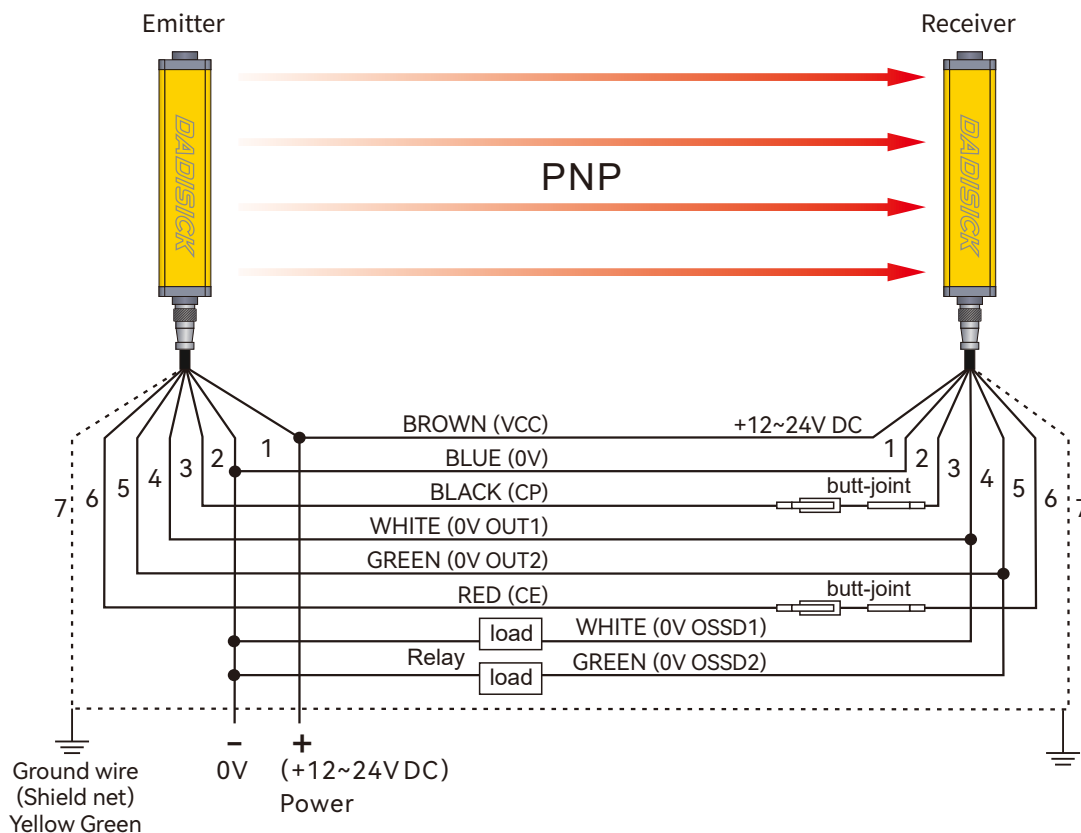


This figure is an example of PNP double output 7-pin wiring.


4. Selection of safety light curtain controller

Name	Order separately	Model	Descriptions
Built-in controller		QET	Used to monitor the signal processing of QT series light curtain, and output one group of NO and one group of NC.
Safety relay		QSRN	QSRN safety relays have three groups of NO and one group of NC, with strong control capabilities. They are suitable for various signal monitoring in industrial places with high safety requirements, including emergency stop signals, safety door opening and closing signals, safety light curtain signals, and two-handed button signals.
Safety relay	  Multifunctional switching switch	Ter-A	Equipped with a mode switch, it can be used for most safety components, such as light curtains, safety switches, carpet contacts, two handed switches, etc. Automatic/manual reset paddles for quick configuration. Dual channel monitoring circuit, safe and reliable.
Light curtain relay		QET-1	Output conversion between NC and NO for QT series light curtain.

4.1 Wiring diagram of QET built-in controller

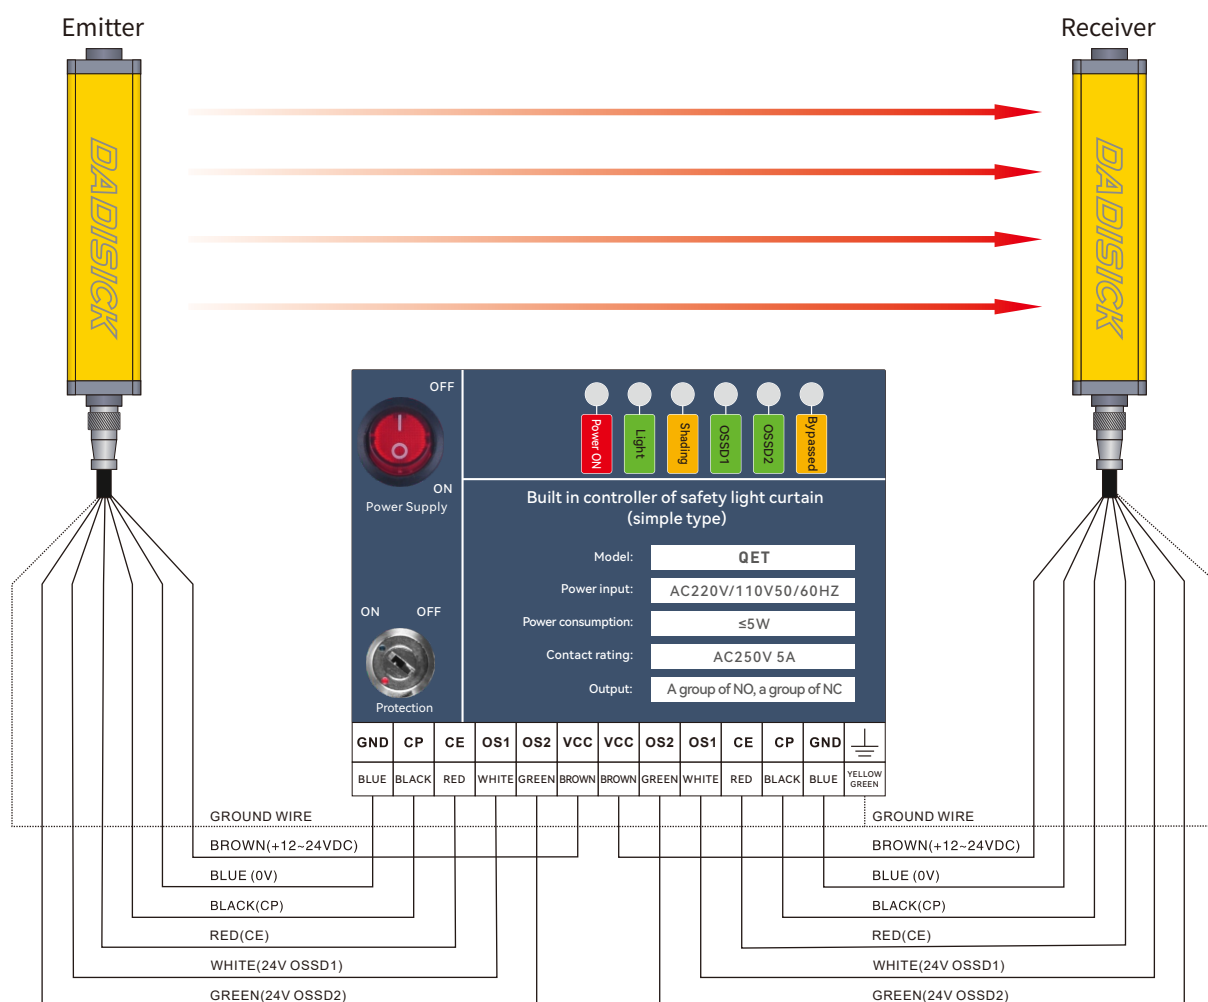


4.2 Wiring diagram of QSRN safety relay

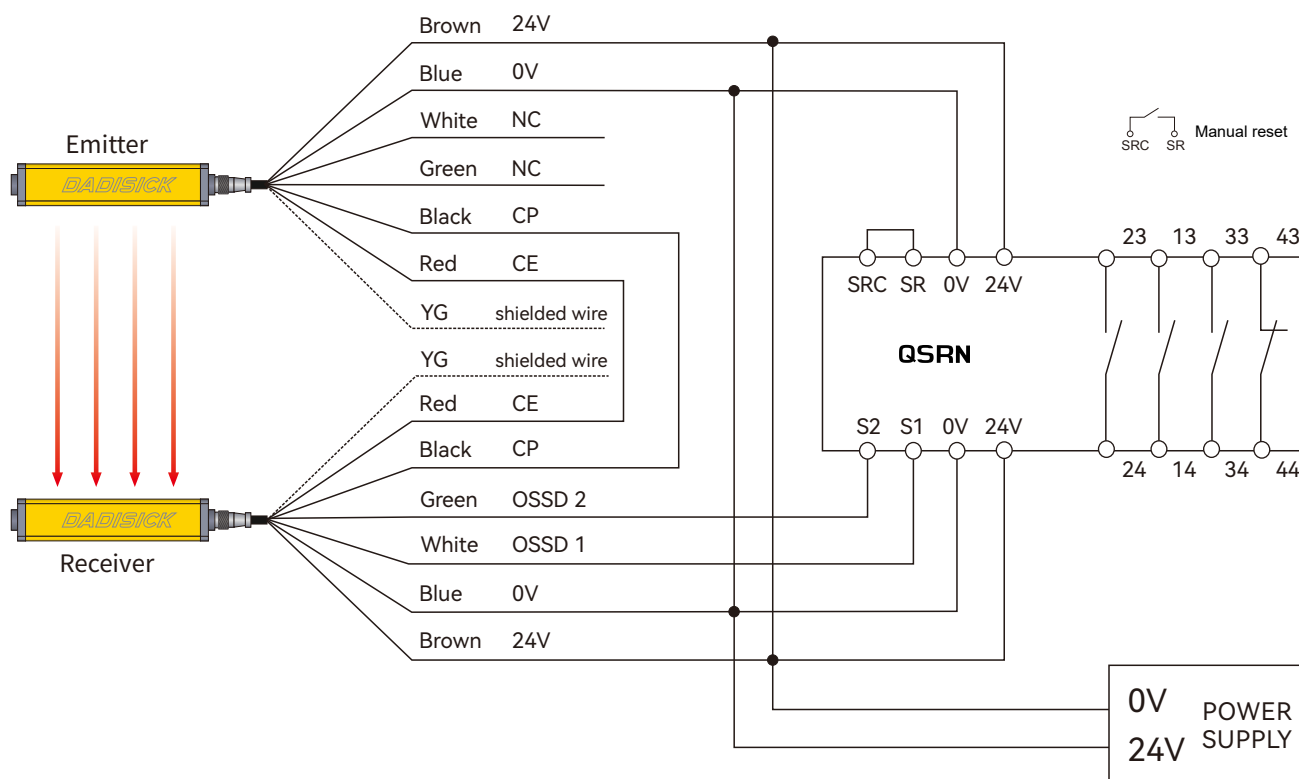


4.3 Wiring diagram of Ter-A safety relay

Dual channel light curtain PNP switch safety input, with automatic reset and PLC signal output.

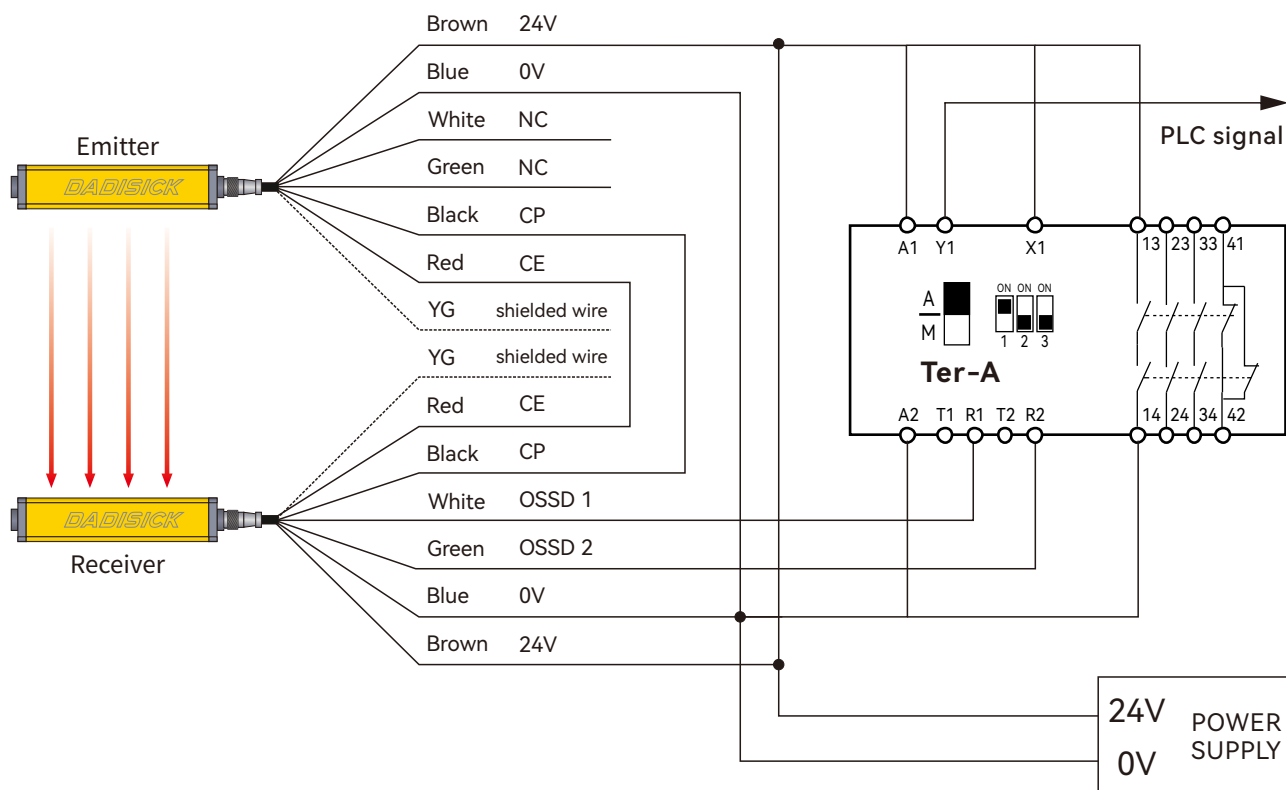


4.4 Wiring diagram of QET-1 light curtain relay

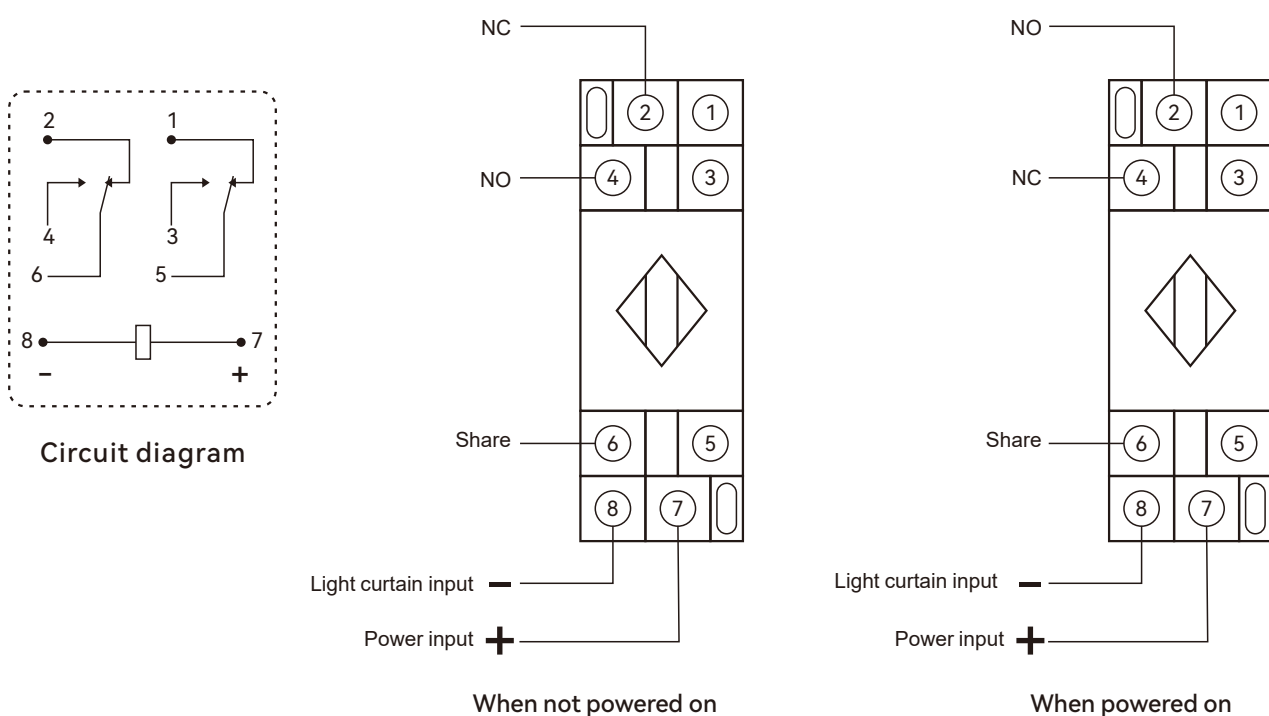


4.5 Wiring between light curtain and PLC and one-chip computer system


NPN wiring:

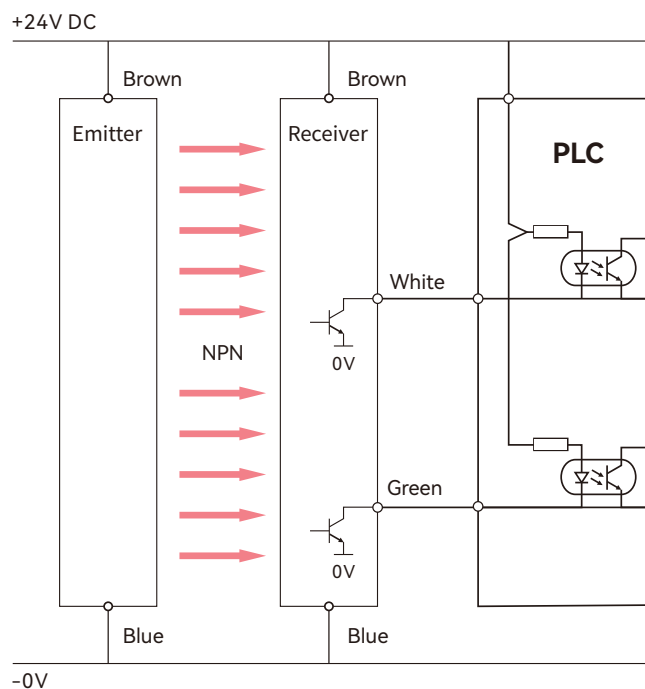


PNP wiring:

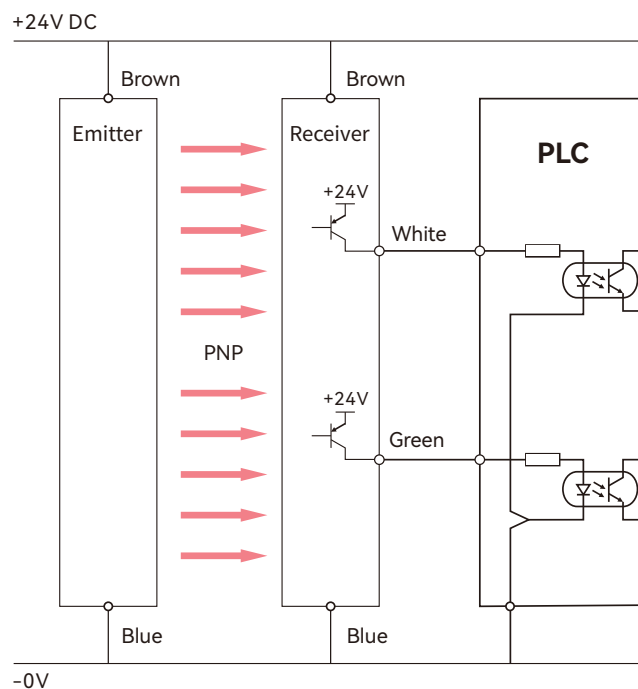


Accessories

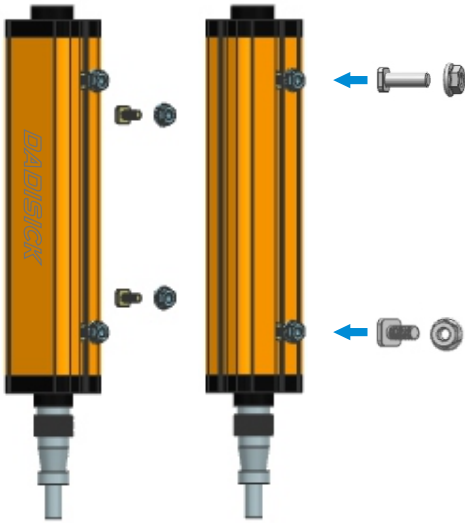






1. Installation method of T-shaped screws on the back
(Original accessories)

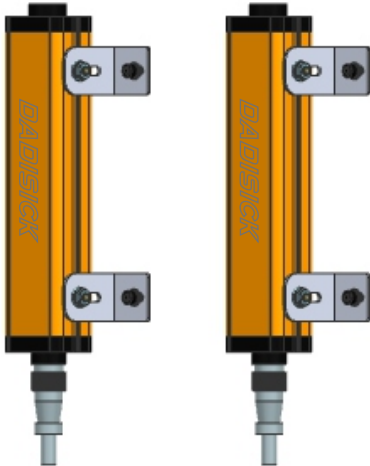


2. Installation method of side right angle bracket
(Original accessories)

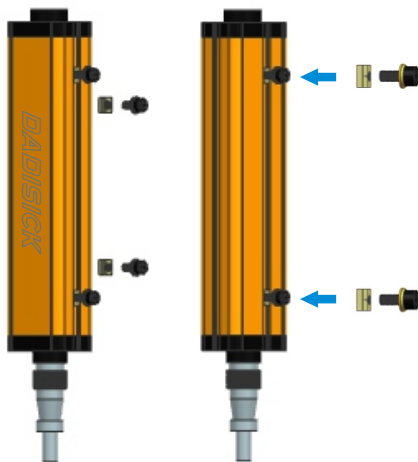


3. Installation method of convex nut
(Optional accessories)

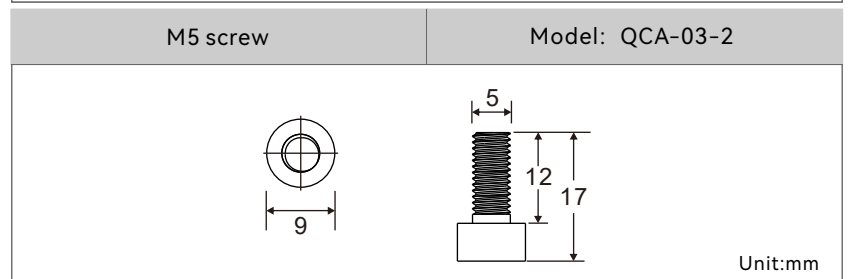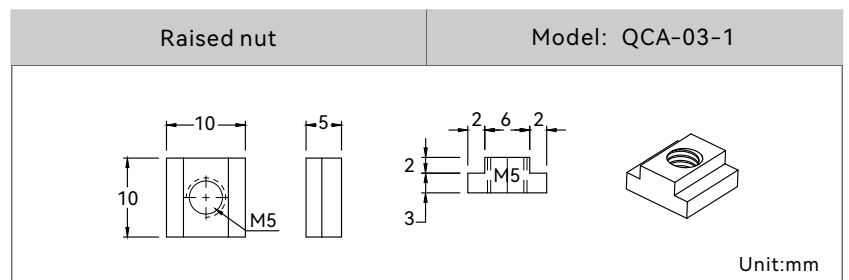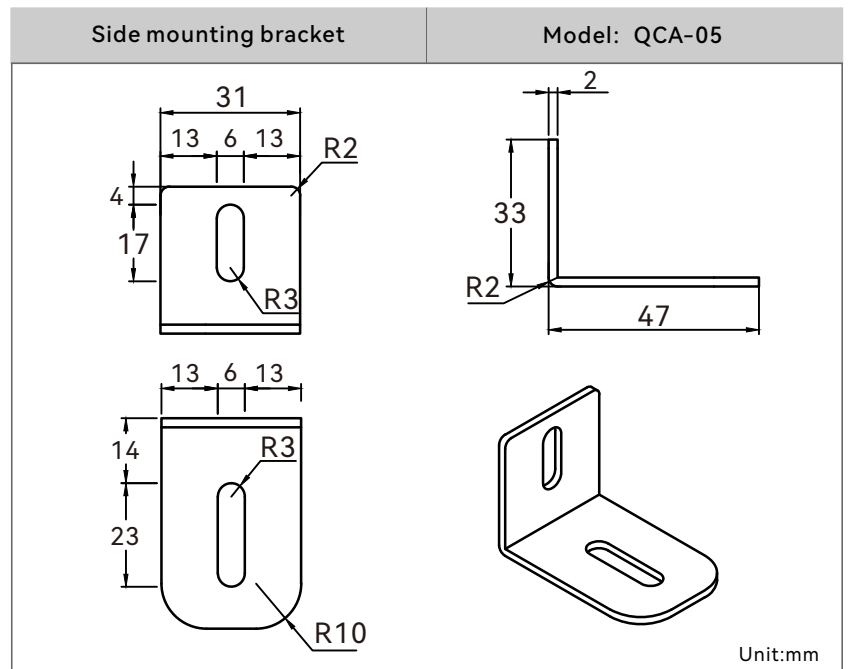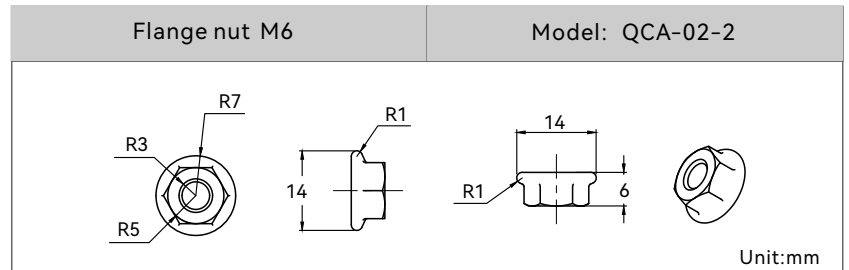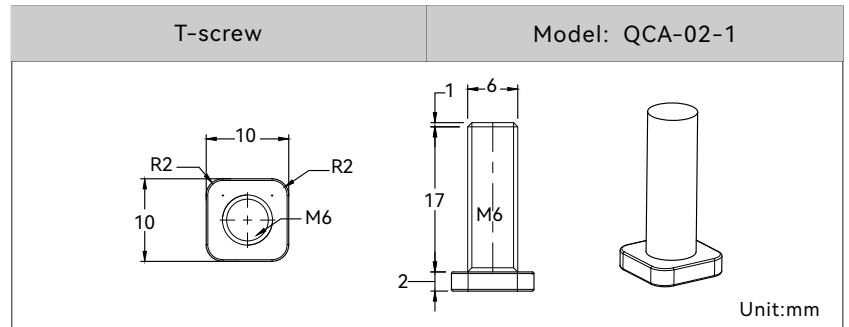

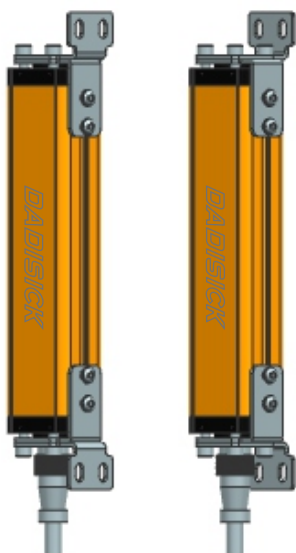








4. Installation method of right angle brackets at both ends
(Order separately)

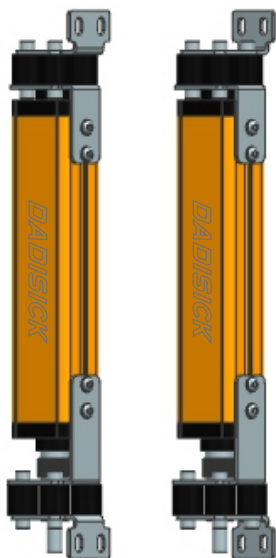

5. Shockproof installation method of right angle brackets at both ends
(Order separately)

Right angle brackets at both ends




Model: QA-02

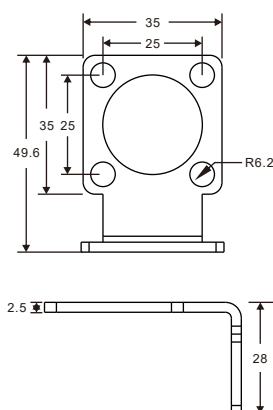


Unit:mm

Shockproof right angle brackets

Model: QA-01

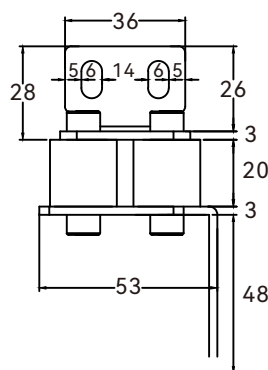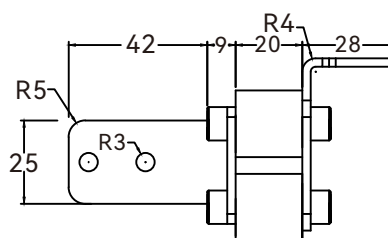

Unit:mm

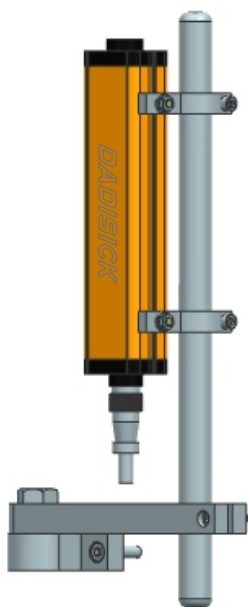


6. Stainless steel bracket installation
(Order separately)


Stainless steel bracket installation

Model: QCA-01


Clip:

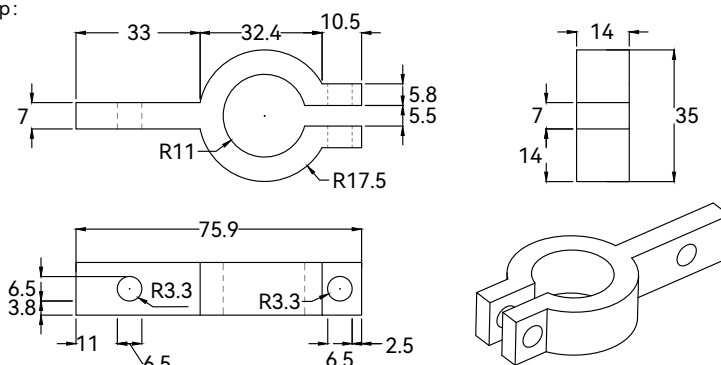


Aluminum round:

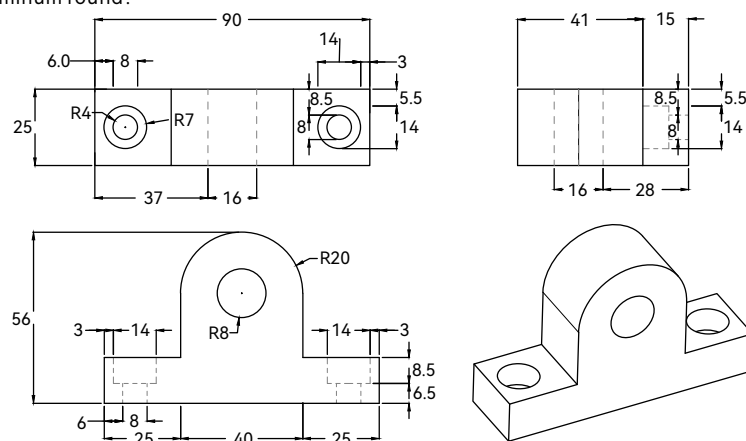

Aluminum arm:

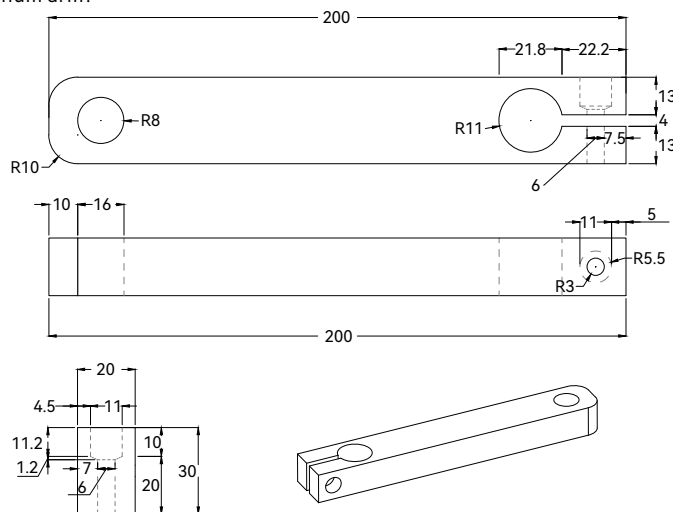

Steel pipe:

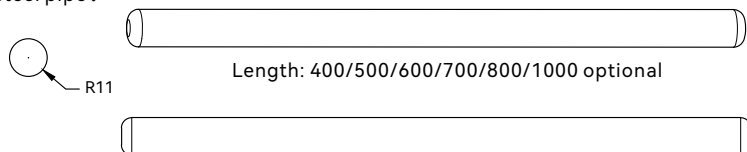

Length: 400/500/600/700/800/1000 optional

Unit:mm