



宁波飞扬电子有限公司

Ningbo Flying Electronics Co.,Ltd.

4.00"(101.60mm)Single Digit 7 Segment Display

Features:

- *Ultra segment intensity
- *Wide viewing angle
- *Range of colors
- *Gray face White segment
- *RoHS compliant

Available option:

- *Alternative face and segment color
- *Alternative font
- *Cropped terminal pins
- *Available emitting color
- *Low current version

Electro/Optical Characteristics If=20mA Ta=25°C

Part Number Common Cathode	Part Number Common Anode	Emitting Color	Peak Wavelength	Forward Voltage V _F /Seg.(DP)		Luminous Intensity I _v /Seg.(DP)	
				Typ.	Max.	Min.	Typ.
NFD-40011CUHR-21	NFD-40011DUHR-21	AlGaInP/GaAs Ultra Red	640	8.00 (4.00)	10.00(5.00)	320.00(80.00)	480.00(120.00)
NFD-40011CUE-21	NFD-40011DUE-21	AlGaInP/GaAs Ultra Orange	632	8.00 (4.00)	10.00(5.00)	320.00(80.00)	480.00(120.00)
NFD-40011CYO-21	NFD-40011DYO-21	AlGaInP/GaAs Ultra Amber	605	8.00 (4.00)	10.00(5.00)	320.00(80.00)	480.00(120.00)
NFD-40011CUY-21	NFD-40011DUY-21	AlGaInP/GaAs Ultra Yellow	590	8.00 (4.00)	10.00(5.00)	320.00(80.00)	480.00(120.00)
NFD-40011CUG-21	NFD-40011DUG-21	AlGaInP/GaAs Ultra Green	574	8.40 (4.20)	10.00(5.00)	200.00(50.00)	320.00(80.00)
NFD-40011CPG-21	NFD-40011DPG-21	InGaN/SiC Pure Green	525	14.00 (7.00)	16.00(8.00)	400.00(100.00)	640.00(160.00)
NFD-40011CUB-21	NFD-40011DUB-21	InGaN/SiC Ultra Blue	470	14.00 (7.00)	16.00(8.00)	320.00(80.00)	480.00(120.00)
NFD-40011CUW-21	NFD-40011DUW-21	InGaN/SiC Ultra White	X-0.31/Y-0.31	14.00 (7.00)	16.00(8.00)	320.00(80.00)	480.00(120.00)
Units			nm	V		mcd	

Maximum Ratings Ta=25°C (Derate above 25°C)

Characteristic	Test Condition	Symbol	UHR	UE	YO	UY	UG	PG	UB	UW	Units
Pulse Forward Current Per Seg.	1/10 duty cycle 0.1ms Pulse width	I _{FP}	100	100	100	100	100	100	100	100	mA
DC Forward Current Per Seg.		I _F	30	30	30	30	30	30	30	30	mA
Reverse Current Per Seg.	V _R =10V	I _R	10	10	10	10	10	10	10	10	μA
Power Dissipation		P _D	65*58	65*58	65*58	65*58	75*58	110*58	120*58	120*58	mW
Operating Temperature		T _{OPR}	-40 to +80								°C
Storage Temperature		T _{TSG}	-40 to +85								°C
Lead soldering temperature	1.60mm from body maximum 3 seconds		260								°C

Checked

Chen N.H.

Approved

Jason Chen

Date


Sep/04/2006

PAGE 1 /2



4.00"(101.60mm)Single Digit 7 Segment Display


PACKAGE DIMENSION

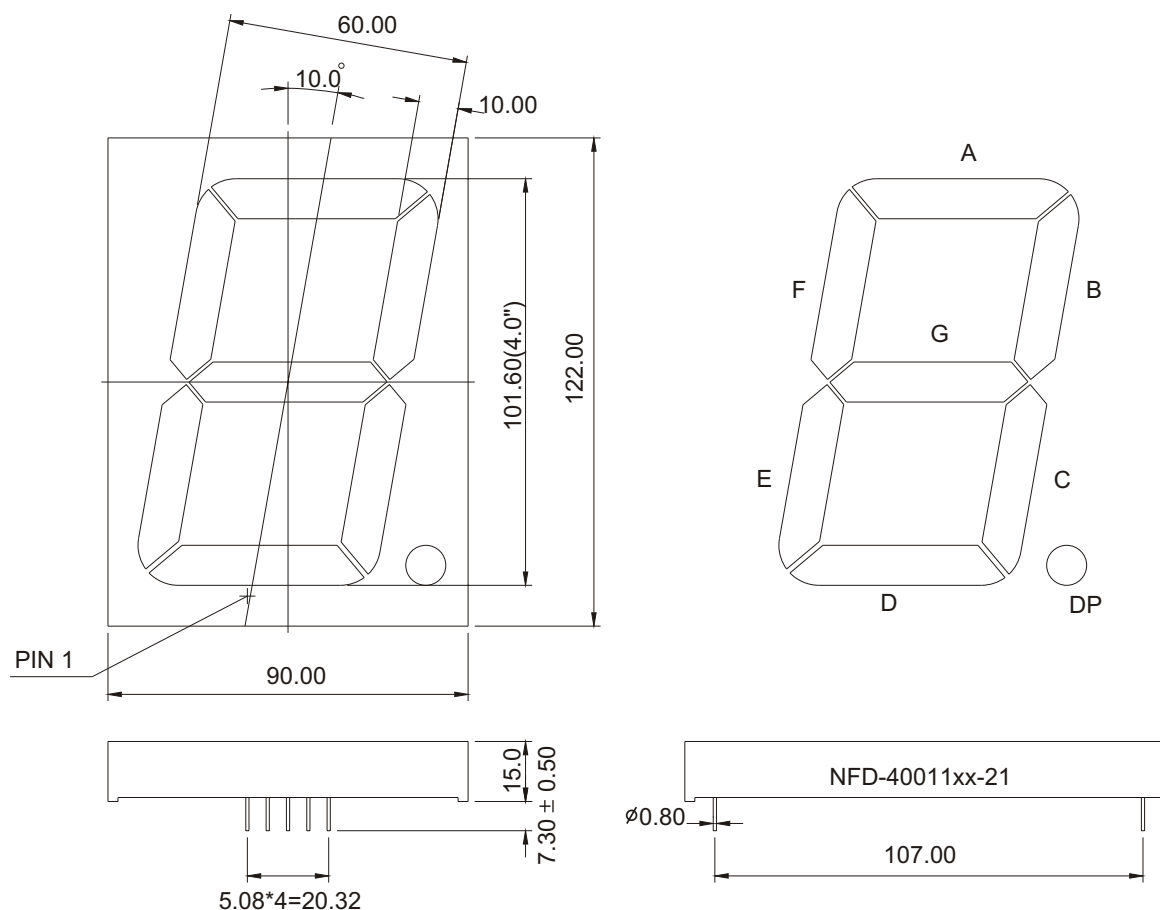

Tolerance $\pm 0.25\text{mm}$ unless stated

INTERNAL CIRCUIT DIAGRAM

Common Cathode NFD-40011Cx

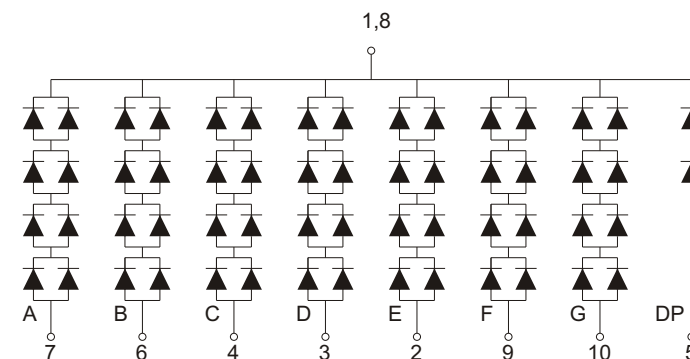

Common Anode NFD-40011Dx

