



宁波飞扬电子有限公司

Ningbo Flying Electronics Co.,Ltd.

4.00"(101.60mm)Single Digit 7 Segment Display

Features:

- *Ultra segment intensity
- *Wide viewing angle
- *Range of colors
- *Black face White segment
- *RoHS compliant

Available option:

- *Alternative face and segment color
- *Alternative font
- *Cropped terminal pins
- *Available emitting color
- *Low current version

Electro/Optical Characteristics If=20mA Ta=25°C

Part Number Common Cathode	Part Number Common Anode	Emitting Color	Peak Wavelength	Forward Voltage V _F /Seg.(DP)		Luminous Intensity I _v /Seg.(DP)	
				Typ.	Max.	Min.	Typ.
NFD-40011EUHR-11	NFD-40011FUHR-11	AlGaInP/GaAs Ultra Red	640	8.00 (4.00)	10.00(5.00)	320.00(80.00)	480.00(120.00)
NFD-40011EUE-11	NFD-40011FUE-11	AlGaInP/GaAs Ultra Orange	632	8.00 (4.00)	10.00(5.00)	320.00(80.00)	480.00(120.00)
NFD-40011EYO-11	NFD-40011FYO-11	AlGaInP/GaAs Ultra Amber	605	8.00 (4.00)	10.00(5.00)	320.00(80.00)	480.00(120.00)
NFD-40011EUY-11	NFD-40011FUY-11	AlGaInP/GaAs Ultra Yellow	590	8.00 (4.00)	10.00(5.00)	320.00(80.00)	480.00(120.00)
NFD-40011EUG-11	NFD-40011FUG-11	AlGaInP/GaAs Ultra Green	574	8.40 (4.20)	10.00(5.00)	200.00(50.00)	320.00(80.00)
NFD-40011EPG-11	NFD-40011FPG-11	InGaN/SiC Pure Green	525	13.20 (6.60)	15.20(7.60)	1200.00(300.00)	1600.00(400.00)
NFD-40011EUB-11	NFD-40011FUB-11	InGaN/SiC Ultra Blue	470	13.20 (6.60)	15.20(7.60)	320.00(80.00)	800.00(200.00)
NFD-40011EUW-11	NFD-40011FUW-11	InGaN/SiC Ultra White	X-0.31/Y-0.31	13.20 (6.60)	15.20(7.60)	1600.00(400.0)	4000.00(1000.0)
Units			nm	V		mcd	

Maximum Ratings Ta=25°C (Derate above 25°C)

Characteristic	Test Condition	Symbol	UHR	UE	YO	UY	UG	PG	UB	UW	Units
Pulse Forward Current Per Seg.	1/10 duty cycle 0.1ms Pulse width	I _{FP}	100	100	100	100	100	100	100	100	mA
DC Forward Current Per Seg.		I _F	30	30	30	30	30	30	30	30	mA
Reverse Current Per Seg.	V _R =10V	I _R	10	10	10	10	10	10	10	10	μA
Power Dissipation		P _D	65*58	65*58	65*58	65*58	75*58	110*58	120*58	120*58	mW
Operating Temperature		T _{OPR}	-40 to +80								°C
Storage Temperature		T _{TSG}	-40 to +85								°C
Lead soldering temperature	1.60mm from body maximum 3 seconds		260								°C

Checked

Chen N.H.

Approved

Jason Chen

Date



Sep/04/2006

PAGE 1 /2



4.00"(101.60mm)Single Digit 7 Segment Display


PACKAGE DIMENSION

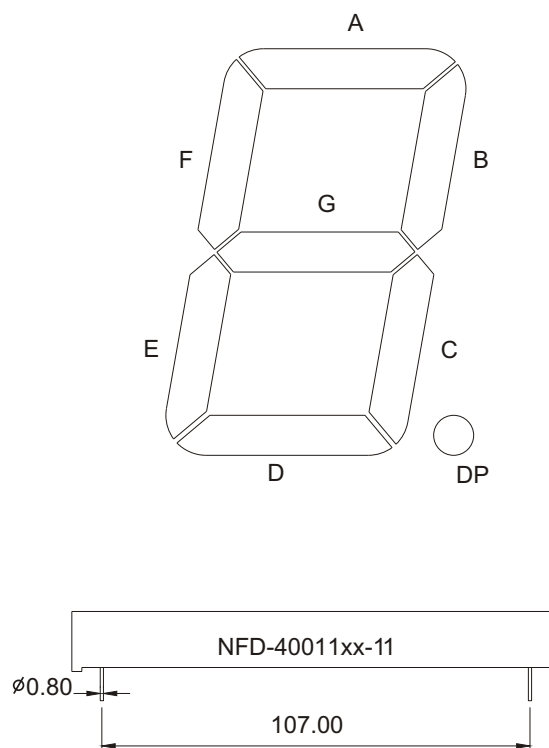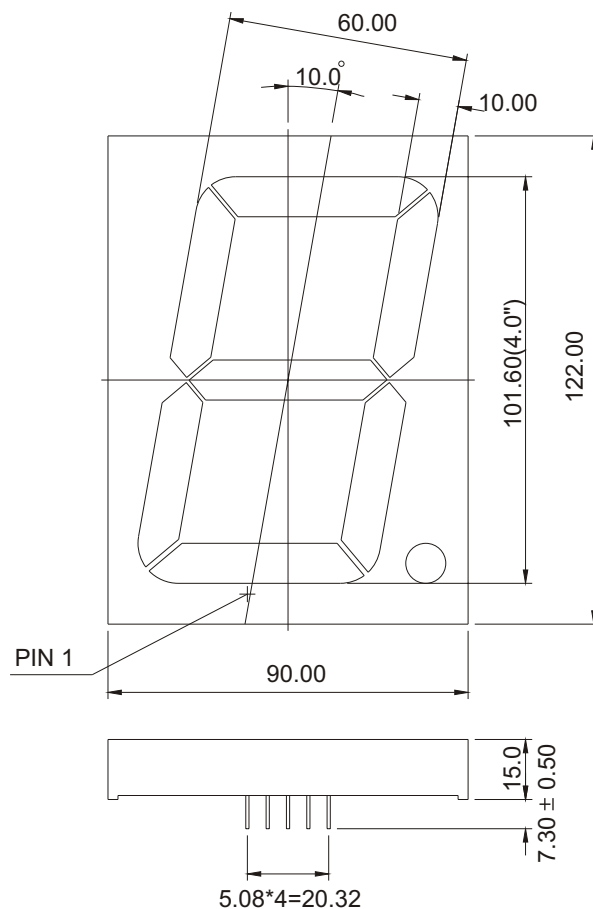

Tolerance $\pm 0.25\text{mm}$ unless stated

INTERNAL CIRCUIT DIAGRAM

Common Cathode NFD-40011Ex

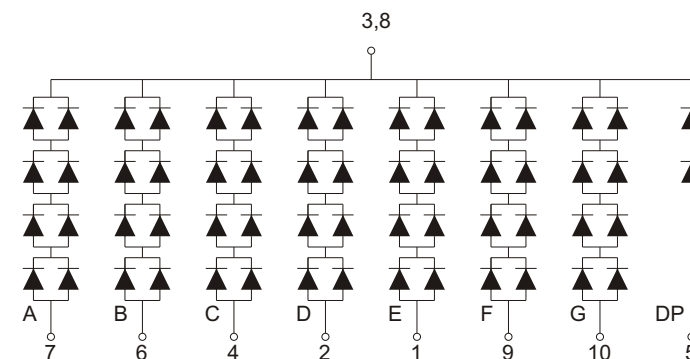

Common Anode NFD-40011Fx

