



0.80"(20.00mm)Three Digit 7 Segment Display

Features:

- *Ultra segment intensity
- *Wide viewing angle
- *Range of colors
- *Black face White segment
- *RoHS compliant

Available option:

- *Alternative face and segment color
- *Alternative font
- *Cropped terminal pins
- *Available emitting color

Electro/Optical Characteristics If=20mA Ta=25°C

Part Number Common Cathode	Part Number Common Anode	Emitting Color	Peak Wavelength	Forward Voltage Vf/Seg.		Luminous Intensity Iv/Seg.	
				Typ.	Max.	Min.	Typ.
NFD-8033AUHR-11	NFD-8033BUHR-11	AlGaInP/GaAs Ultra Red	640	2.00	2.50	40.00	60.00
NFD-8033AUE-11	NFD-8033BUE-11	AlGaInP/GaAs Ultra Orange	632	2.00	2.50	40.00	60.00
NFD-8033AYO-11	NFD-8033BYO-11	AlGaInP/GaAs Ultra Amber	605	2.00	2.50	40.00	60.00
NFD-8033AUY-11	NFD-8033BUY-11	AlGaInP/GaAs Ultra Yellow	590	2.00	2.50	40.00	60.00
NFD-8033AUG-11	NFD-8033BUG-11	AlGaInP/GaAs Ultra Green	574	2.10	2.50	25.00	40.00
NFD-8033APG-11	NFD-8033BPG-11	InGaN/SiC Pure Green	525	3.30	3.80	150.00	200.00
NFD-8033AUB-11	NFD-8033BUB-11	InGaN/SiC Ultra Blue	470	3.30	3.80	40.00	100.00
NFD-8033AUW-11	NFD-8033BUW-11	InGaN/SiC Ultra White	X-0.31/Y-0.31	3.30	3.80	400.00	600.00
Units			nm	V		mcd	

Maximum Ratings Ta=25°C (Derate above 25°C)

Characteristic	Test Condition	Symbol	UHR	UE	YO	UY	UG	PG	UB	UW	Units
Pulse Forward Current Per Seg.	1/10 duty cycle 0.1ms Pulse width	I _{FP}	100	100	100	100	100	100	100	100	mA
DC Forward Current Per Seg.		I _F	30	30	30	30	30	30	30	30	mA
Reverse Current Per Seg.	V _R =5V	I _R	10	10	10	10	10	10	10	10	μA
Power Dissipation		P _D	65*24	65*24	65*24	65*24	75*24	110*24	120*24	120*24	mW
Operating Temperature		T _{OPR}	-40 to +80								°C
Storage Temperature		T _{TSG}	-40 to +85								°C
Lead soldering temperature	1.60mm from body maximum 3 seconds		260								°C

Checked

Chen N.H.

Approved

Jason Chen

Date



Nov/20/2006

PAGE 1 / 2




0.80"(20.00mm) Three Digit 7 Segment Display

PACKAGE DIMENSION


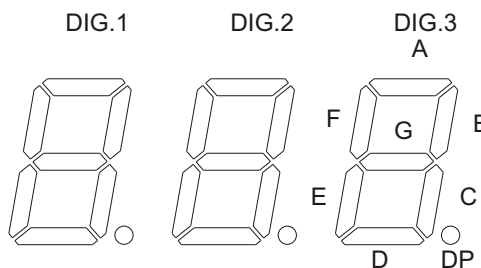
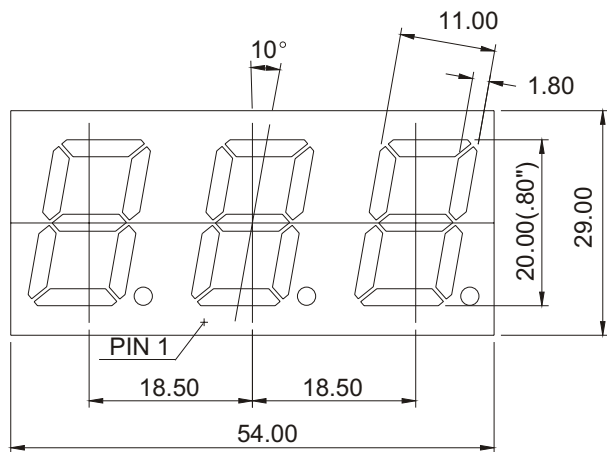


INTERNAL CIRCUIT DIAGRAM

Common Cathode NFD-8033Ax

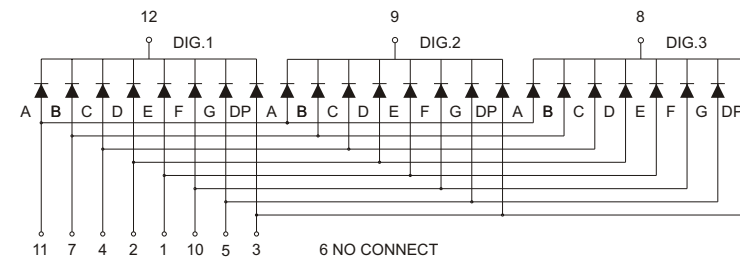

Common Anode NFD-8033Bx

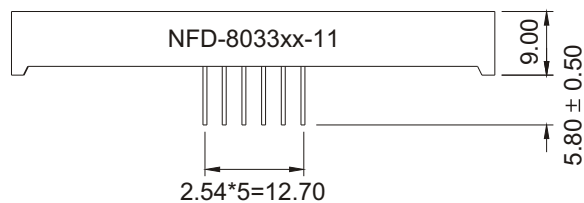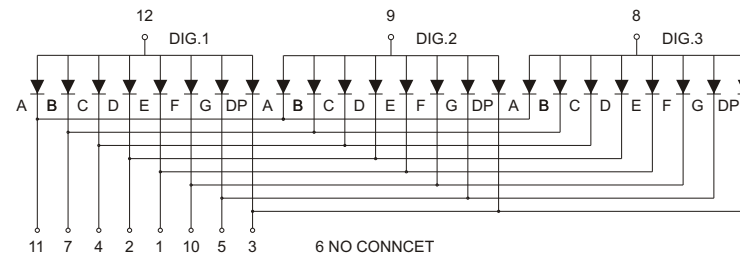

Tolerance $\pm 0.25\text{mm}$ unless stated