



1.20" (39.10mm) Φ 3.00mm 5*7 Single Color Arrow Displays

Features:

- *Ultra dot intensity
- *Wide viewing angle
- *Range of colors
- *Black face White dot
- *RoHS compliant

Available option:

- *Alternative face and dot color
- *Cropped terminal pins
- *Available emitting color
- *Low current version

Electro/Optical Characteristics If=20mA Ta=25°C

Part Number Common Cathode	Part Number Common Anode	Emitting Color	Peak Wavelength	Forward Voltage Vf/Dot		Luminous Intensity Iv/Dot	
				Typ.	Max.	Min.	Typ.
NFM-12571CUHR-11	NFM-12571DUHR-11	AlGaInP/GaAs Ultra Red	640	10.00	12.50	40.00	60.00
NFM-12571CUE-11	NFM-12571DUE-11	AlGaInP/GaAs Ultra Orange	632	10.00	12.50	40.00	60.00
NFM-12571CYO-11	NFM-12571DYO-11	AlGaInP/GaAs Ultra Amber	605	10.00	12.50	40.00	60.00
NFM-12571CUY-11	NFM-12571DUY-11	AlGaInP/GaAs Ultra Yellow	590	10.00	12.50	40.00	60.00
NFM-12571CUG-11	NFM-12571DUG-11	AlGaInP/GaAs Ultra Green	574	10.50	12.50	25.00	40.00
NFM-12571CPG-11	NFM-12571DPG-11	InGaN/SiC Pure Green	525	16.50	19.00	150.00	200.00
NFM-12571CUB-11	NFM-12571DUB-11	InGaN/SiC Ultra Blue	470	16.50	19.00	40.00	100.00
NFM-12571CUW-11	NFM-12571DUW-11	InGaN/SiC Ultra White	X-0.31/Y-0.31	16.50	19.00	200.00	500.00
Units			nm	V		mcd	

Maximum Ratings Ta=25°C (Derate above 25°C)

Characteristic	Test Condition	Symbol	UHR	UE	YO	UY	UG	PG	UB	UW	Units
Pulse Forward Current Per Dot	1/10 duty cycle 0.1ms Pulse width	I _{FP}	100	100	100	100	100	100	100	100	mA
DC Forward Current Per Dot		I _F	30	30	30	30	30	30	30	30	mA
Reverse Current Per Dot	V _R =5V	I _R	10	10	10	10	10	10	10	10	μA
Power Dissipation		P _D	65*15	65*15	65*15	65*15	75*15	110*15	120*15	120*15	mW
Operating Temperature		T _{OPR}	-40 to +80								°C
Storage Temperature		T _{TSG}	-40 to +85								°C
Lead soldering temperature	1.60mm from body maximum 3 seconds		260								°C

Checked

Chen N.H.

Approved

Jason Chen

Date



Apr/21/2011

PAGE 1 / 2






1.20" (39.10mm) Φ 3.00mm 5*7 Single Color Arrow Displays

PACKAGE DIMENSION

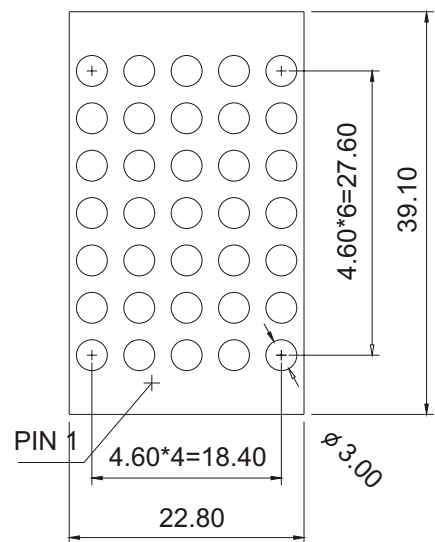


INTERNAL CIRCUIT DIAGRAM

NFM-12571Cx

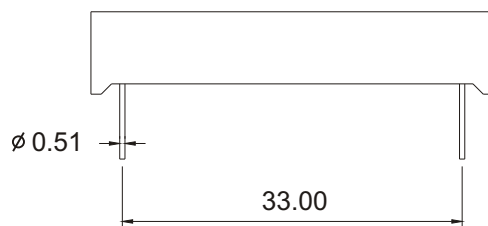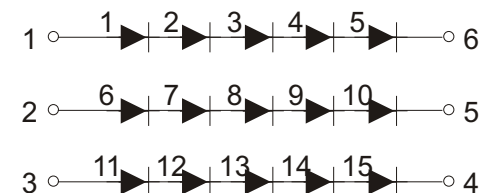

NFM-12571Dx

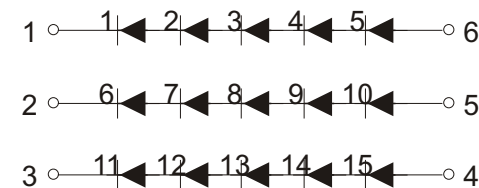

Tolerance ± 0.25 mm unless stated

Checked

Chen N.H.

Approved

Jason Chen

Date

Apr/21/2011

PAGE 2 / 2