



1.20" (31.80mm) Φ 3.00mm 5*7 Single Color Dot Matrix Displays

Features:

- *Ultra dot intensity
- *Wide viewing angle
- *Range of colors
- *Black face White dot
- *RoHS compliant

Available option:

- *Alternative face and dot color
- *Cropped terminal pins
- *Available emitting color
- *Low current version

Electro/Optical Characteristics If=20mA Ta=25°C

| Part Number Common Cathode | Part Number Common Anode | Emitting Color | Peak Wavelength | Forward Voltage Vf/Dot | | Luminous Intensity Iv/Dot | |
|-------------------------------|-----------------------------|---------------------------|--------------------|------------------------|------|---------------------------|--------|
| | | | | Typ. | Max. | Min. | Typ. |
| NFM-12572AUHR-11 | NFM-12572BUHR-11 | AlGaInP/GaAs Ultra Red | 640 | 2.00 | 2.50 | 40.00 | 60.00 |
| NFM-12572AUE-11 | NFM-12572BUE-11 | AlGaInP/GaAs Ultra Orange | 632 | 2.00 | 2.50 | 40.00 | 60.00 |
| NFM-12572AYO-11 | NFM-12572BYO-11 | AlGaInP/GaAs Ultra Amber | 605 | 2.00 | 2.50 | 40.00 | 60.00 |
| NFM-12572AUY-11 | NFM-12572BUY-11 | AlGaInP/GaAs Ultra Yellow | 590 | 2.00 | 2.50 | 40.00 | 60.00 |
| NFM-12572AUG-11 | NFM-12572BUG-11 | AlGaInP/GaAs Ultra Green | 574 | 2.10 | 2.50 | 25.00 | 40.00 |
| NFM-12572APG-11 | NFM-12572BPG-11 | InGaN/SiC Pure Green | 525 | 3.30 | 3.80 | 150.00 | 200.00 |
| NFM-12572AUB-11 | NFM-12572BUB-11 | InGaN/SiC Ultra Blue | 470 | 3.30 | 3.80 | 40.00 | 100.00 |
| NFM-12572AUW-11 | NFM-12572BUW-11 | InGaN/SiC Ultra White | X-0.31/Y-0.31 | 3.30 | 3.80 | 200.00 | 500.00 |
| Units | | | nm | V | | mcd | |

Maximum Ratings Ta=25°C (Derate above 25°C)

| Characteristic | Test Condition | Symbol | UHR | UE | YO | UY | UG | PG | UB | UW | Units |
|-------------------------------|------------------------------------|------------------|------------|-------|-------|-------|-------|--------|--------|--------|-------|
| Pulse Forward Current Per Dot | 1/10 duty cycle 0.1ms Pulse width | I _{FP} | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | mA |
| DC Forward Current Per Dot | | I _F | 30 | 30 | 30 | 30 | 30 | 30 | 30 | 30 | mA |
| Reverse Current Per Dot | V _R =5V | I _R | 10 | 10 | 10 | 10 | 10 | 10 | 10 | 10 | μA |
| Power Dissipation | | P _D | 65*35 | 65*35 | 65*35 | 65*35 | 75*35 | 110*35 | 120*35 | 120*35 | mW |
| Operating Temperature | | T _{OPR} | -40 to +80 | | | | | | | | °C |
| Storage Temperature | | T _{TSG} | -40 to +85 | | | | | | | | °C |
| Lead soldering temperature | 1.60mm from body maximum 3 seconds | | 260 | | | | | | | | °C |

Checked

Chen N.H.

Approved

Jason Chen

Date



Mar/10/2007

PAGE 1 / 2




1.20" (31.80mm) Φ 3.00mm 5*7 Single Color Dot Matrix Displays

PACKAGE DIMENSION

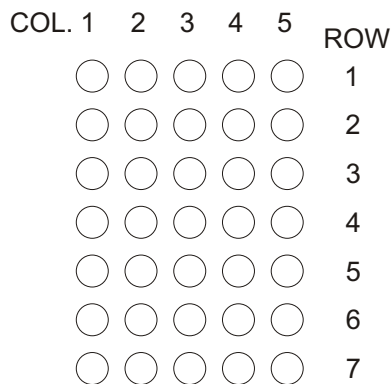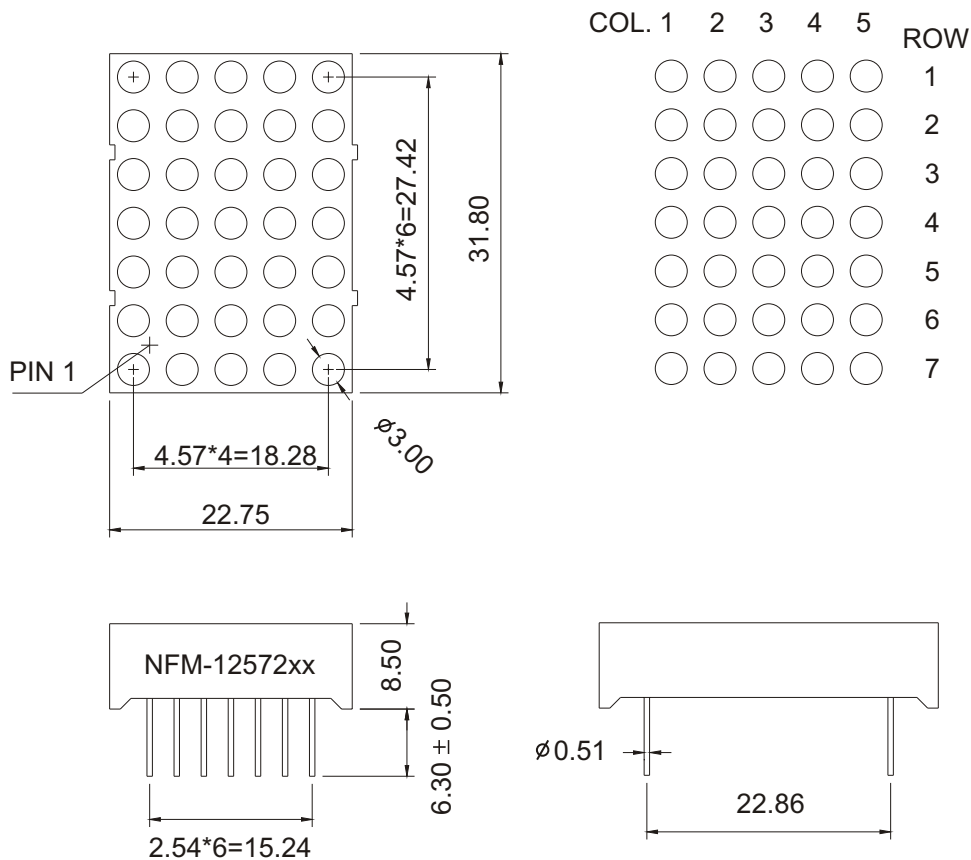


INTERNAL CIRCUIT DIAGRAM

Row Cathode
Column Anode
NFM-12572Ax

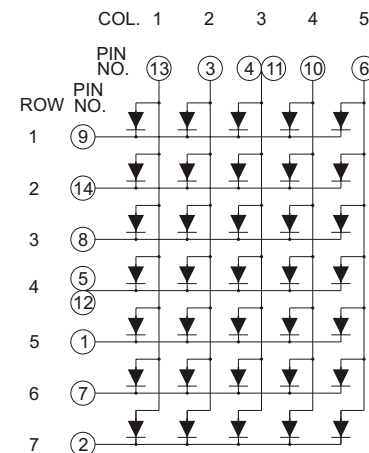

Row Anode
Column Cathode
NFM-12572Bx

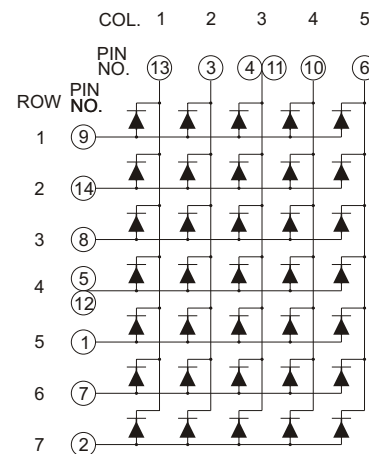

Tolerance \pm 0.25mm unless stated