



32.0mm X 46.0mm Special Design Arrow Led Displays

Features:

- *High segment intensity
- *Wide viewing angle
- *Bi-colors
- *Black face White segment
- *RoHS compliant

Available option:

- *Alternative face and segment color
- *Cropped terminal pins
- *Available emitting color
- *Low current version

Electro/Optical Characteristics If=20mA Ta=25°C

Part Number		Emitting Colors	Peak Wavelength	Forward Voltage V _F /Seg.		Luminous Intensity I _v /Seg.	
				Typ.	Max.	Min.	Typ.
NFA-T053246ZSG-11		GaAlAs/GaAs SH Hi-Red	660	21.60	26.40	96.00	144.00
		GaP/GaP Green	568	26.40	30.00	84.00	132.00
NFA-T053246ZEG-11		GaAsP/GaP Orange	632	25.20	30.00	96.00	144.00
		GaP/GaP Green	568	25.20	30.00	84.00	144.00
Units			nm	V		mcd	

Maximum Ratings Ta=25°C (Derate above 25°C)

Characteristic	Test Condition	Symbol	S	G	E				Units
Pulse Forward Current Per Seg.	1/10 duty cycle 0.1ms Pulse width	I _{FP}	100	100	100				mA
DC Forward Current Per Seg.		I _F	25	30	30				mA
Reverse Current Per Seg.	V _R =10V	I _R	10	10	10				μA
Power Dissipation		P _D	60*12	80*12	80*12				mW
Operating Temperature		T _{OPR}	-40 to +80						°C
Storage Temperature		T _{TSG}	-40 to +85						°C
Lead soldering temperature	1.60mm from body maximum 3 seconds		260						°C

Checked

Chen N.H.

Approved

Jason Chen

Date





Mar/15/2008

PAGE 1 / 2




32.0mm X 46.0mm Special Design Arrow Led Displays

PACKAGE DIMENSION

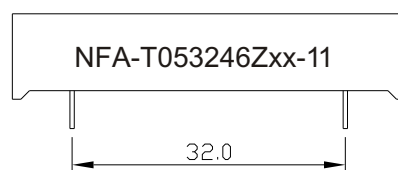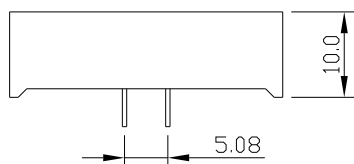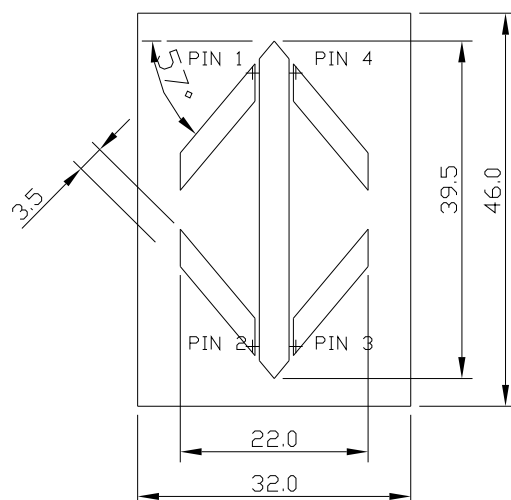

INTERNAL CIRCUIT DIAGRAM

NFA-T053246ZEG

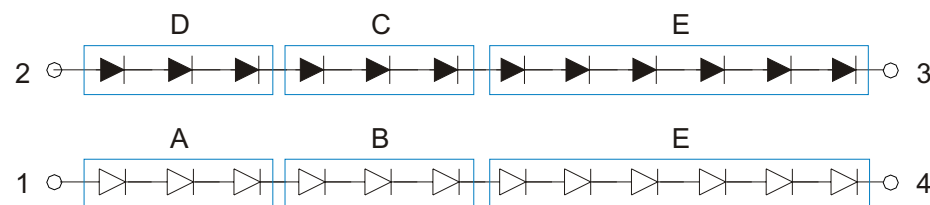

—▷— = GREEN
—▷— = ORANGE

Tolerance $\pm 0.25\text{mm}$ unless stated

Checked

Chen N.H.

Approved

Jason Chen

Date

Mar/15/2008

PAGE 2 /2