



15.00mm X 15.00mm Single Color Light Bar

Features:

- *High segment intensity
- *Wide viewing angle
- *Range of colors
- *White face White segment
- *RoHS compliant

Available option:

- *Alternative face color
- *Cropped terminal pins
- *Available emitting color
- *Low current version

Electro/Optical Characteristics If=20mA Ta=25°C

Part Number	Emitting Colors	Peak Wavelength	Forward Voltage V _F		Luminous Intensity I _v	
			Typ.	Max.	Min.	Typ.
NFA-S15ZH4-A-01	GaP/GaP Red	700	4.50	5.00	1.60	3.20
NFA-S15ZS4-A-01	GaAlAs/GaAs SH Hi-Red	660	3.60	4.40	32.00	48.00
NFA-S15ZD4-A-01	GaAlAs/GaAs DH Super Red	660	3.60	4.40	88.00	112.00
NFA-S15ZE4-A-01	GaAsP/GaP Orange	632	4.20	5.00	32.00	48.00
NFA-S15ZY4-A-01	GaAsP/GaP Yellow	585	4.20	5.00	16.00	28.00
NFA-S15ZG4-A-01	GaP/GaP Green	568	4.40	5.00	28.00	44.00
Units		nm	V		mcd	

Maximum Ratings Ta=25°C (Derate above 25°C)





Characteristic	Test Condition	Symbol	H	S	D	E	Y	G	Units
Pulse Forward Current Per Seg.	1/10 duty cycle 0.1ms Pulse width	I _{FP}	50*4	100*4	100*4	100*4	100*4	100*4	mA
DC Forward Current Per Seg.		I _F	15*4	25*4	25*4	30*4	30*4	30*4	mA
Reverse Current Per Seg.	V _R =5V	I _R	10	10	10	10	10	10	μA
Power Dissipation		P _D	40*4	60*4	60*4	80*4	80*4	80*4	mW
Operating Temperature		T _{OPR}	-40 to +80						°C
Storage Temperature		T _{TSG}	-40 to +85						°C
Lead soldering temperature	1.60mm from body maximum 3 seconds		260						°C

Checked	Chen N.H.	Approved	Jason Chen	Date	Apr/27/2007	PAGE 1 / 2			
---------	-----------	----------	------------	------	-------------	------------	--	--	--



15.00mm X 15.00mm Single Color Light Bar

PACKAGE DIMENSION

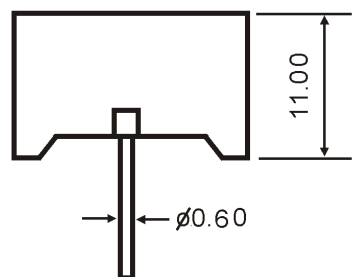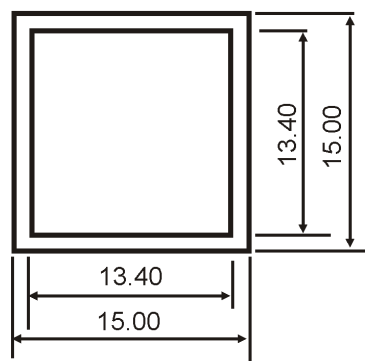

INTERNAL CIRCUIT DIAGRAM

NFA-S15Zx4-A



Tolerance ± 0.25 mm unless stated

Checked

Chen N.H.

Approved

Jason Chen

Date

Apr/27/2007

PAGE 2 / 2