



14.00mm X 7.50mm Single Color Light Bar

Features:

- *High segment intensity
- *Wide viewing angle
- *Range of colors
- *White face White segment
- *RoHS compliant

Available option:

- *Alternative face color
- *Cropped terminal pins
- *Available emitting color
- *Low current version

Electro/Optical Characteristics If=20mA Ta=25°C

Part Number	Emitting Colors	Peak Wavelength	Forward Voltage V _F		Luminous Intensity I _v	
			Typ.	Max.	Min.	Typ.
NFA-R1408ZH-01	GaP/GaP Red	700	2.25	2.50	0.80	1.60
NFA-R1408ZS-01	GaAlAs/GaAs SH Hi-Red	660	1.80	2.20	16.00	24.00
NFA-R1408ZD-01	GaAlAs/GaAs DH Super Red	660	1.80	2.20	44.00	56.00
NFA-R1408ZE-01	GaAsP/GaP Orange	632	2.10	2.50	16.00	24.00
NFA-R1408ZY-01	GaAsP/GaP Yellow	585	2.10	2.50	8.00	14.00
NFA-R1408ZG-01	GaP/GaP Green	568	2.20	2.50	14.00	22.00
Units		nm	V		mcd	

Maximum Ratings Ta=25°C (Derate above 25°C)


Characteristic	Test Condition	Symbol	H	S	D	E	Y	G	Units
Pulse Forward Current Per Seg.	1/10 duty cycle 0.1ms Pulse width	I _{FP}	50	100	100	100	100	100	mA
DC Forward Current Per Seg.		I _F	15	25	25	30	30	30	mA
Reverse Current Per Seg.	V _R =5V	I _R	10	10	10	10	10	10	μA
Power Dissipation		P _D	40*2	60*2	60*2	80*2	80*2	80*2	mW
Operating Temperature		T _{OPR}	-40 to +80						°C
Storage Temperature		T _{TSG}	-40 to +85						°C
Lead soldering temperature	1.60mm from body maximum 3 seconds		260						°C

Checked	Chen N.H.	Approved	Jason Chen	Date	Mar/06/2007	PAGE 1 / 2			
---------	-----------	----------	------------	------	-------------	------------	--	--	--




14.00mm X 7.50mm Single Color Light Bar

PACKAGE DIMENSION

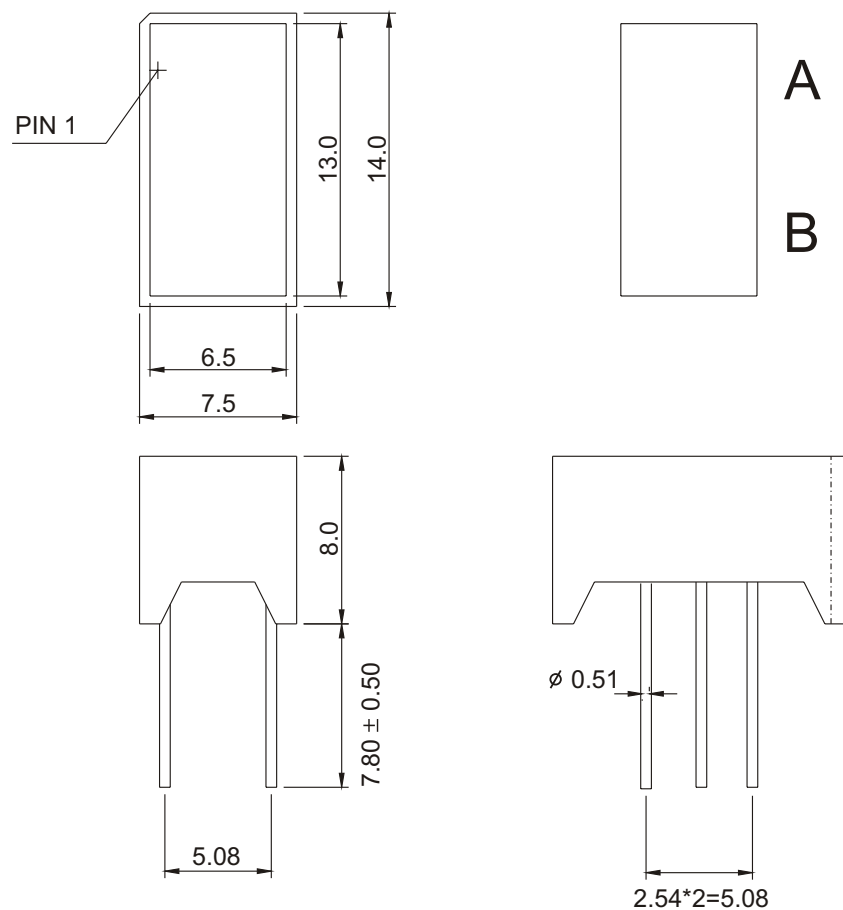

INTERNAL CIRCUIT DIAGRAM

NFA-R1408Zx

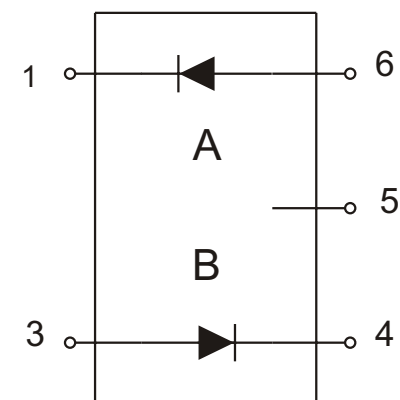

2 NO PIN 5 NO CONNECT

Tolerance ± 0.25 mm unless stated

Checked

Chen N.H.

Approved

Jason Chen

Date

Mar/06/2007

PAGE 2 / 2