



20.00mm X 28.00mm Single Color Light Bar

Features:

- *Ultra segment intensity
- *Wide viewing angle
- *Range of colors
- *White face White segment
- *RoHS compliant

Available option:

- *Alternative face and segment color
- *Cropped terminal pins
- *Available emitting color
- *Low current version

Electro/Optical Characteristics If=20*3mA Ta=25°C

Part Number	Emitting Color	Peak Wavelength	Forward Voltage V _F		Luminous Intensity I _v	
			Typ.	Max.	Min.	Typ.
NFA-R2028ZUHR-01	AlGaInP/GaAs Ultra Red	640	4.00	5.00	240.00	360.00
NFA-R2028ZUE-01	AlGaInP/GaAs Ultra Orange	632	4.00	5.00	240.00	360.00
NFA-R2028ZYO-01	AlGaInP/GaAs Ultra Amber	605	4.00	5.00	240.00	360.00
NFA-R2028ZUY-01	AlGaInP/GaAs Ultra Yellow	590	4.00	5.00	240.00	360.00
NFA-R2028ZUG-01	AlGaInP/GaAs Ultra Green	574	4.20	5.00	150.00	240.00
NFA-R2028ZPG-01	InGaN/SiC Pure Green	525	6.60	7.60	900.00	1200.00
NFA-R2028ZUB-01	InGaN/SiC Ultra Blue	470	6.60	7.60	240.00	600.00
NFA-R2028ZUW-01	InGaN/SiC Ultra White	X-0.31/Y-0.31	6.60	7.60	1200.00	3000.00
Units		nm	V		mcd	

Maximum Ratings Ta=25°C (Derate above 25°C)

Characteristic	Test Condition	Symbol	UHR	UE	YO	UY	UG	PG	UB	UW	Units
Pulse Forward Current Per Seg.	1/10 duty cycle 0.1ms Pulse width	I _{FP}	100*3	100*3	100*3	100*3	100*3	100*3	100*3	100*3	mA
DC Forward Current Per Seg.		I _F	30*3	30*3	30*3	30*3	30*3	30*3	30*3	30*3	mA
Reverse Current Per Seg.	V _R =10V	I _R	10	10	10	10	10	10	10	10	μA
Power Dissipation		P _D	60*6	65*6	65*6	65*6	75*6	110*6	120*6	120*6	mW
Operating Temperature		T _{OPR}	-40 to +80								°C
Storage Temperature		T _{TSG}	-40 to +85								°C
Lead soldering temperature	1.60mm from body maximum 3 seconds		260								°C

Checked

Chen N.H.

Approved

Jason Chen

Date


Oct/16/2007

PAGE 1 / 2




20.00mm X 28.00mm Single Color Light Bar

PACKAGE DIMENSION

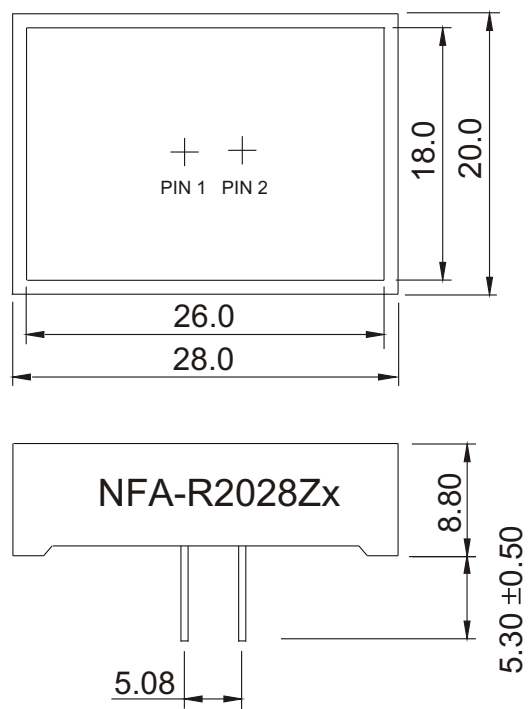

INTERNAL CIRCUIT DIAGRAM

NFA-R2028Zx

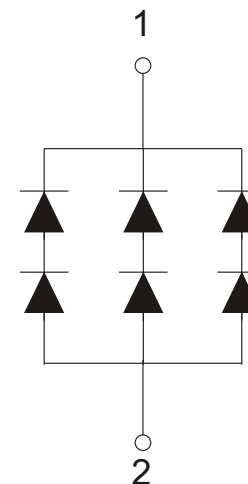

Tolerance ±0.25mm unless stated

Checked

Chen N.H.

Approved

Jason Chen

Date

Oct/16/2007

PAGE 2 / 2