



## 25.4mm X 10.1mm 10 Segment Bi-Color Light Bar

### Features:

- \*High dot intensity
- \*Wide viewing angle
- \*Bi- colors
- \*Gray face White dot
- \*RoHS compliant

### Available option:

- \*Alternative face and dot color
- \*Cropped terminal pins
- \*Available emitting color
- \*Low current version

### Electro/Optical Characteristics If=20mA Ta=25°C

Part Number Row Cathode Column Anode	Part Number Row Anode Column Cathode	Emitting Color	Peak Wavelength	Forward Voltage V <sub>F</sub> /Seg.		Luminous Intensity I <sub>v</sub> /Seg.	
				Typ.	Max.	Min.	Typ.
NFA-R102510ASG-21	NFA-R102510BSG-21	GaAlAs/GaAs Hi-Red	660	1.80	2.20	8.0	12.0
		GaP/GaP Green	570	2.20	2.50	7.0	11.0
NFA-R102510AEG-21	NFA-R102510BEG-21	GaAsP/GaP Orange	632	2.10	2.50	8.0	12.0
		GaP/GaP Green	570	2.20	2.50	7.0	11.0
Units			nm	V		mcd	

### Maximum Ratings Ta=25°C (Derate above 25°C)

Characteristic	Test Condition	Symbol	S	G	E			Units	
Pulse Forward Current Per Dot	1/10duty cycle 0.1ms Pulse width	I <sub>FP</sub>	100	100	100			mA	
DC Forward Current Per Dot		I <sub>F</sub>	25	30	30			mA	
Reverse Current Per Dot	V <sub>R</sub> =5V	I <sub>R</sub>	10	10	10			μA	
Power Dissipation		P <sub>D</sub>	60*10	80*10	80*10			mW	
Operating Temperature		T <sub>OPR</sub>	-40 to +80						°C
Storage Temperature		T <sub>TSG</sub>	-40 to +85						°C
Lead soldering temperature	1.60mm from body maximum 3 seconds		260						°C

Checked

Chen N.H.

Approved

Jason Chen

Date




Mar/08/2007

PAGE 1 / 2



## 25.4mm X 10.1mm 10 Segment Bi-Color Light Bar


### PACKAGE DIMENSION

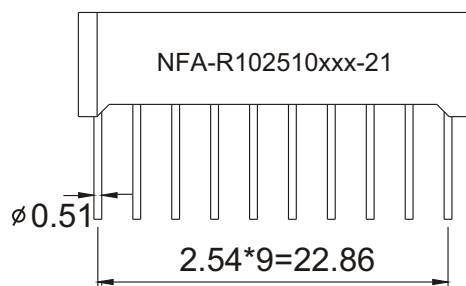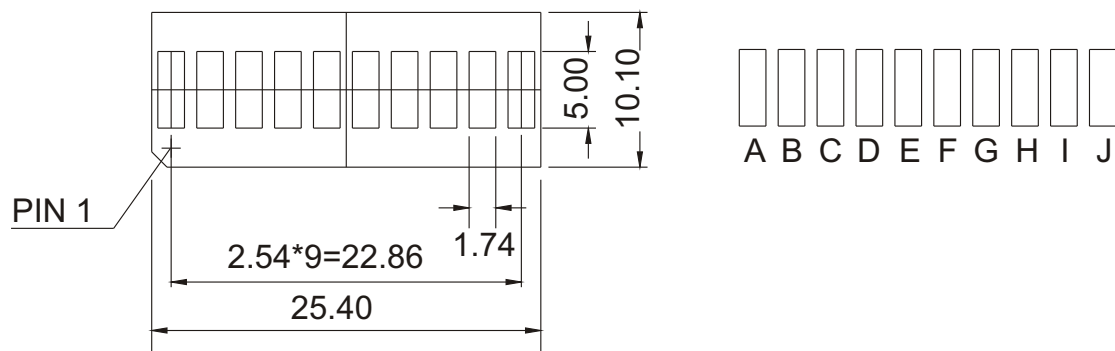

Tolerance ±0.25mm unless stated

### INTERNAL CIRCUIT DIAGRAM

#### Common Cathode NFA-R102510AEG

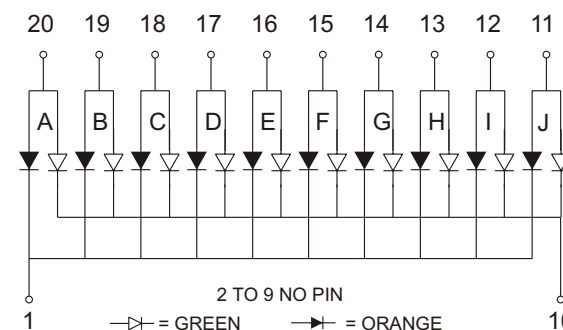

#### Common Anode NFA-R102510BEG

