

The logo for 'atli' is written in a bold, white, lowercase sans-serif font. The letters 'a' and 't' are connected, and the 'l' and 'i' are also connected. The logo is set against a dark blue background that has a white outline of a shield-like shape.

杭州腾力



Creast Value For Customers

ATLI INDUSTRY CO., LIMITED

WELDED LINK CHAIN ASTM80 STANDARD LINK CHAIN



* PROOF COIL CHAIN ASTM80 (G30)



* HIGH TEST CHAIN NACM80 (G43)



* TRANSPORT CHAIN NACM80 (G70)

* PROOF COIL CHAIN ASTM80 (G30)

NOMINAL SIZE		MATERIAL DIAMETER		WORKING LOAD LIMIT		PROOF TEST(MIN)		BREAKING FORCE MIN		INSIDE LENGTH		INSIDE WIDTH	
IN	MM	IN	MM	LBS	KG	LBS	KN	LBS	KN	IN	MM	LBS	KG
5.5	3/16	0.218	5.5	750	340	1500	6.7	3000	13.3	99	2.51	42	19
7.0	1/4	0.281	7.1	1250	570	2500	11.1	5000	22.2	104	2.64	76	34
8.0	5/16	0.343	8.7	1900	860	3800	16.9	7600	33.8	114	2.89	115	52
10.0	3/8	0.406	10.3	2650	1200	5300	23.6	10600	47.2	128	3.25	166	75
11.9	7/16	0.468	11.9	3500	1590	7000	31.1	14000	62.3	142	3.60	225	102
13.0	1/2	0.531	13.5	4500	2040	9000	40.0	18000	80.1	156	3.96	289	131
16.0	5/8	0.656	16.7	6900	3130	13800	61.4	27600	122.8	194	4.92	425	193
20.0	3/4	0.781	19.8	9750	4420	19500	86.7	39000	173.5	220	5.59	612	278

* HIGH TEST CHAIN NACM80 (G43)

NOMINAL SIZE		MATERIAL DIAMETER		WORKING LOAD LIMIT		PROOF TEST(MIN)		BREAKING FORCE MIN		INSIDE LENGTH		INSIDE WIDTH	
IN	MM	IN	MM	LBS	KG	LBS	KN	LBS	KN	IN	MM	LBS	KG
7.0	1/4	0.281	7.1	2600	1180	4300	19.1	7750	34.5	98	2.49	84	38
8.0	5/16	0.343	8.7	3900	1770	6400	28.5	11600	51.6	110	2.79	120	54
10.0	3/8	0.406	10.3	5400	2450	8900	39.6	16200	72.1	134	3.40	176	80
11.9	7/16	0.468	11.9	7200	3260	11900	52.9	21500	95.6	140	3.55	230	104
13.0	1/2	0.531	13.5	9200	4170	15300	68.1	27600	122.8	150	4.06	300	136

* TRANSPORT CHAIN NACM80 (G70)

NOMINAL SIZE		MATERIAL DIAMETER		WORKING LOAD LIMIT		PROOF TEST(MIN)		BREAKING FORCE MIN		INSIDE LENGTH		INSIDE WIDTH	
IN	MM	IN	MM	LBS	KG	LBS	KN	LBS	KN	IN	MM	LBS	KG
7.0	1/4	0.281	7.1	3150	1430	6300	28.0	12600	56.1	98	2.49	84	38
8.0	5/16	0.343	8.7	4700	2130	9400	41.8	18800	83.6	110	2.79	120	54
10.0	3/8	0.406	10.3	6600	3000	13200	58.7	26400	117.4	134	3.40	176	80

WELDED LINK CHAIN ASTM84/90 STANDARD LINK CHAIN



* PROOF COIL CHAIN ASTM84/90 (G30)



* HIGH TEST CHAIN NACM84/90 (G43)



* TRANSPORT CHAIN NACM84/90 (G70)

* PROOF COIL CHAIN ASTM84/90 (G30)

NOMINAL SIZE		MATERIAL DIAMETER		WORKING LOAD LIMIT		PROOF TEST(MIN)		BREAKING FORCE MIN		INSIDE LENGTH		INSIDE WIDTH	
MM	IN	MM	IN	KG	LBS	KG	LBS	KG	LBS	MM	IN	MM	IN
4.0	1/8	4.0	0.156	180	400	3.8	800	7.2	1600	23.9	0.94	6.4	0.25
5.5	3/16	5.5	0.217	365	800	7.2	1500	14.4	3200	24.8	0.98	7.7	0.30
7.0	1/4	7.0	0.276	580	1300	11.6	2600	23.2	5200	31.5	1.24	9.8	0.38
8.0	5/16	8.4	0.331	860	1900	16.9	3800	33.8	7600	32.8	1.29	11.2	0.44
10.0	3/8	10.0	0.394	1200	2650	23.5	5300	47.2	10600	35.0	1.38	14.0	0.55
11.9	7/16	11.9	0.488	1680	3700	32.9	7400	65.8	14800	41.5	1.64	16.6	0.65
13.0	1/2	13.0	0.512	2030	4500	40.0	9000	80.0	18000	45.5	1.79	18.2	0.72
16.0	5/8	16.0	0.630	3130	6900	61.3	13800	122.8	27600	56.0	2.20	20.0	0.79
20.0	3/4	20.0	0.787	4800	10600	94.3	21200	188.6	42400	70.0	2.78	25.0	0.98
22.0	7/8	22.0	0.866	5810	12800	114.1	25600	228.2	51200	77.0	3.03	27.5	1.08
25.0	1	26.0	1.020	8140	17900	159.1	35800	318.2	71600	90.9	3.58	31.7	1.25

* HIGH TEST CHAIN NACM84/90 (G43)

NOMINAL SIZE		MATERIAL DIAMETER		WORKING LOAD LIMIT		PROOF TEST(MIN)		BREAKING FORCE MIN		INSIDE LENGTH		INSIDE WIDTH	
MM	IN	MM	IN	KG	LBS	KG	LBS	KG	LBS	MM	IN	MM	IN
4.0	1/8	4.0	0.156	180	400	3.8	800	7.2	1600	23.9	0.94	6.4	0.25
5.5	3/16	5.5	0.217	365	800	7.2	1500	14.4	3200	24.8	0.98	7.7	0.30
7.0	1/4	7.0	0.276	580	1300	11.6	2600	23.2	5200	31.5	1.24	9.8	0.38
8.0	5/16	8.4	0.331	860	1900	16.9	3800	33.8	7600	32.8	1.29	11.2	0.44

* TRANSPORT CHAIN NACM84/90 (G70)

NOMINAL SIZE		MATERIAL DIAMETER		WORKING LOAD LIMIT		PROOF TEST(MIN)		BREAKING FORCE MIN		INSIDE LENGTH		INSIDE WIDTH	
MM	IN	MM	IN	KG	LBS	KG	LBS	KG	LBS	MM	IN	MM	IN
4.0	1/8	4.0	0.156	180	400	3.8	800	7.2	1600	23.9	0.94	6.4	0.25
5.5	3/16	5.5	0.217	365	800	7.2	1500	14.4	3200	24.8	0.98	7.7	0.30
7.0	1/4	7.0	0.276	580	1300	11.6	2600	23.2	5200	31.5	1.24	9.8	0.38

WELDED LINK CHAIN

NACM96STANDARD LINK CHAIN



* PROOF COIL CHAIN ASTM96 (G30)



* HIGH TEST CHAIN NACM96 (G43)



* TRANSPORT CHAIN NACM96 (G70)

* PROOF COIL CHAIN ASTM96 (G30)

NOMINAL SIZE		MATERIAL DIAMETER		WORKING LOAD LIMIT		PROOF TEST(MIN)		BREAKING FORCE MIN		INSIDE LENGTH		INSIDE WIDTH	
MM	IN	MM	IN	KG	LBS	KG	LBS	KG	LBS	MM	IN	MM	IN
4.0	1/8	4.0	0.156	180	400	3.8	800	7.2	1600	23.9	0.94	6.4	0.25
5.5	3/16	5.5	0.217	365	800	7.2	1500	14.4	3200	24.8	0.98	7.7	0.30
7.0	1/4	7.0	0.276	580	1300	11.6	2600	23.2	5200	31.5	1.24	9.8	0.38
8.0	5/16	8.4	0.331	860	1900	16.9	3800	33.8	7600	32.8	1.29	11.2	0.44
10.0	3/8	10.0	0.394	1200	2650	23.5	5300	47.2	10600	35.0	1.38	14.0	0.55
11.9	7/16	11.9	0.488	1680	3700	32.9	7400	65.8	14800	41.5	1.64	16.6	0.65
13.0	1/2	13.0	0.512	2030	4500	40.0	9000	80.0	18000	45.5	1.79	18.2	0.72
16.0	5/8	16.0	0.630	3130	6900	61.3	13800	122.8	27600	56.0	2.20	20.0	0.79
20.0	3/4	20.0	0.787	4800	10600	94.3	21200	188.6	42400	70.0	2.78	25.0	0.98
22.0	7/8	22.0	0.866	5810	12800	114.1	25600	228.2	51200	77.0	3.03	27.5	1.08
25.0	1	26.0	1.020	8140	17900	159.1	35800	318.2	71600	90.9	3.58	31.7	1.25

* HIGH TEST CHAIN NACM96 (G43)

NOMINAL SIZE		MATERIAL DIAMETER		WORKING LOAD LIMIT		PROOF TEST(MIN)		BREAKING FORCE MIN		INSIDE LENGTH		INSIDE WIDTH	
MM	IN	MM	IN	KG	LBS	KG	LBS	KG	LBS	MM	IN	MM	IN
7.0	1/4	7.0	0.276	1180	2800	17.3	3900	34.6	7800	31.5	1.24	9.8	0.38
8.7	5/16	8.7	0.343	1770	3900	26.0	5850	52.0	11700	32.8	1.29	11.2	0.44
10.0	3/8	10.3	0.406	2450	5400	36.0	8100	72.0	16200	35.0	1.38	14.0	0.55
11.9	7/16	11.9	0.468	3270	7200	48.0	10800	96.0	21600	41.6	1.64	16.6	0.65
13.0	1/2	13.5	0.531	4170	9200	61.3	13800	122.6	27600	45.5	1.79	18.2	0.72

* TRANSPORT CHAIN NACM96(G70)

NOMINAL SIZE		MATERIAL DIAMETER		WORKING LOAD LIMIT		PROOF TEST(MIN)		BREAKING FORCE MIN		INSIDE LENGTH		INSIDE WIDTH	
MM	IN	MM	IN	KG	LBS	KG	LBS	KG	LBS	MM	IN	MM	IN
7.0	1/4	7.0	0.281	1430	3150	28.0	6300	56.0	12600	31.8	1.24	9.8	0.38
8.7	5/16	8.7	0.343	2130	4700	41.8	9400	83.6	18800	32.8	1.29	11.2	0.44
10.0	3/8	10.3	0.406	2990	6600	58.7	13200	117.4	26400	35.0	1.38	14.0	0.55

WELDED LINK CHAIN

MACHINE CHAIN



* NACM90 TWIST LINK MACHINE CHAIN



* NACM90 PASSING LINK MACHINE CHAIN

* NACM90 STRAIGHT LINK MACHINE CHAIN

TRADE SIZE		MATERIAL DIAMETER		WORKING LOAD LIMIT		PROOF TEST(MIN)		BREAKING FORCE MIN		INSIDE LENGTH		INSIDE WIDTH	
MM	NO.	MM	IN	KG	LBS	KG	LBS	KG	LBS	MM	IN	MM	IN
4	3.0	3.0	0.120	98	215	1.91	430	3.82	860	0.55	14.0	0.21	5.3
3	3.4	3.4	0.135	122	270	2.40	540	4.80	1080	0.59	15.0	0.24	6.1
2	3.8	3.8	0.148	147	325	2.89	650	5.78	1300	0.61	15.5	0.26	6.6
1	4.1	4.1	0.162	177	390	3.47	780	6.93	1560	0.63	16.0	0.28	7.1
1/0	4.5	4.5	0.177	211	465	4.14	930	8.27	1860	0.74	18.8	0.31	7.9
2/0	4.9	4.9	0.192	247	545	4.85	1090	9.69	2180	0.78	19.8	0.34	8.6
3/0	5.3	5.3	0.207	288	635	5.65	1270	11.29	2540	0.85	21.6	0.36	9.1
4/0	5.5	5.5	0.218	318	700	6.23	1400	12.44	2800	0.99	25.1	0.38	9.6
5/0	6.4	6.4	0.250	420	925	8.23	1850	16.44	3700	1.07	27.2	0.44	11.2

* NACM90 TWIST LINK MACHINE CHAIN

TRADE SIZE		MATERIAL DIAMETER		WORKING LOAD LIMIT		BREAKING FORCE MIN		INSIDE LENGTH		INSIDE WIDTH		WT Per 100ft kg/100FT	
MM	NO.	MM	IN	KG	LBS	KG	LBS	KG	LBS	MM	IN	MM	IN
4	3.0	3.0	0.120	93	205	3.64	820	13.1	0.52	4.3	0.17	0.0025	5.70
3	3.4	3.4	0.135	116	255	4.53	1020	14.2	0.56	5.1	0.20	0.0036	7.73
2	3.8	3.8	0.148	141	310	5.51	1240	14.7	0.58	5.3	0.21	0.0046	9.54
1	4.1	4.1	0.162	168	370	6.58	1480	15.0	0.59	6.1	0.24	0.0056	11.38
1/0	4.5	4.5	0.177	200	440	7.82	1760	17.2	0.68	6.6	0.26	0.0076	13.47
2/0	4.9	4.9	0.192	236	520	9.24	2080	18.5	0.73	7.1	0.28	0.0096	15.82
3/0	5.3	5.3	0.207	274	605	10.76	2420	20.3	0.80	7.9	0.31	0.0122	18.32
4/0	5.5	5.5	0.218	304	670	11.91	2680	22.5	0.89	8.1	0.32	0.0147	19.91
5/0	6.4	6.4	0.250	400	880	15.64	3520	25.3	1.00	9.4	0.37	0.0221	26.62

* NACM90 PASSING LINK MACHINE CHAIN

TRADE SIZE		MATERIAL DIAMETER		WORKING LOAD LIMIT		PROOF TEST(MIN)		BREAKING FORCE MIN		INSIDE LENGTH		INSIDE WIDTH	
MM	NO.	MM	IN	KG	LBS	KG	LBS	KG	LBS	MM	IN	MM	IN
4.9	2/0	4.9	0.192	204	450	4.00	900	8.01	1800	22.2	0.875	11.9	0.47
5.5	4/0	5.5	0.218	272	600	5.34	1200	10.68	2400	22.2	0.875	12.7	0.50

WELDED LINK CHAIN COIL CHAIN



* NACM90 STRAIGHT LINK MACHINE CHAIN

TRADE SIZE		MATERIAL DIAMETER		WORKING LOAD LIMIT		PROOF TEST(MIN)		BREAKING FORCE MIN		INSIDE LENGTH		INSIDE WIDTH	
MM	NO.	MM	IN	KG	LBS	KG	LBS	KG	LBS	MM	IN	MM	IN
4	3.0	3.0	0.120	98	215	1.91	430	3.82	860	0.55	14.0	0.21	5.3
3	3.4	3.4	0.135	122	270	2.40	540	4.80	1080	0.59	15.0	0.24	6.1
2	3.8	3.8	0.148	147	325	2.89	650	5.78	1300	0.61	15.5	0.26	6.6
1	4.1	4.1	0.162	177	390	3.47	780	6.93	1560	0.63	16.0	0.28	7.1
1/0	4.5	4.5	0.177	211	465	4.14	930	8.27	1860	0.74	18.8	0.31	7.9
2/0	4.9	4.9	0.192	247	545	4.85	1090	9.69	2180	0.78	19.8	0.34	8.6
3/0	5.3	5.3	0.207	288	635	5.65	1270	11.29	2540	0.85	21.6	0.36	9.1
4/0	5.5	5.5	0.218	318	700	6.23	1400	12.44	2800	0.99	25.1	0.38	9.6
5/0	6.4	6.4	0.250	420	925	8.23	1850	16.44	3700	1.07	27.2	0.44	11.2

* NACM90 TWIST LINK MACHINE CHAIN

TRADE SIZE		MATERIAL DIAMETER		WORKING LOAD LIMIT		BREAKING FORCE MIN		INSIDE LENGTH		INSIDE WIDTH		WT Per 100ft kg/100FT	
MM	NO.	MM	IN	KG	LBS	KG	LBS	KG	LBS	MM	IN	MM	IN
4	3.0	3.0	0.120	93	205	3.64	820	13.1	0.52	4.3	0.17	0.0025	5.70
3	3.4	3.4	0.135	116	255	4.53	1020	14.2	0.56	5.1	0.20	0.0036	7.73
2	3.8	3.8	0.148	141	310	5.51	1240	14.7	0.58	5.3	0.21	0.0046	9.54
1	4.1	4.1	0.162	168	370	6.58	1480	15.0	0.59	6.1	0.24	0.0056	11.38
1/0	4.5	4.5	0.177	200	440	7.82	1760	17.2	0.68	6.6	0.26	0.0076	13.47
2/0	4.9	4.9	0.192	236	520	9.24	2080	18.5	0.73	7.1	0.28	0.0096	15.82
3/0	5.3	5.3	0.207	274	605	10.76	2420	20.3	0.80	7.9	0.31	0.0122	18.32
4/0	5.5	5.5	0.218	304	670	11.91	2680	22.5	0.89	8.1	0.32	0.0147	19.91
5/0	6.4	6.4	0.250	400	880	15.64	3520	25.3	1.00	9.4	0.37	0.0221	26.62

PASSING CHAIN



MACHINE CHAIN




MACHINE CHAIN



WELDED LINK CHAIN * ORDINARY MILD STEEL LINK CHAIN

* SHORT LINK CHAIN


LINK SPECIFICATION				TEST LOAD	BREAKING LOAD	NETWT PER 200FT(KG)	
D		L	W			B.F.	H.D.G.
IN	MM	MM	MM	KG	KG		
1/8	3.20	16	12	200	400	11.40	11.74
5/32	4.00	18.5	14.5	300	600	18.60	19.00
3/16	4.70	19	17	400	800	26.20	27.00
7/32	5.50	20	19	550	1100	36.80	38.00
1/4	6.35	22	21	750	1500	50.00	51.50
5/16	7.94	26	26	1200	2400	80.00	82.40
3/8	9.50	28	32	1700	3400	122.00	125.70
7/16	11.11	33	36	2300	4600	164.00	169.00
1/2	12.70	39	43	3000	6000	210.00	216.00
5/8	15.80	45	53	4700	9400	334.00	344.00
3/4	19.00	55	63	6800	13600	485.00	499.00
7/8	22.20	64	74	9250	18500	656.00	675.00
1	25.40	73	84	12150	24300	870.00	896.00

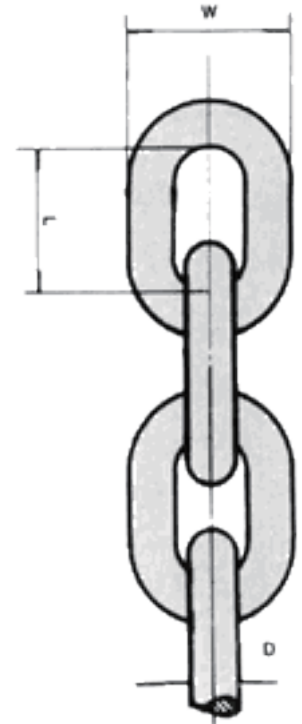

* ORDINARY MILD STEEL LINK CHAIN

* MEDIUM LINK CHAIN


LINK SPECIFICATION				TEST LOAD	BREAKING LOAD	NETWT PER 200FT(KG)	
D		L	W			B.F.	H.D.G.
IN	MM	MM	MM	KG	KG		
1/8	3.20	20	12	200	400	10.40	11.00
5/32	4.00	23	15	300	600	17.40	18.00
3/16	4.70	25	18	400	800	24.40	25.00
7/32	5.50	26	19	550	1100	34.00	35.00
1/4	6.35	26	23	750	1500	48.80	50.00
5/16	7.94	32	29	1200	2400	76.00	78.00
3/8	9.50	35	35	1700	3400	111.00	114.00
7/16	11.11	38	38	2300	4600	154.00	158.00
1/2	12.70	50	45.5	3000	6000	194.00	200.00
5/8	15.80	60	56.7	4700	9400	303.00	312.00
3/4	19.00	76	69	6800	13600	432.00	445.00
7/8	22.20	90	80	9250	18500	586.00	603.00
1	25.40	105	95	12150	24300	770.00	792.00

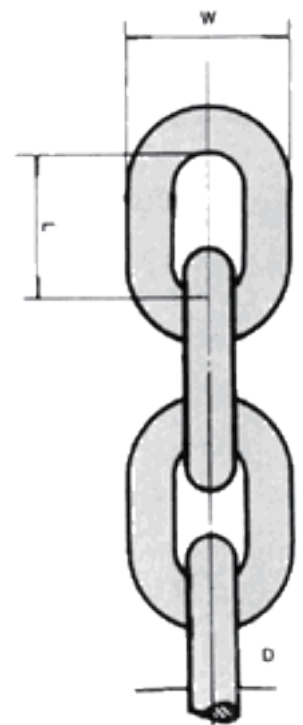

WELDED LINK CHAIN * ORDINARY MILD STEEL LINK CHAIN

* LONG LINK CHAIN

LINK SPECIFICATION				TEST LOAD	BREAKING LOAD	NETWT PER 200FT(KG)	
D	L	W	B.F.			H.D.G.	
IN	MM	MM	MM	KG	KG		
1/8	3.20	23	12	200	400	10.40	10.70
5/32	4.00	27	15	300	600	16.60	17.50
3/16	4.70	31	17	400	800	22.40	23.30
7/32	5.50	32	19	550	1100	32.00	33.00
1/4	6.35	33	21	750	1500	43.50	44.80
5/16	7.94	48	31	1200	2400	68.00	70.00
3/8	9.50	60	37	1700	3400	96.00	99.00
7/16	11.11	71	41	2300	4600	126.00	129.00
1/2	12.70	85	48.5	3000	6000	167.00	172.00
5/8	15.80	114	61.5	4700	9400	256.00	264.00
3/4	19.00	125	75	6800	13600	381.00	392.00
7/8	22.20	140	88	9250	18500	527.00	543.00
1	25.40	155	100	12150	24300	696.00	716.00

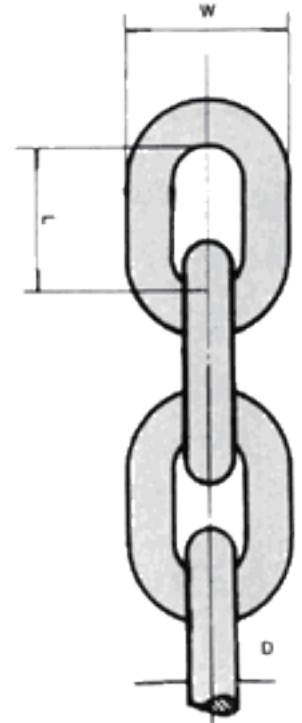

WELDED LINK CHAIN * DIN 763 LINK CHAIN

SIZE		INSIDE LENGTH		OUTSIDE WIDTH		WORKING LOAD	TEST LOAD	BREAKING LOAD	WEIGHT PER M
MM	±MM	MM	±MM	MM	±MM	KG	N	N	KG
3	0.5	26	1.2	12	0.6	55	1050	3200	0.15
4	0.5	32	1.5	16	0.8	100	2000	6000	0.27
5	0.5	35	1.8	20	1	160	3150	10000	0.43
6	0.5	42	2	24	1.2	224	4500	14000	0.63
7	0.5	49	2.5	28	1.4	300	6000	18000	0.86
8	0.5	52	2.5	32	1.6	400	8000	25000	1.1
9	0.5	59	3.0	36	1.8	530	10500	32000	1.41
10	1	65	3.2	40	2.0	630	12500	40000	1.75
11	1	72	3.4	44	2.0	790	15800	47500	2.11
12	1	78	3.6	48	2.3	940	18800	56500	2.55
13	1	82	4	52	2.5	1000	21200	63000	2.95
16	1	100	5	64	3.2	1600	33000	100000	4.45
18	1	113	5.2	70	3.2	2120	42300	127000	5.65
19	1	119	5.6	72	3.4	2370	47300	142000	6.25
20	1	120	6	75	3.8	2500	50000	160000	7.0
22	1	127	6	82	4.0	3170	63300	190000	8.55
25	1	140	6.6	88	4.2	4090	81700	245000	10.90
28	1	152	7.0	96	4.7	6000	120000	300000	13.9
32	1	171	7.8	108	5.2	8000	160000	400000	18.2



WELDED LINK CHAIN * DIN 764 LINK CHAIN

SIZE LOAD		INSIDE LENGTH		INSIDE WIDTH	OUTSIDE WIDTH	LENGTH PER 11 LINKS		WEIGHT PER 100M	BREAKING LOAD	TEST LOAD
MM	±MM	MM	±MM	MM	MM	±MM		KG	KN	KG
4	0.20	16	0.30 / 0.20	5	14	176	1.60 / 0.90	31.3	7	400
5	0.20	18	0.40 / 0.20	7	18.2	198	1.80 / 1.00	51.4	11.8	680
6	0.20	21	0.50 / 0.20	8	21.5	231	2.00 / 1.10	74.0	16.5	850
8	0.20	28	0.50 / 0.30	11	29	308	2.20 / 1.20	131.5	32	1680
10	0.30	35	0.60 / 0.30	14	36	385	2.70 / 1.50	200	50	2630
13	0.40	45	0.70 / 0.40	18	47	495	3.50 / 2.00	350	80	4200
16	0.50	56	0.90 / 0.50	22	58	616	4.30 / 2.50	520	125	6700
18	0.80	63	1.00 / 0.50	24	65	693	4.70 / 2.80	650	160	8400
20	1.00	70	1.10 / 0.60	27	72	770	5.40 / 3.20	820	200	10000
23	1.20	80	1.30 / 0.70	31	83	880	6.20 / 3.50	1100	250	13000
26	1.30	91	1.50 / 0.80	35	94	1001	7.00 / 4.00	1400	320	16000



* DIN 766 LINK CHAIN

SIZE LOAD		INSIDE LENGTH		INSIDE WIDTH	OUTSIDE WIDTH	LENGTH PER 11 LINKS		WEIGHT PER 100M		
MM	±MM	MM	±MM	MM	MM	MM	±MM	KG	KG	KG
2	0.2	12	0.2	0.2	3.5	7.5	132	1.0	0.5	0.07
3	0.2	16	0.2	0.2	4.2	11	176	1.4	0.7	0.16
4	0.2	16	0.3	0.2	5	13.7	176	2.1	1.1	0.32
5	0.2	18.5	0.4	0.2	6	17	203.5	2.4	1.2	0.5
6	0.2	18.5	0.4	0.2	7.2	20.2	203.5	2.4	1.2	0.8
7	0.3	22	0.4	0.2	8.4	23.8	242	3	1.4	1.1
8	0.3	24	0.4	0.2	9.6	27.2	264	3.2	1.5	1.4
9	0.4	27	0.5	0.3	10.8	30.6	297	3.6	1.8	1.8
10	0.4	28	0.5	0.3	12	34	308	3.7	1.9	2.2
11	0.4	31	0.5	0.3	13.2	37.4	341	4	2	2.7
12	0.3	36	0.6	0.3	14.4	40.8	396	4.4	2.2	3.10
13	0.5	36	0.6	0.3	15.6	44.2	396	4.6	2.4	3.8
14	0.6	41	0.7	0.4	16.8	47.6	451	5.4	2.7	4.4
16	0.6	45	0.8	0.4	19.2	54.4	495	6	3	5.7
18	0.9	50	0.8	0.4	21.6	61.2	550	6.6	3.3	7.3
19	0.4	53	0.9	0.4	22.8	64.6	583	7.0	3.7	7.97
20	1	56	1	0.5	24	68	616	7.4	3.7	9
23	1.2	64	1.1	0.5	27.6	78.2	704	8.4	4.2	12
26	1.3	73	1.2	0.6	31.2	88.4	803	9.6	4.8	15
28	1.4	78	1.3	0.65	33.8	95.2	858	10.2	5.1	18
30	1.5	84	1.4	0.7	41.0	102	924	11.0	5.5	19.5
32	1.6	90	1.5	0.75	43.0	108.8	990	11.8	5.9	23.0



WELDED LINK CHAIN

* DIN 5685A/C SHORT/LONG LINK CHAIN

SIZE LOAD	INSIDE LENGTH		OUTSIDE WIDTH	WEIGHT PER 100M		WORKING LOAD	BREAKING LOAD	GRADE	
MM	MM		MM	KG		N	N		
2	12	22	8	7	6	500	1250	A	C
2.5	14	24	10	11	10	750	2000	A	C
3	16	26	12	16.5	15	1120	2800	A	C
4	19	32	16	30	27	2000	5000	A	C
5	21	35	20	50	43	3150	7750	A	C
6	24	42	24	73	63	4500	11500	A	C
7	28	49	28	100	86	6000	15000	A	C
8	32	52	32	130	110	8000	20000	A	C
9	36	59	36	165	141	10000	25000	A	C
10	40	65	40	205	175	12500	31000	A	C
11	44	72	44	250	211	15000	38000	A	C
12	48	78	48	290	255	18000	45000	A	C
13	52	82	52	345	295	21200	53000	A	C



* AUSTRALIAN STANDARD LINK CHAIN

* SHORT LINK CHAIN

CHAIN SIZE	WORKING LOAD	LINK DIMENSION			LINKS PER M	LENGTH PER 100KG	
		S	R	F		B.F.	H.D.G.
MM	MT	MM	MM	MM	PC	M	M
6	0.32	6.3	18.9	21.5	52.9	114	108
8	0.53	8.0	24.0	27.5	41.7	70.5	67.0
10	0.83	10.0	29.5	33.5	33.9	45.2	42.9
12	1.50	12.5	37.5	40.6	26.7	29.5	28.0
16	2.31	16	47.0	54.0	21.3	17.6	16.7



* MEDIUM LINK CHAIN

CHAIN SIZE	WORKING LOAD	LINK DIMENSION			LINKS PER M	LENGTH PER 100KG	
		S	R	F		B.F.	H.D.G.
MM	MT	MM	MM	MM	PC	M	M
3	0.06	3.15	15.7	13.1	63.8	511	498
4	0.11	4.00	18.6	16.0	53.9	320	305
5	0.19	5.00	22.0	19.4	45.4	203	193
6	0.32	6.30	26.1	23.5	37.8	129	120
8	0.53	8.00	32.2	29.5	31.0	77.8	74.1
10	0.83	10.0	39.1	36.2	25.0	48.5	47.1
12	1.35	12.0	46.0	44.0	21.7	34	33.3
13	1.50	13.0	49.1	46.1	20.3	29.7	27.7
16	2.31	16.0	59.6	56.5	16.8	20.2	18.2
20	3.67	20.0	73.3	70.0	13.6	12.3	11.6
24	5.31	24.0	87.0	83.6	11.5	8.5	8.04

WELDED LINK CHAIN

* AUSTRALIAN STANDARD LINK CHAIN

* LONG LINK CHAIN

CHAIN SIZE	WORKING LOAD	LINK DIMENSION			LINKS PER M	LENGTH PER 100KG	
		S	R	F		B.F.	H.D.G.
MM	MT	MM	MM	MM	PC	M	M
5	0.19	5.00	29.3	21.8	34.1	217.0	206.0
6	0.32	6.30	34.5	26.1	29.0	135.0	128.0
8	0.53	8.00	41.2	31.9	24.3	82.2	78.1
10	0.83	10.00	49.0	38.7	20.4	52.9	50.2



* NORWEGIAN STANDARD LINK CHAIN

SIZE	INSIDE LENGTH	INSIDE WIDTH	WEIGHT PER M	BREAKING LOAD	LENGTH PER PC	LENGTH PER PEEL
MM	MM	MM	KG	KG	MM	MM
3.5	18.0	5.5	0.25	500	100	100
5.0	22.0	8.5	0.50	1000	100	60
6.5	24.0	10.0	0.85	1500	50	37
8.0	25.5	11.0	1.35	2500	50	23
10.0	32.0	13.0	2.10	4000	30	15
11.0	35.0	16.0	2.55	5000	30	—
13.0	39.0	18.0	3.70	6400	30	—
16.0	48.0	23.0	5.70	10000	30	—
19.0	57.0	27.0	8.00	14000	30	—



* KOREAN STANDARD LINK CHAIN

NOMINAL SIZE	MATERIAL SIZE	INSIDE LENGTH	INSIDE WIDTH	LENGTH PER PC	WEIGHT PER PC
MM	MM	MM	MM	MM	KG
3	3.0	23.0	5.3	30	4.50
4	4.0	22.0	7.5	30	9.00
5	4.8	23.7	8.3	30	12.74
6	5.8	27.3	10.0	30	18.86
7	7.0	31.0	12.0	15	14.14
8	7.8	35.0	13.7	15	17.23
9	8.8	39.0	15.2	15	22.13
12	12.0	38.0	18.0	15	45.00
15	15.0	45.0	23.0	15	75.45
16	16.0	53.0	23.0	15	76.41



WELDLESS CHAIN

WELDED LINK CHAIN * KOREAN STANDARD LINK CHAIN

NOMINAL SIZE	MATERIAL SIZE	INSIDE LENGTH	INSIDE WIDTH	LENGTH PER PC	WEIGHT PER PC
MM	MM	MM	MM	MM	KG
4	3.9	34.3	6.2	30	7.26
4.5	4.5	44.4	9.2	30	9.46
5	4.8	45.0	11.0	30	11.31
6	6.0	47.0	12.0	30	18.00
7	6.8	50.0	11.4	15	11.19
12	12.0	50.0	18.0	15	42.00
15	14.8	64.0	23.0	15	61.44
19	19.0	75.0	25.0	10	71.00



* USA STANDARD DOUBLE LOOP CHAIN

ITEM NO	DIAMETER	INSIDE LENGTH	OUTSIDE WIDTH	WEIGHT PER 100FT
	MM	MM	MM	KG
5	1.6	23.37	7	1.8
4	1.8	25.40	8	2.2
3	2.0	27.94	9	3.0
2	2.3	33.78	10	3.5
1	2.7	39.12	12	4.5
1L	2.7	51.56	12	4.2
1/0	3.0	45.21	14	5.7
1/0L	3.0	56.90	14	5.2
2/0	3.4	46.23	15.5	7.5
2/0L	3.4	56.90	15.5	7.0
3/0	3.8	55.12	17	9.4
4/0	4.1	55.63	19	11.0
6/0	4.9	73.78	21	15.7



* DOUBLE JACK CHAIN

NO	Material Size	Length Per 100 Links	Approximate Weight Per 100 Ft		Working Load Limit	
			Steel pounds	Brass pounds	Steel pounds	Brass pounds
16	inch	inch	3.50	3.75	11	8
	0.062	34				



WELDLESS CHAIN


* SINGLE JACK CHAIN

NO	DIA	INSIDE LENGTH	INSIDE WIDTH	WORKING LOAD LIMIT		BREAKING LOAD LIMIT	
				Pounds-Steel	Pounds-Brass	Pounds-Steel	Pounds-Brass
18	MM	MM	MM				
	1.19	9.91	2.8	5	4	20	15
16	1.57	12.7	4.6	10	8	40	30
14	2.03	16	5.3	16	11	65	45
12	2.67	19.06	7.0	29	20	115	80
10	3.43	23.62	8.2	43	34	170	135
8	4.1	26.2	8.5	60	43	240	170
6	4.87	30.9	9	88	55	350	265




* DIN5686 KNOTTED CHAIN

NO	DIAMETER	INSIDE LENGTH	OUTSIDE WIDTH	BREAKING LOAD	WEIGHT PER 100M
10	MM	MM	MM	KG	KG
	1.0	15.5	4.5	7	2.1
12	1.2	18.0	5.5	12	3.3
14	1.4	20.0	6.5	16	4.2
16	1.6	23.0	7.0	22	6.0
20	1.8	26.5	8.0	30	7.3
22	2.0	28.0	9.0	40	9.0
25	2.2	31.0	10.0	50	11.0
27	2.5	35.0	11.0	70	14.0
30	2.8	39.0	12.5	90	17.0
32	3.1	41.0	14.0	120	21.0
35	3.4	44.0	15.5	140	26.0
40	3.8	46.0	17.0	160	34.0
45	4.2	52.0	19.0	170	41.0
50	4.6	58.0	20.5	180	50.0
55	5.0	60.0	22.5	190	57.0

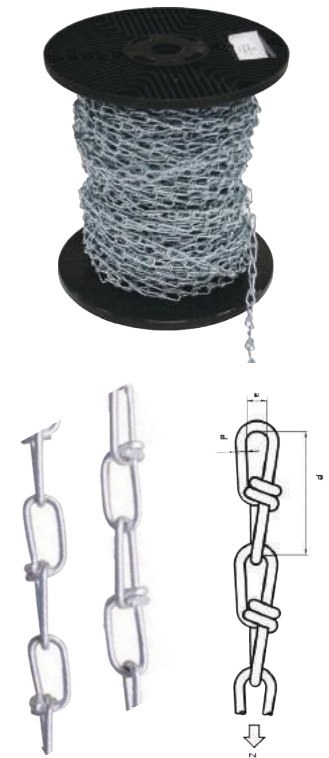

* PLUMBER CHAIN / STAMPED SAFETY CHAIN

NO	MATERIAL SIZE	INSIDE DIA OF EYE	INSIDE LENGTH OF LKS	WEIGHT PER 100	
				STEEL/ lbs.	BRASS/ lbs.
3/0	inch	inch	inch		
	0.015	0.155	0.387	1.44	1.55
2/0	0.018	0.172	0.441	1.56	1.68
1/0	0.022	0.199	0.500	2.33	2.48
1	0.028	0.220	0.600	3.34	3.60
2	0.028	0.264	0.727	3.79	4.08
C-280	0.022	0.199	0.500	20 POUNDS/STAINLESS STEEL	

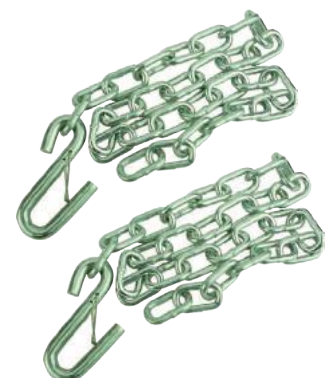

WELDLESS CHAIN

* SASH CHAIN

NO	MATERIAL SIZE	WORKING LOAD LIMIT		BREAKING LOAD LIMIT	
		STEEL/ lbs.	BRASS/ lbs.	STEEL/ lbs.	BRASS/ lbs.
8	inch	75	68	300	270
	0.035±0.002				
25	0.042±0.002	94	80	375	320
30	0.028±0.002	81	75	325	300
35	0.035±0.002	108	100	425	400
40	0.042±0.002	131	125	525	500
45	0.050±0.002	175	163	700	650
50	0.060±0.002	225	210	900	840
60	0.060±0.002	230	215	920	860
65	0.072±0.002	315	290	1260	1160



*REGISTER CHAIN

NO	DIA	INSIDE LENGTH	OUTSIDE WIDTH	WEIGHT	
				KG/100'	KG/25m
1	MM	MM	MM	KG/100'	KG/25m
	1.2	19	6	1.3	0.925
2	1.6	21	8	1.98	1.58
3	2.0	24	11	3.4	2.8
4	2.2	25	12	3.8	3.2
5	2.8	28	15	6.3	5.3
6	3.0	30	16	7.8	5.9



*PACKAGE



Reel



Drum



Pail



Pallet

STAINLESS STEEL LINK CHAIN SUS 304/316

* DIN 763(DIN 5685C) STANDARD

DIA	INSIDE LENGTH	OUTSIDE WIDTH	WEGHT/M
2mm	22mm	4mm	0.06kg
3mm	26mm	6mm	0.15kg
4mm	32mm	8mm	0.27kg
5mm	35mm	10mm	0.43kg
6mm	42mm	12mm	0.63kg
7mm	49mm	14mm	0.86kg
8mm	52mm	16mm	1.10kg
9mm	59mm	18mm	1.41kg
10mm	65mm	20mm	1.75kg
13mm	85mm	26mm	2.95kg

* DIN 766 STANDARD

DIA	INSIDE LENGTH	OUTSIDE WIDTH	WEGHT/M
3mm	10mm	6mm	0.165kg
4mm	19mm	8mm	0.30kg
5mm	21mm	10mm	0.50kg
6mm	24mm	12mm	0.73kg
7mm	28mm	14mm	1.00kg
8mm	32mm	16mm	1.30kg
9mm	36mm	18mm	1.65kg
10mm	40mm	20mm	2.05kg
13mm	52mm	26mm	3.45kg

* DIN 763(DIN 5685C) STANDARD

DIA	INSIDE LENGTH	OUTSIDE WIDTH	WEGHT/M
3mm	23mm	5.3mm	0.15kg
4mm	22mm	7.5mm	0.30kg
5mm	23.7mm	8.3mm	0.47kg
6mm	27.3mm	10mm	0.70kg
7mm	31mm	12mm	0.95kg
8mm	35mm	13.7mm	1.25kg
9mm	39mm	15.2mm	1.58kg
12mm	38mm	18mm	3.13kg

* DIN 766 STANDARD

DIA	INSIDE LENGTH	OUTSIDE WIDTH	WEGHT/M
2mm	12mm	3.5mm	0.07kg
3mm	19mm	5mm	0.16kg
4mm	26mm	6mm	0.27kg
4mm	20mm	6mm	0.29kg
5mm	27mm	7mm	0.44kg
5mm	20mm	7mm	0.49kg
5.5mm	30mm	8mm	0.54kg
5.5mm	24mm	10mm	0.60kg
6mm	31mm	9mm	0.65kg
6mm	24mm	9mm	0.72kg
7mm	37mm	10mm	0.88kg
7mm	28mm	10mm	0.96kg
8mm	38mm	11mm	1.18kg
8mm	32mm	12mm	1.27kg
9mm	39mm	13mm	1.55kg
9mm	36mm	14mm	1.61kg
10mm	42mm	15mm	1.95kg
12mm	54mm	20mm	2.77kg
12mm	48mm	19mm	2.88kg

* DIN 766 STANDARD

DIA	INSIDE LENGTH	OUTSIDE WIDTH	WEGHT/M
2mm	12mm	3.5mm	0.07kg
3mm	16mm	5mm	0.163kg
4mm	16mm	5mm	0.32kg
5mm	18.5mm	6mm	0.50kg
6mm	18.5mm	7.2mm	0.80kg
7mm	22mm	8.4mm	1.10kg
8mm	24mm	9.6mm	1.40kg
9mm	27mm	10.8mm	1.80kg
10mm	28mm	12mm	2.30kg
13mm	36mm	15.6mm	3.80kg



STAINLESS STEEL LINK CHAIN SUS 304/316

* ASTM80 STANDARD

* NACM84/90 STANDARD

DIA		INSIDE LENGTH	OUTSIDE WIDTH	WEGT/M
1/8mm	4mm	23mm	7mm	0.29kg
3/16	5.5mm	24mm	10.2mm	0.60kg
1/4	7mm	25.4mm	12.7mm	1.07kg
5/16	8.7mm	27.9mm	12.7mm	1.57kg
3/8	10mm	31.2mm	15.7mm	2.30kg
1/2	13mm	39.6mm	18.2mm	4.00kg

DIA		INSIDE LENGTH	OUTSIDE WIDTH	WEGT/M
1/8mm	4mm	23mm	7mm	0.29kg
3/16	5.5mm	24mm	10.2mm	0.60kg
1/4	7mm	29.3mm	11mm	0.98kg
5/16	8mm	31.5mm	12.4mm	1.28kg
3/8	10mm	33.6mm	15.1mm	2.12kg
1/2	13mm	43.7mm	19.8mm	3.16kg

BINDER CHAIN

* CHAINS WITH CLEVIS/EYE GRAB HOOKS ON BOTH ENDS



SIZE	ASTM80			NACM90			NACM96			PC/DRUM
	WT KG	W.L. LB	B.L. LB	WT KG	W.L. LB	B.L. LB	WT KG	W.L. LB	B.L. LB	
GRADE 43										
1/4x14'	5.0	2150	7750	4.5	2600	7500	4.5	2600	7800	50
1/4x16'	6.0	2150	7750	5.0	2600	7500	5.0	2600	7800	40
5/16x14'	7.5	3200	11600	6.0	3900	9700	7.0	3900	11700	35
5/16x16'	8.5	3200	11600	6.5	3900	9700	8.0	3900	11700	30
5/16x18'	9.5	3200	11600	7.5	3900	9700	9.0	3900	11700	30
5/16x20'	10.5	3200	11600	8.0	3900	9700	9.5	3900	11700	25
5/16x25'	13.0	3200	11600	10.0	3900	9700	12.0	3900	11700	20
5/16x30'	15.5	3200	11600	12.0	3900	9700	14.0	3900	11700	20
3/8x14'	10.5	4450	16200	9.5	5400	15200	10.0	5400	16200	25
3/8x16'	12.0	4450	16200	11.0	5400	15200	11.5	5400	16200	25
3/8x20'	15.0	4450	16200	13.5	5400	15200	13.5	5400	16200	20
3/8x25'	18.5	4450	16200	16.5	5400	15200	17.5	5400	16200	20
GRADE 70										
1/4x14'	5.0	3150	12600	4.5	3150	12100	4.0	3150	12600	50
1/4x16'	6.0	3150	12600	5.0	3150	12100	5.0	3150	12600	40
5/16x14'	7.5	4700	18800	7.0	4700	18800	7.0	4700	18800	35
5/16x16'	8.5	4700	18800	8.0	4700	18800	8.0	4700	18800	30
5/16x18'	9.5	4700	18800	8.5	4700	18800	9.0	4700	18800	30
5/16x20'	10.5	4700	18800	9.0	4700	18800	10.0	4700	18800	25
5/16x25'	13.0	4700	18800	10.0	4700	18800	12.0	4700	18800	20
5/16x30'	15.5	4700	18800	12.0	4700	18800	14.5	4700	18800	20
3/8x14'	10.5	6600	26400	9.5	6600	24700	10.0	6600	26400	25
3/8x16'	12.0	6600	26400	11.0	6600	24700	11.5	6600	26400	20
3/8x20'	15.0	6600	26400	13.5	6600	24700	14.5	6600	26400	20
3/8x25'	18.5	6600	26400	16.5	6600	24700	18.0	6600	26400	15


USA STANDARD
CHAIN WITH HOOKS



* CHAIN WITH "S" HOOKS ON BOTH ENDS

SIZE	ASTM80			NACM90			NACM96		
	WT	WL	BL	WT	WL	BL	WT	WL	BL
—	KG	LB	LB	KG	LB	LB	KG	LB	LB
3/16"48"	0.8	800	3200	0.8	800	3200	0.8	800	3200
1/4"48"	1.5	1330	5300	1.4	1300	5200	1.4	1300	5200
5/16"48"	2.2	2000	8000	1.9	1900	6800	2.0	1900	7600

*CHAIN WITH DELTA RING AND GRAB HOOK EACH ON ONE END

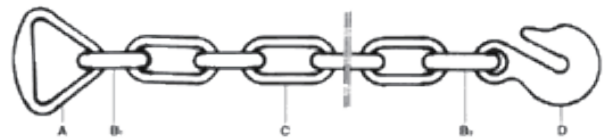

SIZE	ASTM80			NACM90			NACM96		
	WT	WL	BL	WT	WL	BL	WT	WL	BL
—	KG	LB	LB	KG	LB	LB	KG	LB	LB
3/16"48"	0.8	800	3200	0.8	800	3200	0.8	800	3200
1/4"48"	1.5	1330	5300	1.4	1300	5200	1.4	1300	5200
5/16"48"	2.2	2000	8000	1.9	1900	6800	2.0	1900	7600



GALVANIZED GENERAL ANIMAL CHAIN

* ANIMAL CHAIN

Specifications		Length	N.W/Doz	Quantity/Case	Packing Meas
NO.	Size(m/m)				
16	1.6	6	1.64	30	530x390x290
20	1.8	6	1.91	20	530x430x220
22	2.0	6	2.36	20	530x430x250
25	2.3	6	3.13	15	530x390x290
30	2.7	6	4.07	10	530x430x220
35	3.0	6	4.82	10	530x430x250
40	3.2	6	5.48	5	530x430x250
45	3.8	6	7.49	5	530x430x250
50	4.2	6	8.8	5	530x430x250



* USA STANDARD PET CHAINS

NO.	Material Diameter	Inside Length	Outside Width	Weight/Doz		
				10'	15'	20'
1	1.6	26	9.2	2.8	4.2	5.6
2	2.0	37.2	11.2	3.3	5	6.6
3	2.5	48	14	4.4	6.5	8.8
4	3.0	49.5	15	7	10.5	14
5	3.5	56	16	9	13.5	18
6	3.8	62	17.6	11.4	17.1	22.8



* ORNAMENT CHAIN

NO.	Material Diameter	Inside Length	Outside Width	Weight/Doz	
				KG/100'	KG/25m'
1	1.2	19	6	1.3	0.925
2	1.6	21	8	1.98	1.58
3	2.0	24	11	3.4	2.8
4	2.2	25	12	3.8	3.2
5	2.8	28	15	6.3	5.3
6	3.0	30	16	7.8	5.9

* 500 ORNAMENT CHAIN

Specifications	Material Diameter	Inside Length	Inside Width	Weight(g/100m)
500/u1	1.1	16	4	2.6
500/u2	1.4	16	4.5	4.8
500/u3	1.6	20	5.5	6.6
500/u4	1.8	24	6.5	7.8
500/u5	2.0	24	6.5	9
500/u6	2.2	27	7	9.64
500/u7	2.4	30	8.3	14.1
500/u8	2.7	34	9	18
500/u9	3.0	38	8	21.7



CHAINS FOR SHIP

* OPEN LINK CHAIN GB594-77

Link DIA.	Outside Length	Outside Width	Testing Load	Breaking Load	Weight
MM	MM	MM	TF	TF	KG/M
8	41	28	1.2	2.40	1.41
9	46	31	1.55	3.10	1.77
11	56	38	2.30	4.60	2.65
13	65	45	3.20	6.40	3.73
15	75	52	4.30	8.60	4.97
17	85	59	5.50	11.00	6.38
19	95	66	6.80	13.60	7.97
22	110	76	9.20	18.40	10.70
25	125	86	11.80	23.60	13.80



* OPEN LINK CHAIN GB549-83

Link DIA.	Outside Length	Outside Width	Testing Load	Breaking Load	Weight
MM	MM	MM	TF	TF	KG/M
8	40	27	1.2	2.41	1.39
9	45	30	1.52	3.05	1.76
10	50	34	1.88	3.77	2.16
11	55	37	2.27	4.56	2.65
12.5	63	43	2.93	5.89	3.40
14	70	48	3.68	7.39	4.26
16	80	64	4.81	9.65	5.56
18	90	60	5.75	11.55	6.66
19	95	64	6.79	13.61	7.97
20	100	68	7.90	15.84	9.14
22	110	75	9.10	18.25	10.52
24	120	81	10.83	21.72	12.52



* STUD LINK CHAIN GB549-77

Link DIA.	Outside Length	Outside Width	Testing Load		Breaking Load		Weight
MM	MM	MM	class1	class1	class1	class1	KG/M
13	78	47	5.1		7.3		3.73
15	90	54	6.7		9.6		4.97
17	102	61	8.6		12.3		6.38
19	114	69	10.7		15.3		7.97
22	132	79	14.3		20.4		10.70
25	150	90	18.4	26.3	26.3	36.8	13.80
28	168	100	22.9	32.7	32.7	45.8	17.30



CHAINS FOR SHIP

* STUD LINK CHAIN GB549-83

Link DIA.	Outside Length	Outside Width	Testing Load(TF)		Breaking Load(TF)		Weight
			class1	class2	class1	class2	
MM	MM	MM	class1	class2	class1	class2	KG/M
12.5	75	45	4.7(46.1)	6.7(65.7)	6.7(65.7)	9.4(92.2)	3.42
14	84	50	5.9(57.9)	8.4(82.4)	8.4(82.4)	11.8(116.0)	4.29
16	96	58	7.7(75.5)	10.9(107.0)	10.9(107.0)	15.3(150.0)	5.60
17.5	105	63	9.1(89.2)	13.0(127.0)	13.0(127.0)	18.3(179.0)	6.70
19	114	68	10.7(105.2)	15.3(150)	15.3(150)	21.5(211.0)	7.90
20.5	123	74	12.5(123.0)	17.8(175.0)	17.8(175.0)	24.9(244.0)	9.20
22	132	79	14.3(140.0)	20.4(200.0)	20.4(200.0)	28.6(280.0)	10.6
24	144	86	17.0(167.0)	24.2(237.0)	24.2(237.0)	33.9(332.0)	12.61
26	156	94	19.8(194.0)	28.3(278.0)	28.3(278.0)	39.7(389.0)	14.80
28	168	101	22.9(225.0)	32.7(321.0)	32.7(321.0)	45.8(449.0)	17.17



* P(5),S(6) LIFTING CHAIN

Link DIA.	Outside Length	Outside Width	Testing Load		Breaking Load		Weight
			KN S(5)	KN S(5)	KN S(6)	KN S(6)	
MM	MM	MM	KN S(5)	KN S(5)	KN S(6)	KN S(6)	KG/M
8	24	26	25.1	50.2	31.7	63.3	1.4
10	30	34	39.2	78.5	49.5	99	2.2
12	42	40.8	58.1	116	71.3	142.5	2.88
14	50	47.6	77	154	97	194	3.92
16	56	54.5	100	201	126.7	253.5	5.04
18	64	61.2	127	254	160.3	320.6	6.24
20	70	68	157	314	197.9	395.8	8
25	86	74.8	187	374	239.5	479	9.24
25	88	83	245	490	309	618	12.4





ATLI INDUSTRY CO., LIMITED
杭州腾力工贸有限公司
www.atlichain.com sales@atlichain.com

NO.1-1207 Tongren Jinhua Bld
NO.616,Gudun Rd.,HangZhou,310015,ZheJiang,China
浙江省杭州市古墩路616号同人精华大厦1号楼1207室
TEL:+86571 85839981 FAX:+86571 85839982