



Test Report: LRS-100-48

100W Single Output Switching Power Supply

■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Component Stress Test

■ SAFETY & E.M.C. TEST

Safety Test

E.M.C. Test

■ RELIABILITY TEST

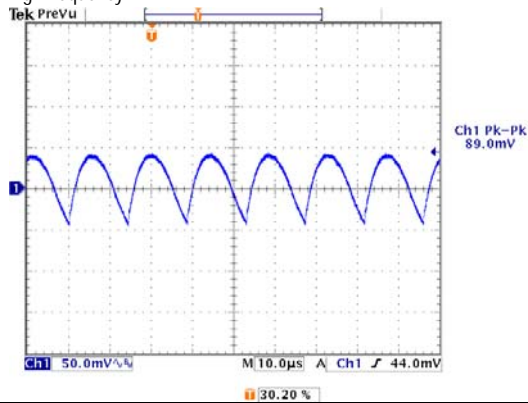
ENVIRONMENT TEST

DESIGN VERIFY TEST


OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OUTPUT VOLTAGE ADJUST RANGE	CH1:43.2 V- 52.8 V	I/P: 230 VAC I/P: 115 VAC O/P: MIN LOAD Ta: 25°C	50.685V-55.101V/230VAC 40.684V-54.344V/115VAC
2	OUTPUT VOLTAGE(Max) TOLERANCE	V1: -1 %- 1 %	I/P: 100VAC /264VAC O/P:FULL/ MIN. LOAD Ta:25°C	V1:- 0.042 %- 0.042%
3	LINE REGULATION (Max)	V1: 0.5 %- 0.5 %	I/P: 100VAC~ 264VAC O/P:FULL LOAD Ta:25°C	V1:-0.021 %-- 0.021%
4	LOAD REGULATION(Max)	V1: -0.5 %-0.5%	I/P: 230VAC O/P:FULL -MIN LOAD Ta:25°C	V1: -0 %- 0%
5	OVER/UNDERSHOOT TEST	< ±5%	I/P: 230VAC O/P:FULL LOAD Ta:25°C	<5%
6	RIPPLE & NOISE(Max)	V1: 200 mVp-p	I/P:230VAC O/P:FULL LOAD Ta:25°C	V1: 106mVp-p

high frequency :




low frequency :

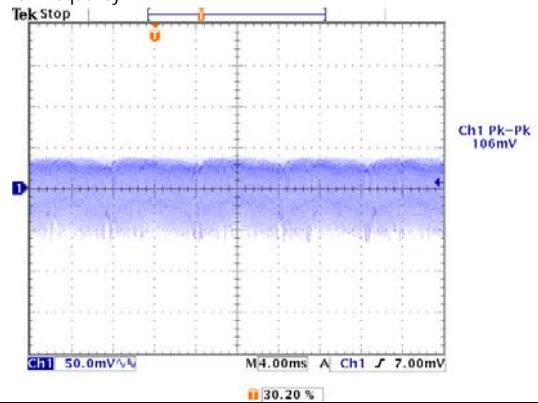

7	SET UP TIME(Max)	230VAC/500ms 115VAC/ 500ms	I/P: 230 VAC I/P: 115 VAC O/P: FULL LOAD Ta: 25°C	230VAC/ 218ms 220VAC/ 220ms
---	------------------	-------------------------------	--	--------------------------------


INPUT=230VAC/50HZ @ FULL LOAD






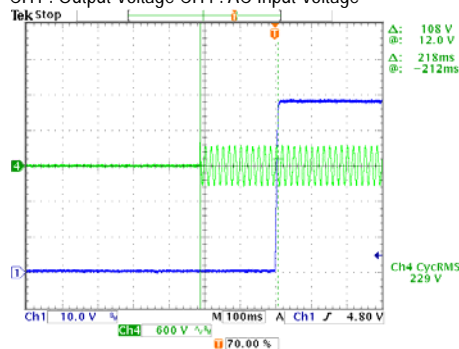
CH1 : Output Voltage CH4 : AC Input Voltage




INPUT=115VAC/60HZ @ FULL LOAD

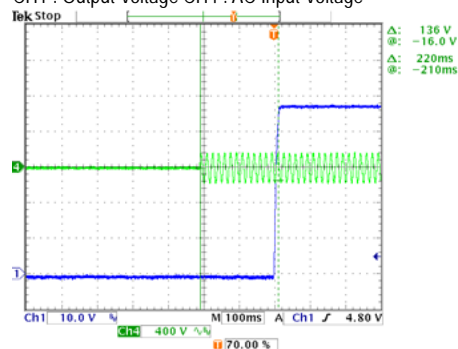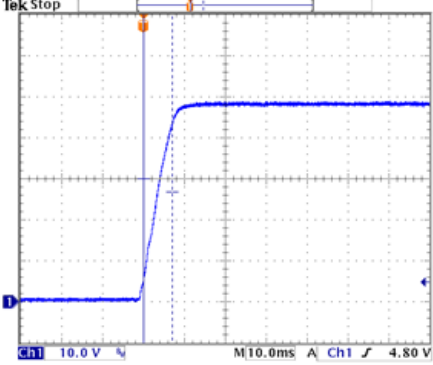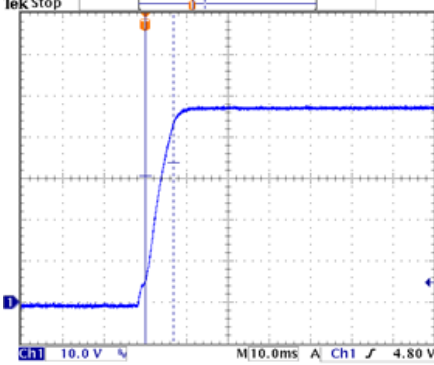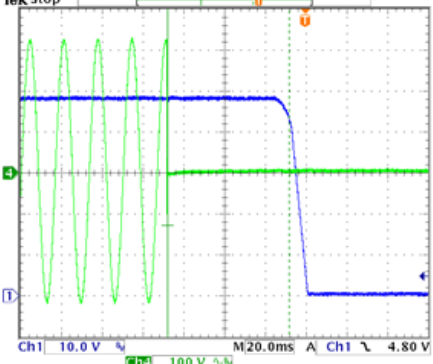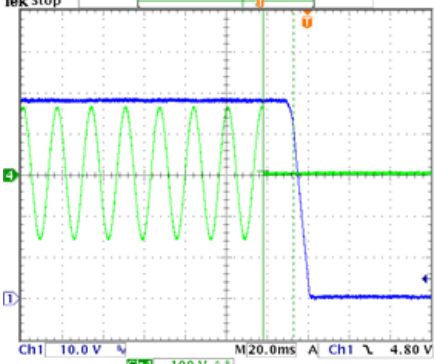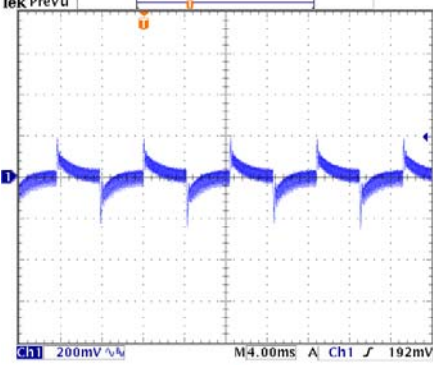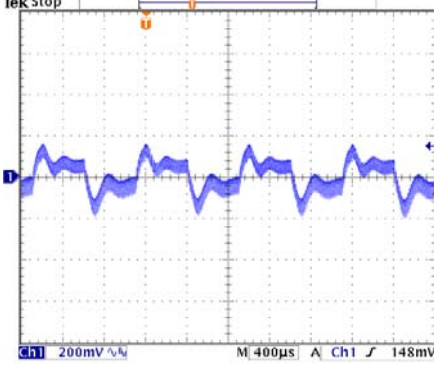
CH1 : Output Voltage CH4 : AC Input Voltage



8	RISE TIME (Max) 230VAC/ 30ms 115VAC/ 30ms	I/P: 230 VAC I/P: 115 VAC O/P: FULL LOAD Ta: 25°C	230VAC/ 7.00ms 115VAC/6.80ms
<p>INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage</p> 		<p>INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage</p> 	
9	HOLD UP TIME(Typ) 230VAC/ 5ms 115VAC/ 10ms	I/P: 230 VAC I/P: 115 VAC O/P: FULL LOAD Ta: 25°C	230VAC/ 59.6ms 115VAC/ 14.8ms
<p>INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage CH4 : AC Input Voltage</p> 		<p>INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage CH4 : AC Input Voltage</p> 	
10	DYNAMIC LOAD V1: 4800 mVp-p	I/P: 230VAC O/P: (1)FULL /50% LOAD 50%DUTY / 120HZ (2)FULL /50% LOAD 50%DUTY / 1KHZ Ta:25°C	452mVp-p 360mVp-p
<p>FULL /50% LOAD 50%DUTY / 120HZ</p> 		<p>FULL /50% LOAD 50%DUTY / 1KHZ</p> 	

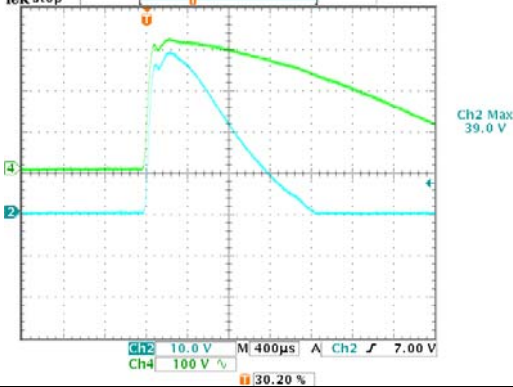INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	85VAC~264VAC	I/P:TESTING O/P:FULL LOAD Ta:25°C	77V~264V
			I/P: (1)LOW-LINE-3V=167 V HIGH-LINE+15%=300 V O/P:FULL/MIN LOAD ON: 30 Sec OFF: 30 Sec 10MIN (2)230Vac ON: 0.5 Sec OFF: 0.5 Sec 20MIN (3)230Vac ON:3Sec OFF:3Sec 12HOURS (POWER ON/OFF NO DAMAGE)	TEST:OK
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE	I/P:170 VAC ~264 VAC O/P:FULL-MIN LOAD Ta:25°C	TEST: OK
3	INPUT CURRENT (Typ)	230V/ 1.2A 115V/ 1.9A	I/P: 230 VAC I/P: 115 VAC O/P: FULL LOAD Ta: 25°C	I =1.08A/ 230VAC I =1.82A/ 115VAC
4	LEAKAGE CURRENT	< 0.75 mA / 240 VAC	I/P: 240 VAC O/P: Min LOAD Ta: 25°C	L-FG: 0.317 mA N-FG: 0.317 mA
5	NO LOAD CONSUMPTION	< 0.3 W	I/P: 115VAC I/P: 230VAC O/P: NO LOAD Ta: 25°C	< 0.1692 W < 0.2820 W
6	INRUSH CURRENT(Typ)	230V/50A COLD START	I/P: 230 VAC O/P: FULL LOAD Ta: 25°C	I =39.0A/ 230VAC
<p>INPUT=230VAC/50HZ @ FULL LOAD CH2 : Input current (1V=1A) CH4 : AC Input Voltage</p>  <p>Ch2 10.0 V M 400µs A Ch2 7.00 V Ch4 100 V 30.20 %</p>				
7	EFFICIENCY(Typ)	91%	I/P:230 VAC O/P:FULL LOAD Ta:25°C	91.53%

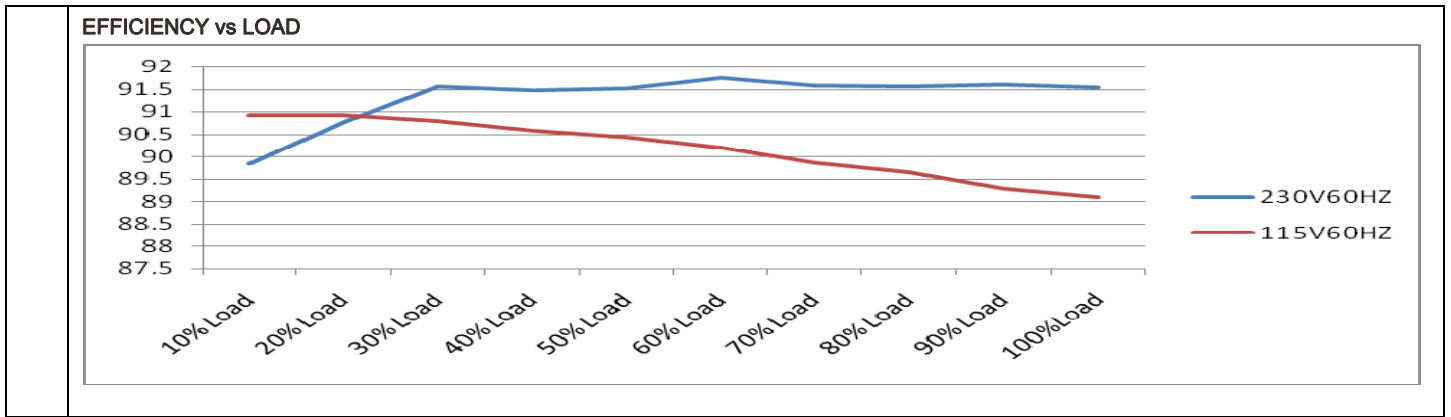

PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER LOAD PROTECTION	110%~ 150%	I/P: 230VAC I/P: 115VAC O/P: TESTING Ta:25°C	124.34%/ 230VAC 117.39%/115VAC Hiccup Mode
2	OVER VOLTAGE PROTECTION	CH:55.2V-64.8V	I/P: 230VAC I/P: 115VAC O/P: MIN LOAD Ta:25°C	63.2V/ 230VAC 62.4V/115VAC Shut down Re- power ON
3	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 264VAC O/P: FULL LOAD Ta:25°C	NO DAMAGE Hiccup Mode

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Transistor (D to S) or (C to E) Peak Voltage	Q1 Rated 11 A / 600 V	I/P:High-Line +3V =267V AC ON/OFF VDS: O/P: (1)Full Load (2)Output Short (3)Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4)Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5)Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6)Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load. Ta:25°C	(1)538V (2)536V (3)554V (4)542V (5)540V (6)560V (7)548V
2	Diode Peak Voltage	Q101 Rated 20 A / 300 V	I/P:High-Line +3V =267 V AC ON/OFF O/P: (1)Full Load (2)Output Short (3)Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4)Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5)Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6)Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load. (8).NO LOAD Ta:25°C	Q101: (1)266V (2)226V (3)265V (4)265V (5)262V (6)265V (7)273V (8)265V
3	Input Capacitor Voltage	C5 Rated: 150 μ /400V	I/P:High-Line +3V =267 V O/P: (1)Full Load input on/off (2) Min load input on /Off (3)Full Load /Min load Change Ta:25°C	(1)366V (2)368V (3)366V
4	Control IC Voltage Test	PWM IC U1 Rated 28 V(MAX) 9.5V(MIN)	I/P:High-Line +3V =267 V AC ON/OFF O/P(1)FULL LOAD (2) Output Short (3)O.L.P (4)O.V.P. (5)NO LOAD VR Min. LOW LINE Ta:25°C	(1) 21.6V (2) 12.4V (3) 21.2V (4) 25.4V (5) 16.3V
5	Clamp Diode Peak Voltage	D 5 Rated: 800 V 2 A	I/P: High-Line +3V = 267 V AC ON/OFF O/P: (1) Dynamic Load 90%Duty/1KHz (2)Full load continue Ta: 25°C	(1) 468V (2) 466V

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P: 4KVAC/min I/P-FG :2KVAC/min O/P-FG:1.25KVAC/min	I/P-O/P: 4.4 KVAC/min I/P-FG: 2.4 KVAC/min O/P-FG:1.5 KVAC/min Ta:25°C	I/P-O/P:2.514mA I/P-FG:2.183mA O/P-FG:1.744mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P:500VDC>100MΩ I/P-FG: 500VDC>100MΩ O/P-FG:500VDC>100MΩ	I/P-O/P: 500 VDC I/P-FG: 500 VDC O/P-FG: 500 VDC Ta:25°C	I/P-O/P: 9999MΩ I/P-FG: 9999MΩ O/P-FG: 9999MΩ NO DAMAGE
3	GROUNDING CONTINUITY	FG(PE) TO CHASSIS OR TRACE < 100 mΩ	40A / 2min Ta:25°C	6mΩ

E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	EN61000-3-2 CLASS A	I/P:230VAC/50HZ O/P: FULL LOAD Ta:25°C	PASS
2	CONDUCTION	EN55022 CLASS B	I/P: 230 VAC (50HZ) O/P: FULL/50% LOAD Ta: 25°C	PASS Test by certified Lab
3	RADIATION	EN55022 CLASS B	I/P: 230 VAC (50HZ) O/P: FULL LOAD Ta: 25°C	PASS Test by certified Lab
4	E.S.D	EN61000-4-2 INDUSTRY AIR: 8KV / Contact: 4KV	I/P: 230 VAC/50HZ O/P: FULL LOAD Ta: 25°C	CRITERIA A
5	E.F.T	EN61000-4-4 INDUSTRY INPUT: 2KV	I/P: 230 VAC/50HZ O/P: FULL LOAD Ta: 25°C	CRITERIA A
6	SURGE	IEC61000-4-5 INDUSTRY L-N : 2KV L,N-PE: 4KV	I/P: 230 VAC/50HZ O/P: FULL LOAD Ta: 25°C	CRITERIA A
7	Test by certified Lab & Test Report Prepare			

RELIABILITY TEST

ENVIRONMENT TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																																																												
1	TEMPERATURE RISE TEST	MODEL: LRS-100-24 1. ROOM AMBIENT BURN-IN: 2 HRS I/P: 230VAC O/P: FULL LOAD Ta=18.6℃ 2. HIGH AMBIENT BURN-IN: 2 HRS I/P: 230VAC O/P: FULL LOAD Ta=51.9℃																																																														
				<table border="1"> <thead> <tr> <th>NO</th> <th>Position</th> <th>ROOM AMBIENT Ta= 18.6 ℃</th> <th>HIGH AMBIENT Ta=51.9 ℃</th> </tr> </thead> <tbody> <tr><td>1</td><td>U1</td><td>46.2℃</td><td>79.1℃</td></tr> <tr><td>2</td><td>D30</td><td>48.2℃</td><td>81.1℃</td></tr> <tr><td>3</td><td>LF1</td><td>44.3℃</td><td>78.5℃</td></tr> <tr><td>4</td><td>BD1</td><td>51.1℃</td><td>83.7℃</td></tr> <tr><td>5</td><td>C5</td><td>42.7℃</td><td>74.2℃</td></tr> <tr><td>6</td><td>D5</td><td>52.2℃</td><td>86.6℃</td></tr> <tr><td>7</td><td>Q1</td><td>51.6℃</td><td>86.6℃</td></tr> <tr><td>8</td><td>R15</td><td>51.7℃</td><td>86.1℃</td></tr> <tr><td>9</td><td>C35</td><td>43.0℃</td><td>76.2℃</td></tr> <tr><td>10</td><td>T1coil</td><td>56.3℃</td><td>89.4℃</td></tr> <tr><td>11</td><td>T1coil</td><td>60.9℃</td><td>93.7℃</td></tr> <tr><td>12</td><td>C105</td><td>46.1℃</td><td>78.9℃</td></tr> <tr><td>13</td><td>Q101</td><td>62.5℃</td><td>94.6℃</td></tr> <tr><td>14</td><td>L100</td><td>39.0℃</td><td>72.1℃</td></tr> </tbody> </table>	NO	Position	ROOM AMBIENT Ta= 18.6 ℃	HIGH AMBIENT Ta=51.9 ℃	1	U1	46.2℃	79.1℃	2	D30	48.2℃	81.1℃	3	LF1	44.3℃	78.5℃	4	BD1	51.1℃	83.7℃	5	C5	42.7℃	74.2℃	6	D5	52.2℃	86.6℃	7	Q1	51.6℃	86.6℃	8	R15	51.7℃	86.1℃	9	C35	43.0℃	76.2℃	10	T1coil	56.3℃	89.4℃	11	T1coil	60.9℃	93.7℃	12	C105	46.1℃	78.9℃	13	Q101	62.5℃	94.6℃	14	L100	39.0℃	72.1℃
NO	Position	ROOM AMBIENT Ta= 18.6 ℃	HIGH AMBIENT Ta=51.9 ℃																																																													
1	U1	46.2℃	79.1℃																																																													
2	D30	48.2℃	81.1℃																																																													
3	LF1	44.3℃	78.5℃																																																													
4	BD1	51.1℃	83.7℃																																																													
5	C5	42.7℃	74.2℃																																																													
6	D5	52.2℃	86.6℃																																																													
7	Q1	51.6℃	86.6℃																																																													
8	R15	51.7℃	86.1℃																																																													
9	C35	43.0℃	76.2℃																																																													
10	T1coil	56.3℃	89.4℃																																																													
11	T1coil	60.9℃	93.7℃																																																													
12	C105	46.1℃	78.9℃																																																													
13	Q101	62.5℃	94.6℃																																																													
14	L100	39.0℃	72.1℃																																																													
2	OVER LOAD BURN-IN TEST	NO DAMAGE 1 HOUR (MIN)	I/P: 230 VAC O/P: 124 %LOAD Ta: 25℃	TEST: OK																																																												
3	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P: 264VAC/100VAC O/P: 100 %LOAD Ta= -30 ℃	TEST: OK																																																												
4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 50 ℃ NO DAMAGE	I/P: 272 VAC O/P: FULL LOAD Ta= 50 ℃ HUMIDITY= 95 %R.H	TEST: OK																																																												
5	TEMPERATURE COEFFICIENT	± 0.03 %/℃ (0-50℃)	I/P: 230 VAC O/P: FULL LOAD	0%/℃ (0-40℃)																																																												
6	STORAGE TEMPERATURE TEST	1. Thermal shock Temperature : -40℃~ +85℃ 2. Temperature change rate : 25℃ / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 5 CYCLE 5. Input/Output condition : STATIC		OK																																																												
7	THERMAL SHOCK TEST	1. Thermal shock Temperature : -30℃~ 70℃ 2. Temperature change rate : 25℃ / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 10 CYCLE 5. Input/Output condition : 230VAC/Full Load AC ON/OFF TEST turn on 58sec ; turn off 2sec		OK																																																												



8	VIBRATION TEST	1 Carton & 1 Set (1) Waveform: Sine Wave (2) Frequency: 10-500Hz (3) Sweep Time: 10min/sweep cycle (4) Acceleration: 5G (5) Test Time: 60min in each axis (X.Y.Z) (6) Ta: 25°C	TEST: OK
9	CAPACITOR LIFE CYCLE	SUPPOSE C105 IS THE MOST CRITICAL COMPONENT (1) I/P: 230VAC O/P: FULL LOAD Ta= 25 °C LIFE TIME (2) I/P: 230VAC O/P: FULL LOAD Ta=50 °C LIFE TIME (3) I/P: 230VAC O/P: 75% LOAD Ta= 50 °C LIFE TIME (4) I/P: 230VAC O/P: 50% LOAD Ta= 50 °C LIFE TIME	(1) 396481HRS (2) 72523HRS (3) 104095HRS (4) 156612HRS
10	MTBF	MIL-HDBK-217F TOTAL FAILURE RATE: 720.6KHRS	
11	DMTBF/Accelerated Life Test	Demonstration Mean Time Between Failure (Expected Life): Above 30,000 hours @ TA 50°C	

TEST RESULT	TESTER	APPROVAL
PASS	FRANK	WANGDZ

2007/3/20 A50-S014