



Test Report: RSP-1600-48

1600W Power Supply with Single Output

■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Control Function Test

Component Stress Test

■ SAFETY & E.M.C. TEST

Safety Test

E.M.C. Test



■ RELIABILITY TEST

ENVIRONMENT TEST

■ DESIGN VERIFY TEST

OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OUTPUT VOLTAGE ADJUST RANGE	CH1: 47.5 V~ 58.8V	I/P : 230 VAC I/P : 115 VAC O/P : MIN LOAD Ta : 25°C	45.62V~60.1V/230VAC 45.62V~60.1V/115VAC
2	OUTPUT VOLTAGE(Max) TOLERANCE	V1: 1%~-1%	I/P: 180VAC /264VAC O/P:FULL/ MIN. LOAD Ta:25°C	V1: 0.2%~-0.2%
3	LINE REGULATION (Max)	V1: 0.5%~-0.5%	I/P: 180VAC~ 264VAC O/P:FULL LOAD Ta:25°C	V1: 0.07%~-0.07%
4	LOAD REGULATION(Max)	V1: 0.5%~-0.5%	I/P: 230VAC O/P:FULL ~MIN LOAD Ta:25°C	V1: 0.05%~-0.05%
5	OVER/UNDERSHOOT TEST	< ±5%	I/P: 230VAC O/P:FULL LOAD Ta:25°C	<5%
6	RIPPLE & NOISE(Max)	V1: 300 mVp-p	I/P:230VAC O/P:FULL LOAD Ta:25°C	V1: 169 mVp-p

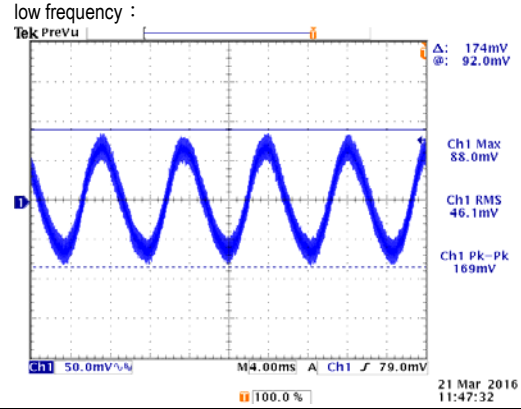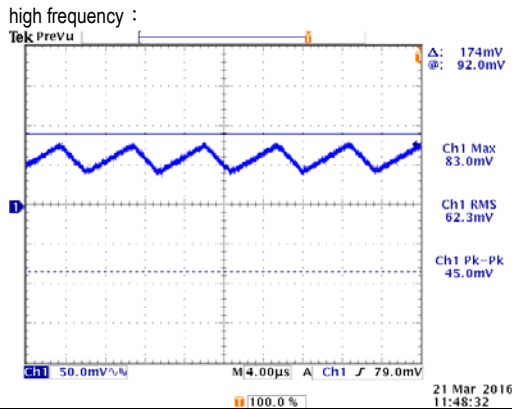


7	SET UP TIME(Max)	230VAC/1500ms	I/P : 230 VAC O/P : FULL LOAD Ta : 25°C	230VAC/ 1120 ms
INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage				

	<p> Δ: 288 V $@$: -12.0 V Δ: 1.12 s $@$: -1.08 s </p> <p>Ch1 10.0 V Ch2 600 V M 400ms A Ch1 4.80 V</p>		
8	RISE TIME (Max) INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage	230VAC/60ms <p> Δ: 1.00 V $@$: 33.6 V Δ: 36.4ms $@$: -200µs </p> <p>Ch1 10.0 V M 10.0ms A Ch1 4.80 V</p>	I/P : 230 VAC O/P : FULL LOAD Ta : 25°C 230VAC/ 36.4 ms
9	HOLD UP TIME (Typ.) INPUT=230VAC/50HZ @ 75% LOAD CH1 : Output Voltage CH2 : AC Input Voltage	230VAC 75%/ 16ms 230VAC 100%/10ms <p> -6.831s 50.00µs/ 停止 </p>	I/P : 230 VAC O/P : 75% LOAD O/P : 100% LOAD Ta : 25°C 17 ms (75% load) 12.8ms (100% load) INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage <p> -7.587s 20.00µs/ 停止 </p>

10	DYNAMIC LOAD	V1: 4800 mVp-p	I/P: 230VAC O/P: (1)FULL /50% LOAD 50%DUTY / 120HZ (2)FULL /50% LOAD 50%DUTY / 1KHZ Ta:25°C	498mVp-p 442mVp-p
	<p>FULL /50% LOAD 50%DUTY / 120HZ</p>		<p>FULL /50% LOAD 50%DUTY / 1KHZ</p>	


INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	90VAC~264VAC	I/P:TESTING O/P:FULL LOAD Ta:25°C	150 V~264V
			I/P: (1)LOW-LINE-3V=87 V HIGH-LINE+15%=300 V O/P:FULL/MIN LOAD (PLEASE CHECK DERATING CURVE) ON: 30 Sec OFF: 30 Sec 10MIN (2)230Vac ON: 0.5 Sec OFF: 0.5 Sec 20MIN (3)230Vac ON:3Sec OFF:3Sec 12HOURS (POWER ON/OFF NO DAMAGE)	TEST:OK
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE	I/P:90 VAC ~264 VAC O/P:FULL~MIN LOAD Ta:25°C	TEST: OK
3	INPUT CURRENT (Typ.)	230V/ 8.5 A 115V/ 15 A	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD (PLEASE CHECK DERATING CURVE) Ta : 25°C	I =7.72A/ 230VAC I =12.7A/ 115VAC
4	LEAKAGE CURRENT	<2 mA / 230 VAC	I/P : 230 VAC O/P : Min LOAD Ta : 25°C	L-FG : 0.6 mA N-FG : 0.6 mA
5	POWER FACTOR (Typ.)	0.97 / 230VAC	I/P : 230 VAC O/P : FULL LOAD Ta : 25°C	PF=0.978/230VAC
	P.F vs LOAD			

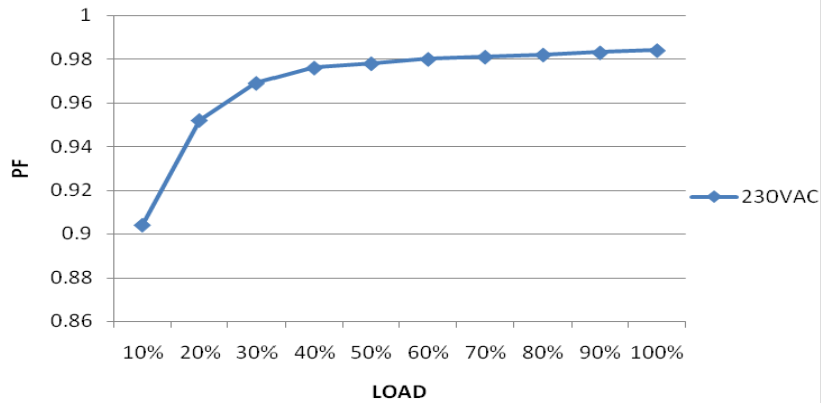

6	EFFICIENCY(Typ.)	93%	I/P:230 VAC O/P:FULL LOAD Ta:25°C	93.5%
---	------------------	-----	-----------------------------------------	-------


EFFICIENCY vs LOAD

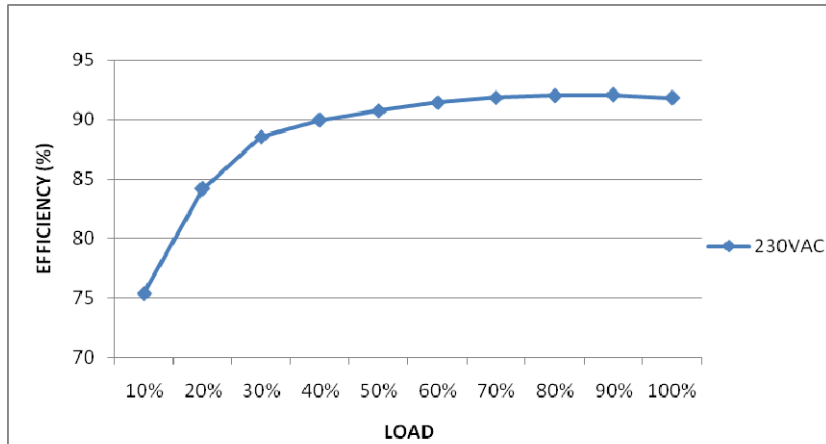

7	INRUSH CURRENT(Typ.)	230V/35 A COLD START	I/P : 230 VAC O/P : FULL LOAD Ta : 25°C	I=31.6A/ 230VAC T50= 1920 us/230V
---	----------------------	-------------------------	-----------------------------------------------	--------------------------------------

INPUT=230VAC/50HZ @ FULL LOAD


CH1 : Input current



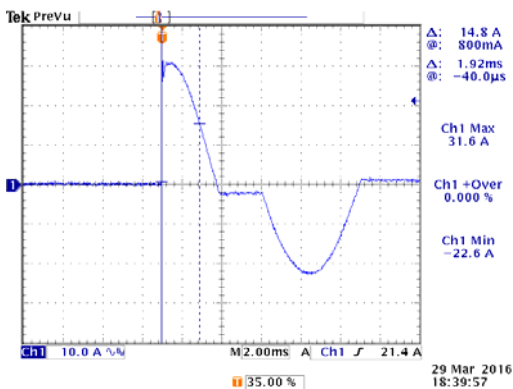


PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER LOAD PROTECTION	105 %~ 115 % PROTECTION TYPE : Constant current limiting, unit will shut down o/p voltage after 5 sec. re-power on to recover	I/P: 264VAC I/P: 230VAC I/P: 180VAC O/P: TESTING Ta:25°C	107.76%/ 264VAC 107.76%/ 230VAC 107.76%/180VAC PROTECTION TYPE : Constant current limiting, unit will shut down o/p voltage after 5 sec. re-power on to recover
2	OVER VOLTAGE PROTECTION	63 V~ 75 V PROTECTION TYPE : Shut down o/p voltage, re-power on to recover	I/P: 264VAC I/P: 230VAC I/P: 90VAC O/P: MIN LOAD Ta:25°C	69V/ 264VAC 69V/ 230VAC 69V/ 90VAC PROTECTION TYPE : Shut down o/p voltage, re-power on to recover
3	OVER TEMPERATURE PROTECTION	NO DAMAGE PROTECTION TYPE : Shut down o/p voltage, recovers automatically after temperature goes down	I/P: 264VAC I/P: 90VAC O/P: FULL LOAD	O.T.P. Active PROTECTION TYPE : Shut down o/p voltage, recovers automatically after temperature goes down
4	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE PROTECTION TYPE : Constant current limiting, unit will shut down o/p voltage after 5 sec. re-power on to recover	I/P: 264VAC I/P: 90VAC O/P: FULL LOAD Ta:25°C	NO DAMAGE PROTECTION TYPE : Constant current limiting, unit will shut down o/p voltage after 5 sec. re-power on to recover

CONTROL FUNCTION TEST

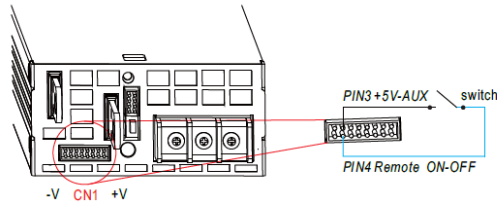NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT											
1	AUXILIARY POWER (AUX)	1. 5V±10%@0.3A ripple:150mVp-p 2. 12V±10%@0.8A ripple:250mVp-p	I/P: 230 VAC O/P: FULL LOAD Ta:25°C	4.78 V 0.3A ; ripple: 15.9mVp-p 11.16V 0.8 A ; ripple: 100 mVp-p											
2	REMOTE ON/OFF CONTROL	<p>※ The power supply can be turned ON/OFF individually or along with other units by using the "Remote ON-OFF" function.</p>  <p>I/P: 230 VAC O/P: FULL LOAD Ta:25°C Test Result :</p> <table border="1" data-bbox="470 1765 1077 1870"> <thead> <tr> <th>Between Remote ON-OFF and +5V-AUX</th> <th>Power Supply Status</th> </tr> </thead> <tbody> <tr> <td>SW SHORT</td> <td>ON</td> </tr> <tr> <td>SW OPEN</td> <td>OFF</td> </tr> </tbody> </table>	Between Remote ON-OFF and +5V-AUX	Power Supply Status	SW SHORT	ON	SW OPEN	OFF	<table border="1" data-bbox="1045 1496 1492 1594"> <thead> <tr> <th>Between Remote ON-OFF and +5V-AUX</th> <th>Power Supply Status</th> </tr> </thead> <tbody> <tr> <td>Switch Short</td> <td>ON</td> </tr> <tr> <td>Switch Open</td> <td>OFF</td> </tr> </tbody> </table>	Between Remote ON-OFF and +5V-AUX	Power Supply Status	Switch Short	ON	Switch Open	OFF
Between Remote ON-OFF and +5V-AUX	Power Supply Status														
SW SHORT	ON														
SW OPEN	OFF														
Between Remote ON-OFF and +5V-AUX	Power Supply Status														
Switch Short	ON														
Switch Open	OFF														
3	REMOTE SENSE	S+ / S- >0.5V Compensate voltage drop on the load wiring up to 0.5V.	I/P: 230 VAC O/P: FULL LOAD Ta:25°C	> 0.5 V											
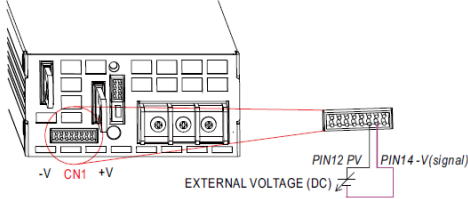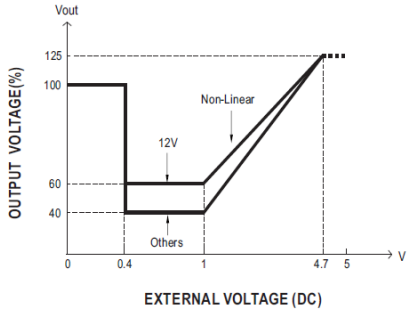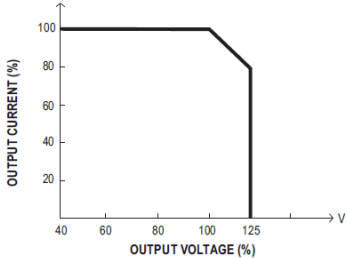
<p>4 ALARM SIGNAL</p>	<p>1. DC OK SIGNAL High (4.5 ~ 5.5V) : When the $V_{out} \leq 80\% \pm 5\%$. Low (-0.1 ~ 0.5V) : When $V_{out} \geq 80\% \pm 5\%$. The maximum sourcing current is 10mA and only for output. I/P: 230 VAC O/P: FULL LOAD Ta: 25°C Test Result :</p> <table border="1" data-bbox="544 479 1058 560"> <thead> <tr> <th>Vout</th> <th>DC OK SIGNAL</th> </tr> </thead> <tbody> <tr> <td>$V_{out} \leq 75\%$</td> <td>5.037 V</td> </tr> <tr> <td>$V_{out} \geq 85\%$</td> <td>-0.09V</td> </tr> </tbody> </table> <p>2. T-ALARM</p> <table border="1" data-bbox="536 618 1128 698"> <thead> <tr> <th>P.S.U STATUS</th> <th>Vo</th> <th>T-ALARM</th> </tr> </thead> <tbody> <tr> <td>NORMAL</td> <td>100%±2%</td> <td>-0.1 ~0.5V</td> </tr> <tr> <td>OTP OR FAN LOCK</td> <td>0V</td> <td>4.5~5.5V</td> </tr> </tbody> </table> <p>I/P: 230 VAC O/P: FULL LOAD Ta: 25°C Test Result :</p> <table border="1" data-bbox="536 797 1115 898"> <thead> <tr> <th>P.S.U STATUS</th> <th>T-ALARM</th> </tr> </thead> <tbody> <tr> <td>NORMAL</td> <td>-0.09V</td> </tr> <tr> <td>OTP OR FAN LOCK</td> <td>4.998V</td> </tr> </tbody> </table>	Vout	DC OK SIGNAL	$V_{out} \leq 75\%$	5.037 V	$V_{out} \geq 85\%$	-0.09V	P.S.U STATUS	Vo	T-ALARM	NORMAL	100%±2%	-0.1 ~0.5V	OTP OR FAN LOCK	0V	4.5~5.5V	P.S.U STATUS	T-ALARM	NORMAL	-0.09V	OTP OR FAN LOCK	4.998V
Vout	DC OK SIGNAL																					
$V_{out} \leq 75\%$	5.037 V																					
$V_{out} \geq 85\%$	-0.09V																					
P.S.U STATUS	Vo	T-ALARM																				
NORMAL	100%±2%	-0.1 ~0.5V																				
OTP OR FAN LOCK	0V	4.5~5.5V																				
P.S.U STATUS	T-ALARM																					
NORMAL	-0.09V																					
OTP OR FAN LOCK	4.998V																					
<p>5 OUTPUT VOLTAGE PROGRAMMABLE(PV)</p>	<p>※ In addition to the adjustment via the built-in potentiometer, the output voltage can be trimmed by applying EXTERNAL VOLTAGE.</p>  <p>⊙ For Remote Sense / Local Sense, please refer to "Voltage Drop Compensation" section.</p> <div style="display: flex; justify-content: space-around;"> <div data-bbox="497 1227 906 1536">  </div> <div data-bbox="995 1240 1343 1496">  </div> </div> <p>⊙ The rated current should change with the Output Voltage Programming accordingly. ⊙ For Remote Sense / Local Sense, please refer to "Voltage Drop Compensation" section.</p> <p>I/P: 230 VAC O/P: FULL LOAD Ta: 25°C Test Result :</p> <table border="1" data-bbox="472 1677 1327 1883"> <thead> <tr> <th>MODEL \ PV</th> <th><0.4V</th> <th>1V</th> <th>4.7V</th> <th>5V</th> </tr> </thead> <tbody> <tr> <td>SPEC</td> <td>48V±5%</td> <td>19.2V±5%</td> <td>60V±5%</td> <td>60V±5%</td> </tr> <tr> <td>Vout</td> <td>48.1V</td> <td>19.21V</td> <td>59.7V</td> <td>61.01V</td> </tr> </tbody> </table>	MODEL \ PV	<0.4V	1V	4.7V	5V	SPEC	48V±5%	19.2V±5%	60V±5%	60V±5%	Vout	48.1V	19.21V	59.7V	61.01V						
MODEL \ PV	<0.4V	1V	4.7V	5V																		
SPEC	48V±5%	19.2V±5%	60V±5%	60V±5%																		
Vout	48.1V	19.21V	59.7V	61.01V																		

<p>6</p>	<p>OUTPUT CURRENT PROGRAMMABLE (PC)</p>	<div style="display: flex; justify-content: space-between;"> <div style="width: 45%;"> <p>© For Remote Sense / Local Sense, please refer to "Voltage Drop Compensation" section.</p> <p>I/P: 230 VAC O/P: TESTING Ta: 25°C Test Result :</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>ADJ V</th> <th><0.4V</th> <th>1V</th> <th>4.7V</th> <th>5V</th> </tr> </thead> <tbody> <tr> <td>SPEC</td> <td>110%±10%</td> <td>20%±10%</td> <td>100%±10%</td> <td>100%±10%</td> </tr> <tr> <td>lout</td> <td>107.6%</td> <td>15.8%</td> <td>100%</td> <td>100.59%</td> </tr> </tbody> </table> </div> <div style="width: 45%;"> </div> </div>			ADJ V	<0.4V	1V	4.7V	5V	SPEC	110%±10%	20%±10%	100%±10%	100%±10%	lout	107.6%	15.8%	100%	100.59%
ADJ V	<0.4V	1V	4.7V	5V															
SPEC	110%±10%	20%±10%	100%±10%	100%±10%															
lout	107.6%	15.8%	100%	100.59%															
<p>7</p>	<p>CURRENT SHARING</p>	<p>< ±5%</p>	<p>I/P : 230 VAC O/P : FULL/50% LOAD Ta : 25°C</p>	<p>O/P : 100%</p> <p>PSU1 : 34.07 A PSU2 : 34.72 A PSU3 : 33.46 A PSU4 : 34.07 A PSU5 : 33.04 A PSU6 : 33.04 A</p> <p>O/P : 50%</p> <p>PSU1 : 17.48 A PSU2 : 17.76 A PSU3 : 17.06 A PSU4 : 17.06 A PSU5 : 16.55 A PSU6 : 16.55 A</p>															

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Transistor (D to S) or (C to E) Peak Voltage	Q901 Rated 37A/600V	I/P: High-Line +3V =267V AC ON/OFF VDS: O/P: (1) Full Load (2) Output Short (3) Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4) Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5) Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6) Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7) 0%→400% Load. Ta: 25°C	VDS: (1) 566V (2) 546V (3) 512V (4) 568V (5) 568V (6) 488V (7) 550V

2	P.F.C Transistor (D to S) or (C to E) Peak Voltage	Q52 Rated 33A/600V	I/P:High-Line +3V =267 V AC ON/OFF O/P: (1)Full Load (2)Output Short (3)Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4)Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5)Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6)Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load. Ta:25°C	VDS: (1)480V (2)472V (3)464V (4)472V (5)456V (6)440V (7)423V
3	Diode Peak Voltage	Q101 Rated 65A/200 V Q104 Rated 65A/200 V	I/P:High-Line +3V =267 V AC ON/OFF O/P: (1)Full Load (2)Output Short (3)Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4)Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5)Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6)Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load. (8).NO LOAD Ta:25°C	Q101: VDS: (1)187V (2)181V (3)185V (4)185V (5)183V (6)183V (7)187V (8)177V Q104: VDS: (1)189V (2)195V (3)195V (4)197V (5)195V (6)197V (7)189V (8)177V
4	Input Capacitor Voltage	C5 Rated: 680μ/400V SURGE VOLTAGE:450V	I/P:High-Line +3V =267 V O/P: (1)Full Load Ta:25°C	(1)395V
5	Control IC Voltage Test	PFC IC U51 Rated 4.5V~ 15V PWM IC U901 Rated 6.5V~ 24V	I/P:High-Line +3V =267 V AC ON/OFF O/P(1)FULL LOAD (2) Output Short (3)O.L.P (4)O.V.P. Ta:25°C	U51 (1) 11.68V (2) 11.68V (3) 11.68V (4) 11.68V U901 (1)12.56V (2)12.56V (3)12.56V (4)12.56V

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P: 3KVAC/min I/P-FG :2KVAC/min O/P-FG:1.5KVAC/min	I/P-O/P: 3.6 KVAC/min I/P-FG: 2.4 KVAC/min O/P-FG:1.8 KVAC/min Ta:25°C	I/P-O/P:6.9mA I/P-FG:8.04mA O/P-FG:6.28m A NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P:500VDC>100MΩ I/P-FG: 500VDC>100MΩ O/P-FG:500VDC>100MΩ	I/P-O/P: 500 VDC I/P-FG: 500 VDC O/P-FG: 500 VDC Ta:25°C	I/P-O/P: 8.16GΩ I/P-FG: 9.35GΩ O/P-FG: 9.4GΩ NO DAMAGE
3	GROUNDING CONTINUITY	FG(PE) TO CHASSIS OR TRACE < 100 mΩ	40A / 2min Ta:25°C	17 mΩ

E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	EN61000-3-2 CLASS A	I/P:230VAC/50HZ O/P:100% LOAD Ta:25°C	PASS
2	CONDUCTION	EN55022 CLASS B	I/P : 230 VAC (50HZ) O/P : FULL/50% LOAD Ta : 25°C	PASS Test by certified Lab
3	RADIATION	EN55022 CLASS A	I/P : 230 VAC (50HZ) O/P : FULL LOAD Ta : 25°C	PASS Test by certified Lab
4	E.S.D	EN61000-4-2 INDUSTRY AIR : 8KV / Contact : 4KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
5	E.F.T	EN61000-4-4 INDUSTRY INPUT : 2KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
6	SURGE	IEC61000-4-5 INDUSTRY L-N : 2KV L,N-PE : 4KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
7	Test by certified Lab & Test Report Prepare			

■ **RELIABILITY TEST**

ENVIRONMENT TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																																																																																																								
1	TEMPERATURE RISE TEST	MODEL : RSP-1600-24 1. ROOM AMBIENT BURN-IN : 1 HRS I/P : 230VAC O/P : FULL LOAD Ta= 28.3 °C 2. HIGH AMBIENT BURN-IN : 3 HRS I/P : 230VAC O/P : FULL LOAD Ta= 52.5 °C																																																																																																										
		<table border="1"> <thead> <tr> <th>NO</th> <th>Position</th> <th>ROOM AMBIENT Ta= 28.3 °C</th> <th>HIGH AMBIENT Ta= 52.5 °C</th> </tr> </thead> <tbody> <tr><td>1</td><td>Q901</td><td>63.0°C</td><td>93.0°C</td></tr> <tr><td>2</td><td>Q904</td><td>60.8°C</td><td>89.5°C</td></tr> <tr><td>3</td><td>Q52</td><td>63.1°C</td><td>89.3°C</td></tr> <tr><td>4</td><td>D50</td><td>70.3°C</td><td>97.8°C</td></tr> <tr><td>5</td><td>BD1</td><td>44.2°C</td><td>69.2°C</td></tr> <tr><td>6</td><td>L900</td><td>54.9°C</td><td>80.5°C</td></tr> <tr><td>7</td><td>T3</td><td>53.4°C</td><td>80.3°C</td></tr> <tr><td>8</td><td>RG301</td><td>71.8°C</td><td>98.9°C</td></tr> <tr><td>9</td><td>RG302</td><td>66.6°C</td><td>92.5°C</td></tr> <tr><td>10</td><td>T1</td><td>60.5°C</td><td>88.0°C</td></tr> <tr><td>11</td><td>Q101</td><td>63.9°C</td><td>94.7°C</td></tr> <tr><td>12</td><td>Q104</td><td>61.3°C</td><td>90.9°C</td></tr> <tr><td>13</td><td>U921</td><td>43.7°C</td><td>68.2°C</td></tr> <tr><td>14</td><td>C5</td><td>38.5°C</td><td>62.4°C</td></tr> <tr><td>15</td><td>L100</td><td>71.9°C</td><td>96.4°C</td></tr> <tr><td>16</td><td>ZNR1</td><td>29.2°C</td><td>53.3°C</td></tr> <tr><td>17</td><td>L2</td><td>47.4°C</td><td>71.9°C</td></tr> <tr><td>18</td><td>RY1</td><td>33.3°C</td><td>58.0°C</td></tr> <tr><td>19</td><td>C101</td><td>31.3°C</td><td>55.1°C</td></tr> <tr><td>20</td><td>T52</td><td>41.7°C</td><td>66.6°C</td></tr> <tr><td>21</td><td>RTH21</td><td>55.7°C</td><td>82.7°C</td></tr> <tr><td>22</td><td>RTH9</td><td>44.4°C</td><td>68.5°C</td></tr> <tr><td>23</td><td>U671</td><td>31.3°C</td><td>55.2°C</td></tr> <tr><td>24</td><td>U82</td><td>59.7°C</td><td>86.3°C</td></tr> <tr><td>25</td><td>Q151</td><td>40.9°C</td><td>65.0°C</td></tr> </tbody> </table>	NO	Position	ROOM AMBIENT Ta= 28.3 °C	HIGH AMBIENT Ta= 52.5 °C	1	Q901	63.0°C	93.0°C	2	Q904	60.8°C	89.5°C	3	Q52	63.1°C	89.3°C	4	D50	70.3°C	97.8°C	5	BD1	44.2°C	69.2°C	6	L900	54.9°C	80.5°C	7	T3	53.4°C	80.3°C	8	RG301	71.8°C	98.9°C	9	RG302	66.6°C	92.5°C	10	T1	60.5°C	88.0°C	11	Q101	63.9°C	94.7°C	12	Q104	61.3°C	90.9°C	13	U921	43.7°C	68.2°C	14	C5	38.5°C	62.4°C	15	L100	71.9°C	96.4°C	16	ZNR1	29.2°C	53.3°C	17	L2	47.4°C	71.9°C	18	RY1	33.3°C	58.0°C	19	C101	31.3°C	55.1°C	20	T52	41.7°C	66.6°C	21	RTH21	55.7°C	82.7°C	22	RTH9	44.4°C	68.5°C	23	U671	31.3°C	55.2°C	24	U82	59.7°C	86.3°C	25	Q151	40.9°C	65.0°C		
NO	Position	ROOM AMBIENT Ta= 28.3 °C	HIGH AMBIENT Ta= 52.5 °C																																																																																																									
1	Q901	63.0°C	93.0°C																																																																																																									
2	Q904	60.8°C	89.5°C																																																																																																									
3	Q52	63.1°C	89.3°C																																																																																																									
4	D50	70.3°C	97.8°C																																																																																																									
5	BD1	44.2°C	69.2°C																																																																																																									
6	L900	54.9°C	80.5°C																																																																																																									
7	T3	53.4°C	80.3°C																																																																																																									
8	RG301	71.8°C	98.9°C																																																																																																									
9	RG302	66.6°C	92.5°C																																																																																																									
10	T1	60.5°C	88.0°C																																																																																																									
11	Q101	63.9°C	94.7°C																																																																																																									
12	Q104	61.3°C	90.9°C																																																																																																									
13	U921	43.7°C	68.2°C																																																																																																									
14	C5	38.5°C	62.4°C																																																																																																									
15	L100	71.9°C	96.4°C																																																																																																									
16	ZNR1	29.2°C	53.3°C																																																																																																									
17	L2	47.4°C	71.9°C																																																																																																									
18	RY1	33.3°C	58.0°C																																																																																																									
19	C101	31.3°C	55.1°C																																																																																																									
20	T52	41.7°C	66.6°C																																																																																																									
21	RTH21	55.7°C	82.7°C																																																																																																									
22	RTH9	44.4°C	68.5°C																																																																																																									
23	U671	31.3°C	55.2°C																																																																																																									
24	U82	59.7°C	86.3°C																																																																																																									
25	Q151	40.9°C	65.0°C																																																																																																									
2	OVER LOAD BURN-IN TEST	NO DAMAGE 1 HOUR (MIN)	I/P : 230 VAC O/P : 105% LOAD Ta : 25°C	TEST : OK																																																																																																								
3	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P : 230VAC/180VAC O/P : 100 % LOAD Ta= -35°C/-30°C	TEST : OK																																																																																																								
4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 50 °C NO DAMAGE	I/P : 272 VAC O/P : FULL LOAD Ta= 50 °C HUMIDITY= 95 %R.H	TEST : OK																																																																																																								
5	TEMPERATURE COEFFICIENT	± 0.03 %/°C (0-50°C)	I/P : 230 VAC O/P : FULL LOAD	± 0.002 %/°C (0-50°C)																																																																																																								

6	STORAGE TEMPERATURE TEST	1. Thermal shock Temperature : -45°C~ +90°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 5 CYCLE 5. Input/Output condition : STATIC	OK
7	THERMAL SHOCK TEST	1. Thermal shock Temperature : -35°C~ +55°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 10 CYCLE 5. Input/Output condition : 15cycle:230V/ FULL LOAD AC ON 3sec/AC OFF 1sec TEST(13500 TIMES) 1cycle:230V/ FULL LOAD Burn In Test	OK
8	VIBRATION TEST	1 Carton & 1 Set (1) Waveform : Sine Wave (2) Frequency : 10~500Hz (3) Sweep Time : 12min/sweep cycle (4) Acceleration : 2G (5) Test Time : 60min in each axis (X.Y.Z) (6) Ta : 25°C	TEST : OK
9	CAPACITOR LIFE CYCLE	SUPPOSE C101 IS THE MOST CRITICAL COMPONENT (1) I/P : 230VAC O/P : FULL LOAD Ta= 25°C LIFE TIME (2) I/P : 230VAC O/P : FULL LOAD Ta= 50°C LIFE TIME (3) I/P : 230VAC O/P : 75% LOAD Ta= 50°C LIFE TIME (4) I/P : 230VAC O/P : 50% LOAD Ta= 50°C LIFE TIME	(1) 2451612HRS (2) 445544HRS (3) 480914HRS (4) 490935HRS
10	MTBF	Conducted by Parts Stress Analysis Prediction 160.9K hrs min. Telcordia SR-332 (Bellcore) ; 42.1K hrs min. MIL-HDBK-217F (25°C)	
11	DMTBF/Accelerated Life Test	Demonstration Mean Time Between Failure (Expected Life): Above 50,000 hours @ TA 50°C	

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	DANIEL GAO	SANFORD SU	VINCENT TSENG

12.10.30 A50-F031