



Test Report: IDPV-65-36

65W PWM Output LED Driver

■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Component Stress Test

■ SAFETY & E.M.C. TEST

Safety Test

E.M.C. Test

■ RELIABILITY TEST

Environment Test



DESIGN VERIFY TEST

OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM FREQUENCY	1KHz (±20%)	I/P: 230 VAC O/P: FULL LOAD Ta: 25°C	912Hz
2	VOLTAGE TOLERANCE	±10%	I/P: 180 VAC / 295 VAC O/P: FULL/ NO LOAD Ta: 25°C	-1.094% ~ 0.603%
3	OVER/UNDERSHOOT TEST	<±10 %	I/P: 230VAC O/P: FULL LOAD Ta: 25°C	<±10%
4	SET UP TIME(Max)	500ms/230VAC	I/P: 230 VAC O/P: FULL LOAD Ta: 25°C	272ms/230VAC
<p>INPUT=230VAC/50HZ @ FULL LOAD</p> <p>CH1: Output Voltage CH2: AC Input Voltage</p>				
5	AUXILIARY DC OUTPUT (For A-Type only)	Nominal 12V (deviation 11.4~12.6) @50mA	I/P: 230 VAC O/P: FULL LOAD	11.90V

6 DIMMING TEST

※ **Dimming principle for PWM style output**
 Dimming is achieved by varying the duty cycle of the output current.

$$\text{Duty cycle(\%)} = \frac{T_{ON}}{T} \times 100\%$$

Output PWM frequency : 1KHz(±20%)

※ **2 in 1 dimming function**

- Ⓞ Applying additive 0 ~ 10VDC

"DO NOT connect "DIM- to Vo-"

- Ⓞ Applying additive 10V PWM signal (frequency range 300~3000Hz):

"DO NOT connect "DIM- to Vo-"

Note : 1. Min. duty cycle of output current is about 8% and the output current is not defined when 0% < Iout < 8%.
 2. The duty cycle of output current could drop down to 0% when dimming input is about 0Vdc or 10V PWM signal with 0% duty cycle.

I/P: 230 VAC
 O/P: DIMMING TEST
 Ta: 25°C

1	Dimming voltage	0V	1V	2V	3V	4V	5V	6V	7V	8V	9V	10V	OPEN
	Output Current	0	0.16A	0.35A	0.52A	0.70A	0.87A	1.06A	1.24A	1.42A	1.60A	1.78A	1.78A
	Duty cycle of output current	0%	8.9%	19.4%	28.9%	38.9%	48.3%	58.9%	68.9%	78.9%	88.9%	98.9%	98.9%
2	Dimming Duty cycle	0%	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	OPEN
	Output Current	0	0.16A	0.34A	0.52A	0.70A	0.88A	1.06A	1.25A	1.43A	1.61A	1.78A	1.79A
	Duty cycle of output current	0%	8.9%	18.9%	28.9%	38.9%	48.9%	58.9%	69.4%	79.4%	89.4%	98.9%	99.4%

TEST RESULT: OK




INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	180VAC-295VAC	I/P: TESTING O/P: FULL LOAD Ta: 25°C	177V-305V
			I/P: (1)LOW-LINE-3V=177 V HIGH-LINE+10V=305 V O/P: FULL/NO LOAD ON: 30 Sec OFF: 30 Sec 10MIN (2)230VAC ON: 0.5 Sec OFF: 0.5 Sec 20MIN (POWER ON/OFF NO DAMAGE)	TEST: OK
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE	I/P: 180 VAC ~295 VAC O/P: FULL-NO LOAD Ta: 25°C	TEST: OK
3	AC CURRENT	0.4A/230VAC 0.3A/277VAC	I/P: 230 VAC I/P: 277 VAC O/P: FULL LOAD Ta: 25°C	I = 0.322A/ 230VAC I = 0.273A/ 277VAC
4	LEAKAGE CURRENT	< 0.75mA / 277VAC	I/P: 277 VAC O/P: NO LOAD Ta: 25°C	L-FG: 0.0028 mA N-FG: 0.0027 mA
5	NO LOAD POWER CONSUMPTION	< 0.5W for Blank-Type < 1.2W for A-Type	I/P: 230VAC O/P: NO LOAD Ta: 25°C	0.425 W for Blank-Type 0.498 W for A-Type
6	INRUSH CURRENT(Typ)	COLD START 30A/230VAC Twidth =270 us measured at 50% Ipeak	I/P: 230 VAC O/P: FULL LOAD Ta: 25°C	I= 24A/ 230VAC Twidth = 88us

INPUT=230VAC/50HZ @ FULL LOAD

CH2: Input current CH1: AC Input Voltage

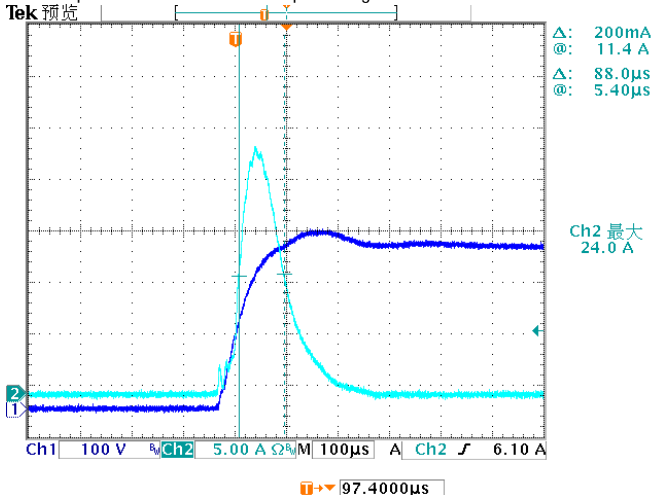



65W PWM Output LED Driver

IDPV-65 series

7	POWER FACTOR	0.95/ 230VAC 0.9/ 277VAC	I/P: 230 VAC I/P: 277 VAC O/P: FULL LOAD Ta: 25°C	PF=0.976 /230VAC PF=0.956 /277VAC																																	
<p>PF vs LOAD</p> <table border="1"> <caption>PF vs LOAD Data</caption> <thead> <tr> <th>LOAD (%)</th> <th>277V PF</th> <th>230V PF</th> </tr> </thead> <tbody> <tr><td>50%</td><td>0.87</td><td>0.93</td></tr> <tr><td>60%</td><td>0.90</td><td>0.94</td></tr> <tr><td>70%</td><td>0.92</td><td>0.95</td></tr> <tr><td>80%</td><td>0.93</td><td>0.96</td></tr> <tr><td>90%</td><td>0.94</td><td>0.97</td></tr> <tr><td>100%</td><td>0.95</td><td>0.98</td></tr> </tbody> </table>					LOAD (%)	277V PF	230V PF	50%	0.87	0.93	60%	0.90	0.94	70%	0.92	0.95	80%	0.93	0.96	90%	0.94	0.97	100%	0.95	0.98												
LOAD (%)	277V PF	230V PF																																			
50%	0.87	0.93																																			
60%	0.90	0.94																																			
70%	0.92	0.95																																			
80%	0.93	0.96																																			
90%	0.94	0.97																																			
100%	0.95	0.98																																			
8	TOTAL HARMONIC DISTORTION	THD<20% (@load≥60%/230VAC; @load≥75%/277VAC)	I/P: 230 VAC I/P: 277 VAC O/P: 60%/75% LOAD Ta: 25°C	THD=9.17% @60% load /230VAC THD=10.23% @75% load /277VAC																																	
<p>THD vs LOAD</p> <table border="1"> <caption>THD vs LOAD Data</caption> <thead> <tr> <th>LOAD (%)</th> <th>277V THD (%)</th> <th>230V THD (%)</th> </tr> </thead> <tbody> <tr><td>50%</td><td>10.23</td><td>9.17</td></tr> <tr><td>60%</td><td>10.23</td><td>9.17</td></tr> <tr><td>70%</td><td>10.23</td><td>9.17</td></tr> <tr><td>80%</td><td>10.23</td><td>9.17</td></tr> <tr><td>90%</td><td>10.23</td><td>9.17</td></tr> <tr><td>100%</td><td>10.23</td><td>9.17</td></tr> </tbody> </table>					LOAD (%)	277V THD (%)	230V THD (%)	50%	10.23	9.17	60%	10.23	9.17	70%	10.23	9.17	80%	10.23	9.17	90%	10.23	9.17	100%	10.23	9.17												
LOAD (%)	277V THD (%)	230V THD (%)																																			
50%	10.23	9.17																																			
60%	10.23	9.17																																			
70%	10.23	9.17																																			
80%	10.23	9.17																																			
90%	10.23	9.17																																			
100%	10.23	9.17																																			
9	EFFICIENCY(Typ)	88%	I/P: 230VAC O/P: FULL LOAD Ta: 25°C	89.54%																																	
<p>EFFICIENCY vs LOAD</p> <table border="1"> <caption>EFFICIENCY vs LOAD Data</caption> <thead> <tr> <th>LOAD (%)</th> <th>277V Efficiency (%)</th> <th>230V Efficiency (%)</th> </tr> </thead> <tbody> <tr><td>10%</td><td>68</td><td>68</td></tr> <tr><td>20%</td><td>76</td><td>79</td></tr> <tr><td>30%</td><td>82</td><td>84</td></tr> <tr><td>40%</td><td>85</td><td>86</td></tr> <tr><td>50%</td><td>87</td><td>87</td></tr> <tr><td>60%</td><td>88</td><td>88</td></tr> <tr><td>70%</td><td>88</td><td>89</td></tr> <tr><td>80%</td><td>88</td><td>89</td></tr> <tr><td>90%</td><td>88</td><td>89</td></tr> <tr><td>100%</td><td>88</td><td>89.54</td></tr> </tbody> </table>					LOAD (%)	277V Efficiency (%)	230V Efficiency (%)	10%	68	68	20%	76	79	30%	82	84	40%	85	86	50%	87	87	60%	88	88	70%	88	89	80%	88	89	90%	88	89	100%	88	89.54
LOAD (%)	277V Efficiency (%)	230V Efficiency (%)																																			
10%	68	68																																			
20%	76	79																																			
30%	82	84																																			
40%	85	86																																			
50%	87	87																																			
60%	88	88																																			
70%	88	89																																			
80%	88	89																																			
90%	88	89																																			
100%	88	89.54																																			



PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER CURRENT PROTECTION	105 %- 115 %	I/P: 200VAC I/P: 230VAC I/P: 295VAC O/P: TESTING Ta: 25°C	111.6%/ 200VAC 111.6%/ 230VAC 111.6%/ 295VAC Hiccup mode, recovers automatically after fault condition is removed
2	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 180VAC I/P: 295VAC O/P: 80%/FULL LOAD Ta: 25°C	NO DAMAGE Shut down O/P voltage, re-power on to recovery

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Transistor (D to S) or (C to E) Peak Voltage	Q1 Rated 9A/800V	I/P: High-Line +3V =298V O/P: (1) Full Load Turn on (2) Output Short (3) Full load continue Ta: 25°C	(1) 682V (2) 700V (3) 684V
2	Diode Peak Voltage	D100 Rated 20A/300V	I/P: High-Line +3V =298V O/P: (1) Full Load Turn on (2) Output Short (3) Full load continue Ta: 25°C	(1) 177V (2) 244V (3) 176V
3	Control IC Voltage Test	U1 Rated 35V	I/P: High-Line +3V =298V O/P: (1) Full Load input on/off (2) NO load input on /Off (3) Full Load /NO load Change Ta: 25°C	(1) 15.2V (2) 15.1V (3) 15.1V



SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P: 3.75KVAC/min	I/P-O/P: 4.2KVAC/min Ta: 25°C	I/P-O/P: 1.922mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P: 500VDC>100MΩ	I/P-O/P: 500VDC Ta: 25°C	I/P-O/P: >9999MΩ

E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	EN61000-3-2 CLASS C	I/P: 230VAC/50HZ O/P: FULL /60% LOAD Ta: 25°C	PASS
2	CONDUCTION	EN55015	I/P: 230 VAC/50HZ O/P: FULL LOAD Ta: 25°C	PASS
3	RADIATION	EN55015	I/P: 230 VAC/50HZ O/P: FULL LOAD Ta: 25°C	PASS
4	E.S.D	EN61000-4-2 LIGHT INDUSTRY Air: 8KV Contact: 4KV	I/P: 230 VAC/50HZ O/P: FULL LOAD Ta: 25°C	PASS
5	E.F.T	EN61000-4-4 LIGHT INDUSTRY INPUT: 1KV	I/P: 230VAC/50HZ O/P: FULL LOAD Ta: 25°C	PASS
6	SURGE	EN61000-4-5 LIGHT INDUSTRY L-N: 1KV	I/P: 230VAC/50HZ O/P: FULL LOAD Ta: 25°C	PASS
7	Test by certified Lab & Test Report Prepare			

■ **RELIABILITY TEST**

ENVIRONMENT TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																																																												
1	TEMPERATURE RISE TEST	MODEL: IDV-65-24 1. ROOM AMBIENT BURN-IN: 2 HRS I/P: 230VAC O/P: FULL LOAD Ta= 26.7°C 2. HIGH AMBIENT BURN-IN: 2 HRS I/P: 230VAC O/P: FULL LOAD Ta= 41.7°C																																																														
		<table border="1"> <thead> <tr> <th>NO</th> <th>Position</th> <th>ROOM AMBIENT Ta= 26.7°C</th> <th>HIGH AMBIENT Ta=41.7°C</th> </tr> </thead> <tbody> <tr><td>1</td><td>BD1</td><td>67.6°C</td><td>81.6°C</td></tr> <tr><td>2</td><td>C8</td><td>58.3°C</td><td>72.3°C</td></tr> <tr><td>3</td><td>C6</td><td>58.6°C</td><td>73.8°C</td></tr> <tr><td>4</td><td>D1</td><td>73.6°C</td><td>89.6°C</td></tr> <tr><td>5</td><td>Q1</td><td>69.4°C</td><td>83.4°C</td></tr> <tr><td>6</td><td>U1</td><td>72.5°C</td><td>78.0°C</td></tr> <tr><td>7</td><td>R17</td><td>66.3°C</td><td>81.1°C</td></tr> <tr><td>8</td><td>T1</td><td>71.8°C</td><td>86.4°C</td></tr> <tr><td>9</td><td>D100</td><td>79.0°C</td><td>94.8°C</td></tr> <tr><td>10</td><td>Q100</td><td>55.0°C</td><td>69.0°C</td></tr> <tr><td>11</td><td>U100</td><td>56.4°C</td><td>71.2°C</td></tr> <tr><td>12</td><td>RG1</td><td>62.5°C</td><td>77.0°C</td></tr> <tr><td>13</td><td>C105</td><td>57.6°C</td><td>71.6°C</td></tr> <tr><td>14</td><td>C107</td><td>46.5°C</td><td>60.5°C</td></tr> </tbody> </table>	NO	Position	ROOM AMBIENT Ta= 26.7°C	HIGH AMBIENT Ta=41.7°C	1	BD1	67.6°C	81.6°C	2	C8	58.3°C	72.3°C	3	C6	58.6°C	73.8°C	4	D1	73.6°C	89.6°C	5	Q1	69.4°C	83.4°C	6	U1	72.5°C	78.0°C	7	R17	66.3°C	81.1°C	8	T1	71.8°C	86.4°C	9	D100	79.0°C	94.8°C	10	Q100	55.0°C	69.0°C	11	U100	56.4°C	71.2°C	12	RG1	62.5°C	77.0°C	13	C105	57.6°C	71.6°C	14	C107	46.5°C	60.5°C		
NO	Position	ROOM AMBIENT Ta= 26.7°C	HIGH AMBIENT Ta=41.7°C																																																													
1	BD1	67.6°C	81.6°C																																																													
2	C8	58.3°C	72.3°C																																																													
3	C6	58.6°C	73.8°C																																																													
4	D1	73.6°C	89.6°C																																																													
5	Q1	69.4°C	83.4°C																																																													
6	U1	72.5°C	78.0°C																																																													
7	R17	66.3°C	81.1°C																																																													
8	T1	71.8°C	86.4°C																																																													
9	D100	79.0°C	94.8°C																																																													
10	Q100	55.0°C	69.0°C																																																													
11	U100	56.4°C	71.2°C																																																													
12	RG1	62.5°C	77.0°C																																																													
13	C105	57.6°C	71.6°C																																																													
14	C107	46.5°C	60.5°C																																																													
2	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P: 295VAC/200VAC O/P: FULL LOAD Ta= -25°C	TEST: OK																																																												
3	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 40 °C NO DAMAGE	I/P: 305VAC O/P: FULL LOAD Ta=40 °C HUMIDITY= 95% R.H	TEST: OK																																																												
4	TEMPERATURE COEFFICIENT	±0.03%/°C (0~40°C)	I/P: 230 VAC O/P: FULL LOAD	±0.002%/°C (0~40°C)																																																												
5	STORAGE TEMPERATURE TEST	1. Thermal shock Temperature: -45°C ~ +85°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle: 5 CYCLE 5. Input/Output condition: STATIC		TEST: OK																																																												
6	THERMAL SHOCK TEST	1. Thermal shock Temperature: -25°C ~ +45°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle: 10 CYCLE 5. Input/Output condition: 230VAC/Full Load AC ON/OFF TEST AC on 3 sec/AC off 1 sec TEST		TEST: OK																																																												



65W PWM Output LED Driver

IDPV-65 series

7	VIBRATION TEST	1 Carton & 1 Set (1) Waveform: Sine Wave (2) Frequency: 10-500Hz (3) Sweep Time: 10min/sweep cycle (4) Acceleration: 2G (5) Test Time: 60min in each axis (X.Y.Z) (6) Ta: 25°C	TEST: OK
8	CAPACITOR LIFE CYCLE	IDPV-65-24: SUPPOSE C105 IS THE MOST CRITICAL COMPONENT (1) I/P: 230VAC O/P: FULL LOAD Ta= 25 °C LIFE TIME (2) I/P: 230VAC O/P: FULL LOAD Ta= 40 °C LIFE TIME (3) I/P: 230VAC O/P: 75% LOAD Ta= 40 °C LIFE TIME (4) I/P: 230VAC O/P: 50% LOAD Ta= 40 °C LIFE TIME	(1) 500786 HRS (2) 162877 HRS (3) 235838 HRS (4) 344889 HRS
9	MTBF	Conducted by Parts Stress Analysis Prediction 398.7K hrs min MIL-HDBK-217F (25°C)	

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	CHENZH/ZHUOKB	SKY	LIUWY