



Test Report: GST220A15-R7B

220W AC-DC High Reliability Industrial Adaptor

■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Component Stress Test

■ SAFETY & E.M.C. TEST

Safety Test

E.M.C. Test

■ RELIABILITY TEST

ENVIRONMENT TEST

DESIGN VERIFY TEST

OUTPUT FUNCTION TEST


NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OUTPUT VOLTAGE(Max) TOLERANCE	V1: -5%~ 5%	I/P: 100VAC /264VAC O/P:FULL/ MIN. LOAD Ta:25°C	V1: -1.75%~ 1.07%
2	LINE REGULATION (Max)	V1: -1%~ 1%	I/P: 100VAC~ 264VAC O/P:FULL LOAD Ta:25°C	V1: 0%~ 0%
3	LOAD REGULATION(Max)	V1: -5%~ 5%	I/P: 230VAC O/P:FULL -MIN LOAD Ta:25°C	V1: -1.75%~ 1.07%
4	OVER/UNDERSHOOT TEST	< ±5%	I/P: 230VAC O/P:FULL LOAD Ta:25°C	< ±5%
5	RIPPLE & NOISE(Max)	V1: 100mVp-p	I/P:230VAC O/P:FULL LOAD Ta:25°C	V1: 12.4mVp-p
<div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> <p>high frequency :</p> </div> <div style="text-align: center;"> <p>low frequency :</p> </div> </div>				
6	SET UP TIME(Max)	230VAC/2000ms 115VAC/2000ms	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	230VAC/ 944ms 115VAC/ 1100ms
<div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> <p>INPUT=230VAC/50HZ @ FULL LOAD</p> <p>CH1 : Output Voltage CH2 : AC Input Voltage</p> </div> <div style="text-align: center;"> <p>INPUT=115VAC/60HZ @ FULL LOAD</p> <p>CH1 : Output Voltage CH2 : AC Input Voltage</p> </div> </div>				
7	RISE TIME (Max)	230VAC/50ms 115VAC/50ms	I/P : 230 VAC I/P : 115 VAC	230VAC/ 9.60ms 115VAC/ 10.8ms

		O/P : FULL LOAD Ta : 25°C	
INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage		INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage	
<p>Δ: 1.90 V @: 14.9 V Δ: 9.60ms @: 0.00 s</p>		<p>Δ: 10.9 V @: 1.50 V Δ: 10.8ms @: 0.00 s</p>	
8	HOLD UP TIME (Typ.)	230VAC/20ms 115VAC/20ms	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C
		230VAC/ 24.8ms 115VAC/ 24.8ms	
INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage		INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage	
<p>Δ: 308 V @: 104 V Δ: 24.8ms @: -58.0ms</p>		<p>Δ: 12.0 V @: -8.00 V Δ: 24.8ms @: -58.0ms</p>	
9	DYNAMIC LOAD	V1: 1200mVp-p	I/P: 230VAC O/P: (1)FULL /50% LOAD 50%DUTY / 120HZ (2)FULL /50% LOAD 50%DUTY / 1KHZ Ta:25°C
		574mVp-p 582mVp-p	
FULL /50% LOAD 50%DUTY / 120HZ		FULL /50% LOAD 50%DUTY / 1KHZ	
<p>Ch1 Pk-Pk 574mV Waveform Intensity: 74%</p>		<p>Ch1 Pk-Pk 582mV</p>	

INPUT FUNCTION TEST


NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	100VAC-264VAC	I/P:TESTING O/P:FULL LOAD Ta:25°C	72 V-264V
			I/P: LOW-LINE-3V=82 V HIGH-LINE+15%=300 V O/P:FULL/MIN LOAD (PLEASE CHECK DERATING CURVE) ON: 30 Sec OFF: 30 Sec 10MIN (POWER ON/OFF NO DAMAGE)	TEST:OK
2	INPUT FREQUENCY RANGE	47HZ -63 HZ NO DAMAGE	I/P:100 VAC -264 VAC O/P:FULL-MIN LOAD Ta:25°C	TEST: OK
3	INPUT CURRENT (Typ.)	230V/ 2A 115V/ 4A	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	I =0.982A/ 230VAC I =1.928A/ 115VAC
4	LEAKAGE CURRENT	<0.75 mA / 240 VAC	I/P : 240 VAC O/P : Min LOAD Ta : 25°C	L-FG : 0.354 mA N-FG : 0.354 mA
5	NO LOAD CONSUMPTION	< 0.15W	I/P : 115VAC I/P : 230VAC O/P : NO LOAD Ta : 25°C	< 0.0963 W < 0.1026 W
6	POWER FACTOR (Typ.)	0.91/ 230VAC 0.98/115VAC	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	PF=0.958/230VAC PF=0.994/115VAC

P.F vs LOAD

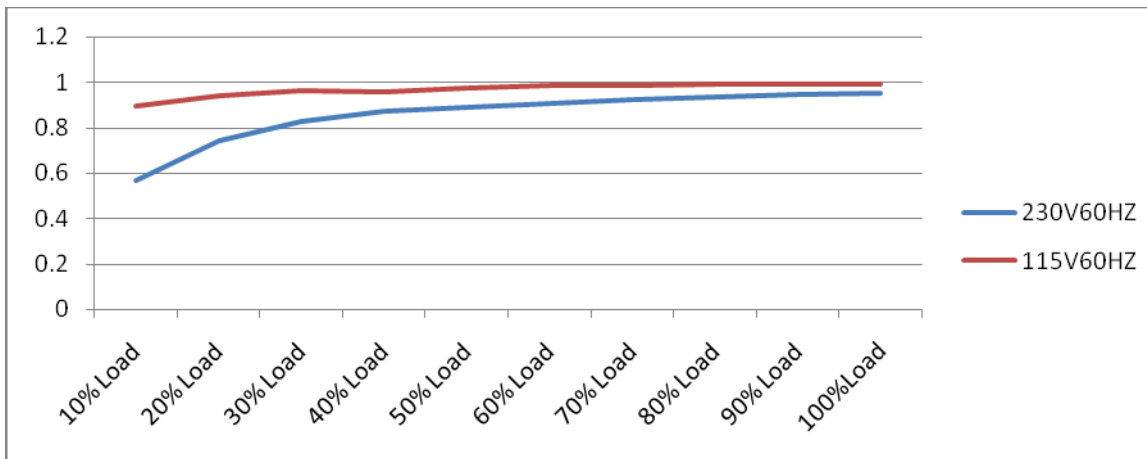


7	EFFICIENCY(Typ.)	90%	I/P:230 VAC O/P:FULL LOAD Ta:25°C	91.00%
---	------------------	-----	---	--------

EFFICIENCY vs LOAD

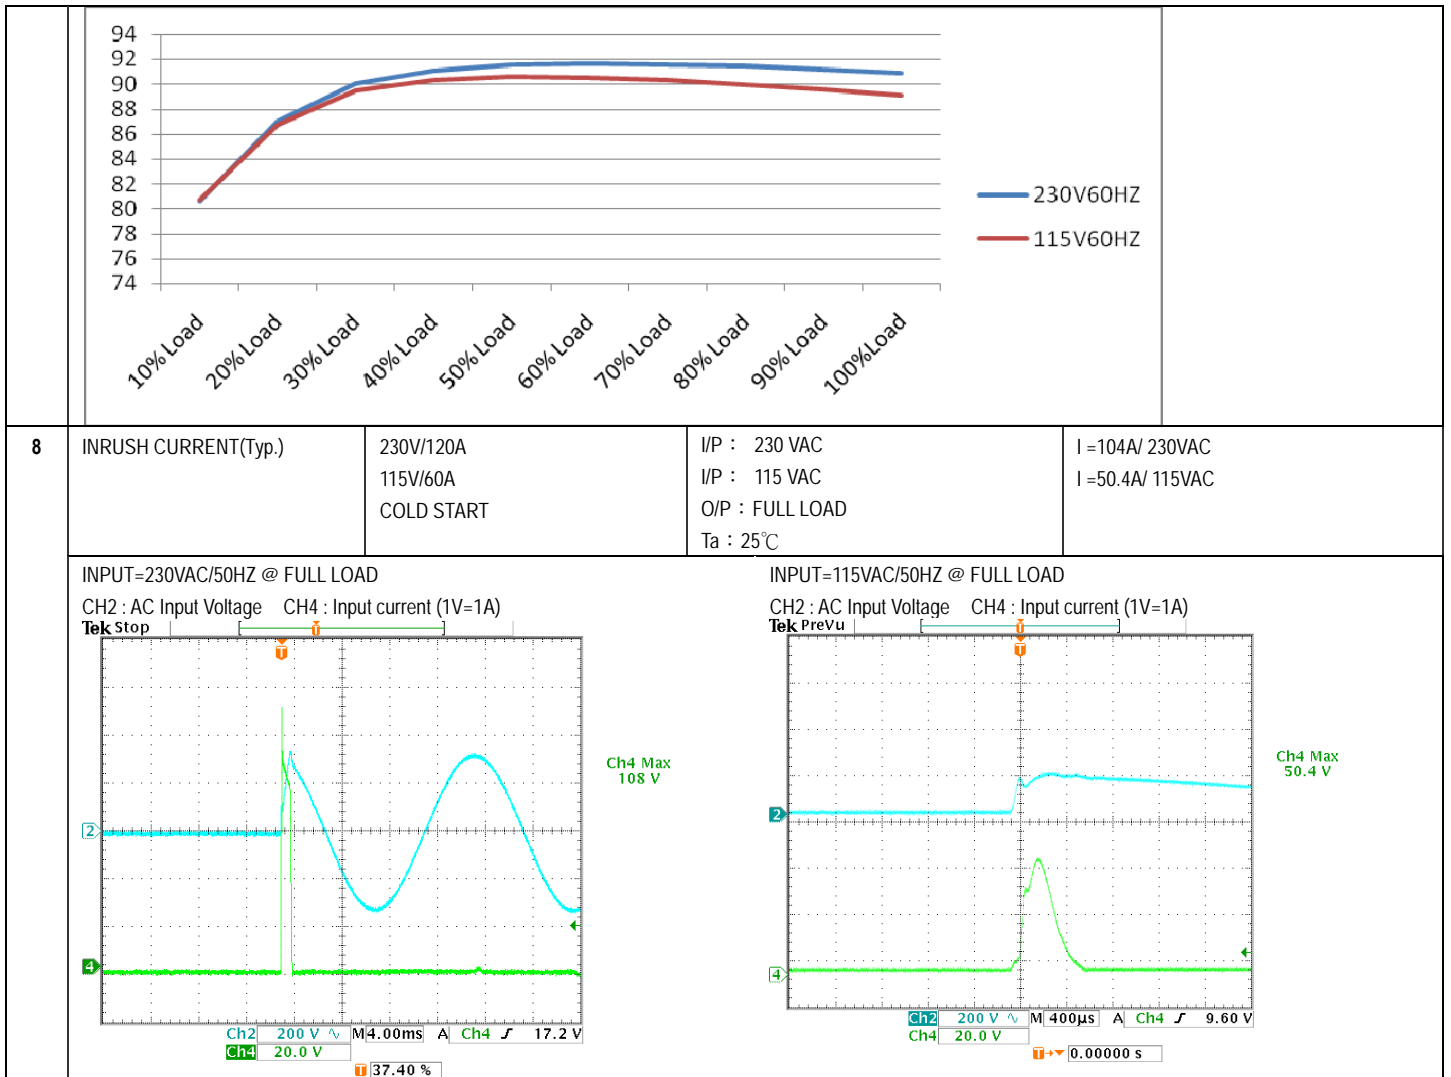

8	INRUSH CURRENT(Typ.)	230V/120A 115V/60A COLD START	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	I=104A/ 230VAC I=50.4A/ 115VAC
	<p>INPUT=230VAC/50HZ @ FULL LOAD INPUT=115VAC/50HZ @ FULL LOAD</p> <p>CH2 : AC Input Voltage CH4 : Input current (1V=1A) CH2 : AC Input Voltage CH4 : Input current (1V=1A)</p>			

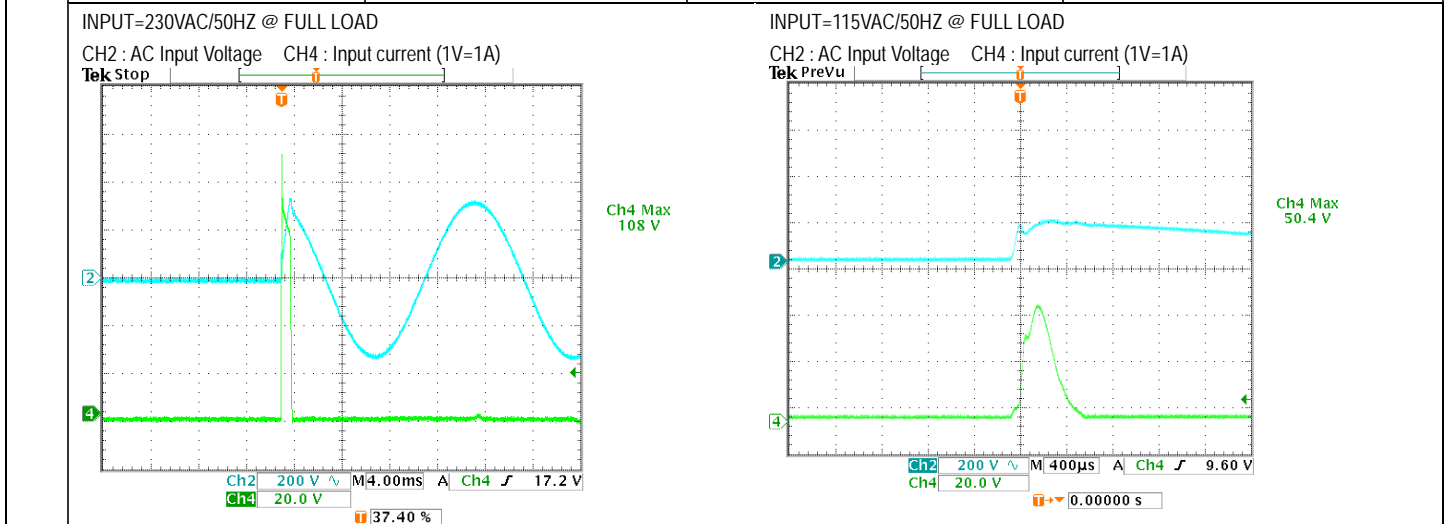

PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER LOAD PROTECTION	105%~ 135%	I/P: 264VAC I/P: 230VAC I/P: 100VAC O/P: TESTING Ta:25°C	128.73%/ 264VAC 128.51%/ 230VAC 128.73%/100VAC PROTECTION TYPE : Hiccup mode,recovers automatically after fault condition is removed
2	OVER VOLTAGE PROTECTION	15.75V~20.25V	I/P: 264VAC I/P: 230VAC I/P: 90VAC O/P: MIN LOAD Ta:25°C	19.1V/ 264VAC 19.1V/ 230VAC 19.1V/ 90VAC PROTECTION TYPE : Shot down o/p voltage,re-power on to recover
3	OVER TEMPERATURE PROTECTION	Protection type :	I/P: 264VAC I/P: 90VAC O/P: FULL LOAD	O.T.P. Active Protection type : Shut down o/p voltage,recovers automatically after temperature goes down
4	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 264VAC I/P: 90VAC O/P: FULL LOAD Ta:25°C	NO DAMAGE PROTECTION TYPE : Hiccup mode,recovers automatically after fault condition is removed

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Transistor (D to S) or (C to E) Peak Voltage	Q5 Rated : 18A/ 600V	I/P:High-Line +3V =267V AC ON/OFF VDS: O/P: (1)Full Load (2)Output Short (3) Full Load Continue Ta:25°C	VDS: (1)488V (2) 498V (3) 448V
2	P.F.C Transistor (D to S) or (C to E) Peak Voltage	Q1 Rated : 15.8A/ 600 V	I/P:High-Line +3V =267V AC ON/OFF VDS: O/P: (1)Full Load (2)Output Short (3) Full Load Continue Ta:25°C	VDS: (1)540V (2) 530V (3) 490V
3	P.F.C DIODE	D2 Rated : 15 A/ 600 V	I/P:High-Line +3V =267 V AC ON/OFF O/P: (1)Full Load (2)Output Short (3)Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (4)Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz Ta:25°C	(1) 450V (2) 450V (3) 452V (4) 450V
4	Diode Peak Voltage	Q101 Rated : 75 A/ 60V	I/P:High-Line +3V =267V AC ON/OFF VDS: O/P: (1)Full Load (2)Output Short (3) Full Load Continue	Q101: VDS: (1) 37.0V (2) 11.8V (3) 37.0V
5	Input Capacitor Voltage	C5 Rated: : 220 μ /450 V 105 °C	I/P:High-Line +3V =267 V O/P: (1)Full Load input on/off (2) Min load input on /Off (3)Full Load /Min load Change Ta:25°C	(1) 436V (2)436V (3)425V
6	Control IC Voltage Test	PWM IC U1 Rated : 32V -0.4 V(MIN.)	I/P:High-Line +3V =267 V AC ON/OFF O/P(1)FULL LOAD (2) Output Short (3)O.L.P (4)O.V.P. Ta:25°C	(1) 27.3V (2) 20.2V (3) 20.2V (4) 31.3V

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P: 3KVAC/min I/P-FG:2KVAXIC/min	I/P-O/P: 3.6 KVAC/min I/P-FG:2.4KVAXIC/min Ta:25°C	I/P-O/P:6.73mA I/P-FG:3.24mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P:500VDC>100M Ω	I/P-O/P: 500 VDC Ta:25°C	I/P-O/P: 9999M Ω NO DAMAGE

E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	EN61000-3-2 CLASS A	I/P:230VAC/50HZ O/P:FULL LOAD Ta:25°C	PASS
2	CONDUCTION	EN55022 CLASS B	I/P : 230 VAC (50HZ) O/P : FULL/50% LOAD Ta : 25°C	PASS Test by certified Lab
3	RADIATION	EN55022 CLASS B	I/P : 230 VAC (50HZ) O/P : FULL LOAD Ta : 25°C	PASS Test by certified Lab
4	E.S.D	EN61000-4-2 LIGHT INDUSTRY AIR : 8KV / Contact : 4KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
5	E.F.T	EN61000-4-4 LIGHT INDUSTRY INPUT : 1KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
6	SURGE	IEC61000-4-5 LIGHT INDUSTRY L-N : 1KV L,N-PE : 2KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
7	Test by certified Lab & Test Report Prepare			

■ RELIABILITY TEST

ENVIRONMENT TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																																																																																																				
1	TEMPERATURE RISE TEST	MODEL : GST220A12-R7B 1. ROOM AMBIENT BURN-IN : 1HRS I/P : 230VAC O/P : FULL LOAD Ta=32.6 °C 2. HIGH AMBIENT BURN-IN : 1HRS I/P : 230VAC O/P : FULL LOAD Ta=51.1°C																																																																																																						
		<table border="1"> <thead> <tr> <th>NO</th> <th>Position</th> <th>ROOM AMBIENT Ta= 32.6 °C</th> <th>HIGH AMBIENT Ta= 51.1 °C</th> </tr> </thead> <tbody> <tr><td>1</td><td>LF1</td><td>76.8°C</td><td>93.3°C</td></tr> <tr><td>2</td><td>LF2</td><td>62.8°C</td><td>78.9°C</td></tr> <tr><td>3</td><td>L2</td><td>64.4°C</td><td>80.4°C</td></tr> <tr><td>4</td><td>C2</td><td>60.4°C</td><td>76.6°C</td></tr> <tr><td>5</td><td>C11</td><td>65.1°C</td><td>81.0°C</td></tr> <tr><td>6</td><td>R5</td><td>67.1°C</td><td>83.2°C</td></tr> <tr><td>7</td><td>D3</td><td>65.9°C</td><td>82.2°C</td></tr> <tr><td>8</td><td>BD1</td><td>66.1°C</td><td>82.4°C</td></tr> <tr><td>9</td><td>D2</td><td>67.6°C</td><td>83.8°C</td></tr> <tr><td>10</td><td>Q2</td><td>66.9°C</td><td>83.2°C</td></tr> <tr><td>11</td><td>L1</td><td>69.0°C</td><td>84.8°C</td></tr> <tr><td>12</td><td>C5</td><td>70.2°C</td><td>86.2°C</td></tr> <tr><td>13</td><td>C81</td><td>68.5°C</td><td>84.5°C</td></tr> <tr><td>14</td><td>Q5</td><td>68.1°C</td><td>84.3°C</td></tr> <tr><td>15</td><td>C101</td><td>68.6°C</td><td>84.9°C</td></tr> <tr><td>16</td><td>C13</td><td>71.1°C</td><td>87.3°C</td></tr> <tr><td>17</td><td>T1</td><td>87.0°C</td><td>104.6°C</td></tr> <tr><td>18</td><td>U4</td><td>70.9°C</td><td>87.5°C</td></tr> <tr><td>19</td><td>TSW1</td><td>63.9°C</td><td>80.4°C</td></tr> <tr><td>20</td><td>CASE</td><td>57.3°C</td><td>76.4°C</td></tr> <tr><td>21</td><td>RTH2</td><td>64.9°C</td><td>81.4°C</td></tr> <tr><td>22</td><td>Q102</td><td>79.2°C</td><td>95.9°C</td></tr> <tr><td>23</td><td>C109</td><td>76.4°C</td><td>93.0°C</td></tr> <tr><td>24</td><td>U1</td><td>74.6°C</td><td>90.7°C</td></tr> </tbody> </table>	NO	Position	ROOM AMBIENT Ta= 32.6 °C	HIGH AMBIENT Ta= 51.1 °C	1	LF1	76.8°C	93.3°C	2	LF2	62.8°C	78.9°C	3	L2	64.4°C	80.4°C	4	C2	60.4°C	76.6°C	5	C11	65.1°C	81.0°C	6	R5	67.1°C	83.2°C	7	D3	65.9°C	82.2°C	8	BD1	66.1°C	82.4°C	9	D2	67.6°C	83.8°C	10	Q2	66.9°C	83.2°C	11	L1	69.0°C	84.8°C	12	C5	70.2°C	86.2°C	13	C81	68.5°C	84.5°C	14	Q5	68.1°C	84.3°C	15	C101	68.6°C	84.9°C	16	C13	71.1°C	87.3°C	17	T1	87.0°C	104.6°C	18	U4	70.9°C	87.5°C	19	TSW1	63.9°C	80.4°C	20	CASE	57.3°C	76.4°C	21	RTH2	64.9°C	81.4°C	22	Q102	79.2°C	95.9°C	23	C109	76.4°C	93.0°C	24	U1	74.6°C	90.7°C		
NO	Position	ROOM AMBIENT Ta= 32.6 °C	HIGH AMBIENT Ta= 51.1 °C																																																																																																					
1	LF1	76.8°C	93.3°C																																																																																																					
2	LF2	62.8°C	78.9°C																																																																																																					
3	L2	64.4°C	80.4°C																																																																																																					
4	C2	60.4°C	76.6°C																																																																																																					
5	C11	65.1°C	81.0°C																																																																																																					
6	R5	67.1°C	83.2°C																																																																																																					
7	D3	65.9°C	82.2°C																																																																																																					
8	BD1	66.1°C	82.4°C																																																																																																					
9	D2	67.6°C	83.8°C																																																																																																					
10	Q2	66.9°C	83.2°C																																																																																																					
11	L1	69.0°C	84.8°C																																																																																																					
12	C5	70.2°C	86.2°C																																																																																																					
13	C81	68.5°C	84.5°C																																																																																																					
14	Q5	68.1°C	84.3°C																																																																																																					
15	C101	68.6°C	84.9°C																																																																																																					
16	C13	71.1°C	87.3°C																																																																																																					
17	T1	87.0°C	104.6°C																																																																																																					
18	U4	70.9°C	87.5°C																																																																																																					
19	TSW1	63.9°C	80.4°C																																																																																																					
20	CASE	57.3°C	76.4°C																																																																																																					
21	RTH2	64.9°C	81.4°C																																																																																																					
22	Q102	79.2°C	95.9°C																																																																																																					
23	C109	76.4°C	93.0°C																																																																																																					
24	U1	74.6°C	90.7°C																																																																																																					
2	OVER LOAD BURN-IN TEST	NO DAMAGE 1 HOUR (MIN)	I/P : 230 VAC O/P : 127 % LOAD Ta : 25°C	TEST : OK																																																																																																				
3	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P : 264VAC/100VAC O/P : 100 % LOAD Ta= -35 °C	TEST : OK																																																																																																				
4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 50 °C NO DAMAGE	I/P : 272 VAC O/P : FULL LOAD Ta= 49.8 °C HUMIDITY= 95 %R.H	TEST : OK																																																																																																				
5	TEMPERATURE COEFFICIENT	± 0.03 %/°C (0-50°C)	I/P : 230 VAC O/P : FULL LOAD	± 0.008 %/°C (0-50°C)																																																																																																				



6	STORAGE TEMPERATURE TEST	<ol style="list-style-type: none"> 1. Thermal shock Temperature : -40°C~ +85°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 5 CYCLE 5. Input/Output condition : STATIC 	OK
7	THERMAL SHOCK TEST	<ol style="list-style-type: none"> 1. Thermal shock Temperature : -30°C~ +70°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 10 CYCLE 5. Input/Output condition : 230VAC/Full Load AC ON/OFF TEST turn on 58sec ; turn off 2sec 	OK
8	VIBRATION TEST	<p>1 Carton & 1 Set</p> <ol style="list-style-type: none"> (1) Waveform : Sine Wave (2) Frequency : 10-500Hz (3) Sweep Time : 12min/sweep cycle (4) Acceleration : 2G (5) Test Time : 60min in each axis (X.Y.Z) (6) Ta : 25°C 	TEST : OK
9	CAPACITOR LIFE CYCLE	<p>SUPPOSE C 109 IS THE MOST CRITICAL COMPONENT</p> <ol style="list-style-type: none"> (1) I/P : 230VAC O/P : FULL LOAD Ta= 25 °C LIFE TIME (2) I/P : 230VAC O/P : FULL LOAD Ta= 50 °C LIFE TIME (3) I/P : 230VAC O/P : 75% LOAD Ta= 50 °C LIFE TIME (4) I/P : 230VAC O/P : 50% LOAD Ta= 50 °C LIFE TIME 	<ol style="list-style-type: none"> (1) 131599HRS (2) 26362HRS (3) 54213HRS (4) 94394HRS
10	MTBF	<p>MIL-HDBK-217F TOTAL FAILURE RATE : 209.47 KHRS</p>	
11	DMTBF/Accelerated Life Test	<p>Demonstration Mean Time Between Failure (Expected Life): Above 30,000 hours @ TA 50°C</p>	

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	FRANK	GESG	WANGDZ

12.10.30 A50-F031