



LINAN WEIMAI ELECTRON CO.LTD

Address: No.399 North HuanCheng Road Linan Hangzhou China www.weimaicable.com
Phone:0086-61077585 Mobile:0086-13758296286 Email: sales@weimaicable.com

Coaxial Cable RG6 60% Braiding 75ohm china manufacturer supplier Item: WM-COAX-001

1) Construction

Center Conductor: 1.02±0.01mm Copper Clad Steel/CCS Conductivity 21%
Dielectric: 4.75±0.05mmFoam PE
Shield: Bonded Al Foil
Braid Coverage: 64X0.16mm Al alloy Braiding Pitch40 60%Coverage
Jacket: 6.80±0.05mm PVC white/black 75Degree
Package: 100M/Roll 305M/Drum 1000ft/500ft/Pull Box

2) Characteristics

Sparker Test: 4000VAC
Impedance: 75±3 Ohm
Capacitance: 54±3pF/m
Velocity of Propagation: 85%
Return Loss: 20dB min (5-2300MHz)

3) Attenuation

Attenuation	[@68° F. (20° C.)]	
Frequency (MHz)	Maximum (dB/100 ft.)	Maximum (dB/100 m)
5	0.81	2.65
50	1.5	4.9
100	2.0	6.5
200	2.8	9.2
400	4.1	13.6
700	5.6	18.4
900	6.2	20.3
1000	6.68	21.9
1450	8.15	26.72
1800	9.0	29.5
2250	10.56	34.62



LINAN WEIMAI ELECTRON CO.LTD

Address: No.399 North HuanCheng Road Linan Hangzhou China www.weimaicable.com

Phone:0086-61077585 Mobile:0086-13758296286 Email: sales@weimaicable.com

**Coaxial Cable RG6 60% Braiding 75ohm china manufacturer
supplier Item: WM-COAX-001**



Email: sales@weimaicable.com Skype: weimaicable wechat:13758296286



LINAN WEIMAI ELECTRON CO.LTD

Address: No.399 North HuanCheng Road Linan Hangzhou China www.weimaicable.com
Phone:0086-61077585 Mobile:0086-13758296286 Email: sales@weimaicable.com

Coaxial Cable RG6 60% Braiding 75ohm china manufacturer supplier Item: WM-COAX-003

1) Construction

Center Conductor: 1.02±0.01mm Copper Clad Steel/CCS Conductivity 18%
Dielectric: 4.75±0.05mmFoam PE
Shield: Bonded Al Foil
Braid Coverage: 80X0.12mm Al alloy Braiding Pitch26 60%Coverage
Jacket: 6.80±0.05mm PVC white/black 75Degree
Package: 100M/Roll 305M/Drum 1000ft/500ft/Pull Box

2) Characteristics

Sparker Test: 4000VAC
Impedance: 75±3 Ohm
Capacitance: 54±3pF/m
Velocity of Propagation: 85%
Return Loss: 20dB min (5-2300MHz)

3) Attenuation

Attenuation	[@68° F. (20° C.)]	
Frequency (MHz)	Maximum (dB/100 ft.)	Maximum (dB/100 m)
5	0.81	2.65
50	1.5	4.9
100	2.0	6.5
200	2.8	9.2
400	4.1	13.6
700	5.6	18.4
900	6.2	20.3
1000	6.68	21.9
1450	8.15	26.72
1800	9.0	29.5
2250	10.56	34.62




LINAN WEIMAI ELECTRON CO.LTD

Address: No.399 North HuanCheng Road Linan Hangzhou China www.weimaicable.com

Phone:0086-61077585 Mobile:0086-13758296286 Email: sales@weimaicable.com

**Coaxial Cable RG6 60% Braiding 75ohm china manufacturer
supplier Item: WM-COAX-003**

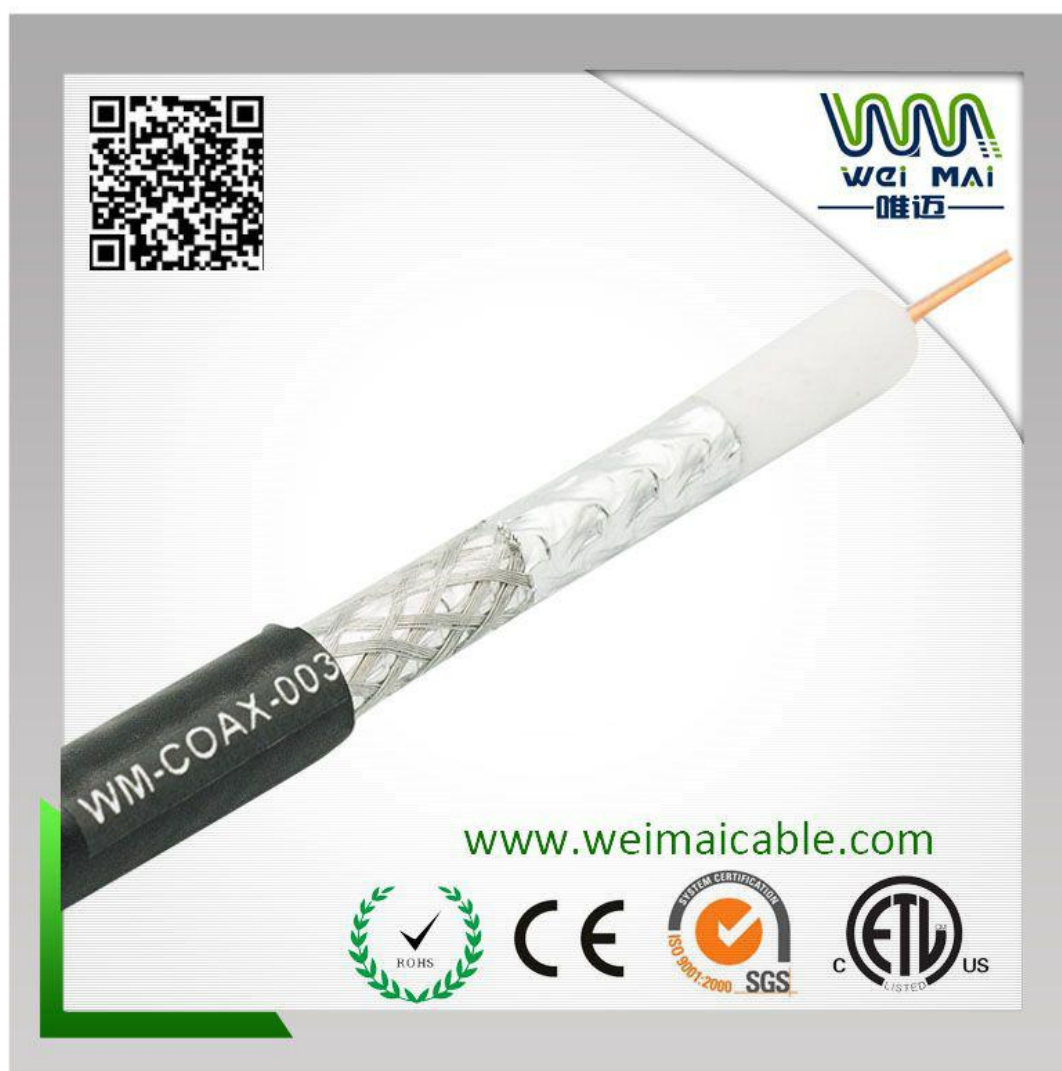

Email: sales@weimaicable.com Skype: weimaicable wechat:13758296286



LINAN WEIMAI ELECTRON CO.LTD

Address: No.399 North HuanCheng Road Linan Hangzhou China www.weimaicable.com
Phone:0086-61077585 Mobile:0086-13758296286 Email: sales@weimaicable.com

Coaxial Cable RG6 90% Braiding 75ohm china manufacturer supplier Item: WM-COAX-004

1) Construction

Center Conductor:	1.02±0.01mm Copper Clad Steel/CCS Conductivity 21%
Dielectric:	4.75±0.05mmFoam PE
Shield:	Bonded Al Foil
Braid Coverage:	115X0.15mm Al alloy Braiding Pitch22 90%Coverage
Jacket:	6.80±0.05mm PVC white/black 75Degree
Package:	100M/Roll 305M/Drum 1000ft/500ft/Pull Box

2) Characteristics

Sparker Test:	4000VAC
Impedance:	75±3 Ohm
Capacitance:	54±3pF/m
Velocity of Propagation:	85%
Return Loss:	20dB min (5-2300MHz)

3) Attenuation

Attenuation	[@68° F. (20° C.)]	
Frequency (MHz)	Maximum (dB/100 ft.)	Maximum (dB/100 m)
5	0.81	2.65
50	1.5	4.9
100	2.0	6.5
200	2.8	9.2
400	4.1	13.6
700	5.6	18.4
900	6.2	20.3
1000	6.68	21.9
1450	8.15	26.72
1800	9.0	29.5
2250	10.56	34.62




LINAN WEIMAI ELECTRON CO.LTD

Address: No.399 North HuanCheng Road Linan Hangzhou China www.weimaicable.com

Phone:0086-61077585 Mobile:0086-13758296286 Email: sales@weimaicable.com

**Coaxial Cable RG6 90% Braiding 75ohm china manufacturer
supplier Item: WM-COAX-004**

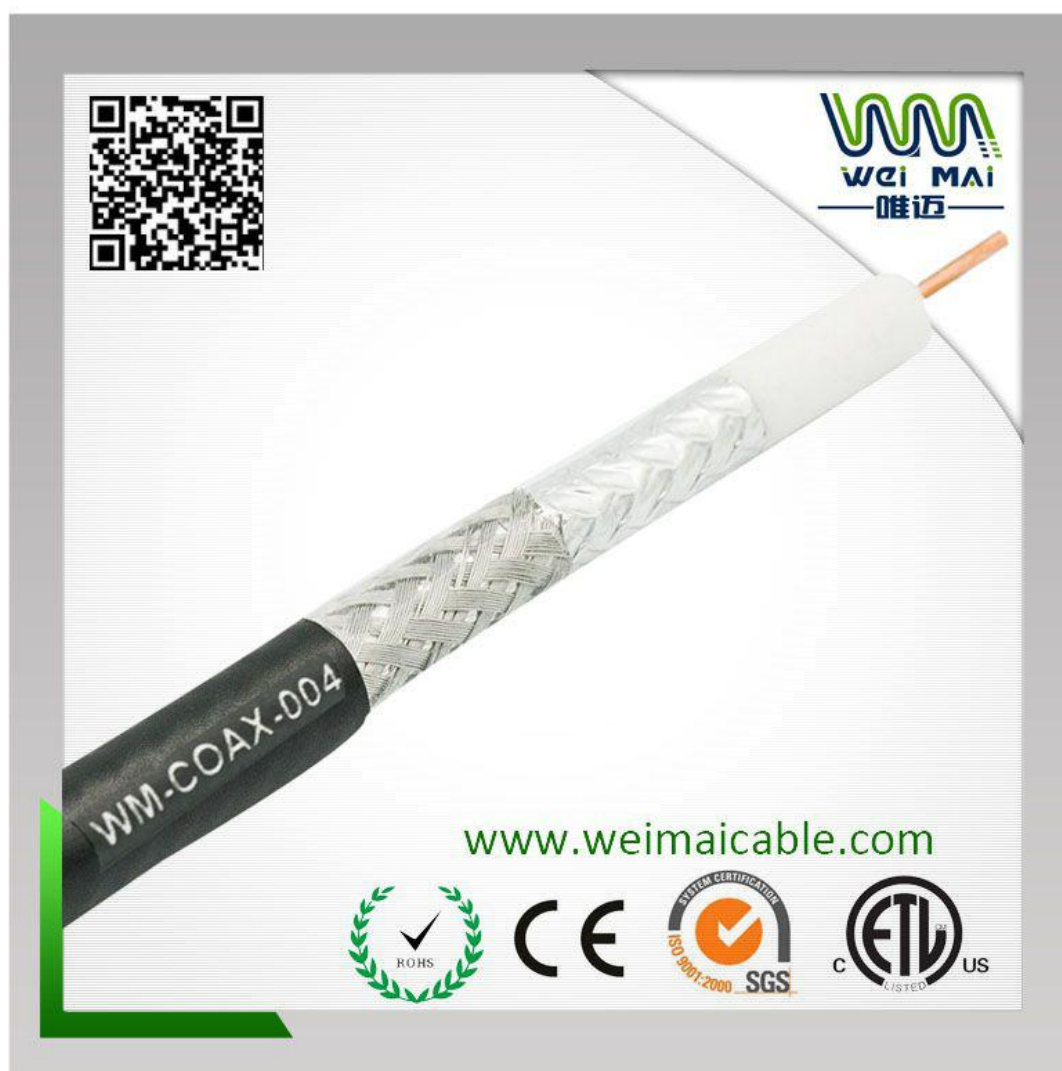

Email: sales@weimaicable.com Skype: weimaicable wechat:13758296286



LINAN WEIMAI ELECTRON CO.LTD

Address: No.399 North HuanCheng Road Linan Hangzhou China www.weimaicable.com
Phone:0086-61077585 Mobile:0086-13758296286 Email: sales@weimaicable.com

Coaxial Cable RG6 80% Braiding 75ohm china manufacturer supplier Item: WM-COAX-005

1) Construction

Center Conductor: 1.02±0.01mm Copper Clad Steel/CCS Conductivity 21%
Dielectric: 4.75±0.05mmFoam PE
Shield: Bonded Al Foil
Braid Coverage: 96X0.12mm Al alloy Braiding Pitch22 80%Coverage
Jacket: 6.80±0.05mm PVC white/black 75Degree
Package: 100M/Roll 305M/Drum 1000ft/500ft/Pull Box

2) Characteristics

Sparker Test: 4000VAC
Impedance: 75±3 Ohm
Capacitance: 54±3pF/m
Velocity of Propagation: 85%
Return Loss: 20dB min (5-2300MHz)

3) Attenuation

Attenuation	[@68° F. (20° C.)]	
Frequency (MHz)	Maximum (dB/100 ft.)	Maximum (dB/100 m)
5	0.81	2.65
50	1.5	4.9
100	2.0	6.5
200	2.8	9.2
400	4.1	13.6
700	5.6	18.4
900	6.2	20.3
1000	6.68	21.9
1450	8.15	26.72
1800	9.0	29.5
2250	10.56	34.62




LINAN WEIMAI ELECTRON CO.LTD

Address: No.399 North HuanCheng Road Linan Hangzhou China www.weimaicable.com

Phone:0086-61077585 Mobile:0086-13758296286 Email: sales@weimaicable.com

**Coaxial Cable RG6 80% Braiding 75ohm china manufacturer
supplier Item: WM-COAX-005**

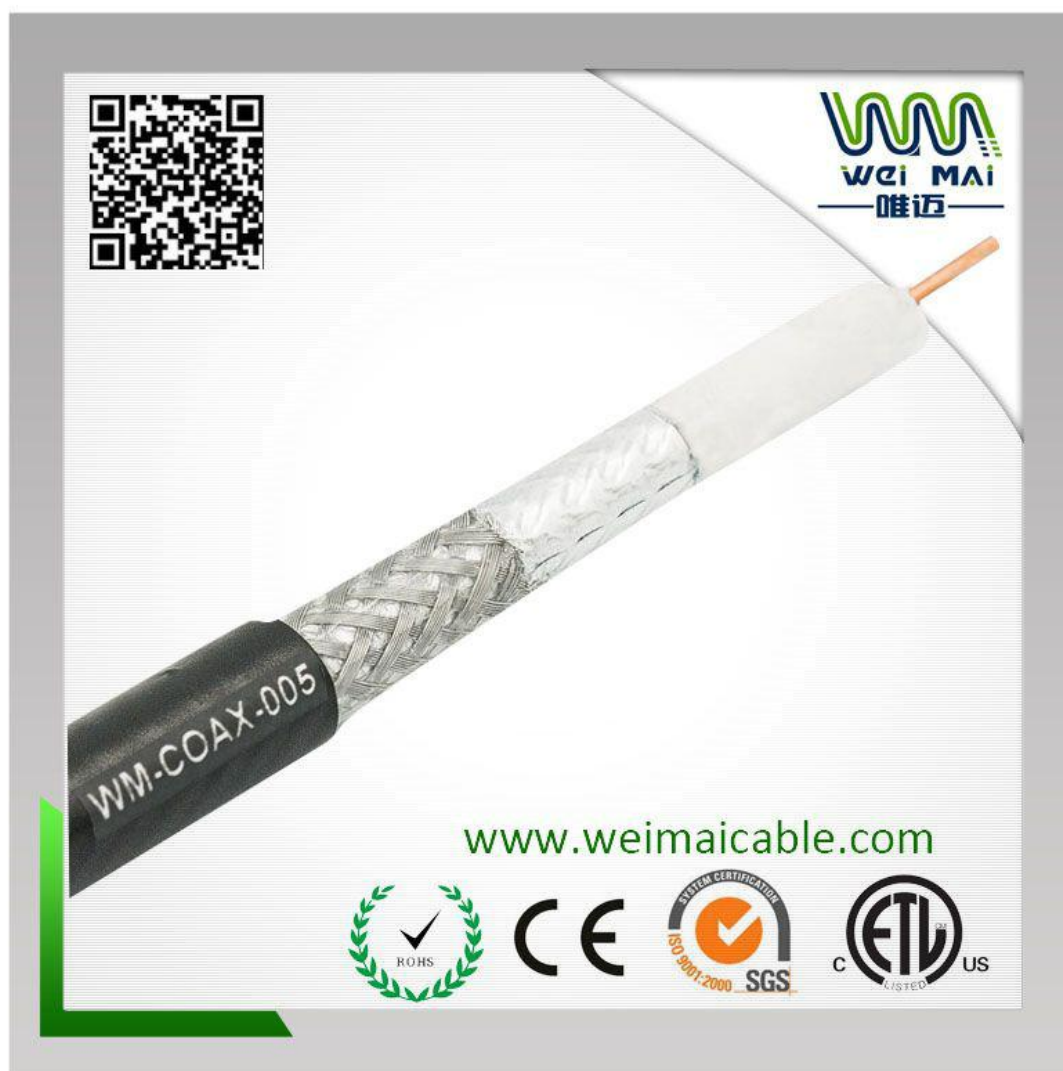



Email: sales@weimaicable.com Skype: weimaicable wechat:13758296286

LINAN WEIMAI ELECTRON CO.LTD

Address: No.399 North HuanCheng Road Linan Hangzhou China www.weimaicable.com

Phone:0086-61077585 Mobile:0086-13758296286 Email: sales@weimaicable.com

Coaxial Cable RG59+2DC 95% Braiding 75ohm china manufacturer supplier

Item: WM-COAX-007

1) Construction

Center Conductor:	0.6±0.01mm Copper /CU
Dielectric:	3.3±0.05mm Solid PE
Shield:	CCA Foil
Braid Coverage:	96X0.12mmCCA Al alloy 95%Coverage
Jacket:	7.80±0.10mmPVC white/Black
Power Lines:	2X23X0.15mm CCA Al alloy
Package:	100M/Roll 305M/Drum 1000ft/500ft/Pull Box

2) Characteristics

Sparker Test:	4000VAC
Impedance:	75±3 Ohm
Capacitance:	54±3pF/m
Velocity of Propagation:	85%
Return Loss:	20dB min (5-2300MHz)

3) Attenuation

Attenuation	[@68° F. (20° C.)]		
Frequency (MHz)	Max. (dB/100 ft.)	Frequency (MHz)	Max. (dB/100 ft.)
5	0.86	400	5.10
55	2.05	450	5.40
83	2.45	500	5.70
187	3.60	550	5.95
211	3.80	600	6.20
250	4.10	750	6.97
300	4.45	865	7.52
350	4.80	1000	8.12

Email: sales@weimaicable.com Skype: weimaicable wechat:13758296286



LINAN WEIMAI ELECTRON CO.LTD

Address: No.399 North HuanCheng Road Linan Hangzhou China www.weimaicable.com
Phone:0086-61077585 Mobile:0086-13758296286 Email: sales@weimaicable.com

**Coaxial Cable RG59+2DC 95% Braiding 75ohm china manufacturer
supplier**

Item: WM-COAX-007



Email: sales@weimaicable.com Skype: weimaicable wechat:13758296286



LINAN WEIMAI ELECTRON CO.LTD

Address: No.399 North HuanCheng Road Linan Hangzhou China www.weimaicable.com
Phone:0086-61077585 Mobile:0086-13758296286 Email: sales@weimaicable.com

Coaxial Cable RG6 96% Braiding 75ohm china manufacturer supplier Item: WM-COAX-008

1) Construction

Center Conductor:	0.90±0.01mm Copper /CU
Dielectric:	4.75±0.05mmFoam PE
Shield:	CCA Foil
Braid Coverage:	128X0.12mm CCA Al alloy Braiding Pitch24 96%Coverage
Jacket:	6.80±0.05mm PVC white/black 75Degree
Package:	100M/Roll 305M/Drum 1000ft/500ft/Pull Box

2) Characteristics

Sparker Test:	4000VAC
Impedance:	75±3 Ohm
Capacitance:	54±3pF/m
Velocity of Propagation:	85%
Return Loss:	20dB min (5-2300MHz)

3) Attenuation

Attenuation	[@68° F. (20° C.)]	
Frequency (MHz)	Maximum (dB/100 ft.)	Maximum (dB/100 m)
5	0.81	2.65
50	1.5	4.9
100	2.0	6.5
200	2.8	9.2
400	4.1	13.6
700	5.6	18.4
900	6.2	20.3
1000	6.68	21.9
1450	8.15	26.72
1800	9.0	29.5
2250	10.56	34.62



LINAN WEIMAI ELECTRON CO.LTD

Address: No.399 North HuanCheng Road Linan Hangzhou China www.weimaicable.com

Phone:0086-61077585 Mobile:0086-13758296286 Email: sales@weimaicable.com

Coaxial Cable RG6 96% Braiding 75ohm china manufacturer supplier
Item: WM-COAX-008



Email: sales@weimaicable.com Skype: weimaicable wechat:13758296286



LINAN WEIMAI ELECTRON CO.LTD

Address: No.399 North HuanCheng Road Linan Hangzhou China www.weimaicable.com
Phone:0086-61077585 Mobile:0086-13758296286 Email: sales@weimaicable.com

Coaxial Cable RG59 95% Braiding 75ohm china manufacturer supplier Item: WM-COAX-009

1) Construction

Center Conductor:	0.80±0.01mm Copper /CU
Dielectric:	3.77±0.05mm Solid PE
Shield:	CCA Foil
Braid Coverage:	128X0.12mmCCA Al alloy Pitch30 Coverage95%
Jacket:	6.10±0.10mmPVC white/Black
Package:	100M/Roll 305M/Drum 1000ft/500ft/Pull Box

2) Characteristics

Sparker Test:	4000VAC
Impedance:	75±3 Ohm
Capacitance:	54±3pF/m
Velocity of Propagation:	85%
Return Loss:	20dB min (5-2300MHz)

3) Attenuation

Attenuation	[@68° F. (20° C.)]		
Frequency (MHz)	Max. (dB/100 ft.)	Frequency (MHz)	Max. (dB/100 ft.)
5	0.86	400	5.10
55	2.05	450	5.40
83	2.45	500	5.70
187	3.60	550	5.95
211	3.80	600	6.20
250	4.10	750	6.97
300	4.45	865	7.52
350	4.80	1000	8.12



LINAN WEIMAI ELECTRON CO.LTD

Address: No.399 North HuanCheng Road Linan Hangzhou China www.weimaicable.com

Phone:0086-61077585 Mobile:0086-13758296286 Email: sales@weimaicable.com

Coaxial Cable RG59 95% Braiding 75ohm china manufacturer
supplier Item: WM-COAX-009





LINAN WEIMAI ELECTRON CO.LTD

Address: No.399 North HuanCheng Road Linan Hangzhou China www.weimaicable.com
Phone:0086-61077585 Mobile:0086-13758296286 Email: sales@weimaicable.com

Coaxial Cable RG6 60% Braiding 75ohm china manufacturer supplier Item: WM-COAX-010

1) Construction

Center Conductor:	1.02±0.01mm Copper Clad Steel/CCS Conductivity 21%
Dielectric:	4.57±0.05mmFoam PE
Shield:	Bonded Al Foil
Braid Coverage:	80X0.12mm Al alloy Braiding Pitch28 60%Coverage
Jacket:	6.90±0.05mm PVC white/black 75Degree ETL
Package:	100M/Roll 305M/Drum 1000ft/500ft/Pull Box

2) Characteristics

Sparker Test:	4000VAC
Impedance:	75±3 Ohm
Capacitance:	54±3pF/m
Velocity of Propagation:	85%
Return Loss:	20dB min (5-2300MHz)

3) Attenuation

Attenuation	[@68° F. (20° C.)]	
Frequency (MHz)	Maximum (dB/100 ft.)	Maximum (dB/100 m)
5	0.58	1.9
50	1.5	4.9
100	2.0	6.5
400	4.1	13.6
700	5.6	18.4
1000	6.5	21.4
1450	8.0	26.2
1800	8.5	27.9
2250	10.0	34.0

Coaxial Cable RG6 60% Braiding 75ohm china manufacturer supplier

Email: sales@weimaicable.com Skype: weimaicable wechat:13758296286




LINAN WEIMAI ELECTRON CO.LTD

Address: No.399 North HuanCheng Road Linan Hangzhou China www.weimaicable.com

Phone:0086-61077585 Mobile:0086-13758296286 Email: sales@weimaicable.com

Item: WM-COAX-010

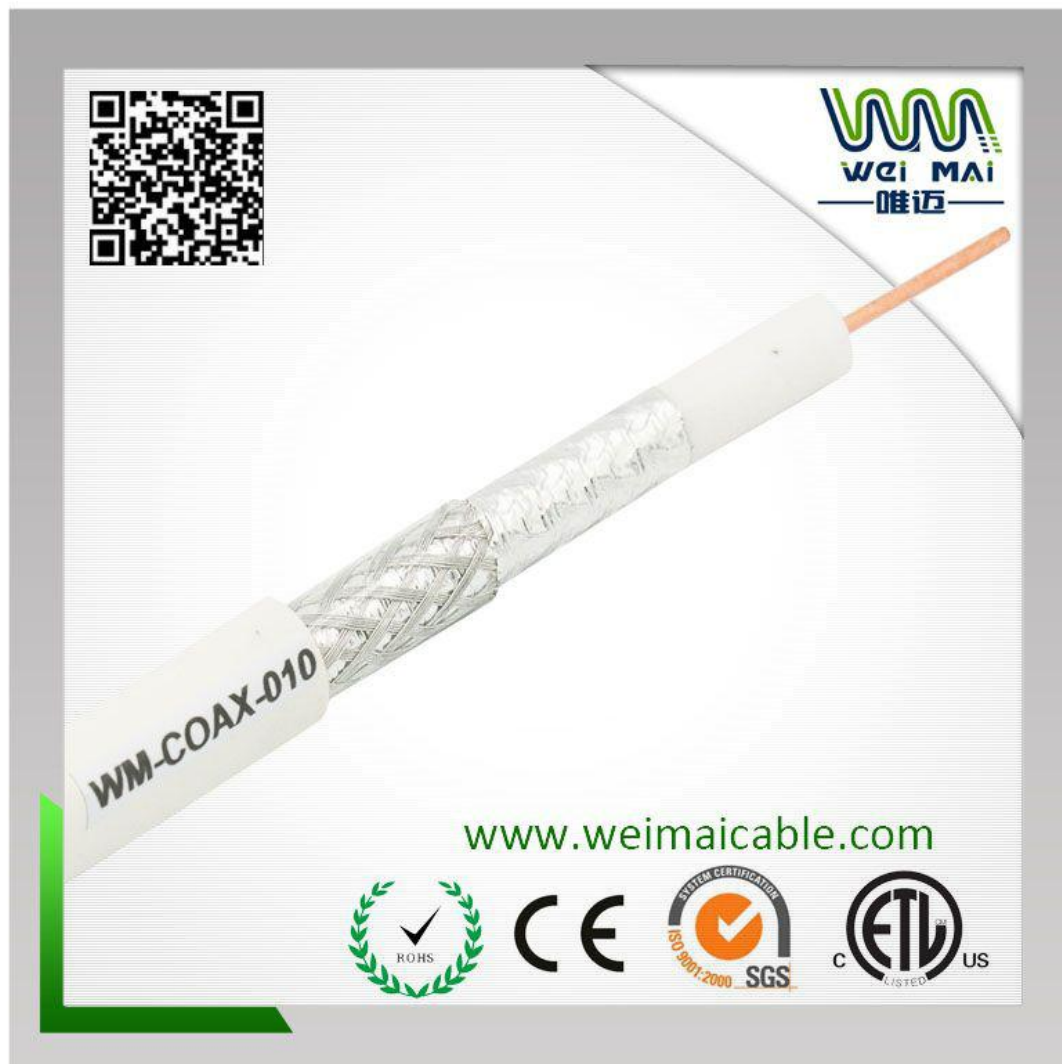



LINAN WEIMAI ELECTRON CO.LTD

Address: No.399 North HuanCheng Road Linan Hangzhou China www.weimaicable.com
Phone:0086-61077585 Mobile:0086-13758296286 Email: sales@weimaicable.com

Coaxial Cable RG6 60% Braiding 75ohm china manufacturer supplier Item: WM-COAX-011

1) Construction

Center Conductor: 1.02 $\pm$ 0.01mm Copper Clad Steel/CCS Conductivity 21%
Dielectric: 4.57 $\pm$ 0.05mmFoam PE
Shield: Bonded Al Foil
Braid Coverage: 80X0.12mm Al alloy Braiding Pitch28 60%Coverage
Jacket: 6.90 $\pm$ 0.05mm PVC white/black 75Degree ETL
Package: 100M/Roll 305M/Drum 1000ft/500ft/Pull Box

2) Characteristics

Sparker Test: 4000VAC
Impedance: 75 $\pm$ 3 Ohm
Capacitance: 54 $\pm$ 3pF/m
Velocity of Propagation: 85%
Return Loss: 20dB min (5-2300MHz)

3) Attenuation

Attenuation	[@68° F. (20° C.)]	
Frequency (MHz)	Maximum (dB/100 ft.)	Maximum (dB/100 m)
5	0.58	1.9
50	1.5	4.9
100	2.0	6.5
400	4.1	13.6
700	5.6	18.4
1000	6.5	21.4
1450	8.0	26.2
1800	8.5	27.9
2250	10.0	34.0




LINAN WEIMAI ELECTRON CO.LTD

Address: No.399 North HuanCheng Road Linan Hangzhou China www.weimaicable.com

Phone:0086-61077585 Mobile:0086-13758296286 Email: sales@weimaicable.com

Coaxial Cable RG6 60% Braiding 75ohm china manufacturer
supplier Item: WM-COAX-011

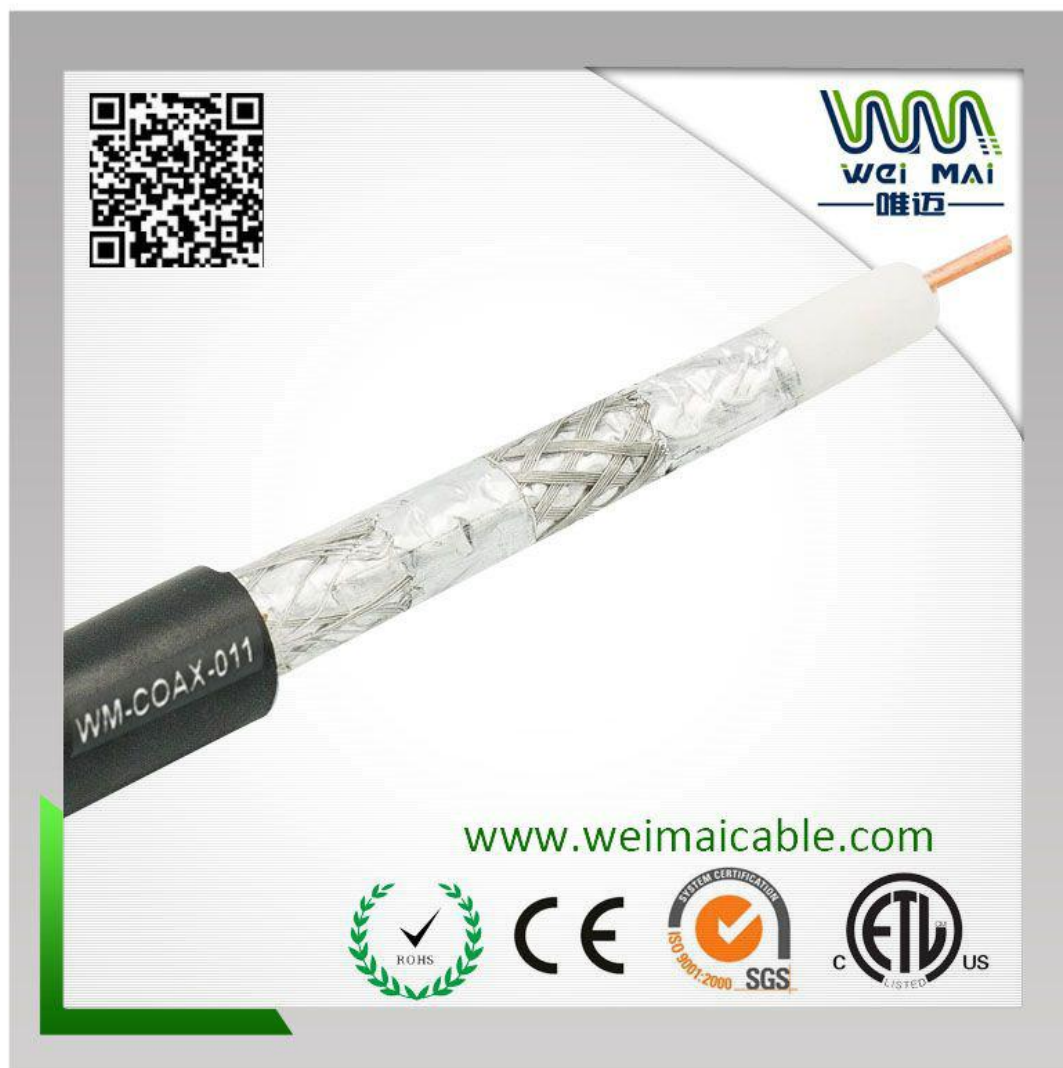



LINAN WEIMAI ELECTRON CO.LTD

Address: No.399 North HuanCheng Road Linan Hangzhou China www.weimaicable.com
Phone:0086-61077585 Mobile:0086-13758296286 Email: sales@weimaicable.com

Coaxial Cable RG6 60% Braiding 75ohm china manufacturer supplier Item: WM-COAX-012

1) Construction

Center Conductor:	1.02±0.01mm Copper Clad Steel/CCS	Conductivity 21%
Dielectric:	4.57±0.05mmFoam PE	
1 st Shield:	Bonded Al Foil	
2 nd Shield Braid Coverage:	80X0.12mm Al alloy Braiding Pitch28	60%Coverage
3 rd Shield:	Al- PE-Al Foil	
4 th Shield Barid Coverage:	48X0.12mm Al alloy Braiding Pitch38	40% Coverage
Jacket:	7.50±0.05mm PVC white/black	75Degree ETL
Package:	100M/Roll 305M/Drum 1000ft/500ft/Pull Box	

2) Characteristics

Sparker Test:	4000VAC
Impedance:	75±3 Ohm
Capacitance:	54±3pF/m
Velocity of Propagation:	85%
Return Loss:	20dB min (5-2300MHz)

3) Attenuation

Attenuation	[@68° F. (20° C.)]	
Frequency (MHz)	Maximum (dB/100 ft.)	Maximum (dB/100 m)
5	0.82	2.6
50	1.5	4.9
100	2.0	6.5
400	4.48	14.69
700	6.43	21.08
1000	8.12	26.62
1450	8.13	26.65
1800	8.50	27.9
2250	10.00	34.00




LINAN WEIMAI ELECTRON CO.LTD

Address: No.399 North HuanCheng Road Linan Hangzhou China www.weimaicable.com

Phone:0086-61077585 Mobile:0086-13758296286 Email: sales@weimaicable.com

**Coaxial Cable RG6 60% Braiding 75ohm china manufacturer
supplier Item: WM-COAX-012**

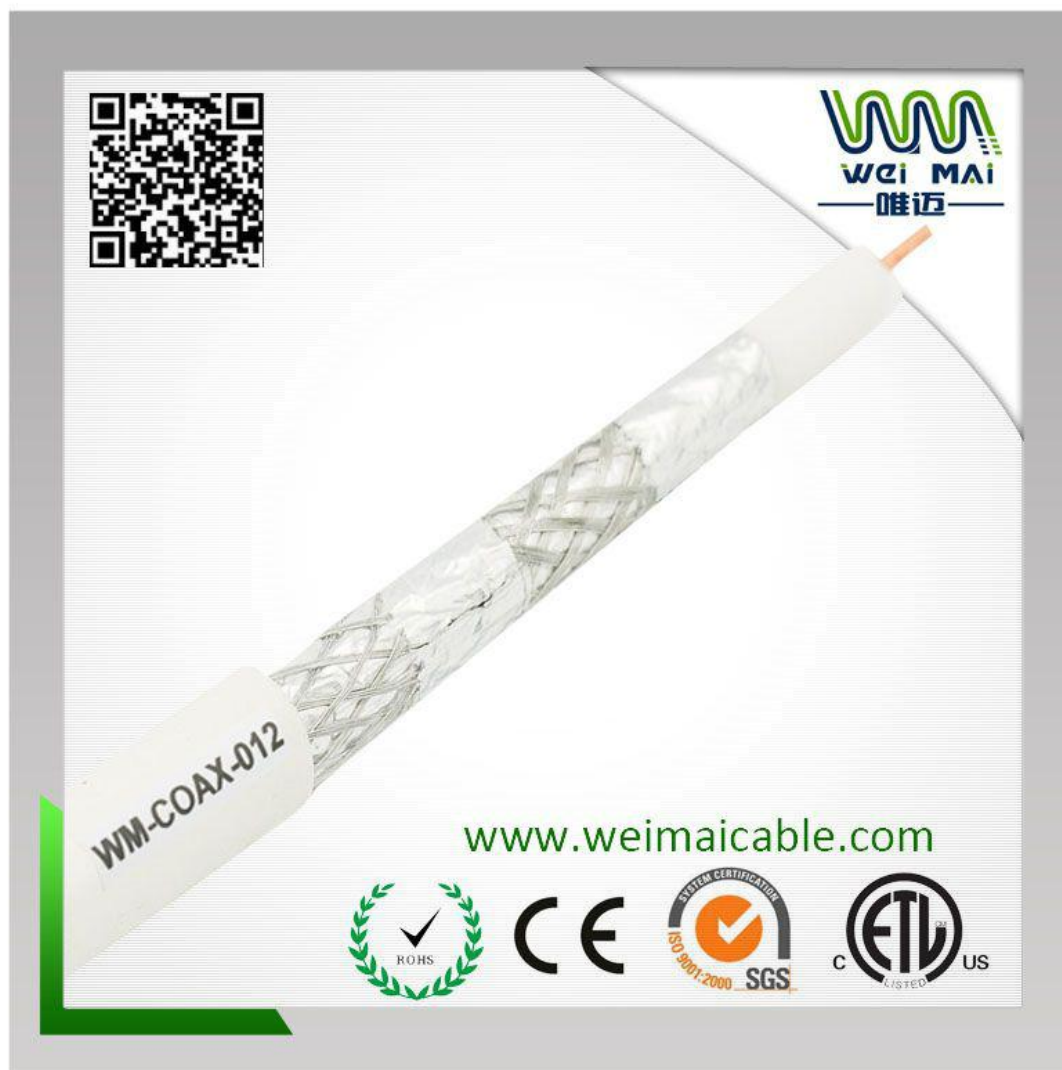



LINAN WEIMAI ELECTRON CO.LTD

Address: No.399 North HuanCheng Road Linan Hangzhou China www.weimaicable.com
Phone:0086-61077585 Mobile:0086-13758296286 Email: sales@weimaicable.com

Coaxial Cable RG59+2DC 95% Braiding 75ohm china manufacturer supplier

Item: WM-COAX-014

1) Construction

Center Conductor:	0.81±0.01mm Copper /CU
Dielectric:	3.66±0.05mmFoam PE
Shield:	Bonded Al Foil
Braid Coverage:	128X0.12mmCCA Pitch 22 95%Coverage
Jacket:	6.10±0.10mmPVC white/Black ETL
Power Lines:	2X7X0.38mm CCA
Package:	100M/Roll 305M/Drum 1000ft/500ft/Pull Box

2) Characteristics

Sparker Test:	4000VAC
Impedance:	75±3 Ohm
Capacitance:	54±3pF/m
Velocity of Propagation:	85%
Return Loss:	20dB min (5-2300MHz)

3) Attenuation

Attenuation	[@68° F. (20° C.)]		
Frequency (MHz)	Max. (dB/100 ft.)	Frequency (MHz)	Max. (dB/100 ft.)
5	0.86	400	5.10
55	2.05	450	5.40
83	2.45	500	5.70
187	3.60	550	5.95
211	3.80	600	6.20
250	4.10	750	6.97
300	4.45	865	7.52
350	4.80	1000	8.12



LINAN WEIMAI ELECTRON CO.LTD

Address: No.399 North HuanCheng Road Linan Hangzhou China www.weimaicable.com

Phone:0086-61077585 Mobile:0086-13758296286 Email: sales@weimaicable.com

Coaxial Cable RG59+2DC 95% Braiding 75ohm china manufacturer supplier

Item: WM-COAX-014



Email: sales@weimaicable.com Skype: weimaicable wechat:13758296286



LINAN WEIMAI ELECTRON CO.LTD

Address: No.399 North HuanCheng Road Linan Hangzhou China www.weimaicable.com
Phone:0086-61077585 Mobile:0086-13758296286 Email: sales@weimaicable.com

Coaxial Cable RG59+2DC 95% Braiding 75ohm china manufacturer supplier

Item: WM-COAX-015

1) Construction

Center Conductor:	0.81±0.01mm Copper /CU
Dielectric:	3.66±0.05mmFoam PE
Shield:	Bonded Al Foil
Braid Coverage:	128X0.12mmCCA Pitch 22 95%Coverage
Jacket:	6.10±0.10mmPVC white/Black ETL
Power Lines:	2X7X0.38mm CCA
Package:	100M/Roll 305M/Drum 1000ft/500ft/Pull Box

2) Characteristics

Sparker Test:	4000VAC
Impedance:	75±3 Ohm
Capacitance:	54±3pF/m
Velocity of Propagation:	85%
Return Loss:	20dB min (5-2300MHz)

3) Attenuation

Attenuation	[@68° F. (20° C.)]		
Frequency (MHz)	Max. (dB/100 ft.)	Frequency (MHz)	Max. (dB/100 ft.)
5	0.86	400	5.10
55	2.05	450	5.40
83	2.45	500	5.70
187	3.60	550	5.95
211	3.80	600	6.20
250	4.10	750	6.97
300	4.45	865	7.52
350	4.80	1000	8.12



LINAN WEIMAI ELECTRON CO.LTD

Address: No.399 North HuanCheng Road Linan Hangzhou China www.weimaicable.com

Phone:0086-61077585 Mobile:0086-13758296286 Email: sales@weimaicable.com

**Coaxial Cable RG59+2DC 95% Braiding 75ohm china manufacturer
supplier**

Item: WM-COAX-015



Email: sales@weimaicable.com Skype: weimaicable wechat:13758296286



LINAN WEIMAI ELECTRON CO.LTD

Address: No.399 North HuanCheng Road Linan Hangzhou China www.weimaicable.com
Phone:0086-61077585 Mobile:0086-13758296286 Email: sales@weimaicable.com

Coaxial Cable RG59+2DC 95% Braiding 75ohm china manufacturer supplier

Item: WM-COAX-016

1) Construction

Center Conductor:	0.81±0.01mm Copper /CU
Dielectric:	3.66±0.05mmFoam PE
Shield:	Bonded Al Foil
Braid Coverage:	144X0.12mmCu Pitch 25 95%Coverage
Jacket:	6.10±0.10mmPVC white/Black ETL
Power Lines:	2X7X0.35mm Cu
Package:	100M/Roll 305M/Drum 1000ft/500ft/Pull Box

2) Characteristics

Sparker Test:	4000VAC
Impedance:	75±3 Ohm
Capacitance:	54±3pF/m
Velocity of Propagation:	85%
Return Loss:	20dB min (5-2300MHz)

3) Attenuation

Attenuation		[@68° F. (20° C.)]	
Frequency (MHz)	Max. (dB/100 ft.)	Frequency (MHz)	Max. (dB/100 ft.)
5	0.86	400	5.10
55	2.05	450	5.40
83	2.45	500	5.70
187	3.60	550	5.95
211	3.80	600	6.20
250	4.10	750	6.97
300	4.45	865	7.52
350	4.80	1000	8.12




LINAN WEIMAI ELECTRON CO.LTD

Address: No.399 North HuanCheng Road Linan Hangzhou China www.weimaicable.com

Phone:0086-61077585 Mobile:0086-13758296286 Email: sales@weimaicable.com

**Coaxial Cable RG59+2DC 95% Braiding 75ohm china manufacturer
supplier**

Item: WM-COAX-016

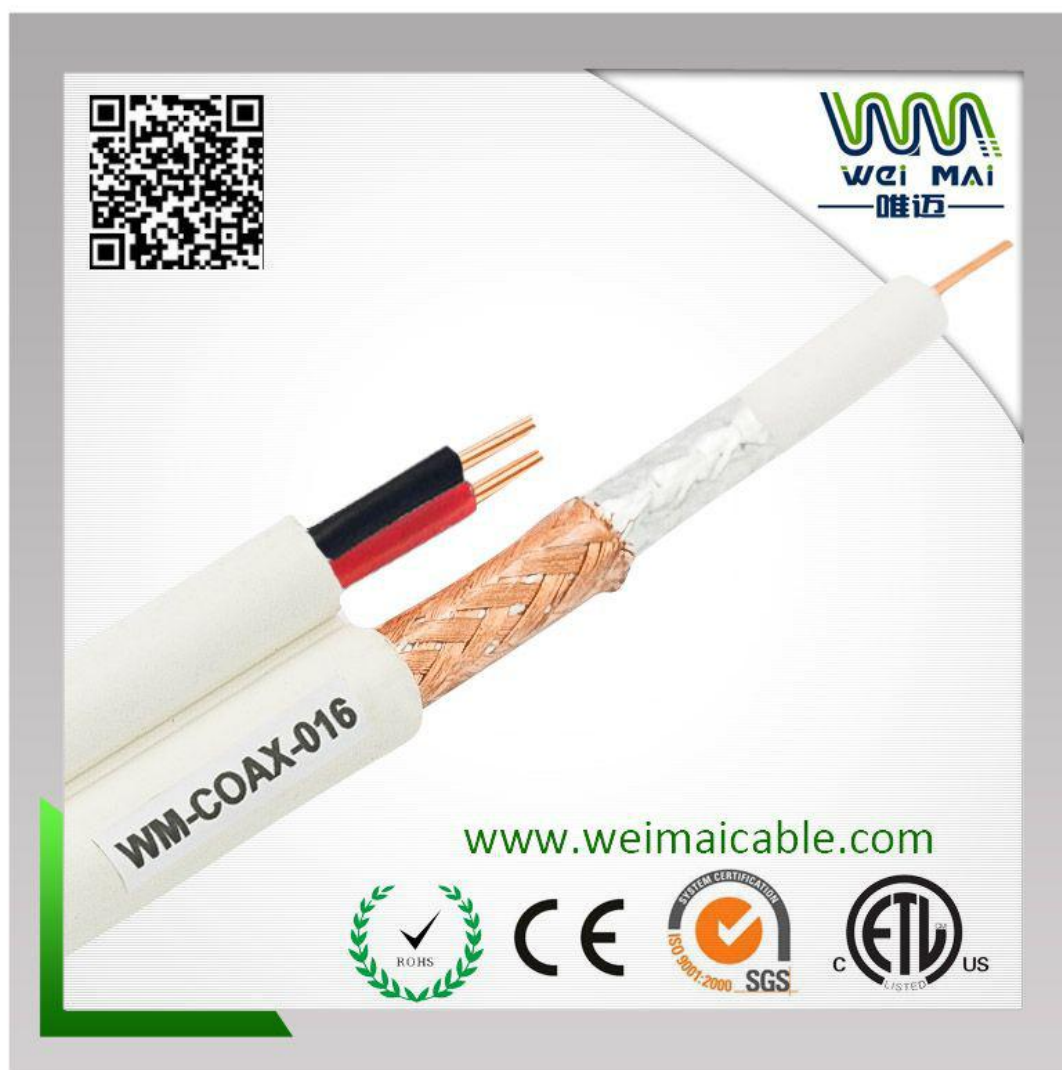

Email: sales@weimaicable.com Skype: weimaicable wechat:13758296286



LINAN WEIMAI ELECTRON CO.LTD

Address: No.399 North HuanCheng Road Linan Hangzhou China www.weimaicable.com
Phone:0086-61077585 Mobile:0086-13758296286 Email: sales@weimaicable.com

Coaxial Cable RG59+2DC 95% Braiding 75ohm china manufacturer supplier

Item: WM-COAX-017

1) Construction

Center Conductor:	0.81±0.01mm Copper /CU
Dielectric:	3.66±0.05mmFoam PE
Shield:	Bonded Al Foil
Braid Coverage:	144X0.12mmCu Pitch 25 95%Coverage
Jacket:	6.10±0.10mmPVC white/Black ETL
Power Lines:	2X7X0.35mm Cu
Package:	100M/Roll 305M/Drum 1000ft/500ft/Pull Box

2) Characteristics

Sparker Test:	4000VAC
Impedance:	75±3 Ohm
Capacitance:	54±3pF/m
Velocity of Propagation:	85%
Return Loss:	20dB min (5-2300MHz)

3) Attenuation

Attenuation		[@68° F. (20° C.)]	
Frequency (MHz)	Max. (dB/100 ft.)	Frequency (MHz)	Max. (dB/100 ft.)
5	0.86	400	5.10
55	2.05	450	5.40
83	2.45	500	5.70
187	3.60	550	5.95
211	3.80	600	6.20
250	4.10	750	6.97
300	4.45	865	7.52
350	4.80	1000	8.12



LINAN WEIMAI ELECTRON CO.LTD

Address: No.399 North HuanCheng Road Linan Hangzhou China www.weimaicable.com
Phone:0086-61077585 Mobile:0086-13758296286 Email: sales@weimaicable.com

Coaxial Cable RG59+2DC 95% Braiding 75ohm china manufacturer supplier

Item: WM-COAX-017



Email: sales@weimaicable.com Skype: weimaicable wechat:13758296286



LINAN WEIMAI ELECTRON CO.LTD

Address: No.399 North HuanCheng Road Linan Hangzhou China www.weimaicable.com
Phone:0086-61077585 Mobile:0086-13758296286 Email: sales@weimaicable.com

Coaxial Cable RG6 40% Braiding 75ohm china manufacturer supplier Item: WM-COAX-018

1) Construction

Center Conductor:	0.90±0.01mm Copper Clad Steel/CCS Conductivity 18%
Dielectric:	4.75±0.05mmFoam PE
Shield:	Bonded Al Foil
Braid Coverage:	64X0.15mm Al alloy Braiding Pitch40 40%Coverage
Jacket:	6.60±0.05mm PVC white/black 75Degree
Package:	100M/Roll 305M/Drum 1000ft/500ft/Pull Box

2) Characteristics

Sparker Test:	4000VAC
Impedance:	75±3 Ohm
Capacitance:	54±3pF/m
Velocity of Propagation:	85%
Return Loss:	20dB min (5-2300MHz)

3) Attenuation

Attenuation	[@68° F. (20° C.)]	
Frequency (MHz)	Maximum (dB/100 ft.)	Maximum (dB/100 m)
5	0.91	2.9
50	2.0	6.5
100	2.5	8.1
200	3.0	9.8
400	4.5	14.7
700	6.0	19.6
900	6.5	21.3
1000	7.5	24.5
1450	8.6	28.1
1800	9.5	31.1
2250	10.9	35.73



LINAN WEIMAI ELECTRON CO.LTD

Address: No.399 North HuanCheng Road Linan Hangzhou China www.weimaicable.com
Phone:0086-61077585 Mobile:0086-13758296286 Email: sales@weimaicable.com

Coaxial Cable RG6 40% Braiding 75ohm china manufacturer
supplier Item: WM-COAX-018





Email: sales@weimaicable.com Skype: weimaicable wechat:13758296286

LINAN WEIMAI ELECTRON CO.LTD

Address: No.399 North HuanCheng Road Linan Hangzhou China www.weimaicable.com

Phone:0086-61077585 Mobile:0086-13758296286 Email: sales@weimaicable.com

Coaxial Cable RG6 75ohm china manufacturer supplier

Item: WM-COAX-019

1) Construction

Center Conductor:	0.90±0.01mm Copper Clad Copper/CCC
Dielectric:	4.75±0.05mmFoam PE
Shield:	CCA Al Foil
Braid Coverage:	48X0.12mmCCA Braiding
Jacket:	6.60±0.05mm PVC white/black 75Degree
Package:	100M/Roll 305M/Drum 1000ft/500ft/Pull Box

2) Characteristics

Sparker Test:	4000VAC
Impedance:	75±3 Ohm
Capacitance:	54±3pF/m
Velocity of Propagation:	85%
Return Loss:	20dB min (5-2300MHz)

3) Attenuation

Attenuation	[@68° F. (20° C.)]	
Frequency (MHz)	Maximum (dB/100 ft.)	Maximum (dB/100 m)
5	0.91	2.9
50	2.0	6.5
100	2.5	8.1
200	3.0	9.8
400	4.5	14.7
700	6.0	19.6
900	6.5	21.3
1000	7.5	24.5
1450	8.6	28.1
1800	9.5	31.1
2250	10.9	35.73

Email: sales@weimaicable.com Skype: weimaicable wechat:13758296286




LINAN WEIMAI ELECTRON CO.LTD

Address: No.399 North HuanCheng Road Linan Hangzhou China www.weimaicable.com

Phone:0086-61077585 Mobile:0086-13758296286 Email: sales@weimaicable.com

Coaxial Cable RG6 75ohm china manufacturer supplier

Item: WM-COAX-019

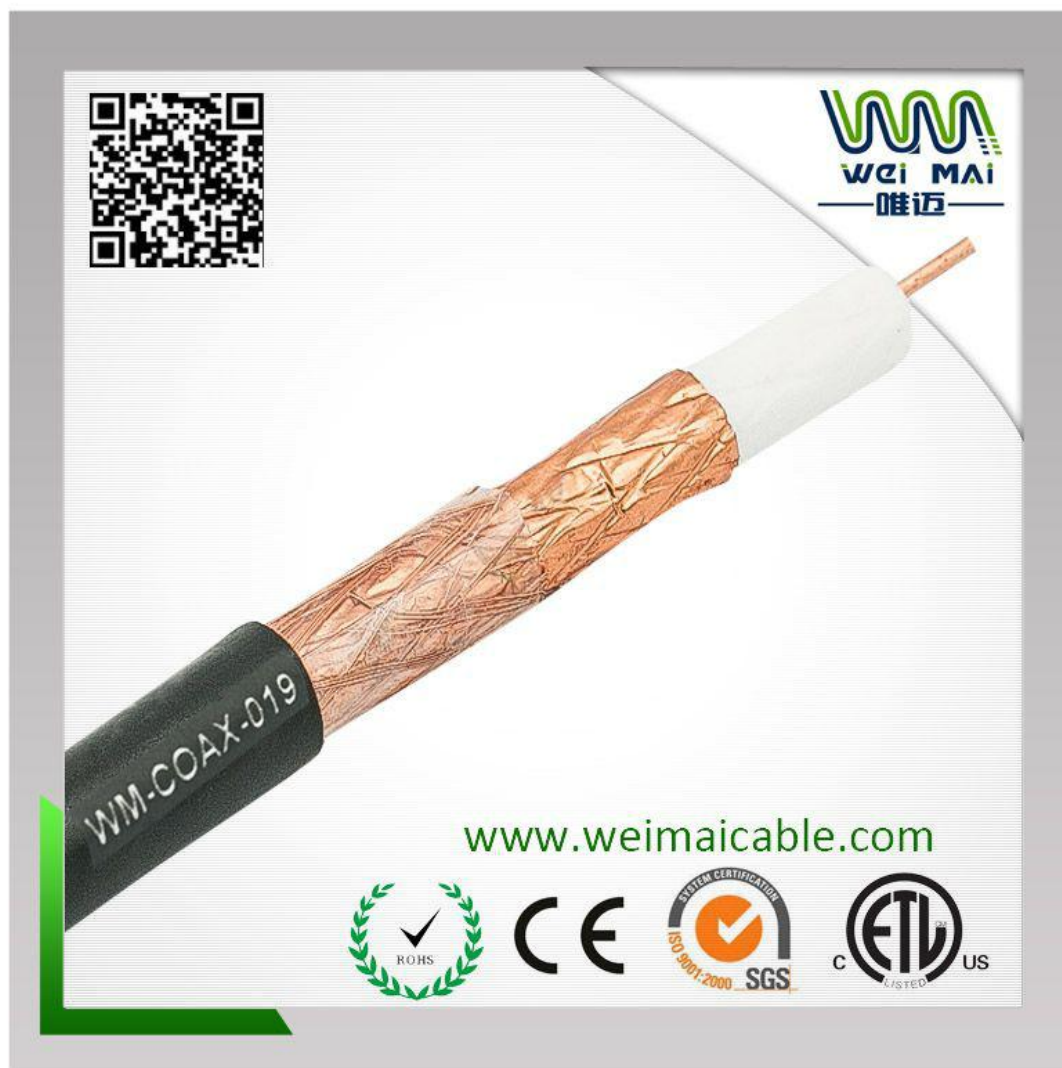

Email: sales@weimaicable.com Skype: weimaicable wechat:13758296286

Phone:0086-61077585 Mobile:0086-13758296286 Email: sales@weimaicable.com

Coaxial Cable RG6 75ohm china manufacturer supplier
Item: WM-COAX-019

1) Construction

Center Conductor: 0.90±0.01mm Copper Clad Copper/CCC
Dielectric: 4.75±0.05mmFoam PE
Shield: CCA Al Foil
Braid Coverage: 48X0.12mmCCA Braiding
Jacket: 6.60±0.05mm PVC white/black 75Degree
Package: 100M/Roll 305M/Drum 1000ft/500ft/Pull Box

2) Characteristics

Sparker Test: 4000VAC
Impedance: 75±3 Ohm
Capacitance: 54±3pF/m
Velocity of Propagation: 85%
Return Loss: 20dB min (5-2300MHz)

3) Attenuation

Attenuation	[@68° F. (20° C.)]	
Frequency (MHz)	Maximum (dB/100 ft.)	Maximum (dB/100 m)
5	0.91	2.9
50	2.0	6.5
100	2.5	8.1
200	3.0	9.8
400	4.5	14.7
700	6.0	19.6
900	6.5	21.3
1000	7.5	24.5
1450	8.6	28.1
1800	9.5	31.1
2250	10.9	35.73



LINAN WEIMAI ELECTRON CO.LTD

Address: No.399 North HuanCheng Road Linan Hangzhou China www.weimaicable.com
Phone:0086-61077585 Mobile:0086-13758296286 Email: sales@weimaicable.com

Coaxial Cable RG6 60% Braiding 75ohm china manufacturer supplier Item: WM-COAX-020

1) Construction

Center Conductor: 0.90±0.01mm Copper Clad Copper/CCC
Dielectric: 4.75±0.05mmFoam PE
Shield: CCA Al Foil
Braid Coverage: 64X0.15mmCCA Braiding Pitch 40 60%Coverage
Jacket: 6.60±0.05mm PVC white/black 75Degree
Package: 100M/Roll 305M/Drum 1000ft/500ft/Pull Box

2) Characteristics

Sparker Test: 4000VAC
Impedance: 75±3 Ohm
Capacitance: 54±3pF/m
Velocity of Propagation: 85%
Return Loss: 20dB min (5-2300MHz)

3) Attenuation

Attenuation	[@68° F. (20° C.)]	
Frequency (MHz)	Maximum (dB/100 ft.)	Maximum (dB/100 m)
5	0.81	2.65
50	1.5	4.9
100	2.0	6.5
200	2.8	9.2
400	4.1	13.6
700	5.6	18.4
900	6.2	20.3
1000	6.68	21.9
1450	8.15	26.72
1800	9.0	29.5
2250	10.56	34.62




LINAN WEIMAI ELECTRON CO.LTD

Address: No.399 North HuanCheng Road Linan Hangzhou China www.weimaicable.com

Phone:0086-61077585 Mobile:0086-13758296286 Email: sales@weimaicable.com

Coaxial Cable RG6 60% Braiding 75ohm china manufacturer supplier
Item: WM-COAX-020

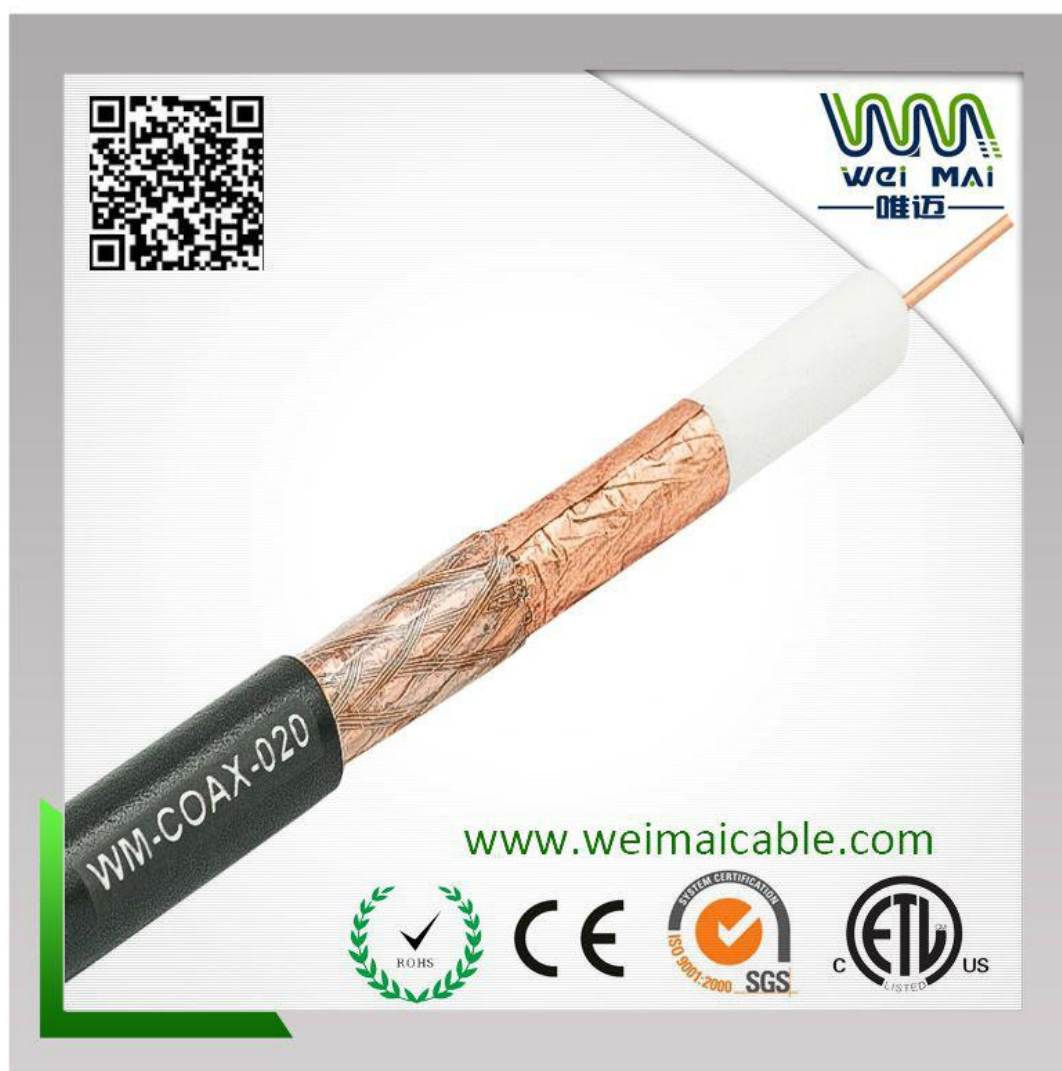

Email: sales@weimaicable.com Skype: weimaicable wechat:13758296286



LINAN WEIMAI ELECTRON CO.LTD

Address: No.399 North HuanCheng Road Linan Hangzhou China www.weimaicable.com
Phone:0086-61077585 Mobile:0086-13758296286 Email: sales@weimaicable.com

Coaxial Cable KX6A 60% Braiding 75ohm china manufacturer supplier Item: WM-COAX-023

1) Construction

Center Conductor:	7*0.2mm Copper-clad Aluminum /CCA
Dielectric:	3.5±0.05mm Solid PE
Braid Coverage:	72X0.12mmCCA Braiding 60%Coverage
Jacket:	7.80±0.10mmPVC white/Black
Power Lines:	4X0.35mm CCS
Package:	100M/Roll 305M/Drum 1000ft/500ft/Pull Box

2) Characteristics

Sparker Test:	4000VAC
Impedance:	75±3 Ohm
Capacitance:	54±3pF/m
Velocity of Propagation:	85%
Return Loss:	20dB min (5-2300MHz)

3) Attenuation

Attenuation	[@68° F. (20° C.)]	
Frequency (MHz)	Maximum (dB/100 ft.)	Maximum (dB/100 m)
5	0.81	2.65
50	1.5	4.9
100	2.0	6.5
200	2.8	9.2
400	4.1	13.6
700	5.6	18.4
900	6.2	20.3
1000	6.68	21.9
1450	8.15	26.72
1800	9.0	29.5
2250	10.56	34.62



LINAN WEIMAI ELECTRON CO.LTD

Address: No.399 North HuanCheng Road Linan Hangzhou China www.weimaicable.com

Phone:0086-61077585 Mobile:0086-13758296286 Email: sales@weimaicable.com

**Coaxial Cable KX6A 60% Braiding 75ohm china manufacturer
supplier Item: WM-COAX-023**



Email: sales@weimaicable.com Skype: weimaicable wechat:13758296286



LINAN WEIMAI ELECTRON CO.LTD

Address: No.399 North HuanCheng Road Linan Hangzhou China www.weimaicable.com
Phone:0086-61077585 Mobile:0086-13758296286 Email: sales@weimaicable.com

Coaxial Cable RG6 60% Braiding 75ohm china manufacturer supplier Item: WM-COAX-024

1) Construction

Center Conductor:	1.02±0.01mm Copper Clad Steel/CCS Conductivity 21%
Dielectric:	4.75±0.05mmFoam PE
Shield:	Bonded Al Foil
Braid Coverage:	64X0.16mm Al alloy Braiding Pitch40 60%Coverage
Jacket:	6.80±0.05mm PVC white/black 75Degree
Package:	100M/Roll 305M/Drum 1000ft/500ft/Pull Box

2) Characteristics

Sparker Test:	4000VAC
Impedance:	75±3 Ohm
Capacitance:	54±3pF/m
Velocity of Propagation:	85%
Return Loss:	20dB min (5-2300MHz)

3) Attenuation

Attenuation	[@68° F. (20° C.)]	
Frequency (MHz)	Maximum (dB/100 ft.)	Maximum (dB/100 m)
5	0.81	2.65
50	1.5	4.9
100	2.0	6.5
200	2.8	9.2
400	4.1	13.6
700	5.6	18.4
900	6.2	20.3
1000	6.68	21.9
1450	8.15	26.72
1800	9.0	29.5
2250	10.56	34.62




LINAN WEIMAI ELECTRON CO.LTD

Address: No.399 North HuanCheng Road Linan Hangzhou China www.weimaicable.com

Phone:0086-61077585 Mobile:0086-13758296286 Email: sales@weimaicable.com

**Coaxial Cable RG6 60% Braiding 75ohm china manufacturer
supplier Item: WM-COAX-024**

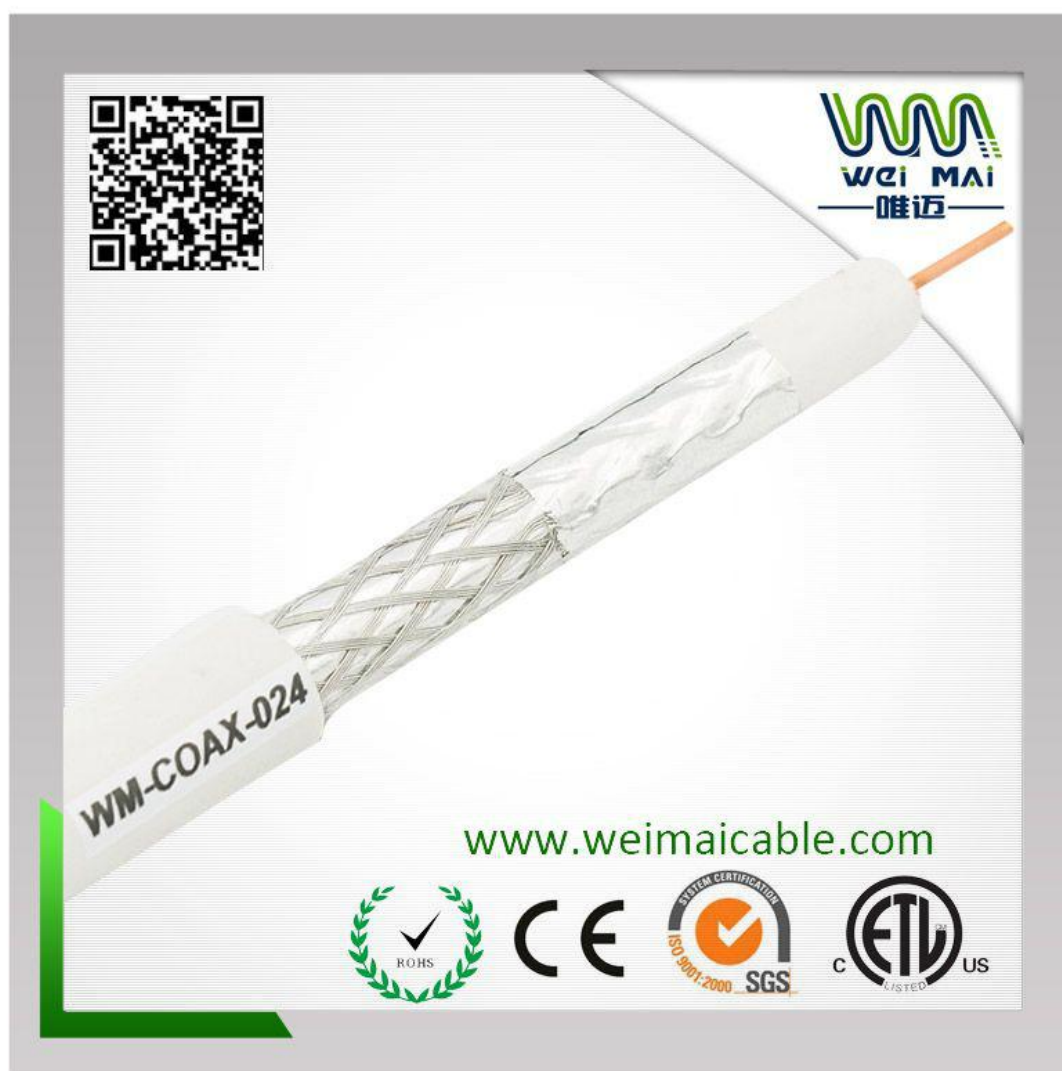

Email: sales@weimaicable.com Skype: weimaicable wechat:13758296286



LINAN WEIMAI ELECTRON CO.LTD

Address: No.399 North HuanCheng Road Linan Hangzhou China www.weimaicable.com
Phone:0086-61077585 Mobile:0086-13758296286 Email: sales@weimaicable.com

Coaxial Cable RG6 60% Braiding 75ohm china manufacturer supplier Item: WM-COAX-025

1) Construction

Center Conductor:	1.02±0.01mm Copper Clad Steel/CCS Conductivity 21%
Dielectric:	4.75±0.05mmFoam PE
1 st Shield:	Bonded Al Foil
2 nd Shield Braid Coverage:	64X0.12mm Al alloy Braiding Pitch40 60%Coverage
3 rd Shield:	High Temperature Aluminum Foil
Jacket:	7.0±0.05mm PVC white/black 75Degree
Package:	100M/Roll 305M/Drum 1000ft/500ft/Pull Box

2) Characteristics

Sparker Test:	4000VAC
Impedance:	75±3 Ohm
Capacitance:	54±3pF/m
Velocity of Propagation:	85%
Return Loss:	20dB min (5-2300MHz)

3) Attenuation

Attenuation	[@68° F. (20° C.)]	
Frequency (MHz)	Maximum (dB/100 ft.)	Maximum (dB/100 m)
5	0.81	2.65
50	1.5	4.9
100	2.0	6.5
200	2.8	9.2
400	4.1	13.6
700	5.6	18.4
900	6.2	20.3
1000	6.68	21.9
1450	8.15	26.72
1800	9.0	29.5
2250	10.56	34.62




LINAN WEIMAI ELECTRON CO.LTD

Address: No.399 North HuanCheng Road Linan Hangzhou China www.weimaicable.com

Phone:0086-61077585 Mobile:0086-13758296286 Email: sales@weimaicable.com

**Coaxial Cable RG6 60% Braiding 75ohm china manufacturer
supplier Item: WM-COAX-025**

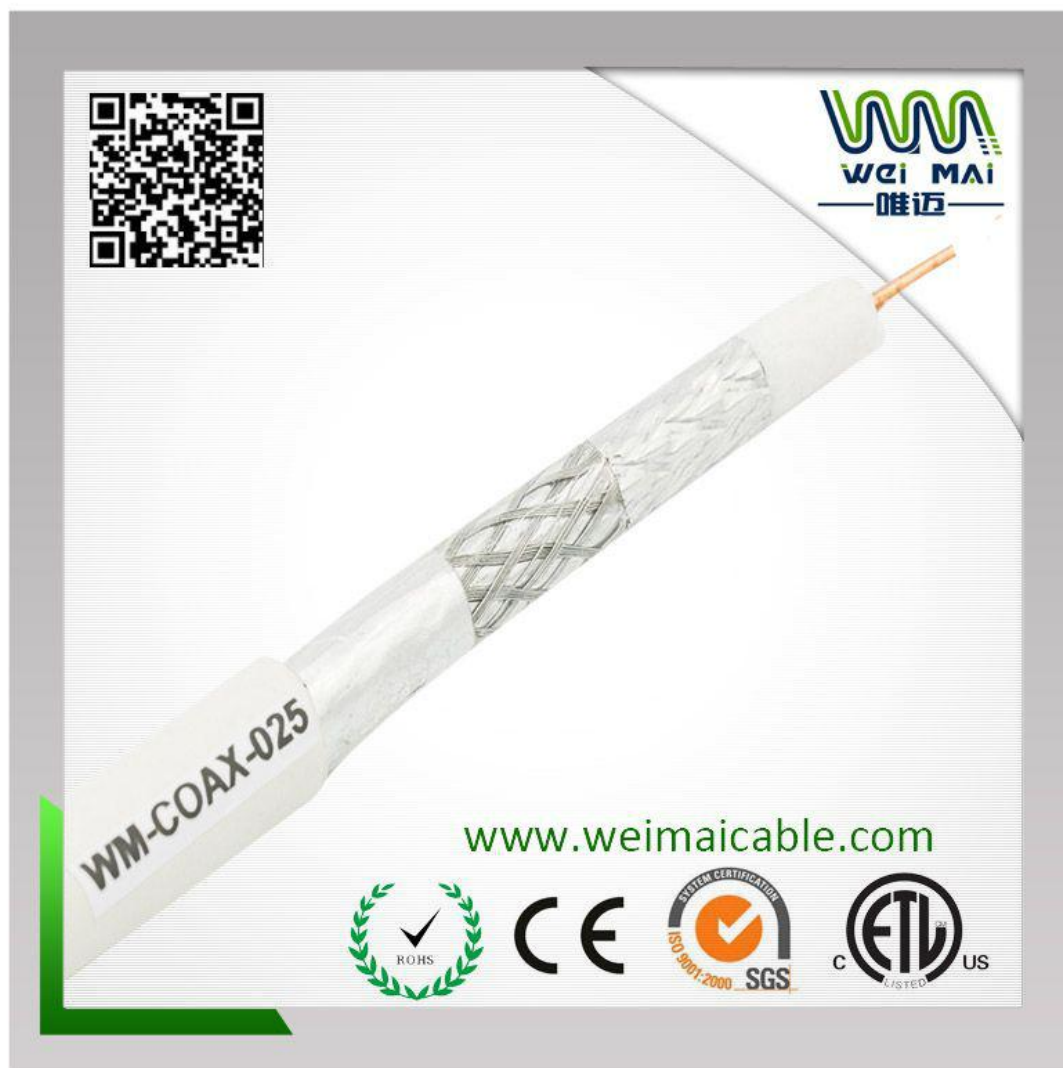

Email: sales@weimaicable.com Skype: weimaicable wechat:13758296286



LINAN WEIMAI ELECTRON CO.LTD

Address: No.399 North HuanCheng Road Linan Hangzhou China www.weimaicable.com
Phone:0086-61077585 Mobile:0086-13758296286 Email: sales@weimaicable.com

Coaxial Cable RG6 60% Braiding 75ohm china manufacturer supplier Item: WM-COAX-026

1) Construction

Center Conductor:	1.02±0.01mm Copper Clad Steel/CCS Conductivity 21%
Dielectric:	4.57±0.05mmFoam PE
1 st Shield:	Bonded Al Foil
2 nd Shield Braid Coverage:	64X0.15mm Al alloy Braiding 60%Coverage
3 rd Shield:	High Temperature Aluminum Foil
4 th Shield Barid Coverage:	48X0.15mm Al alloy Braiding 40% Coverage
Jacket:	7.50±0.05mm PVC white/black 75Degree
Package:	100M/Roll 305M/Drum 1000ft/500ft/Pull Box

2) Characteristics

Sparker Test:	4000VAC
Impedance:	75±3 Ohm
Capacitance:	54±3pF/m
Velocity of Propagation:	85%
Return Loss:	20dB min (5-2300MHz)

3) Attenuation

Attenuation	[@68° F. (20° C.)]	
Frequency (MHz)	Maximum (dB/100 ft.)	Maximum (dB/100 m)
5	0.82	2.6
50	1.5	4.9
100	2.0	6.5
400	4.48	14.69
700	6.43	21.08
1000	8.12	26.62
1450	8.13	26.65
1800	8.50	27.9
2250	10.00	34.00




LINAN WEIMAI ELECTRON CO.LTD

Address: No.399 North HuanCheng Road Linan Hangzhou China www.weimaicable.com

Phone:0086-61077585 Mobile:0086-13758296286 Email: sales@weimaicable.com

Coaxial Cable RG6 60% Braiding 75ohm china manufacturer supplier
Item: WM-COAX-026

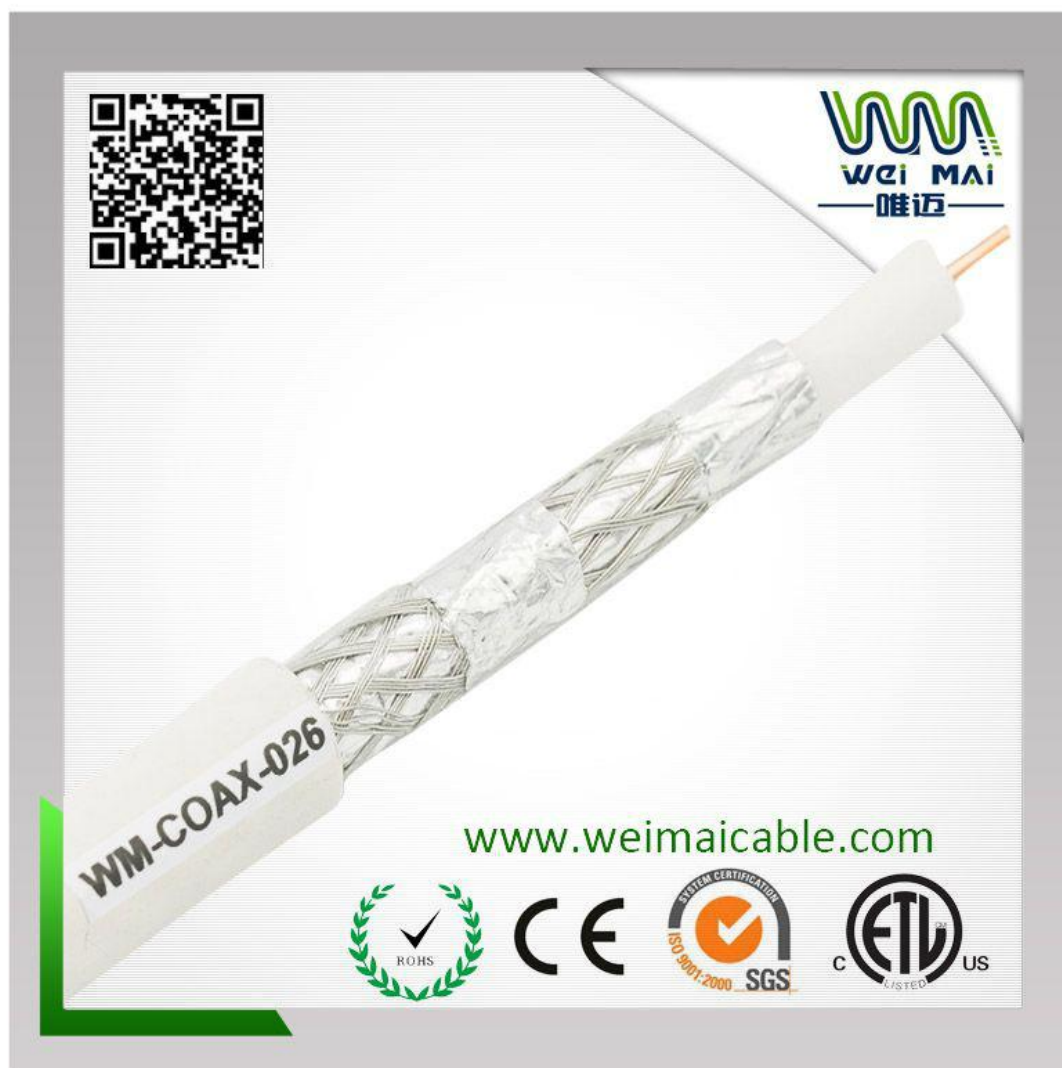

Email: sales@weimaicable.com Skype: weimaicable wechat:13758296286



LINAN WEIMAI ELECTRON CO.LTD

Address: No.399 North HuanCheng Road Linan Hangzhou China www.weimaicable.com
Phone:0086-61077585 Mobile:0086-13758296286 Email: sales@weimaicable.com

Coaxial Cable RG213 95% Braiding 75ohm china manufacturer supplier Item: WM-COAX-027

1) Construction

Center Conductor:	7*0.75mm Copper/CU
Dielectric:	7.24±0.05mm Solid PE
Braid Coverage:	128X0.15mmCU Braiding 95%Coverage
Jacket:	10.30±0.10mmPVC Black
Package:	100M/Roll 305M/Drum 1000ft/500ft/Pull Box

2) Characteristics

Sparker Test:	4000VAC
Impedance:	75±3 Ohm
Capacitance:	54±3pF/m
Velocity of Propagation:	85%
Return Loss:	20dB min (5-2300MHz)

3) Attenuation

Attenuation	[@68° F. (20° C.)]	
Frequency (MHz)	Maximum (dB/100 ft.)	Maximum (dB/100 m)
5	0.81	2.65
50	1.5	4.9
100	2.0	6.5
200	2.8	9.2
400	4.1	13.6
700	5.6	18.4
900	6.2	20.3
1000	6.68	21.9
1450	8.15	26.72
1800	9.0	29.5
2250	10.56	34.62



LINAN WEIMAI ELECTRON CO.LTD

Address: No.399 North HuanCheng Road Linan Hangzhou China www.weimaicable.com

Phone:0086-61077585 Mobile:0086-13758296286 Email: sales@weimaicable.com

Coaxial Cable RG213 95% Braiding 75ohm china manufacturer supplier
Item: WM-COAX-027



Email: sales@weimaicable.com Skype: weimaicable wechat:13758296286



LINAN WEIMAI ELECTRON CO.LTD

Address: No.399 North HuanCheng Road Linan Hangzhou China www.weimaicable.com
Phone:0086-61077585 Mobile:0086-13758296286 Email: sales@weimaicable.com

Coaxial Cable RG6+M 95% Braiding 75ohm china manufacturer supplier Item: WM-COAX-028

1) Construction

Center Conductor:	1.02±0.01mm Copper Clad Steel/CCS Conductivity 18%
Dielectric:	4.75±0.05mmFoam PE
Shield:	Bonded Al Foil
Braid Coverage:	112X0.12mm Al alloy Braiding Pitch22 95%Coverage
Jacket:	6.80±0.05mm PVC white/black 75Degree
Messenger:	1.3mmSteel
Package:	305M/Drum

2) Characteristics

Sparker Test:	4000VAC
Impedance:	75±3 Ohm
Capacitance:	54±3pF/m
Velocity of Propagation:	85%
Return Loss:	20dB min (5-2300MHz)

3) Attenuation

Attenuation	[@68° F. (20° C.)]	
Frequency (MHz)	Maximum (dB/100 ft.)	Maximum (dB/100 m)
5	0.81	2.65
50	1.5	4.9
100	2.0	6.5
200	2.8	9.2
400	4.1	13.6
700	5.6	18.4
900	6.2	20.3
1000	6.68	21.9
1450	8.15	26.72
1800	9.0	29.5
2250	10.56	34.62




LINAN WEIMAI ELECTRON CO.LTD

Address: No.399 North HuanCheng Road Linan Hangzhou China www.weimaicable.com

Phone:0086-61077585 Mobile:0086-13758296286 Email: sales@weimaicable.com

**Coaxial Cable RG6+M 95% Braiding 75ohm china manufacturer
supplier Item: WM-COAX-028**

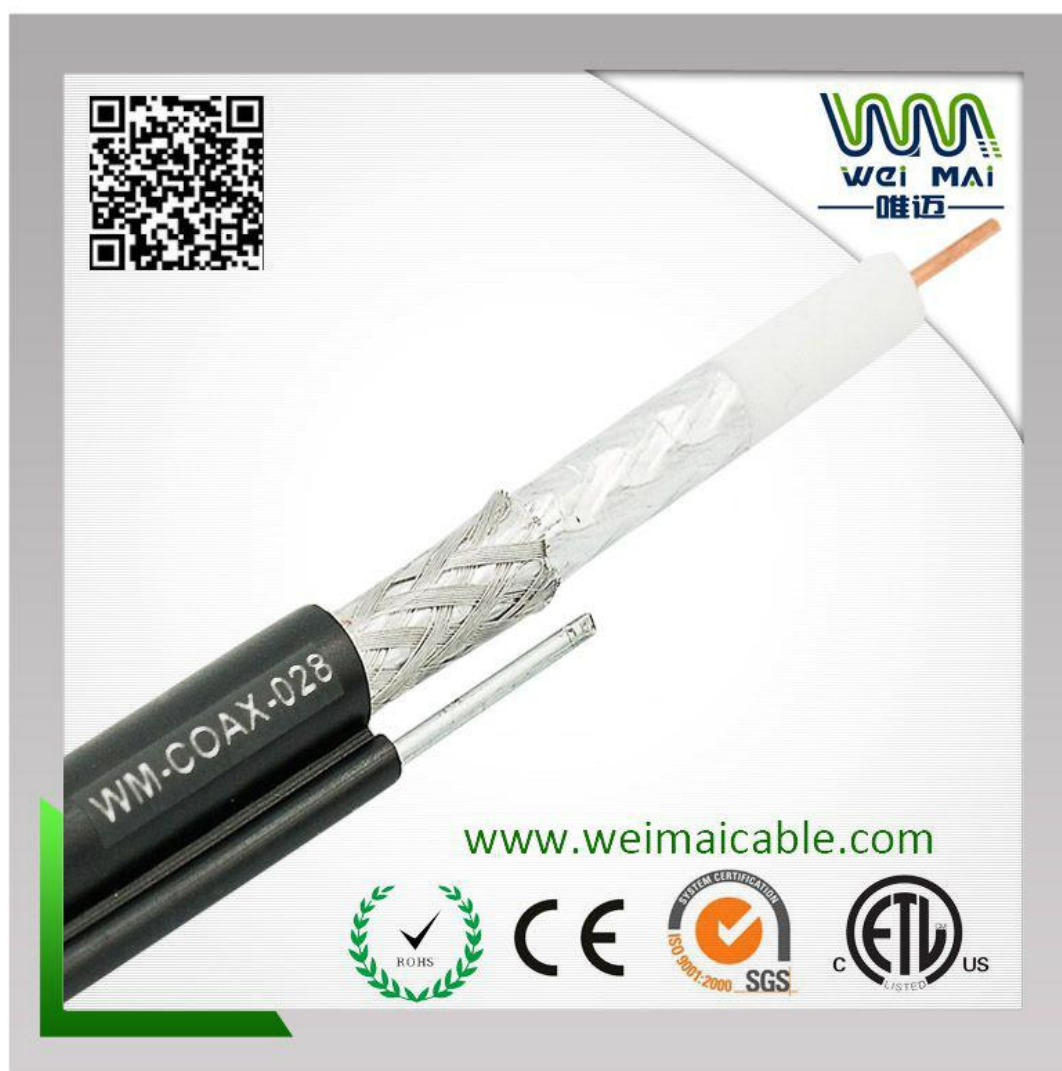



Phone: sales@weimaicable.com Skype: weimaicable wechat:13758296286

LINAN WEIMAI ELECTRON CO.LTD

Address: No.399 North HuanCheng Road Linan Hangzhou China www.weimaicable.com
Phone:0086-61077585 Mobile:0086-13758296286 Email: sales@weimaicable.com

Coaxial Cable RG59+2DC 95% Braiding 75ohm china manufacturer supplier Item: WM-COAX-031

1) Construction

Center Conductor:	0.81±0.01mm Copper /CU
Dielectric:	3.7±0.05mmFoam PE
Shield:	CCA Foil
Braid Coverage:	128X0.12mmCCA Pitch 20 95%Coverage
Jacket:	6.10±0.10mmPVC white/Black
Power Lines:	2X7X0.38mm CCA
Package:	100M/Roll 305M/Drum 1000ft/500ft/Pull Box

2) Characteristics

Sparker Test:	4000VAC
Impedance:	75±3 Ohm
Capacitance:	54±3pF/m
Velocity of Propagation:	85%
Return Loss:	20dB min (5-2300MHz)

3) Attenuation

Attenuation	[@68° F. (20° C.)]		
Frequency (MHz)	Max. (dB/100 ft.)	Frequency (MHz)	Max. (dB/100 ft.)
5	0.86	400	5.10
55	2.05	450	5.40
83	2.45	500	5.70
187	3.60	550	5.95
211	3.80	600	6.20
250	4.10	750	6.97
300	4.45	865	7.52
350	4.80	1000	8.12

Email: sales@weimaicable.com Skype: weimaicable wechat:13758296286



LINAN WEIMAI ELECTRON CO.LTD

Address: No.399 North HuanCheng Road Linan Hangzhou China www.weimaicable.com

Phone:0086-61077585 Mobile:0086-13758296286 Email: sales@weimaicable.com

**Coaxial Cable RG59+2DC 95% Braiding 75ohm china manufacturer
supplier**

Item: WM-COAX-031



Email: sales@weimaicable.com Skype: weimaicable wechat:13758296286



LINAN WEIMAI ELECTRON CO.LTD

Address: No.399 North HuanCheng Road Linan Hangzhou China www.weimaicable.com
Phone:0086-61077585 Mobile:0086-13758296286 Email: sales@weimaicable.com

Coaxial Cable BT3002 90% Braiding 75ohm china manufacturer supplier Item: WM-COAX-032

1) Construction

Center Conductor:	0.32mm Copper/CU
Dielectric:	1.95±0.05mm Solid PE
Braid Coverage:	80X0.11mmTinned CCA Braiding Pitch 20 90%Coverage
Jacket:	3.55±0.10mmPVC white/Black
Package:	100M/Roll 305M/Drum 1000ft/500ft/Pull Box

2) Characteristics

Sparker Test:	4000VAC
Impedance:	75±3 Ohm
Capacitance:	54±3pF/m
Velocity of Propagation:	85%
Return Loss:	20dB min (5-2300MHz)

3) Attenuation


Attenuation	[@68° F. (20° C.)]	
Frequency (MHz)	Maximum (dB/100 ft.)	Maximum (dB/100 m)
5	0.81	2.65
50	1.5	4.9
100	2.0	6.5
200	2.8	9.2
400	4.1	13.6
700	5.6	18.4
900	6.2	20.3
1000	6.68	21.9
1450	8.15	26.72
1800	9.0	29.5
2250	10.56	34.62



LINAN WEIMAI ELECTRON CO.LTD

Address: No.399 North HuanCheng Road Linan Hangzhou China www.weimaicable.com
Phone:0086-61077585 Mobile:0086-13758296286 Email: sales@weimaicable.com

**Coaxial Cable BT3002 90% Braiding 75ohm china manufacturer
supplier Item: WM-COAX-032**

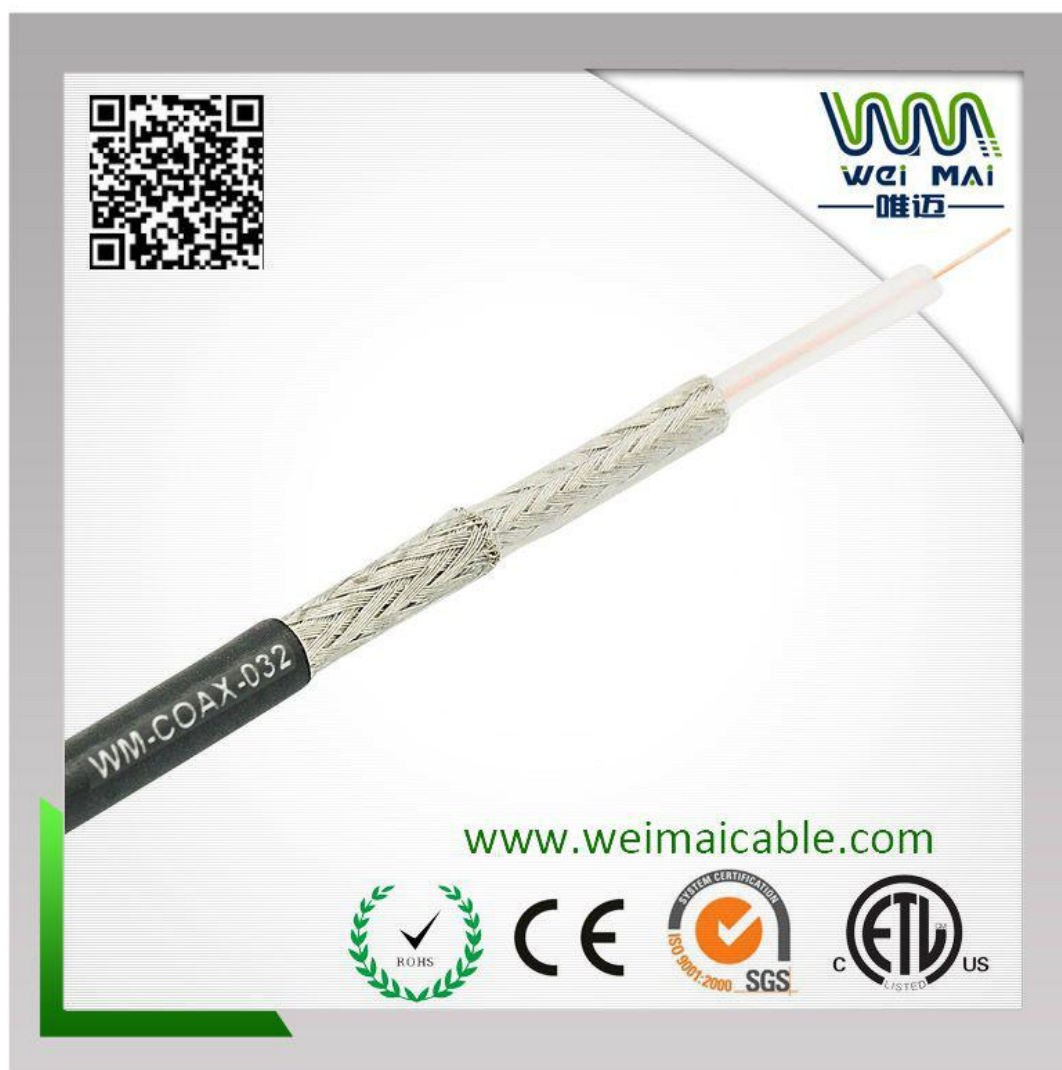

Email: sales@weimaicable.com Skype: weimaicable wechat:13758296286



LINAN WEIMAI ELECTRON CO.LTD

Address: No.399 North HuanCheng Road Linan Hangzhou China www.weimaicable.com
Phone:0086-61077585 Mobile:0086-13758296286 Email: sales@weimaicable.com

Coaxial Cable RG6+M 85% Braiding 75ohm china manufacturer supplier Item: WM-COAX-033

1) Construction

Center Conductor:	1.02±0.01mm Copper Clad Steel/CCS Conductivity 18%
Dielectric:	4.75±0.05mmFoam PE
Shield:	Bonded Al Foil
Braid Coverage:	128X0.14mm Al alloy Braiding Pitch 40 85%Coverage
Jacket:	6.80±0.05mm PVC white/black 75Degree
Messenger:	1.3mmSteel
Package:	305M/Drum

2) Characteristics

Sparker Test:	4000VAC
Impedance:	75±3 Ohm
Capacitance:	54±3pF/m
Velocity of Propagation:	85%
Return Loss:	20dB min (5-2300MHz)

3) Attenuation

Attenuation	[@68° F. (20° C.)]	
Frequency (MHz)	Maximum (dB/100 ft.)	Maximum (dB/100 m)
5	0.81	2.65
50	1.5	4.9
100	2.0	6.5
200	2.8	9.2
400	4.1	13.6
700	5.6	18.4
900	6.2	20.3
1000	6.68	21.9
1450	8.15	26.72
1800	9.0	29.5
2250	10.56	34.62



LINAN WEIMAI ELECTRON CO.LTD

Address: No.399 North HuanCheng Road Linan Hangzhou China www.weimaicable.com

Phone:0086-61077585 Mobile:0086-13758296286 Email: sales@weimaicable.com

Coaxial Cable RG6+M 85% Braiding 75ohm china manufacturer supplier
Item: WM-COAX-033



Email: sales@weimaicable.com Skype: weimaicable wechat:13758296286



LINAN WEIMAI ELECTRON CO.LTD

Address: No.399 North HuanCheng Road Linan Hangzhou China www.weimaicable.com
Phone:0086-61077585 Mobile:0086-13758296286 Email: sales@weimaicable.com

Coaxial Cable RG11+M 75% Braiding 75ohm china manufacturer supplier Item: WM-COAX-034

1) Construction

Center Conductor:	1.63±0.01mm Copper Clad Steel/CCS	Conductivity 18%
Dielectric:	7.30±0.05mmFoam PE	
Shield:	Bonded Al Foil	
Braid Coverage:	112X0.14mm Al alloy Braiding Pitch 30	75%Coverage
Jacket:	10.20±0.05mm PVC black 75Degree	
Messenger:	1.83mmSteel	
Package:	305M/Drum	

2) Characteristics

Sparker Test:	4000VAC
Impedance:	75±3 Ohm
Capacitance:	54±3pF/m
Velocity of Propagation:	85%
Return Loss:	20dB min (5-2300MHz)

3) Attenuation

Attenuation	[@68° F. (20° C.)]	
Frequency (MHz)	Maximum (dB/100 ft.)	Maximum (dB/100 m)
5	0.81	2.65
50	1.5	4.9
100	2.0	6.5
200	2.8	9.2
400	4.1	13.6
700	5.6	18.4
900	6.2	20.3
1000	6.68	21.9
1450	8.15	26.72
1800	9.0	29.5
2250	10.56	34.62




LINAN WEIMAI ELECTRON CO.LTD

Address: No.399 North HuanCheng Road Linan Hangzhou China www.weimaicable.com

Phone:0086-61077585 Mobile:0086-13758296286 Email: sales@weimaicable.com

**Coaxial Cable RG11+M 75% Braiding 75ohm china manufacturer
supplier Item: WM-COAX-034**

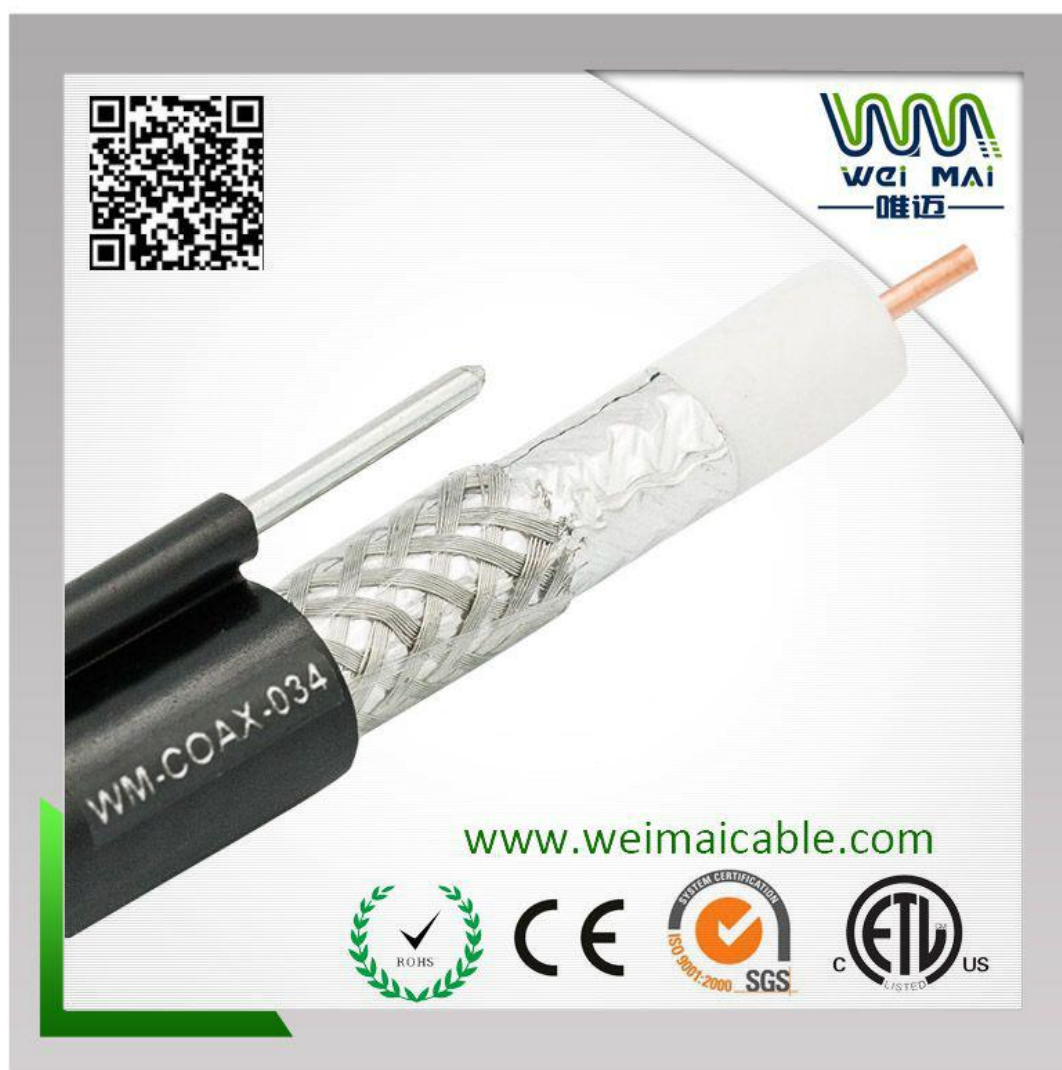

Email: sales@weimaicable.com Skype: weimaicable wechat:13758296286



LINAN WEIMAI ELECTRON CO.LTD

Address: No.399 North HuanCheng Road Linan Hangzhou China www.weimaicable.com
Phone:0086-61077585 Mobile:0086-13758296286 Email: sales@weimaicable.com

Coaxial Cable RG59 80% Braiding 75ohm china manufacturer supplier Item: WM-COAX-035

1) Construction

Center Conductor:	0.81±0.01mm Copper Clad Steel/CCS	Conductivity 21%
Dielectric:	3.66±0.05mmFoam PE	
1 st Shield:	Bonded Al Foil	
2 nd Shield Braid Coverage:	96X0.12mm Al alloy Braiding Pitch 40	80%Coverage
3 rd Shield:	High Temperature Aluminum Foil	
Jacket:	6.10±0.10mmPVC	white/Black
Package:	100M/Roll 305M/Drum 1000ft/500ft/Pull Box	

2) Characteristics

Sparker Test:	4000VAC
Impedance:	75±3 Ohm
Capacitance:	54±3pF/m
Velocity of Propagation:	85%
Return Loss:	20dB min (5-2300MHz)

3) Attenuation

Attenuation	[@68° F. (20° C.)]		
Frequency (MHz)	Max. (dB/100 ft.)	Frequency (MHz)	Max. (dB/100 ft.)
5	0.86	400	5.10
55	2.05	450	5.40
83	2.45	500	5.70
187	3.60	550	5.95
211	3.80	600	6.20
250	4.10	750	6.97
300	4.45	865	7.52
350	4.80	1000	8.12




LINAN WEIMAI ELECTRON CO.LTD

Address: No.399 North HuanCheng Road Linan Hangzhou China www.weimaicable.com

Phone:0086-61077585 Mobile:0086-13758296286 Email: sales@weimaicable.com

**Coaxial Cable RG59 80% Braiding 75ohm china manufacturer
supplier Item: WM-COAX-035**

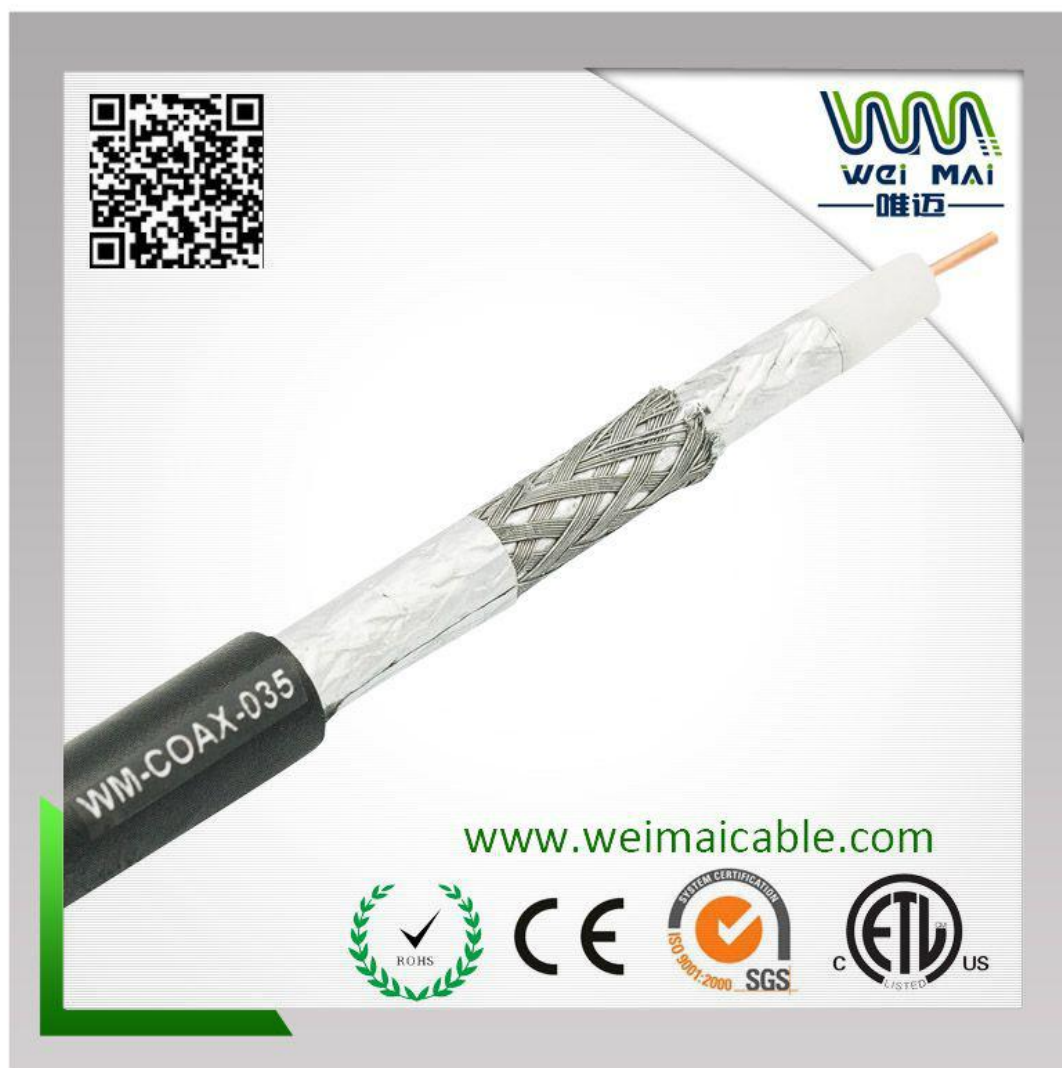

Email: sales@weimaicable.com Skype: weimaicable wechat:13758296286



LINAN WEIMAI ELECTRON CO.LTD

Address: No.399 North HuanCheng Road Linan Hangzhou China www.weimaicable.com
Phone:0086-61077585 Mobile:0086-13758296286 Email: sales@weimaicable.com

Coaxial Cable RG6 75% Braiding 75ohm china manufacturer supplier Item: WM-COAX-036

1) Construction

Center Conductor:	1.02±0.01mm Copper Clad Steel/CCS Conductivity 18%
Dielectric:	4.75±0.05mmFoam PE
1 st Shield:	Bonded Al Foil
2 nd Shield Braid Coverage:	96X0.12mm Al alloy Braiding 75%Coverage
3 rd Shield:	High Temperature Aluminum Foil
Jacket:	6.9±0.05mm PVC white/black 75Degree
Package:	100M/Roll 305M/Drum 1000ft/500ft/Pull Box

2) Characteristics

Sparker Test:	4000VAC
Impedance:	75±3 Ohm
Capacitance:	54±3pF/m
Velocity of Propagation:	85%
Return Loss:	20dB min (5-2300MHz)

3) Attenuation


Attenuation	[@68° F. (20° C.)]	
Frequency (MHz)	Maximum (dB/100 ft.)	Maximum (dB/100 m)
5	0.81	2.65
50	1.5	4.9
100	2.0	6.5
200	2.8	9.2
400	4.1	13.6
700	5.6	18.4
900	6.2	20.3
1000	6.68	21.9
1450	8.15	26.72
1800	9.0	29.5
2250	10.56	34.62



LINAN WEIMAI ELECTRON CO.LTD

Address: No.399 North HuanCheng Road Linan Hangzhou China www.weimaicable.com
Phone:0086-61077585 Mobile:0086-13758296286 Email: sales@weimaicable.com

**Coaxial Cable RG6 75% Braiding 75ohm china manufacturer
supplier Item: WM-COAX-036**

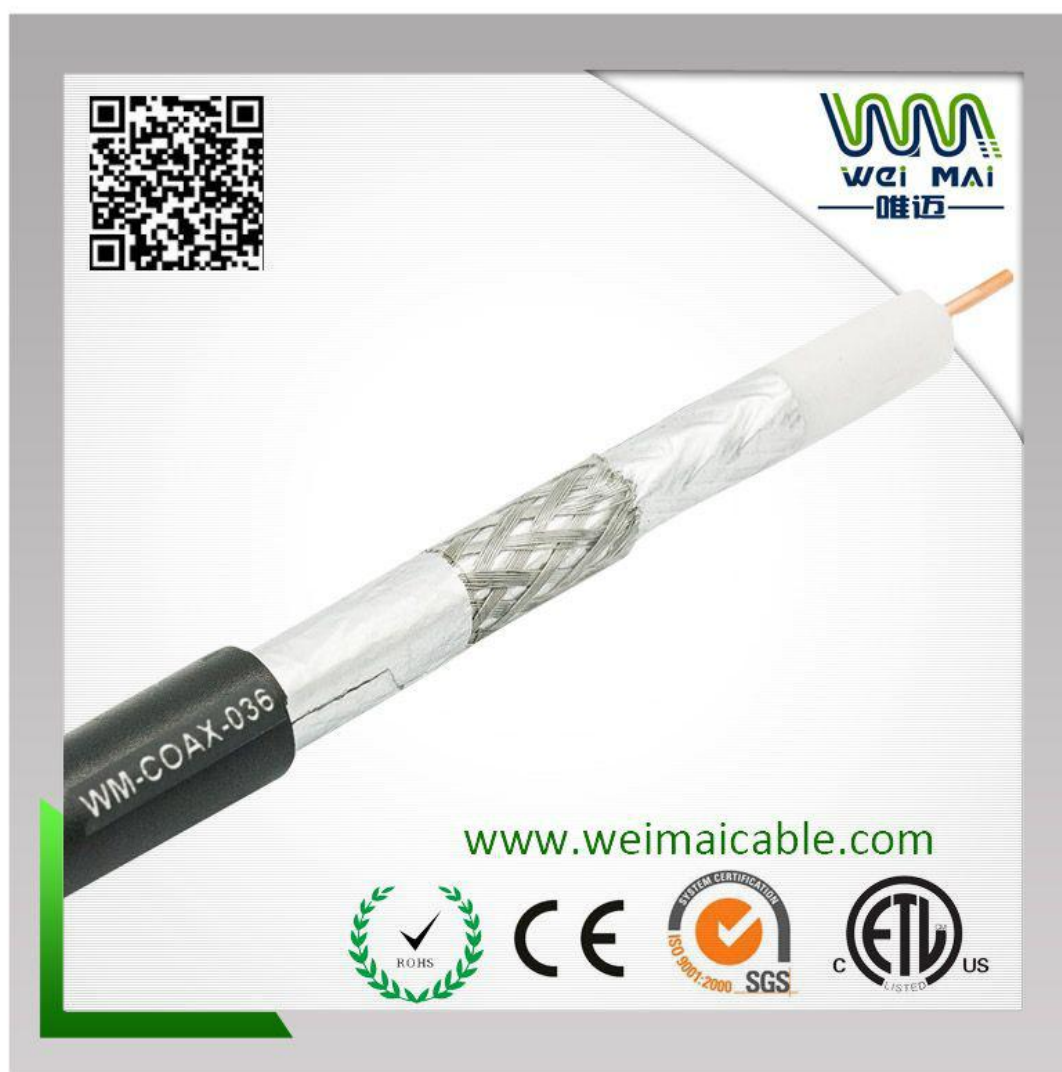



— sales@weimaicable.com Skype: weimaicable wechat:13758296286

LINAN WEIMAI ELECTRON CO.LTD

Address: No.399 North HuanCheng Road Linan Hangzhou China www.weimaicable.com
Phone:0086-61077585 Mobile:0086-13758296286 Email: sales@weimaicable.com

Coaxial Cable RG6 75ohm china manufacturer supplier Item: WM-COAX-039

1) Construction

Center Conductor: 0.95±0.01mm Copper Clad Steel/CCS Conductivity 18%
Dielectric: 4.75±0.05mmFoam PE
Shield: Al Foil
Braid Coverage: 48X0.12mmAl alloy Braiding
Jacket: 6.80±0.05mm PVC white/black 75Degree
Package: 100M/Roll 305M/Drum 1000ft/500ft/Pull Box

2) Characteristics

Sparker Test: 4000VAC
Impedance: 75±3 Ohm
Capacitance: 54±3pF/m
Velocity of Propagation: 85%
Return Loss: 20dB min (5-2300MHz)

3) Attenuation

Attenuation	[@68° F. (20° C.)]	
Frequency (MHz)	Maximum (dB/100 ft.)	Maximum (dB/100 m)
5	0.81	2.65
50	1.5	4.9
100	2.0	6.5
200	2.8	9.2
400	4.1	13.6
700	5.6	18.4
900	6.2	20.3
1000	6.68	21.9
1450	8.15	26.72
1800	9.0	29.5
2250	10.56	34.62

Email: sales@weimaicable.com Skype: weimaicable wechat:13758296286



LINAN WEIMAI ELECTRON CO.LTD

Address: No.399 North HuanCheng Road Linan Hangzhou China www.weimaicable.com

Phone:0086-61077585 Mobile:0086-13758296286 Email: sales@weimaicable.com

Coaxial Cable RG6 75ohm china manufacturer supplier

Item: WM-COAX-039



Email: sales@weimaicable.com Skype: weimaicable wechat:13758296286



LINAN WEIMAI ELECTRON CO.LTD

Address: No.399 North HuanCheng Road Linan Hangzhou China www.weimaicable.com
Phone:0086-61077585 Mobile:0086-13758296286 Email: sales@weimaicable.com

Coaxial Cable RG6 60% Braiding 75ohm china manufacturer supplier Item: WM-COAX-041

1) Construction

Center Conductor:	1.02±0.01mm Copper/CU
Dielectric:	4.75±0.05mmFoam PE
Shield:	Al Foil
Braid Coverage:	64X0.12mmTinned Copper Braiding Pitch35 60%Coverage
Jacket:	6.80±0.05mm PVC Gray 75Degree
Package:	100M/Roll 305M/Drum 1000ft/500ft/Pull Box

2) Characteristics

Sparker Test:	4000VAC
Impedance:	75±3 Ohm
Capacitance:	54±3pF/m
Velocity of Propagation:	85%
Return Loss:	20dB min (5-2300MHz)

3) Attenuation

Attenuation	[@68° F. (20° C.)]	
Frequency (MHz)	Maximum (dB/100 ft.)	Maximum (dB/100 m)
5	0.81	2.65
50	1.5	4.9
100	2.0	6.5
200	2.8	9.2
400	4.1	13.6
700	5.6	18.4
900	6.2	20.3
1000	6.68	21.9
1450	8.15	26.72
1800	9.0	29.5
2250	10.56	34.62




LINAN WEIMAI ELECTRON CO.LTD

Address: No.399 North HuanCheng Road Linan Hangzhou China www.weimaicable.com

Phone:0086-61077585 Mobile:0086-13758296286 Email: sales@weimaicable.com

Coaxial Cable RG6 60% Braiding 75ohm china manufacturer supplier
Item: WM-COAX-041

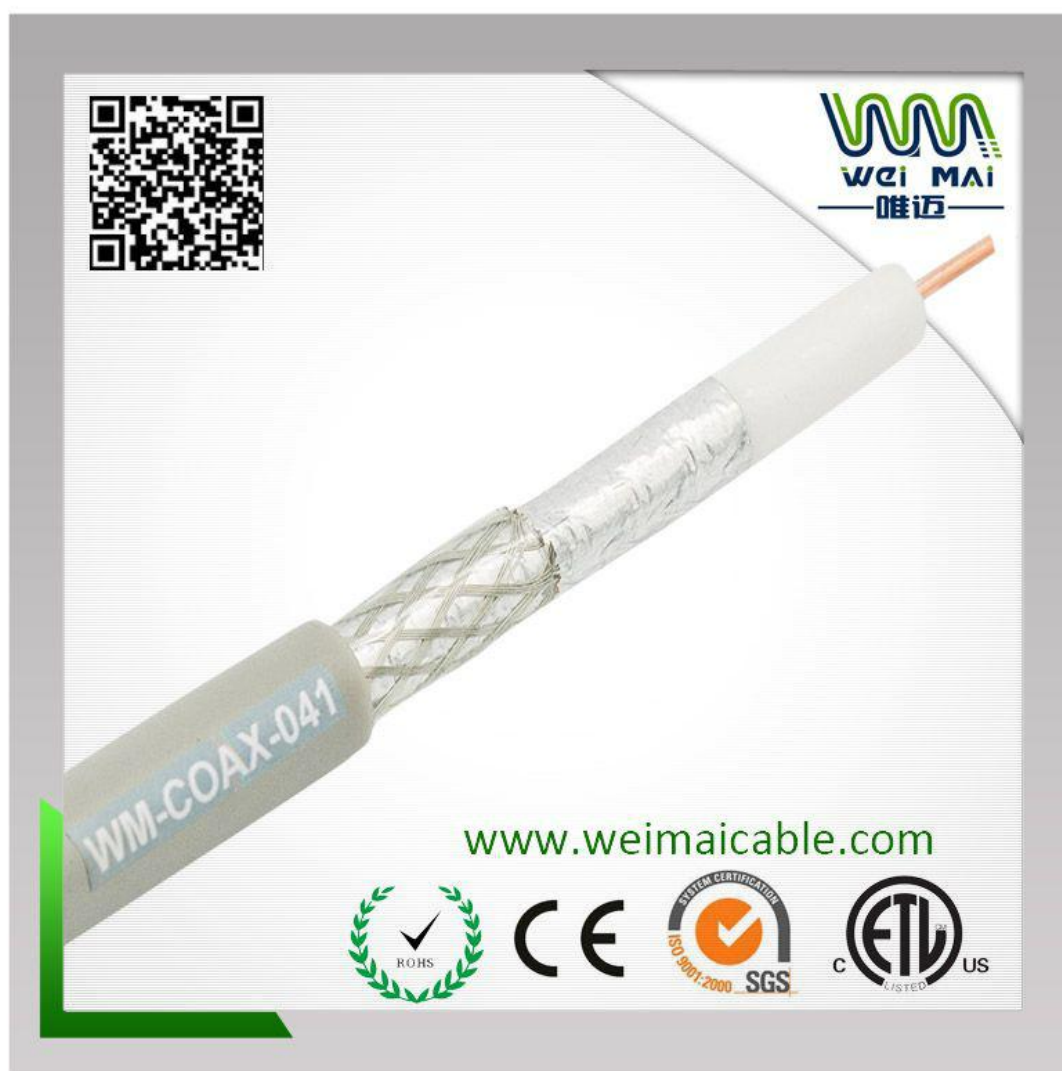

Email: sales@weimaicable.com Skype: weimaicable wechat:13758296286



LINAN WEIMAI ELECTRON CO.LTD

Address: No.399 North HuanCheng Road Linan Hangzhou China www.weimaicable.com
Phone:0086-61077585 Mobile:0086-13758296286 Email: sales@weimaicable.com

Coaxial Cable RG59 60% Braiding 75ohm china manufacturer supplier Item: WM-COAX-042

1) Construction

Center Conductor:	0.81±0.01mm Copper/CU
Dielectric:	3.66±0.05mmFoam PE
Shield:	Al Foil
Braid Coverage:	64X0.12mm Tinned Copper Braiding Pitch 32 60%Coverage
Jacket:	6.10±0.10mmPVC Gray
Package:	100M/Roll 305M/Drum 1000ft/500ft/Pull Box

2) Characteristics

Sparker Test:	4000VAC
Impedance:	75±3 Ohm
Capacitance:	54±3pF/m
Velocity of Propagation:	85%
Return Loss:	20dB min (5-2300MHz)

3) Attenuation

Attenuation	[@68° F. (20° C.)]		
Frequency (MHz)	Max. (dB/100 ft.)	Frequency (MHz)	Max. (dB/100 ft.)
5	0.86	400	5.10
55	2.05	450	5.40
83	2.45	500	5.70
187	3.60	550	5.95
211	3.80	600	6.20
250	4.10	750	6.97
300	4.45	865	7.52
350	4.80	1000	8.12



LINAN WEIMAI ELECTRON CO.LTD

Address: No.399 North HuanCheng Road Linan Hangzhou China www.weimaicable.com

Phone:0086-61077585 Mobile:0086-13758296286 Email: sales@weimaicable.com

Coaxial Cable RG59 60% Braiding 75ohm china manufacturer
supplier Item: WM-COAX-042

