

CUT-70H



Quick Specs



Industrial Application:

Home workshops
Metal workshops
Light fabrication
Repair and maintenance

For These materials:

Mild Steel
Brass
Stainless Steel
Copper
Aluminum
Processes: Plasma cutting

Input Power: 400V, 3-Phase

Amperage Range: 20-70A

Rated Output at 40°C (104°F):
70A at 115V @60% Duty Cycle

Weight: 22KG

Compact, indestructible and versatile

The **CUT-70H** manual plasma system is designed based on the full digital control system, provide excellent cutting and beveling performance on material up to 22mm thickness. This inverter based design operates for a single phase supply with 60A powerful output at 60% heavy duty cycle, set a new standard in this class.

The control system incorporates features such as auto-pilot restart, equipped with industry renowned Torch for superior durability and consumable life.

The **CUT-70H** operates with 3 phase power supply.

Specialist Features

- **Pilot Arc** for superior arc performance and easy start.
- **HF or Non-HF Arc ignition:** reliable plasma arc initiation without high frequency.
- **Continuous Output Control:** focus the arc for different material thickness.
- **Rapid Arc Restrike:** fast cutting through gaps, even expanded metal.
- **Powerful with heavy duty:** 60A @60%.
- Recommended 10mm quality cut capacity (0.5 m/min, with optional torch).
- **2T(STD)/4T(HOLD) control mode**
- **Generator power supply friendly.**

Outstanding Quality:

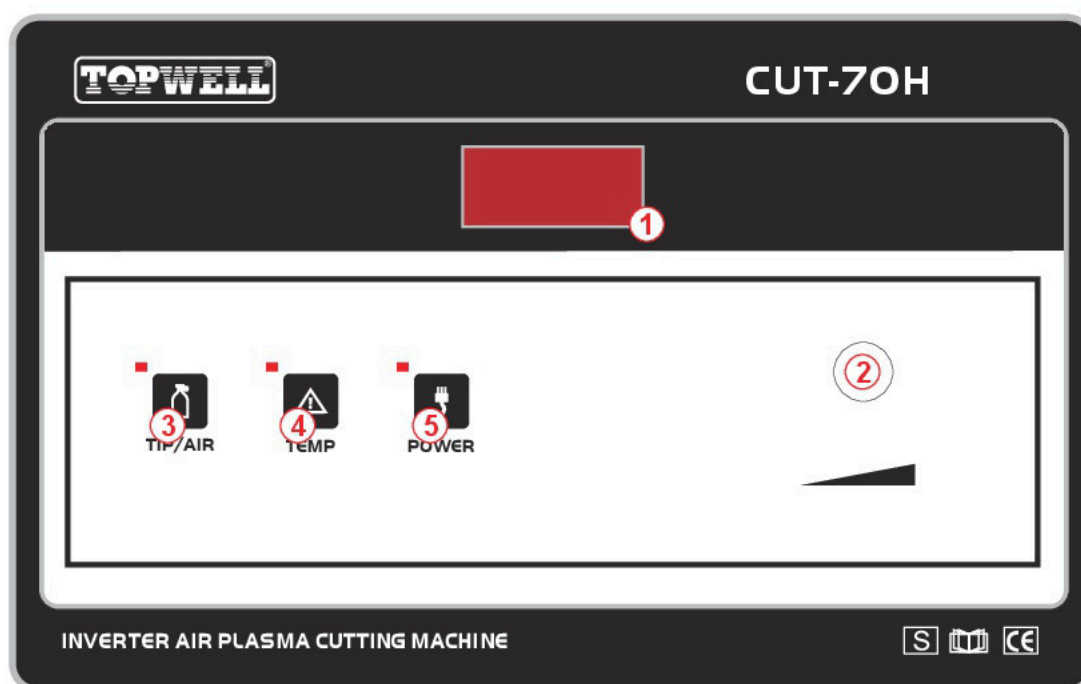
- Newly designed using the latest power electronic technology for improved reliability.
- CE Certified.
- One-Year Warranty on parts.



Technical specifications

Item No	CUT-70H
Rated Input Voltage	3PH ~ 400V ±15%
Max. Load Power Capacity	11.14KVA
Rated Duty Cycle(40oC) 60%	70A/115V
100%	50A/105V
Welding Current/Voltage Range	20A/90V~70A/115V
Open Circuit Voltage	390V
Power Factor	0.85
Efficiency	85%
Required Air Pressure	0.3~0.5MPa
Gas Pro-flow/Retard Time	Preset
Quality Cutting Thickness(500mm/min)	18mm
Severance Cutting Thickness(125mm/min)	32mm
Dimension (LxWxH)	540X240X480mm
Weight (KG)	22KG

General View of Control Panel



Control Panel Parameter Values

1.Ammeter/Voltmeter Display

2.Encoder Control

3.Gas supply problem

4.Over heat/Over loading

5.Power LED

CUTTING CAPACITY

CUT-60Di

Capacity	Thickness	Cut speed
	Cutting	
Recommended	15mm	500mm/min
	20mm	250mm/min
Severance (hand cutting)	25mm	125mm/min
Pierce*	12mm	

*Pierce rating for handheld use or with automatic torch height control


CUT-70H

Capacity	Thickness	Cut speed
	Cutting	
Recommended	18mm	500mm/min
	23mm	250mm/min
Severance (hand cutting)	32mm	125mm/min
Pierce*	12mm	

*Pierce rating for handheld use or with automatic torch height control





rol

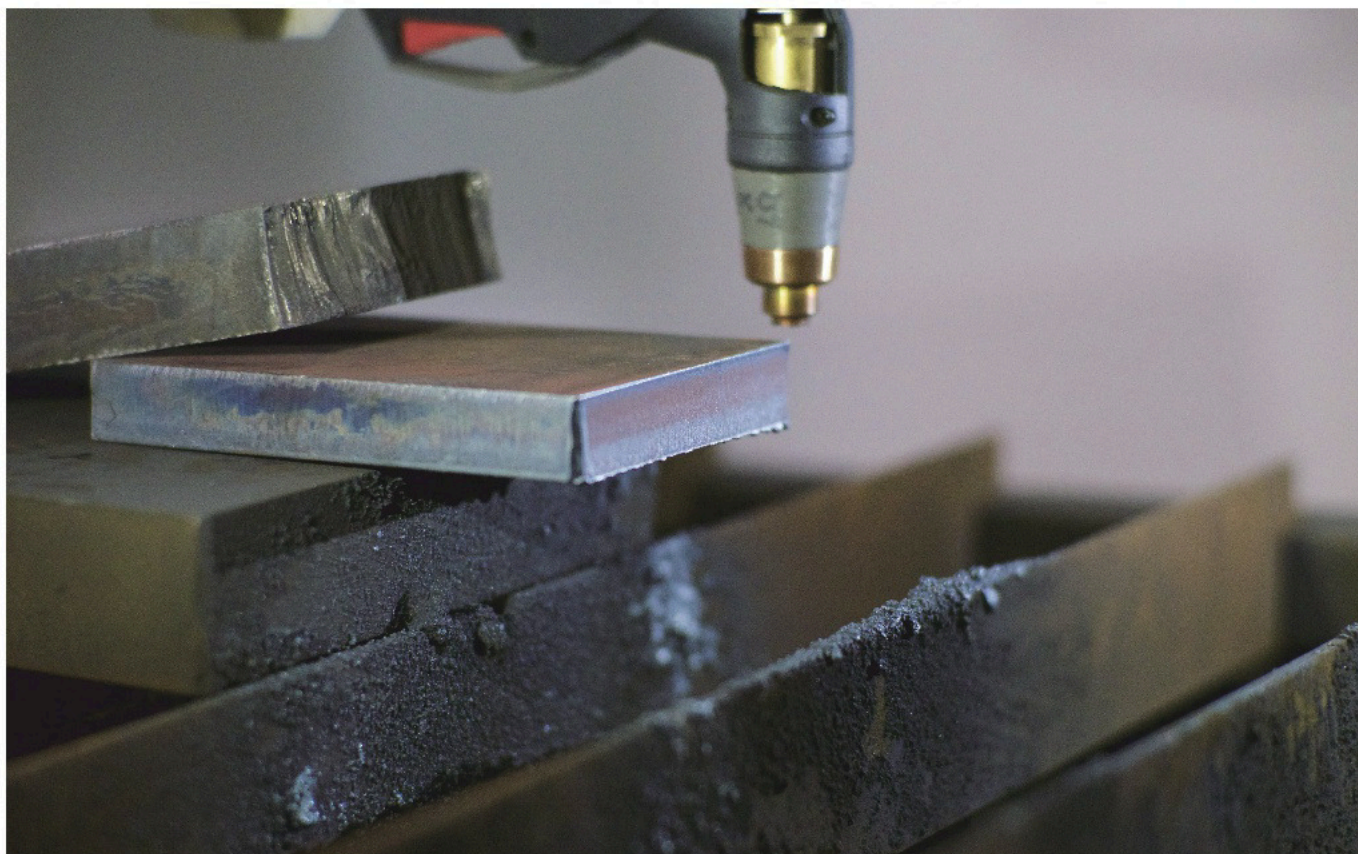CUT PERFORMANCE



Non-HF Arc Ignition system

torches with pilot arc cut in without high frequency.

			
<p>Torch off.</p>	<p>By pressing the trigger the torch will be fed by the current thus causing a temporary short circuit between electrode and tip.</p>	<p>The air then pushes up the small piston, thus creating, between the electrode and the tip, the distance needed to strike the pilot arc.</p>	<p>By positioning the torch on the part to be cut, the plasma arc will strike.</p>

Less electromagnetic disturbance, with consequent absence of problems for any electronic, radio, television, telephone and computer systems in the vicinity of the cutting positions.

Less electric stress on the torch - and on the respective connecting cables - due to the absence of the high voltage necessary for striking the arc. Greater simplicity in comparison with other torches (without high frequency) on the market, with a consequent decrease of the risks of jamming in the mechanical pneumatic movement for striking the arc. Subject to wear (electrode, tips, nozzles, diffusers etc.), thanks to the better cooling of the torch obtained by reducing the insulating thicknesses (without endangering the safety parameters).



Accessories

For Standard accessories



PLASMA torch: HT70-CB

Current: 70 Amp
Duty Cycle: 60%
Gas: AIR
Gas Pressure: 4.5-5.0 Bar
Gas Flow: 130 LPM
Ignition: HF
Post Flow: 70 sec. recommended
Standard Length: 6M



Earth clamp

For Optional accessories



PLASMA torch: Trafimet S75

Voltage class: M
Standard Length: 6M
Air consumption: 150 l/min
Air pressure: 5 bar
Duty Cycle 60%: 70A
Duty Cycle 100%: 50A
Ignition: Without HF