

STC-205AC/DC



4-in-1: DC Pulse TIG+AC TIG+Mix TIG+Plasma Cutting



Quick Specs



- ◆ **Processes:**
DC TIG,
AC TIG,
MIX TIG,
MMA(Stick),
Plasma cutting
- ◆ **Input Power:**
200-240V/1-PH/50-60Hz
- ◆ **Rated Output at 40°C (104°F):**
TIG: 200A/18V/60%
PAC: 50A/100V/ 60%
- ◆ **Applications:**
Metal fabrication workshops
Shipyards and offshore industry
Chemical and process industry
Mechanized welding
Car body repairs and maintenance

TOP Features:

- ✓ **DC TIG Features** With the Pulse function, it can reduce heat input and increase control of the weld puddle, penetration and distortion.
- ✓ **AC TIG Features**
 - 2 AC Waveforms**
 -  **Standard Square Wave**
fast freezing puddle, deep penetration and fast travel speeds.
 -  **Sine Wave**
For customers that like a traditional arc. Quiet with good wetting.
 - 3 AC Waveshape Controls**
 - **Balance control** provides adjustable oxide removal which is essential for creating the highest quality aluminum welds.
 - **Frequency** controls the width of the arc cone and can improve directional control of the arc.
 - **Amplitude** controls the heat input to the work piece and the electrode.
- ✓ **MIX TIG Features** AC current and DC current in one duty cycle, easily get an excellent arc concentration and reduce heat input.
- ✓ **Plasma Cutting Features** 50A@60% Duty cycle power source for cutting 10mm metal @500mm/min.
- ✓ HF start for a better ignition
- ✓ DC+/DC-: Improved TIG starting
- ✓ Pre-flow and post-flow adjustment
- ✓ 2T and 4T selection
- ✓ Capable to remote control
- ✓ 10 channels memory capacity



Pulse TIG

◆ Conventional Pulsed TIG

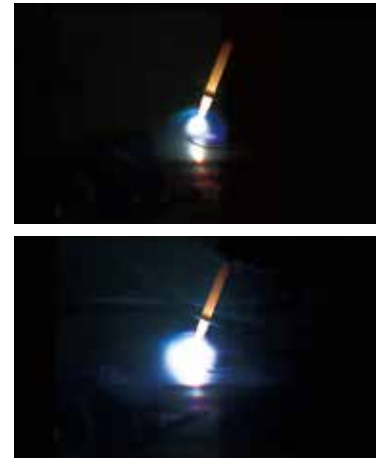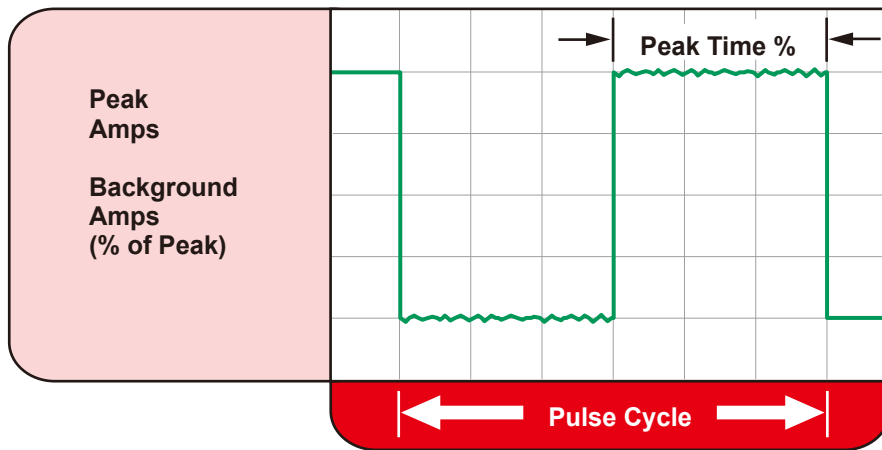

Typically from 0.2 to 10 PPS. Provides a heating and cooling effect on the weld puddle and can reduce distortion by lowering the average amperage. This heating and cooling effect also produces a distinct ripple pattern in the weld bead. The relationship between pulse frequency and travel speed determines the distance between the ripples. Slow pulsing can also be coordinated with filler metal addition and can increase overall control of the weld puddle.

◆ High Speed Pulsed TIG

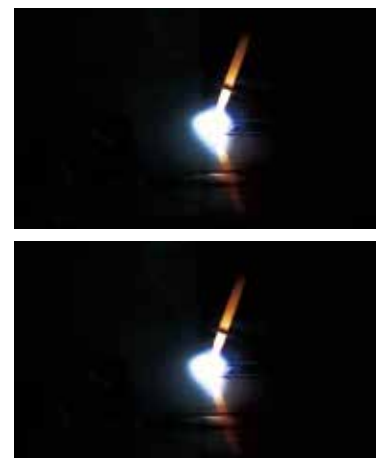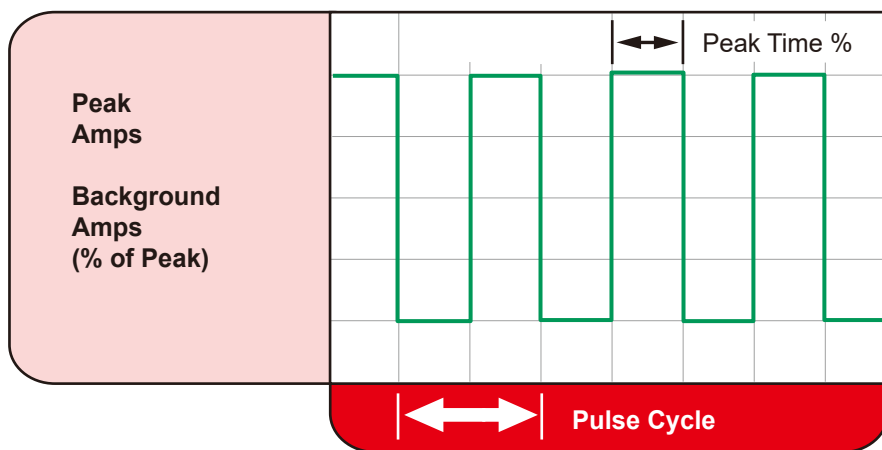

In excess of 40 PPS, Pulsed TIG becomes more audible than visible—causing increased puddle agitation for a better as-welded microstructure. Pulsing the weld current at high speeds — between a high Peak and a low Background amperage — can also constrict and focus the arc. This results in maximum arc stability, increased penetration and increased travel speeds.

AC Waveforms

◆ Standard Square Wave

The Standard Square Wave offers fast transitions between EN and EP for a responsive, dynamic, and focused arc with better directional control. It forms a fast-freezing puddle with deep penetration and fast travel speeds.

◆ Sine Wave

The Sine Wave a soft arc with the feel of a conventional power source. It provides good wetting action and actually sounds quieter than other waves. Its fast transition through the zero amperage point also eliminates the need for continuous high frequency.

Cutting Capacity


Capacity	Cutting	Cut speed
Recommended	10mm	500mm/min
	15mm	250mm/min
Severance(hand cutting)	18mm	125mm/min

MIX TIG Control

◆ Features of MIX TIG:


The AC current can get a very good clearance, and DC current can get a deeper penetration. Use the MIX TIG we can get an excellent Arc Concentration, can be carried out the excellent welding performance from thin to thick plate.

- 1) Nice weld appearance, deep penetration.
- 2) Excellent Arc Concentration.
- 3) Substantially reduce the electrode consumption.

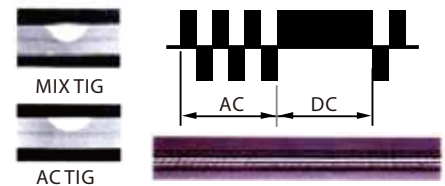


◆ MIX TIG Frequency (Hz):

the cycle time of MIX TIG in 1 second. Adjustable range: 1-5Hz.

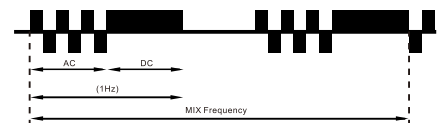

◆ MIX TIG Balance (DC) %:

DC Balance (%) = $(t_{ad}/T_{mix}) \times 100$

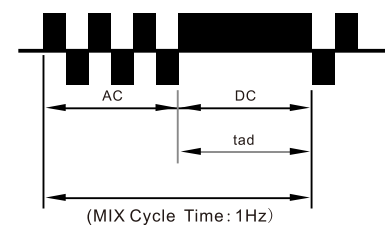







AC Waveshape Controls



AC Frequency control

Controls the width of the arc cone. Increasing the AC Frequency provides a more focused arc with increased directional control.




Note: Decreasing the AC Frequency softens the arc and broadens the weld puddle for a wider weld bead.

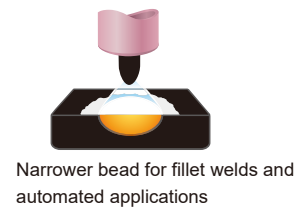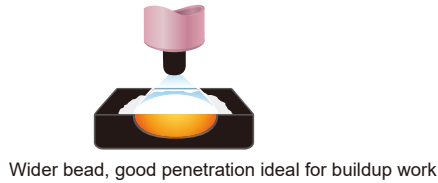

AC Balance Control

Controls arc cleaning action. Adjusting the % EN of the AC wave controls the width of the etching zone surrounding the weld.





Note: Set the AC Balance control for adequate arc cleaning action at the sides and in front of the weld puddle. AC Balance should be fine tuned according to how heavy or thick the oxides are.

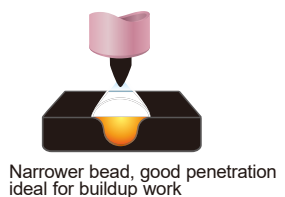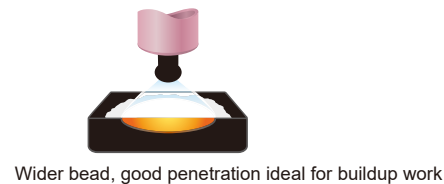

Amplitude Control

Adjusts the ratio of EN to EP amperage to precisely control heat input to the work and the electrode.

EN amperage controls the level of penetration, while EP amperage dramatically effects the arc cleaning action along with the AC Balance control.

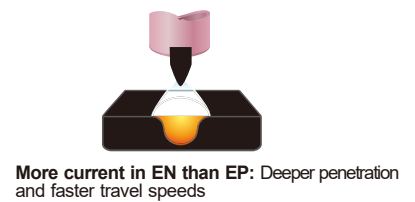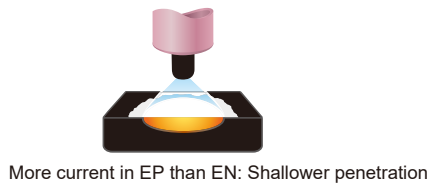

Technical Specifications

Item No		STC-205AC/DC
Rated Input Voltage		1PH ~ 230V ±15%
Max. Load Power Capacity		TIG: 5.63KVA MMA: 6.60KVA PAC: 8.20KVA
Rated Duty Cycle(40°C) 60%		TIG: 200A/18V MMA: 160A/26.4V PAC: 50A/105V
100%		TIG: 160A/16.4V MMA: 130A/25.2V PAC: 40A/100V
Welding Current/Voltage Range		TIG: 5A/10.2V~200A/18V MMA: 20A/20.8V~160A/26.4V PAC: 20A/90A~50A/105V
Open Circuit Voltage		TIG/MMA: 70V~80V PAC: 260V~290V
Power Factor		0.8
Efficiency		80%
TIG	Pulse	Peak Current 5A~200A
		Base Current 5A~200A
		Pulse Frequency 0.2Hz~200Hz
		Pulse Width (Ratio) 1~100%
	AC TIG	AC Frequency Range 20Hz~250Hz
		AC Clean Width (AC Balance) +40~-40
		AC Clean Ratio (AC Bias) % +30~-50
	MIX TIG	MIX Frequency 1Hz~5Hz
		DC Balance (%) 20~80
		Arc-starting Current 5A~200A
		Crater-filling Current 5A~200A
		Current Up-slope Time 0.1S~15S
		Current Down-slop Time 0.1S~15S
		Pre-Gas Time 0.1S~15S
		Flow-Gas Time 0.1S~15S
		Spot Arc Time 0.1S-10S
MMA	Arc Force	10A~160A
	Hot Start Time	0.1~3S
	Hot Start Current	10A~160A
PAC	Required Air Pressure	0.3~0.5MPa
	Gas Pro-flow/Retard Time	0.1S~15S
	Quality Cutting Thickness (500mm/min)	10mm
	Severance Cutting Thickness (125mm/min)	18mm
Dimension (LxWxH)		517x230x451mm
Weight (KG)		25.7kg

Accessories

Standard accessories

TIG-26



Technical data (EN 60 974-7):	
Type of cooling:	Gas cooled
Rating:	180A DC
	150AAC
Duty cycle:	35%
Tungsten electrodes:	Ø 0.5–4 mm



Type of cooling:	air cooled
Rating:	180A DC
	130AAC
Duty cycle:	35%
Tungsten electrodes:	Ø 0.5–4.0 mm

Consumables:

