

MIG-250i

Compact design, heavy duty powers



Quick Specs

- ◆ **Processes:**
MIG,
Flux-Cored,
MMA(Stick)
- ◆ **Input Power:**
MIG-250i:
200-240V/1-PH/50-60Hz
- ◆ **Rated Output at 40°C (104°F):**
MIG-250i: 250A/26.5V/60%
- ◆ **Applications:**
Metal Fabrication,
Maintenance and Repair,
Auto Body,
Light Industrial



TOP Features:

- ✓ **Multi-Process capable**-Welds MIG, flux-cored and MMA(stick).
- ✓ **Superior MAG Process**-Welds with mixed or CO shielding gas 2 for superior quality welding.
- ✓ **Spot/Stitch mode is easy to operate and provides a quick and effective means for spot welding mild, galvanized or stainless materials.**
- ✓ **4T Trigger Hold** allows to hold the present current by user until press the trigger again.
- ✓ **Professional 4-rolls wire-feeder provides a stable wire speed.**
- ✓ **10 Pins multipurpose AMP connectors extend the usage range and it's easy to work with a push-pull torch or spool gun.**
- ✓ **Fast, precise, clean arc ignition and arc ending.**

Advanced MIG/MAG

- ◆ In the advanced MIG mode, MIG/MAG welding is carried out in inert gas with automatic wire feed. With this mode, a high welding speed and excellent quality are offered without any extra costs in the processing of ferrous metals, as well as various steels.



Four-rollers Drive Systems

- ◆ **4-Roll wire-feeder with strong feeding motor**
Four-rollers drive systems deliver the electrode to the welding torch. It provides a stable wire speed and is popular for industrial applications.




Spot/Stitch Mode

- ◆ Use the spot and cycle arc timer you can easily control the welding time and the stitch length during the continue spot welding jobs.
- ◆ Spot/Stitch mode provides a quick and effective means for spot welding mild, galvanized or stainless materials. Very useful for the car body repairs.



The short-circuiting metal transfer mode

- ◆ The short-circuiting metal transfer mode is the low heat input mode of metal transfer for GMAW and has higher electrode efficiencies, 93% or more. The low heat input reduces weldment distortion and makes it ideal for sheet metal thickness materials.

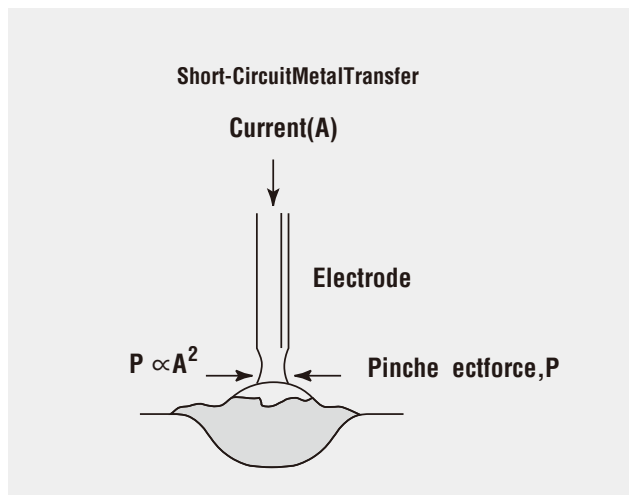

Technical Specifications

Item No	MIG-250i
Rated Input Voltage	1PH ~ 230V ±15%
Max. Load Power Capacity	10.35KVA
Rated Duty Cycle(40℃) 60%	MIG: 250A/26.5V
	MMA: 250A/28V
100%	MIG: 200A/24V
	MMA: 200A/28V
Welding Current/Voltage Range	MIG: 30A/15.5V~250A/26.5V
	MMA:30A/21.2V~250A/30V
Open Circuit Voltage	70V~80V
Power Factor	0.8
Efficiency	80%
Pre-Gas Time	Preset
Flow-Gas Time	Preset
Wire-feed Mechanism	4 Rollers
Wire-feed Speed Range	0~25m/ min
Wire Spool Capacity	300mm (15kg)
Filler Wires Ø (mm) Fe, Ss:	0.6~1.2 mm
Dimension (LxWxH)	770x250x650mm
Weight (KG)	32KG

Accessories

Standard accessories

MIG-24



Gas nozzle

Technical data (EN 60 974-7):

Rating:	250 A CO ₂
	220 A mixed gas M21
	(DIN EN ISO 14175)
Duty cycle:	60%
Wire size:	∅ 0.8–1.2 mm



Contact tip



Contact tip holder



Gas diffuser



Electrode holder with cable 2M
Earth clamp with cable 2M

Optional accessories

BINZEL MB EVO PRO 24



Technical data (EN 60 974-7):

Rating:	250 A CO ₂
	220 A mixed gas M21
	(DIN EN ISO 14175)
Duty cycle:	60%
Wire size:	∅ 0.8–1.2 mm



Argon gas regular
or CO₂ gas regular with heater



Push-pull Troch:
QTLB-24KD/36KD