



PROFESSIONAL IN WELDING

PROMIG 500SYN DPulse

High Speed Pulse MIG Welding

Ultra High Deposition Rate, Ultra High Welding Performance



DPulse ST | Mild Steel

DPulse XT | Aluminum, Mild Steel

DPulse XT Plus | Stainless Steel, Aluminum, Mild Steel

Quick Specs

Input Voltage	3PH ~ 400V ±15%
Output Range	30A/15.5V~500A/39V
Rated Output(40 C) 60%	500A / 39V
Net Weight	81.5kg
Wire Feeder	4-Rollers

Machines Processes

SMAW	GMAW-P
GMAW	GMAW-HDP
FCAW	GMAW-HSP

Industrial Applications

Boat, ship and yacht building	General manufacturing
General fabrication	Structural steel fabrication
Transportation	Sheet metal fabrication
Light-gauge tube and sheet	



Equipment

Welding process package		Cooling system	
Synergy Control	●	Air-cooled	○
Pulse MIG	●	Water-cooled	●
HSP (High Speed Pulse)	●		
HDP (High-Speed Double Pulse)	●		
HSA (High-Speed Spray Arc)	○		
MDP (Micro Double Process)	○		
ULS (Ultra Low Spatter)	○		
HPC (Hybrid Pulse Control)	○		
HSS (High Speed Spot)	○		
		Operational options	
		At the wire feeder unit	●
		At the power source	○
		At the remote control unit	○
		● Standard options	○ Optionally available

Advanced Features

• Synergy Control

Set weld procedures with one control. Just easily takes 3 Steps to achieve weld perfection.

• Improved Operation Process & Controls

Initial Arc control, Burn Back control, Arc Length control, Dynamic control, these make an easier operation and handling for welding.

• High Speed Pulse (HSP)

The deposition rate can increase 25~48% for M.S. by comparing with MAG process.

• High-Speed Double Pulse (HDP)

By the HDP process, it's easy to get a beautiful TIG-Like weld appearance, and the deposition rate could be increased up to 30% if compare to the standard double pulse process, especially in Aluminum.

• High-Speed Spray Arc (HSA)

Highly concentrated and extremely stable arc with high density, up to 30% faster welding speed than conventional MIG-MAG welding.

• Micro Double Process (MDP)

Precise energy input, low distortion, perfect TIG-like welding appearance easily produced by anyone, and the welding productivity can up to twice as quick as the conventional TIG.

• Ultra Low Spatter (ULS)

It is a modified short-arc transfer arc, it controls the volatility during the change of state between short and arc to control the amount and size of the spatter generated. Up to 75% less spatter, up to 25% saving on gas costs.


• Hybrid Pulse Control (HPC)

Mixes Pulse (spray arc) and short-circuit transfer types in one duty cycle. It great performance for all pipe welding solutions.

• High Speed Spot (HSS)

Offers a faster travel speed and better welding performance, especially for thin (less than 2mm) pipes or frame/structure welding jobs, like the furnitures etc.

Simple Operation

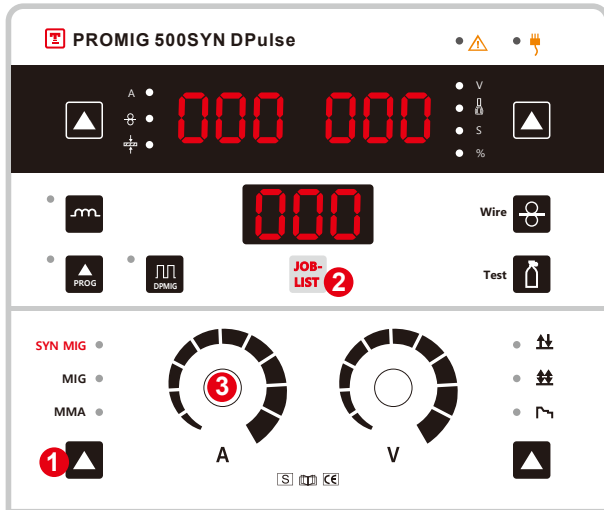

3 Steps To Achieve Weld Perfection

- 1 Select operation mode.
 - 2 Select Job-list No. (Welding process)
 - 3 Adjust welding current.
- (always the perfect setting by the synergic function using the material thickness)

JOBS-list							
	Material	Gas	Wire				
			0.8	1.0	1.2	1.6	
JOBS No.							
No Pulse	M.S.	100%CO ₂	101	102	103	104	
		82%Ar 18%CO ₂	201	202	203	204	
	Flux Cored	100%CO ₂	/	/	303	304	
	AL	100%Ar	/	/	113	/	
HSP (High Speed Pulse)	M.S.	82%Ar 18%CO ₂	/	402	403	/	
	S.S.	308	/	502	503	/	
		316	/	602	603	/	
	AL	4043	100%Ar	/	702	703	/
		5356		/	802	803	/
		Al99		/	902	903	/


Synergy Control With Job-list

The Job-lists display is easily and intuitively controlled through its graphical user interface. We assembled the perfect welding curve in every Job-No. to help the users choose the best welding process for carbon steels, aluminum alloys and stainless steel. Operation is easier than ever before.

Improved Operation Process & Controls


Arc Length control

With the arc length control, no matter the changing distance between the torch and the workpiece, or the welding voltage, the arc length is kept constant, and the seam quality and appearance remain unchanged.

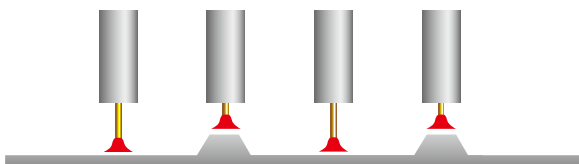



Dynamic control

The arc can easily be adjusted depending on the workpiece and positions as well as to the individual preferences of the welder through Dynamic Control. Changing the arc to soft or hard or anywhere in between, increases the reliability for a good root formation and side fusion even with a non-ideal position of the torch.

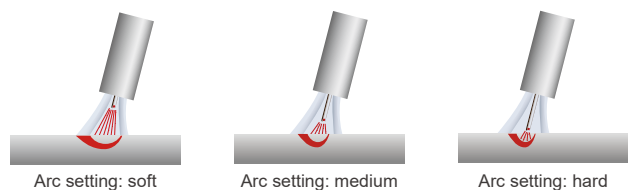

Initial Arc control & Burn Back control

Initial Arc control is used to improve the success rate of arc ignition and form a smaller molten ball. Burn Back Control enhances the function of eliminating molten ball, making the secondary arc initial easier.

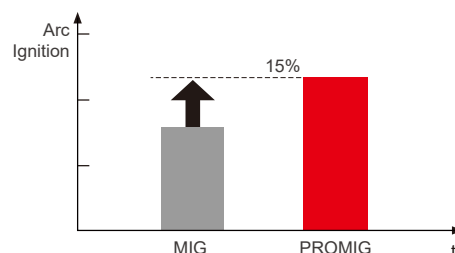



HSP - High Speed Pulse

Specifically designed for demanding workshop use, the deposition rate can increase 25~48 % for various materials, whether used in manufacturing thick materials or sheet metal.


The High-Speed Pulse(HSP) process enables you to save time, money, and energy compared to traditional pulse welding. This process is ready to raise pulse welding to a whole new level!

In general, One pulse melt one droplet, but we increase the submission of these droplets by TOPWELL' s New High-Speed pulse process. The transition will be faster, narrower HAZ zone and deeper penetration!

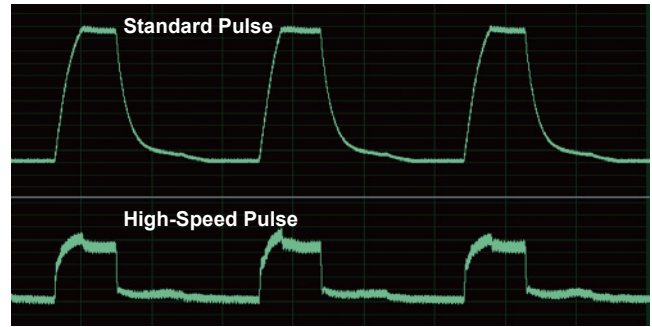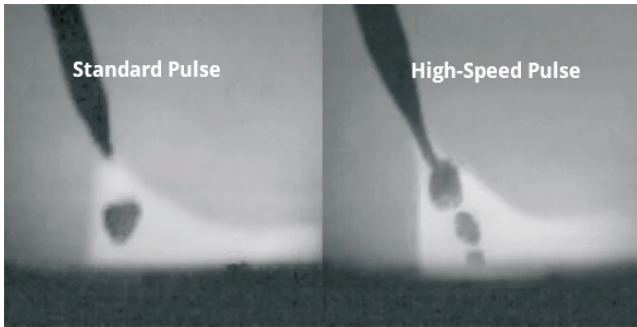


Get better welding seam

Less heat input, less spatters, less rework.

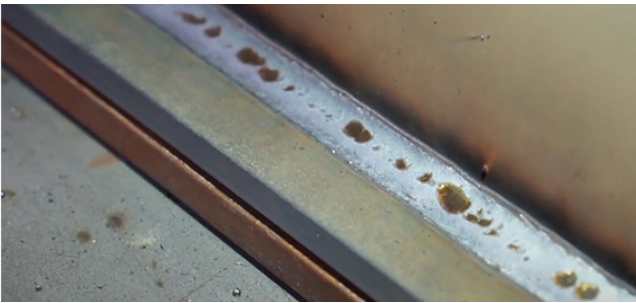



Get higher welding strength

Deeper penetration, no undercut defects, higher strength.

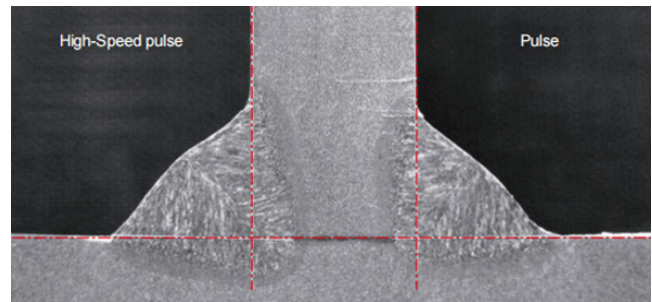

HDP - High-speed Double Pulse



HDP is the High-Speed Double Pulse. The high and low pulse phases of the double pulse work with the High Speed Pulse process, the deposition rate is increased by up to 30%, the welding productivity is significantly improved than a standard double pulse. The professional welding curve for excellent control of heating and cooling phases, ensures precise energy input, low spatter, low distortion and a beautiful TIG-like welding appearance. HDP is particularly suitable for medium to thick-walled welding, especially for Aluminum and Steel applications.

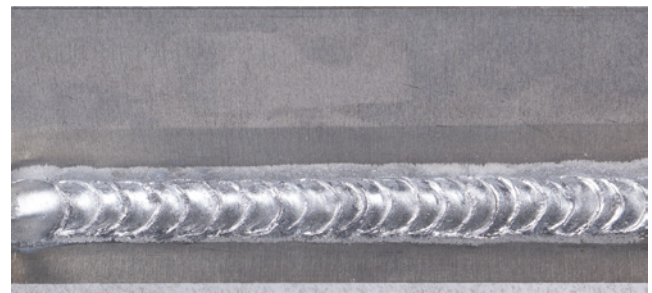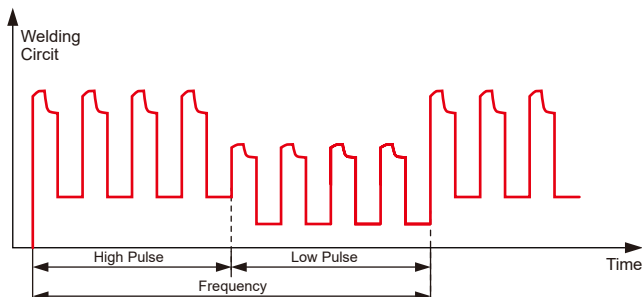

5356 ϕ 1.2mm, HDP 5mm AL. welding current: 170A


HSA - High Speed Spray Arc

The perfect combination of a highly concentrated and extremely stable arc with high density. HSA delivers deeper penetration, narrower heating zone, allows smaller opening angles for multi-layer welding, significantly improves the welding speed up to 30% faster than conventional MIG-MAG welding. It makes welding more efficient and more economical.

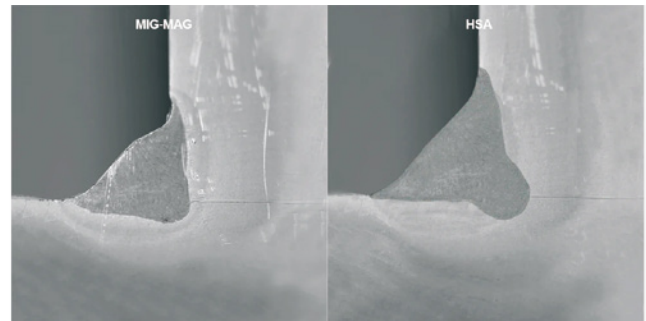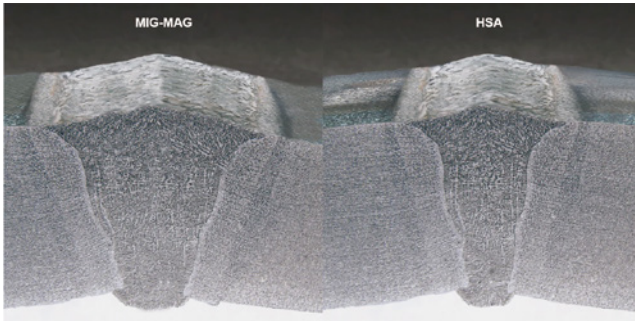



MDP - Micro Double Process

MDP is Micro Double Process, ultra-precise on the synergy Pulse wave-form controlled process-control, freely adjust the weld seam chevrons from coarse to fine. The key is that when the high and low pulses alternate, there is no droplet formation in the low pulse phase. The advantage of MDP are precise energy input, low distortion, perfect TIG-like welding appearance easily produced by anyone, and the welding productivity can up to twice as quick as the conventional TIG. MDP is particularly suitable for thin to medium-walled (1-8mm) Aluminum, Steel, and CrNi applications, like frames, tables, beds, and furniture structures.

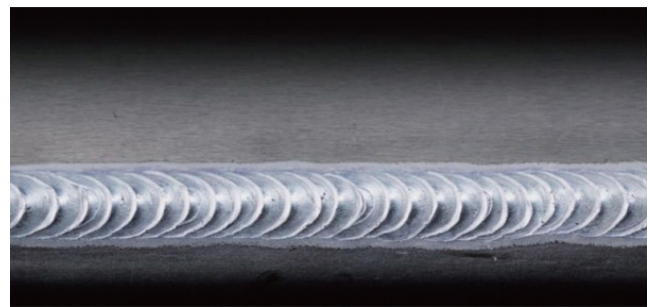


ULS - Ultra Low Spatters

The ULS process is a modified short-arc transfer arc, it controls the volatility during the change of state between short and arc to control the amount and size of the spatter generated. Even in CO₂ and MAG welding, it can minimize the spatters, which means less rework, fewer rejects, less cleaning required and savings on wearing parts.

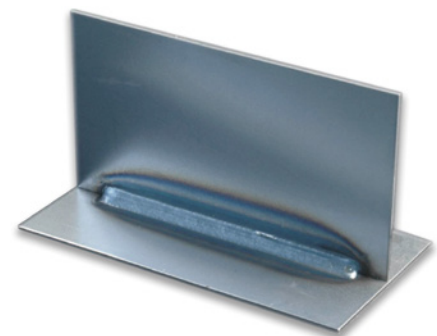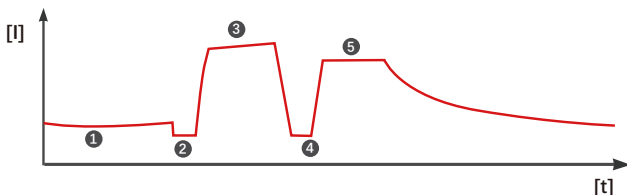

· Welding current: 130A · Shield gas: MAG

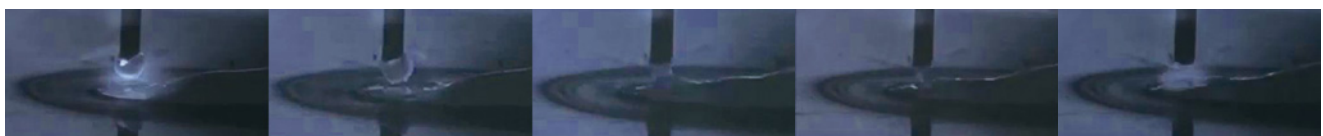

- 1 Droplet formation
- 2 Component contact current is reduced lower droplet load
- 3 Droplet is "pinched"
- 4 Droplet detachment current is reduced spattering is minimised
- 5 Deeper penetration is achieved by increasing the current