


UNDERGROUND LIGHTS

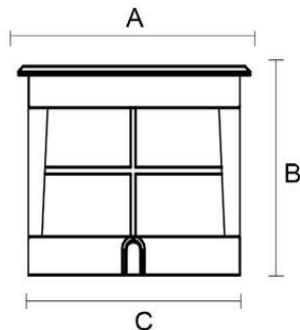

MB23-0501

The Application of Occasions

Suitable places: Garden

Product Description

Simple and easy appearance, in line with contemporary aesthetic concept
The lamp body adopts high quality and Anti-UV ability outdoor's polycarbonate;
High efficiency constant current driver, ensure the light source is maximum used.

Protection class

IP67

Material

Diffuse: Glass

Body: Aluminum+Stainless steel


Cut Out

ø95*75mm/ø115*89mm/ø145*89mm

ø155*89mm/ø185*89mm/ø235*89mm/ø293*89mm

Item No.	Lamp Type	Power	LM	CCT	PF	Voltage	CRI	A	B	C (mm)
MB23-0501100	LED	6W	480	2700K-6000K	0.6	AC110-265V	80-90	Ø100	78	Ø95
MB23-0501120	LED	12W	960	2700K-6000K	0.6	AC110-265V	80-90	Ø120	92	Ø115
MB23-0501160	LED	18W	1440	2700K-6000K	0.6	AC110-265V	80-90	Ø160	92	Ø145
MB23-0501180	LED	24W	1920	2700K-6000K	0.9	AC110-265V	80-90	Ø180	92	Ø155
MB23-0501200	LED	36W	2880	2700K-6000K	0.9	AC110-265V	80-90	Ø200	92	Ø185
MB23-0501250	LED	48W	3840	2700K-6000K	0.9	AC110-265V	80-90	Ø250	92	Ø235
MB23-0501320	LED	72W	5760	2700K-6000K	0.9	AC110-265V	80-90	Ø320	92	Ø293

UNDERGROUND LIGHTS

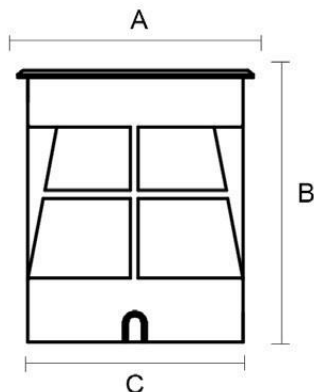

MB23-0502

The Application of Occasions

Suitable places: Garden

Product Description

Simple and easy appearance, in line with contemporary aesthetic concept
The lamp body adopts high quality and Anti-UV ability outdoor's polycarbonate;
High efficiency constant current driver, ensure the light source is maximum used.

Protection class

IP67

Material

Diffuse: Glass

Body: Aluminum+Stainless steel

Cut Out

ø115*135mm/ø144*150mm/ø170*163mm/ø242*190mm

Item No.	Lamp Type	Power	LM	CCT	PF	Voltage	CRI	A	B	C (mm)
MB23-0502130	LED	6W	480	2700K-6000K	0.6	AC110-265V	80-90	Ø130	140	Ø115
MB23-0502160	LED	18W	1440	2700K-6000K	0.6	AC110-265V	80-90	Ø160	153	Ø144
MB23-0502200	LED	24W	1920	2700K-6000K	0.9	AC110-265V	80-90	Ø200	163	Ø170
MB23-0502250	LED	36W	2880	2700K-6000K	0.9	AC110-265V	80-90	Ø250	193	Ø242

UNDERGROUND LIGHTS

MB23-0503

The Application of Occasions

Suitable places: Garden

Product Description

Simple and easy appearance, in line with contemporary aesthetic concept

The lamp body adopts high quality and Anti-UV ability outdoor's polycarbonate;

High efficiency constant current driver, ensure the light source is maximum used.

Protection class

IP65

Material


Diffuse: Glass

Body: Aluminum+Stainless steel

Cut Out


ø60*70mm/ø75*70mm/ø95*80mm/ø115*90mm/ø125*90mm

ø155*90mm/ø165*90mm/ø185*90mm/ø240*90mm/ø290*90mm



Item No.	Lamp Type	Power	LM	CCT	PF	Voltage	CRI	A	B	C (mm)
MB23-050365	LED	1W	80	2700K-6000K	0.6	AC110-265V	80-90	Ø65	75	Ø60
MB23-050380	LED	3W	240	2700K-6000K	0.6	AC110-265V	80-90	Ø80	75	Ø75
MB23-0503100	LED	5W	400	2700K-6000K	0.6	AC110-265V	80-90	Ø100	85	Ø95
MB23-0503120	LED	6W	480	2700K-6000K	0.6	AC110-265V	80-90	Ø120	95	Ø115
MB23-0503150	LED	9W	720	2700K-6000K	0.6	AC110-265V	80-90	Ø150	95	Ø125
MB23-0503160	LED	12W	960	2700K-6000K	0.6	AC110-265V	80-90	Ø160	95	Ø155
MB23-0503180	LED	15W	1200	2700K-6000K	0.6	AC110-265V	80-90	Ø180	95	Ø165
MB23-0503200	LED	18W	1440	2700K-6000K	0.6	AC110-265V	80-90	Ø200	95	Ø185
MB23-0503250	LED	24W	1920	2700K-6000K	0.9	AC110-265V	80-90	Ø250	95	Ø240
MB23-0503300	LED	36W	2880	2700K-6000K	0.9	AC110-265V	80-90	Ø300	95	Ø290

UNDERGROUND LIGHTS



MB23-0504

The Application of Occasions

Suitable places: Garden

Product Description

Simple and easy appearance, in line with contemporary aesthetic concept
The lamp body adopts high quality and Anti-UV ability outdoor's polycarbonate;
High efficiency constant current driver, ensure the light source is maximum used.

Protection class

IP65

Material

Diffuse: Glass

Body: Aluminum+Stainless steel


Cut Out

ø60*70mm/ø75*70mm/ø95*80mm/ø115*90mm

ø155*90mm/ø165*90mm/ø185*90mm/ø206*90mm/ø240*90mm

Item No.	Lamp Type	Power	LM	CCT	PF	Voltage	CRI	A	B	C (mm)
MB23-050465	LED	3W	240	2700K-6000K	0.6	AC110-265V	80-90	Ø65	75	Ø60
MB23-050480	LED	5W	400	2700K-6000K	0.6	AC110-265V	80-90	Ø80	75	Ø75
MB23-0504100	LED	7W	560	2700K-6000K	0.6	AC110-265V	80-90	Ø100	85	Ø95
MB23-0504120	LED	10W	800	2700K-6000K	0.6	AC110-265V	80-90	Ø120	95	Ø115
MB23-0504160	LED	15W	1200	2700K-6000K	0.6	AC110-265V	80-90	Ø160	95	Ø155
MB23-0504180	LED	20W	1600	2700K-6000K	0.9	AC110-265V	80-90	Ø180	95	Ø165
MB23-0504200	LED	30W	2400	2700K-6000K	0.9	AC110-265V	80-90	Ø200	95	Ø185
MB23-0504220	LED	40W	3200	2700K-6000K	0.9	AC110-265V	80-90	Ø220	95	Ø206
MB23-0504250	LED	50W	4000	2700K-6000K	0.9	AC110-265V	80-90	Ø250	95	Ø240

UNDERGROUND LIGHTS

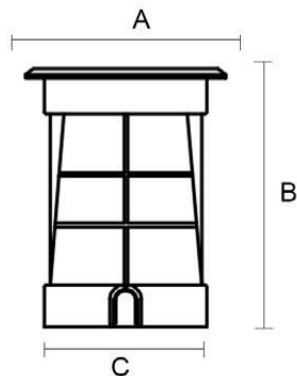

MB23-0505

The Application of Occasions

Suitable places: Garden

Product Description

Simple and easy appearance, in line with contemporary aesthetic concept
The lamp body adopts high quality and Anti-UV ability outdoor's polycarbonate;
High efficiency constant current driver, ensure the light source is maximum used.

Protection class

IP65

Material

Diffuse: Glass


Body: Aluminum+Stainless steel

Cut Out

ø65*92mm

Item No.	Lamp Type	Power	LM	CCT	PF	Voltage	CRI	A	B	C (mm)
MB23-0505	LED	5W	400	2700K-6000K	0.6	AC110-265V	80-90	Ø80	95	Ø65

UNDERGROUND LIGHTS

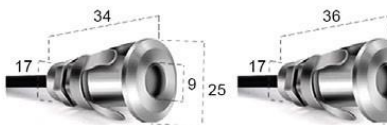

MB23-050625



MB23-050623



MB23-050622



MB23-050620



MB23-050615



MB23-050612

MB23-0506

The Application of Occasions

Suitable places: Garden

Product Description

Simple and easy appearance, in line with contemporary aesthetic concept

The lamp body adopts high quality and Anti-UV ability outdoor's polycarbonate; High efficiency constant current driver, ensure the light source is maximum used.

Protection class

IP65

Material

Diffuse: Glass

Body: Stainless steel

Cut Out

ø17*34mm/ø17*36mm/ø16.5*55mm

ø13*30mm/ø12*27mm/ø11*35mm

Item No.	Lamp Type	Power	LM	CCT	PF	Voltage	CRI	A	B	C (mm)
MB23-050625	LED	0.5W	40	2700K-6000K	0.6	AC110-265V	80-90	Ø25	34	Ø17
MB23-050623	LED	0.5W	40	2700K-6000K	0.6	AC110-265V	80-90	Ø23	36	Ø17
MB23-050622	LED	0.5W	40	2700K-6000K	0.6	AC110-265V	80-90	Ø22	55	Ø16.5
MB23-050620	LED	0.4W	32	2700K-6000K	0.6	AC110-265V	80-90	Ø20	30	Ø13
MB23-050615	LED	0.3W	24	2700K-6000K	0.6	AC110-265V	80-90	Ø15	27	Ø12
MB23-050612	LED	0.2W	16	2700K-6000K	0.6	AC110-265V	80-90	Ø12	35	Ø11

UNDERGROUND LIGHTS



MB-10132

The Application of Occasions

Suitable places: Garden

Product Description

Simple and easy appearance, in line with contemporary aesthetic concept
The lamp body adopts high quality and Anti-UV ability outdoor's polycarbonate;
High efficiency constant current driver, ensure the light source is maximum used.

Protection class

IP65

Material

Diffuse: Glass


Body: Stainless steel

Cut Out

ø56*86mm

Item No.	Lamp Type	Power	LM	CCT	PF	Voltage	CRI	A	B	C (mm)
MB-10132	LED	1W	80	2700K-6000K	0.6	AC110-265V	80-90	Ø62	90	Ø56
MB-10132T1	LED	1W	80	2700K-6000K	0.6	AC110-265V	80-90	Ø62	100	Ø56
MB-10132T2	LED	1W	80	2700K-6000K	0.6	AC110-265V	80-90	Ø62	100	Ø56
MB-10132T3	LED	1W	80	2700K-6000K	0.6	AC110-265V	80-90	Ø62	100	Ø56
MB-10132T4	LED	1W	80	2700K-6000K	0.6	AC110-265V	80-90	Ø62	100	Ø56

UNDERGROUND LIGHTS

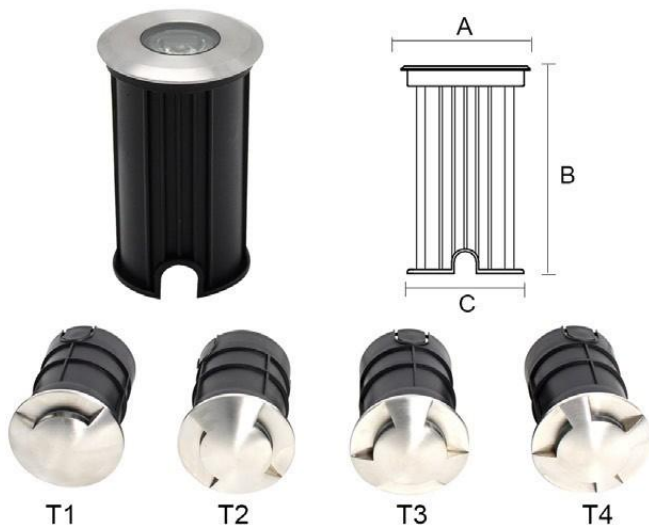

MB-10133

The Application of Occasions

Suitable places: Garden

Product Description

Simple and easy appearance, in line with contemporary aesthetic concept
The lamp body adopts high quality and Anti-UV ability outdoor's polycarbonate;
High efficiency constant current driver, ensure the light source is maximum used.

Protection class

IP65

Material

Diffuse: Glass

Body: Stainless steel

Cut Out

ø47*80mm

Item No.	Lamp Type	Power	LM	CCT	PF	Voltage	CRI	A	B	C (mm)
MB-10133	LED	1W	80	2700K-6000K	0.6	AC110-265V	80-90	Ø52	84	Ø47
MB-10133T1	LED	1W	80	2700K-6000K	0.6	AC110-265V	80-90	Ø52	93	Ø47
MB-10133T2	LED	1W	80	2700K-6000K	0.6	AC110-265V	80-90	Ø52	93	Ø47
MB-10133T3	LED	1W	80	2700K-6000K	0.6	AC110-265V	80-90	Ø52	93	Ø47
MB-10133T4	LED	1W	80	2700K-6000K	0.6	AC110-265V	80-90	Ø52	93	Ø47

UNDERGROUND LIGHTS



MB-10134

The Application of Occasions

Suitable places: Garden

Product Description

Simple and easy appearance, in line with contemporary aesthetic concept. The lamp body adopts high quality and Anti-UV ability outdoor's polycarbonate. High efficiency constant current driver, ensure the light source is maximum used.

Protection class

IP65

Material

Diffuse: Glass


Body: Stainless steel

Cut Out

ø38*70mm

Item No.	Lamp Type	Power	LM	CCT	PF	Voltage	CRI	A	B	C (mm)
MB-10134	LED	1W	80	2700K-6000K	0.6	AC110-265V	80-90	Ø42	74	Ø38
MB-10134T1	LED	1W	80	2700K-6000K	0.6	AC110-265V	80-90	Ø42	82	Ø38
MB-10134T2	LED	1W	80	2700K-6000K	0.6	AC110-265V	80-90	Ø42	82	Ø38
MB-10134T3	LED	1W	80	2700K-6000K	0.6	AC110-265V	80-90	Ø42	82	Ø38
MB-10134T4	LED	1W	80	2700K-6000K	0.6	AC110-265V	80-90	Ø42	82	Ø38

UNDERGROUND LIGHTS

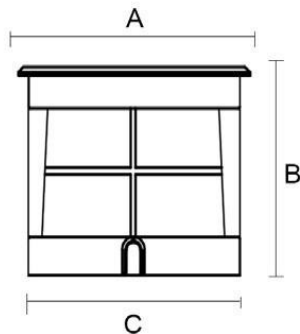

MB-D001

The Application of Occasions

Suitable places: Garden

Product Description

Simple and easy appearance, in line with contemporary aesthetic concept
The lamp body adopts high quality and Anti-UV ability outdoor's polycarbonate;
High efficiency constant current driver, ensure the light source is maximum used.

Protection class

IP65

Material

Diffuse: Glass


Body: Aluminum+Stainless steel

Cut Out

ø148*118mm/ø168*118mm/ø198*118mm

Item No.	Lamp Type	Power	LM	CCT	PF	Voltage	CRI	A	B	C (mm)
MB-D001	LED	10W	80	2700K-6000K	0.6	AC110-265V	80-90	Ø150	120	Ø148
MB-D001	LED	15W	80	2700K-6000K	0.6	AC110-265V	80-90	Ø180	120	Ø168
MB-D001	LED	20W	80	2700K-6000K	0.9	AC110-265V	80-90	Ø210	120	Ø198

UNDERGROUND LIGHTS

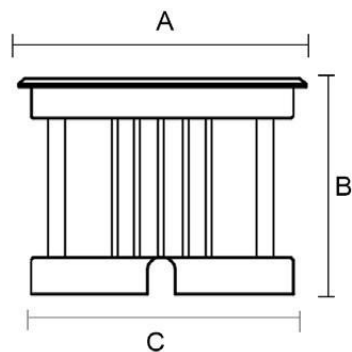

MB-D011

The Application of Occasions

Suitable places: Garden

Product Description

Simple and easy appearance, in line with contemporary aesthetic concept
The lamp body adopts high quality and Anti-UV ability outdoor's polycarbonate;
High efficiency constant current driver, ensure the light source is maximum used.

Protection class

IP67

Material

Diffuse: Glass


Body: Aluminum+Stainless steel

Cut Out

ø90*72mm

Item No.	Lamp Type	Power	LM	CCT	PF	Voltage	CRI	A	B	C (mm)
MB-D011	LED	3W	240	2700K-6000K	0.6	AC110-265V	80-90	Ø100	75	Ø90

UNDERGROUND LIGHTS

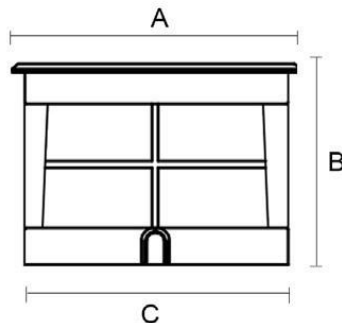

MB-D012

The Application of Occasions

Suitable places: Garden

Product Description

Simple and easy appearance, in line with contemporary aesthetic concept

The lamp body adopts high quality and Anti-UV ability outdoor's polycarbonate; High efficiency constant current driver, ensure the light source is maximum used.

Protection class

IP67

Material

Diffuse: Glass


Body: Aluminum+Stainless steel

Cut Out

ø145*100mm/ø168*118mm/ø200*118mm/ø240*118mm/ø290*102mm

Item No.	Lamp Type	Power	LM	CCT	PF	Voltage	CRI	A	B	C (mm)
MB-D012	LED	9W	720	2700K-6000K	0.6	AC110-265V	80-90	Ø160	105	Ø145
MB-D013	LED	12W	960	2700K-6000K	0.6	AC110-265V	80-90	Ø180	118	Ø168
MB-D014	LED	18W	1440	2700K-6000K	0.6	AC110-265V	80-90	Ø210	118	Ø200
MB-D015	LED	24W	1920	2700K-6000K	0.9	AC110-265V	80-90	Ø260	118	Ø240
MB-D016	LED	36W	2880	2700K-6000K	0.9	AC110-265V	80-90	Ø320	105	Ø290

UNDERGROUND LIGHTS

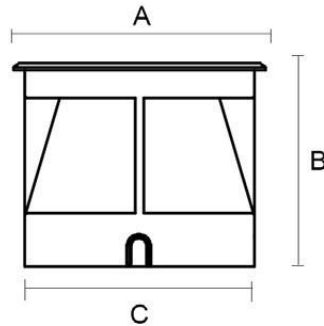

MB-D017

The Application of Occasions

Suitable places: Garden

Product Description

Simple and easy appearance, in line with contemporary aesthetic concept
The lamp body adopts high quality and Anti-UV ability outdoor's polycarbonate;
High efficiency constant current driver, ensure the light source is maximum used.

Protection class

IP67

Material

Diffuse: Glass


Body: Aluminum+Stainless steel

Cut Out

ø150*140mm/ø175*125mm/ø198*140mm/ø245*140mm

Item No.	Lamp Type	Power	LM	CCT	PF	Voltage	CRI	A	B	C (mm)
MB-D017	LED	15W	1200	2700K-6000K	0.6	AC110-265V	80-90	Ø160	145	Ø150
MB-D018	LED	20W	1600	2700K-6000K	0.9	AC110-265V	80-90	Ø180	130	Ø175
MB-D019	LED	30W	2400	2700K-6000K	0.9	AC110-265V	80-90	Ø210	145	Ø198
MB-D020	LED	50W	4000	2700K-6000K	0.9	AC110-265V	80-90	Ø270	145	Ø245

UNDERGROUND LIGHTS

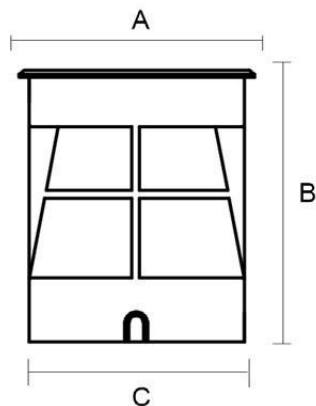

MB-D021

The Application of Occasions

Suitable places: Garden

Product Description

Simple and easy appearance, in line with contemporary aesthetic concept
The lamp body adopts high quality and Anti-UV ability outdoor's polycarbonate;
High efficiency constant current driver, ensure the light source is maximum used.

Protection class

IP67

Material

Diffuse: Glass


Body: Aluminum+Stainless steel

Cut Out

ø125*140mm

Item No.	Lamp Type	Power	LM	CCT	PF	Voltage	CRI	A	B	C (mm)
MB-D021	LED	7W	560	2700K-6000K	0.6	AC110-265V	80-90	Ø130	145	Ø125

UNDERGROUND LIGHTS

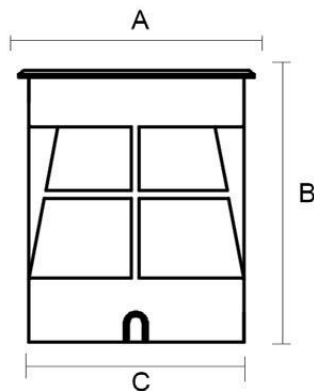

MB-D022

The Application of Occasions

Suitable places: Garden

Product Description

Simple and easy appearance, in line with contemporary aesthetic concept
The lamp body adopts high quality and Anti-UV ability outdoor's polycarbonate;
High efficiency constant current driver, ensure the light source is maximum used.

Protection class

IP67

Material

Diffuse: Glass


Body: Aluminum+Stainless steel

Cut Out

ø150*180mm/ø170*180mm

Item No.	Lamp Type	Power	LM	CCT	PF	Voltage	CRI	A	B	C (mm)
MB-D022	LED	15W	1200	2700K-6000K	0.6	AC110-265V	80-90	Ø160	185	Ø150
MB-D023	LED	20W	1600	2700K-6000K	0.9	AC110-265V	80-90	Ø180	185	Ø170

UNDERGROUND LIGHTS

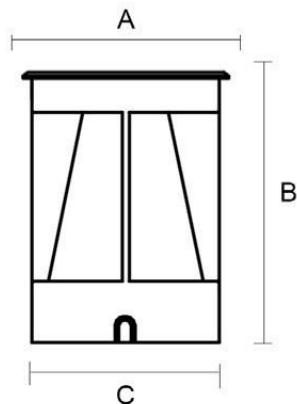

MB-D024

The Application of Occasions

Suitable places: Garden

Product Description

Simple and easy appearance, in line with contemporary aesthetic concept
The lamp body adopts high quality and Anti-UV ability outdoor's polycarbonate;
High efficiency constant current driver, ensure the light source is maximum used.

Protection class

IP67

Material

Diffuse: Glass


Body: Aluminum+Stainless steel

Cut Out

ø92*120mm

Item No.	Lamp Type	Power	LM	CCT	PF	Voltage	CRI	A	B	C (mm)
MB-D024	LED	3W	240	2700K-6000K	0.6	AC110-265V	80-90	Ø100	125	Ø92

UNDERGROUND LIGHTS

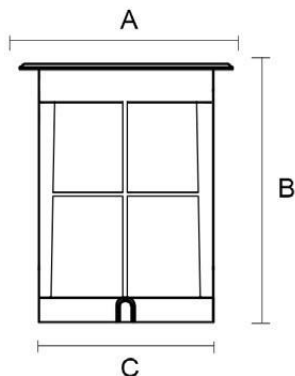

MB-D025

The Application of Occasions

Suitable places: Garden

Product Description

Simple and easy appearance, in line with contemporary aesthetic concept
The lamp body adopts high quality and Anti-UV ability outdoor's polycarbonate;
High efficiency constant current driver, ensure the light source is maximum used.

Protection class

IP67

Material

Diffuse: Glass

Body: Aluminum+Stainless steel

Cut Out

ø108*85mm

Item No.	Lamp Type	Power	LM	CCT	PF	Voltage	CRI	A	B	C (mm)
MB-D025	LED	5W	400	2700K-6000K	0.6	AC110-265V	80-90	Ø120	90	Ø108



Guangzhou Huaen Lighting Co.,Ltd

Wechat/WhatsApp: +8618665613129

TEL:+86-18665613129

Email:info@china-customization.com

Https://tfbcustomlighting.com