


MB18-QJ01



Features&Benefit (功能和优点)


Category (品类)	Step Light
Diffuser Material (扩散器材质)	Glass
Cover Material (面盖材质)	Aluminum
Operating mode (运行)	Built in
Steuerbar (开关)	On/Off
IP (防水等级)	54
Mounting type (安装类型)	Recessed
Mounting location (安装位置)	Wall
Application environment (应用环境)	Indoor/Outdoor
Cut out (预埋件)	196*48*77mm
Body color (表面颜色)	Black/Dark Gray/Sliver Gray

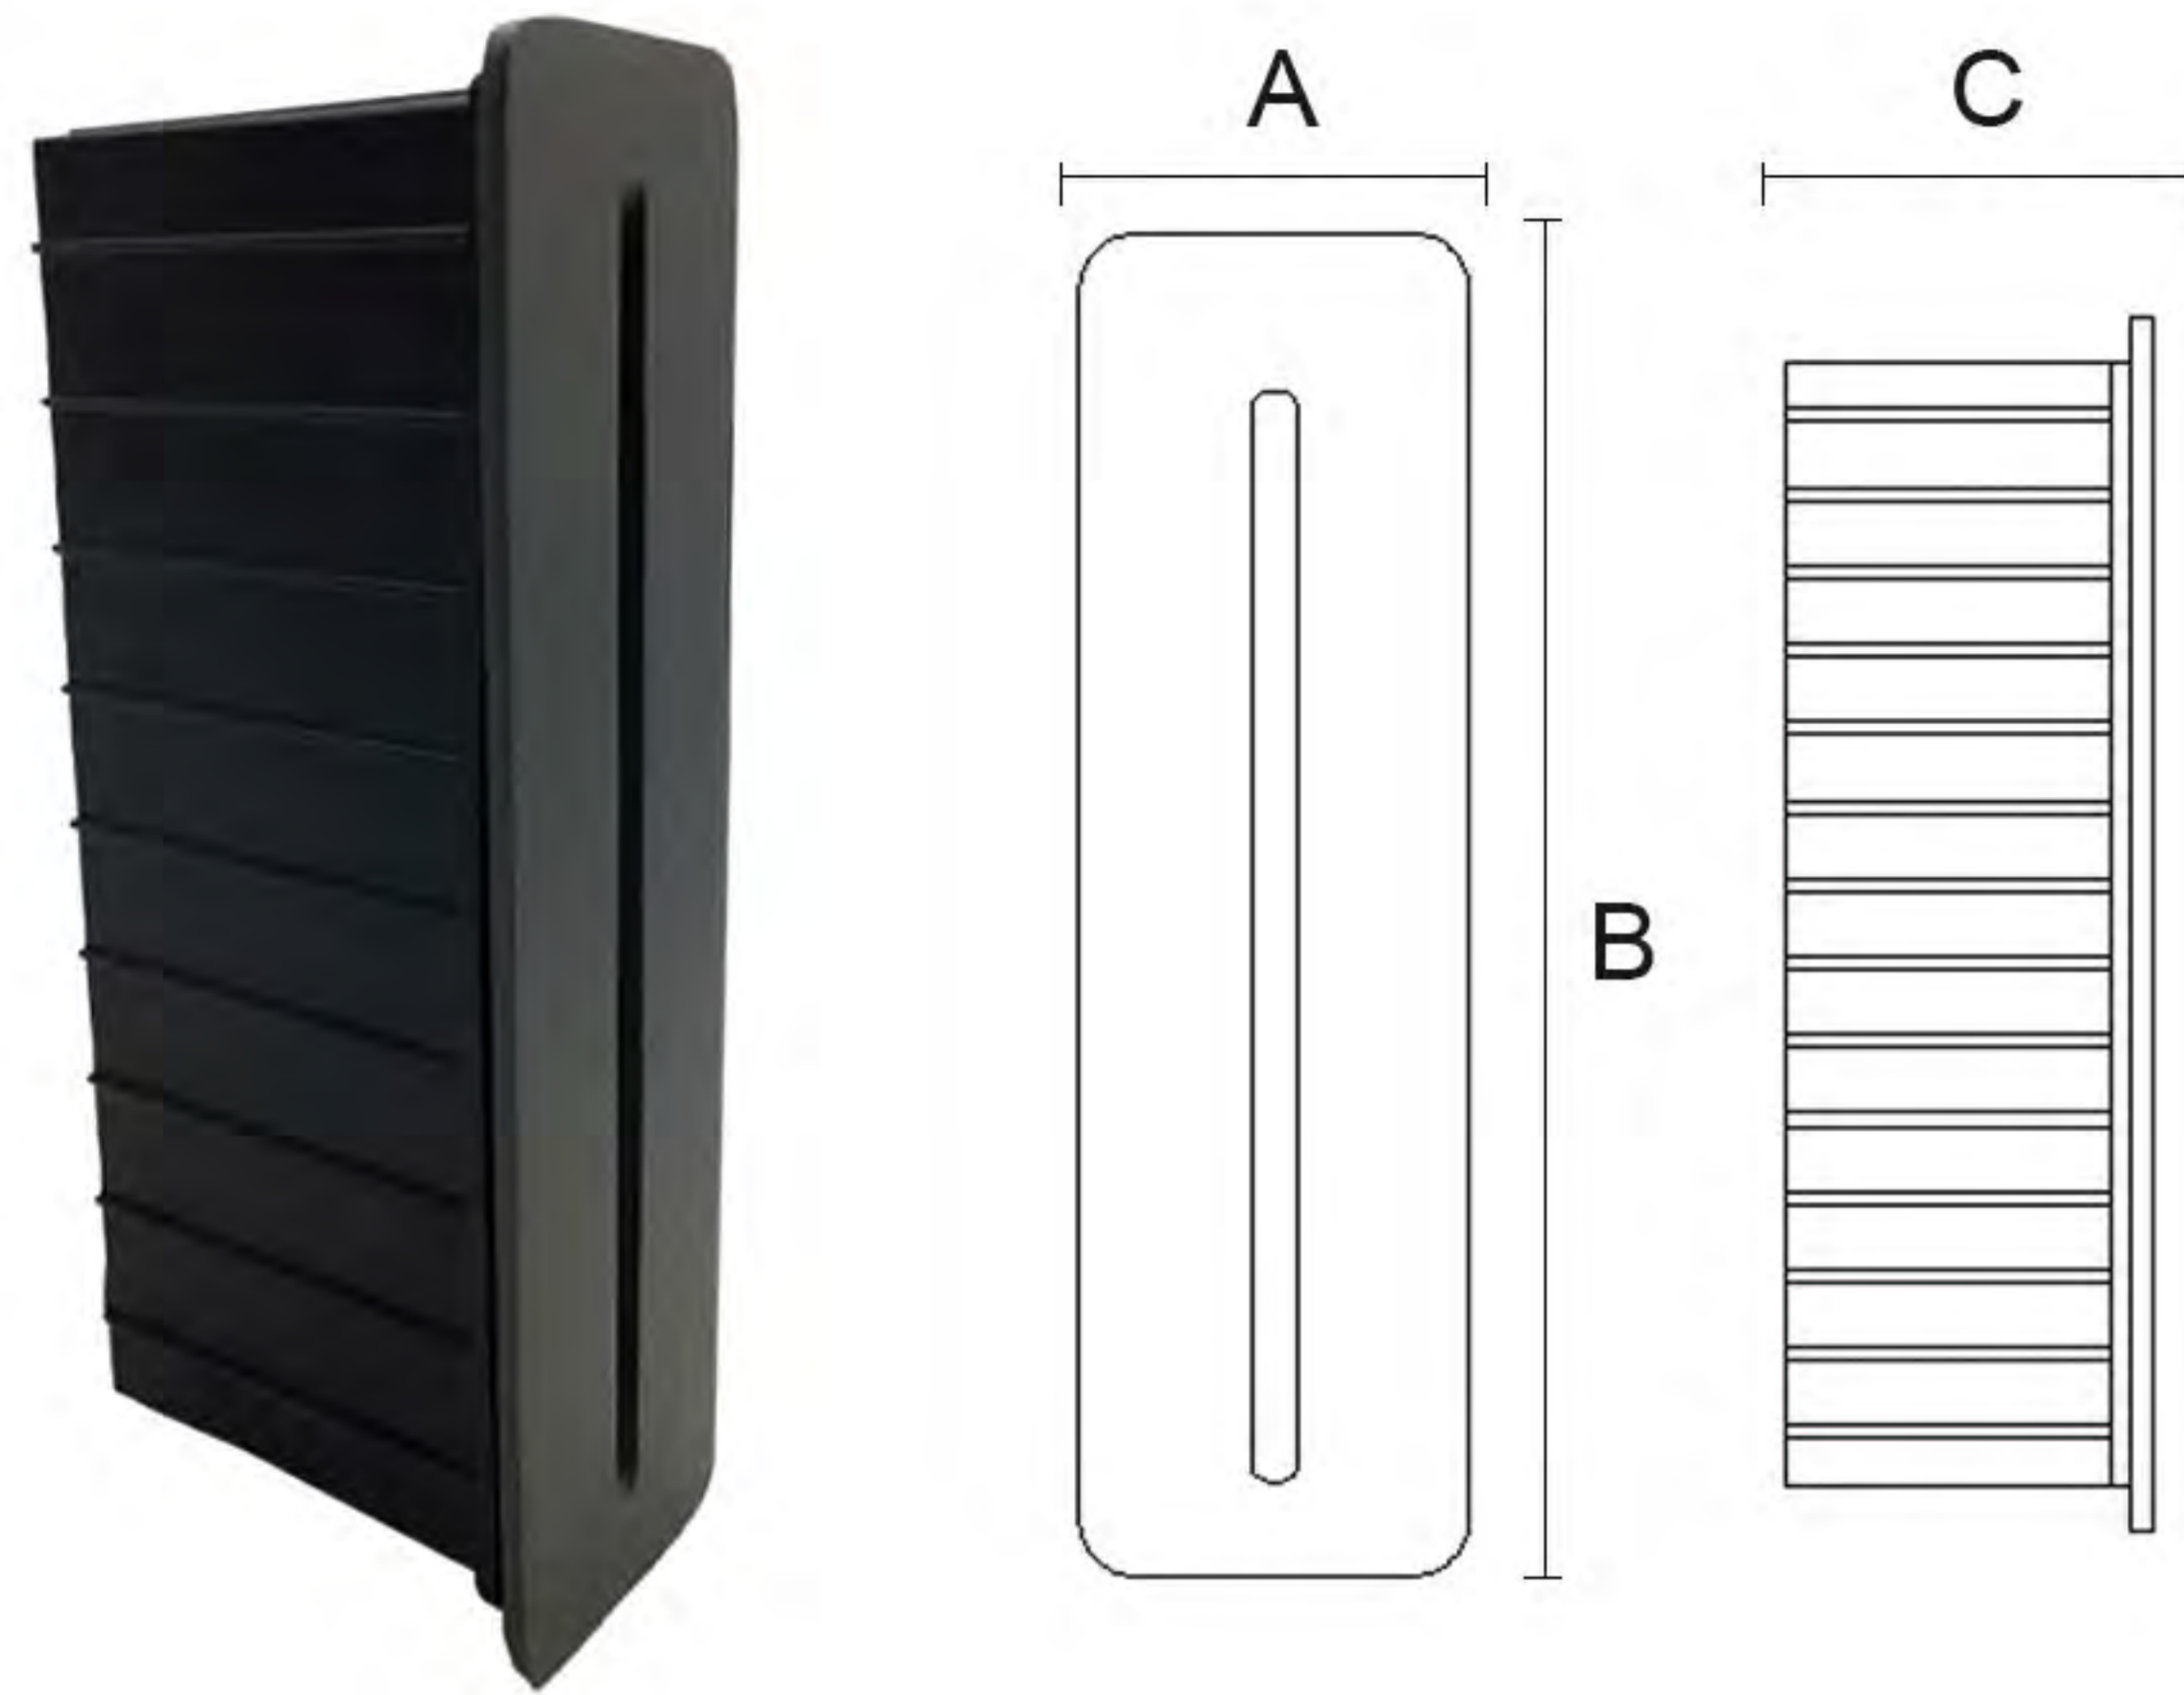

Product Description (产品描述)

Suitable for building facades, underground parking lot entrances and exits, parks, corridors, staircases, passages, courtyards and other various scenes; the lamps and lanterns adopt a downward light-emitting method, the light is soft and not harsh.

Lightmap (光影图)

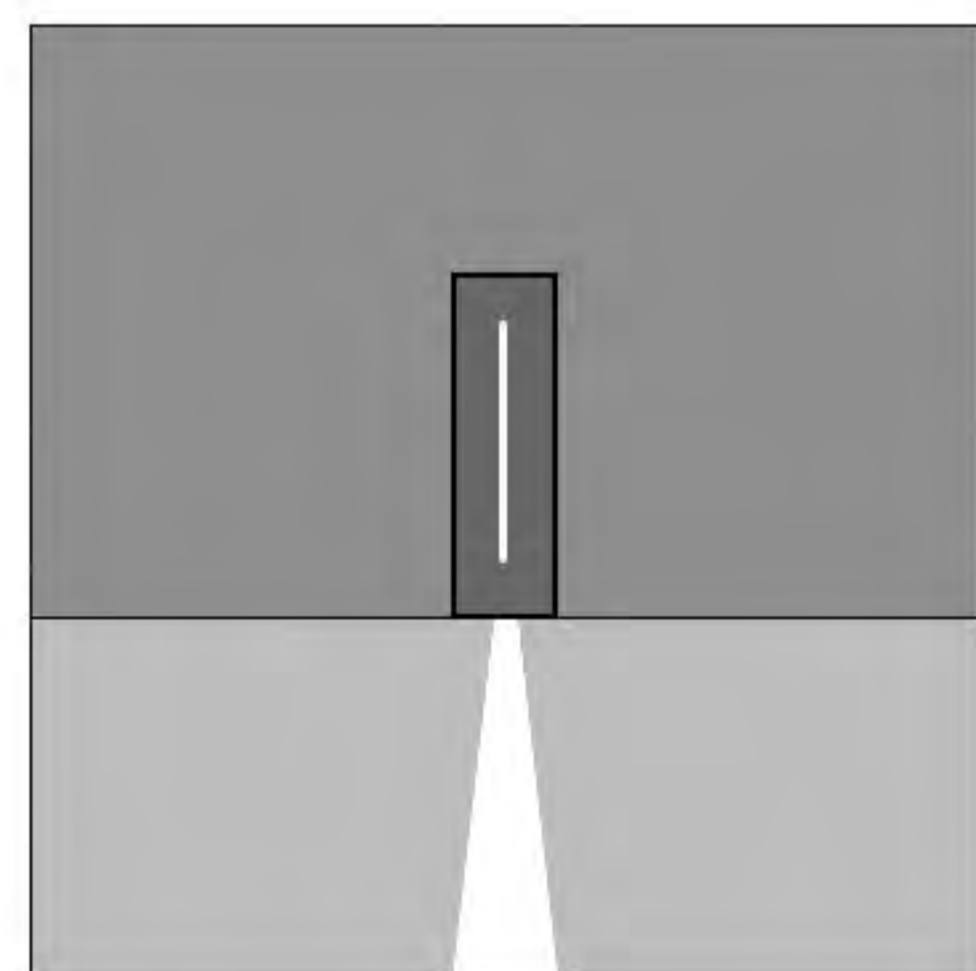

front view (正面图)




Technical Date (技术参数)

Item No.	Lamp Type	Power	LM	CCT	PF	Voltage	CRI	A	B	C (mm)
MB18-QJ01	LED	3W	210	2700K-6000K	0.6	AC110-265V	80-90	55	215	80


MB18-QJ02/MB18-QJ03



MB18-QJ02

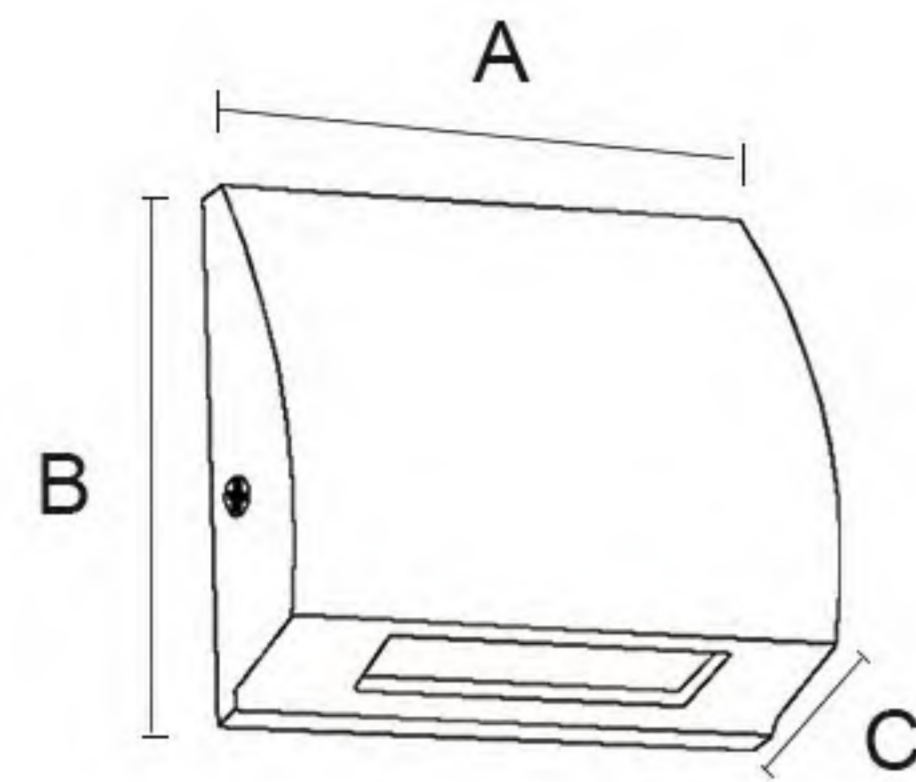

MB18-QJ03

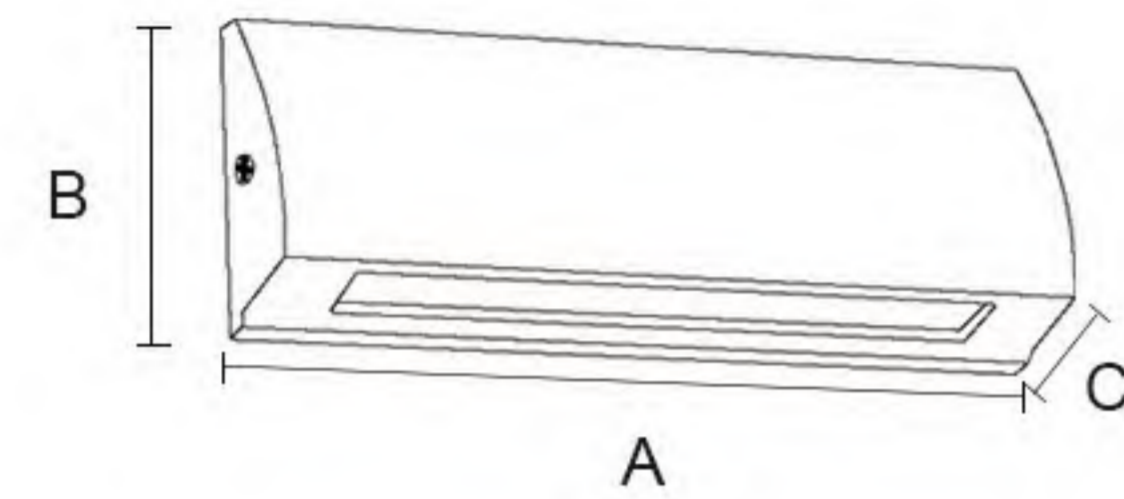

Features&Benefit (功能和优点)


Category (品类)	Step Light
Diffuser Material (扩散器材质)	Glass
Cover Material (面盖材质)	Aluminum
Operating mode (运行)	Built in
Steuerbar (开关)	On/Off
IP (防水等级)	54
Mounting type (安装类型)	Wall mounted
Mounting location (安装位置)	Wall
Application environment (应用环境)	Indoor/Outdoor
Body color (表面颜色)	Black/Dark Gray/Sliver Gray




Product Description (产品描述)

Suitable for building facades, underground parking lot entrances and exits, parks, corridors, staircases, passages, courtyards and other various scenes; the lamps and lanterns adopt a downward light-emitting method, the light is soft and not harsh.

Lightmap (光影图)

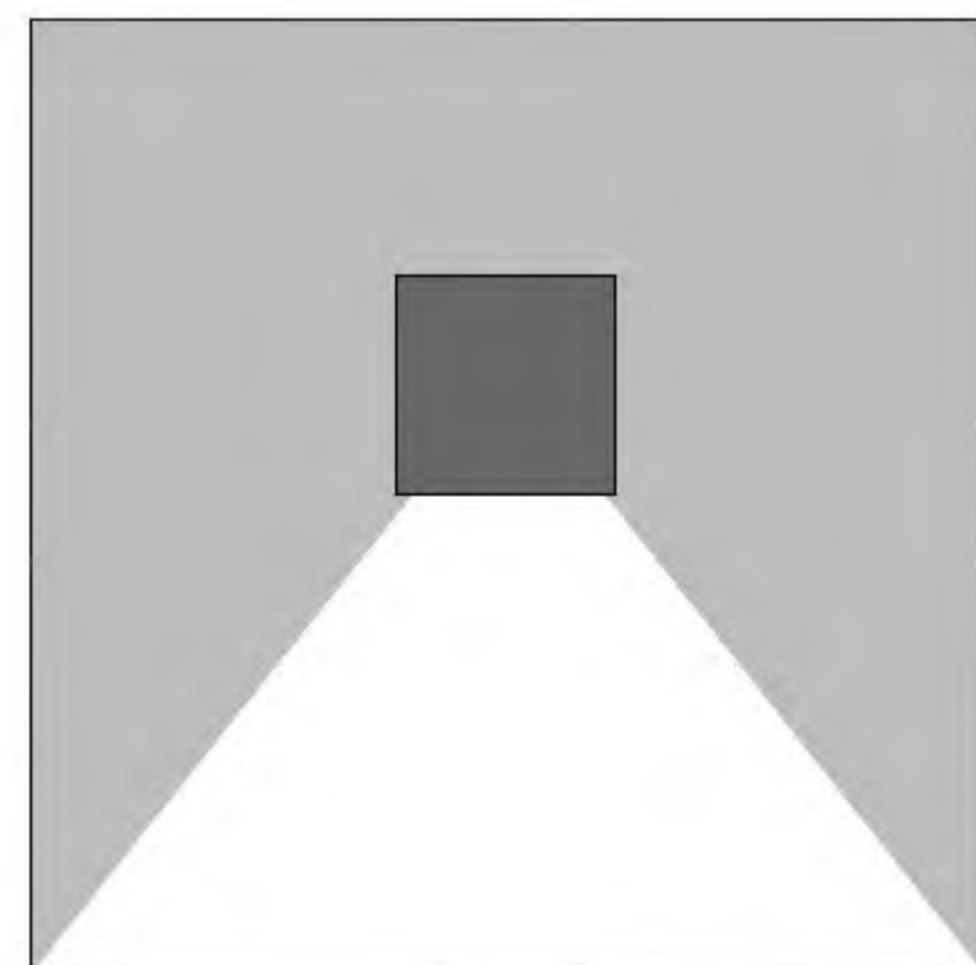


front view (正面图)

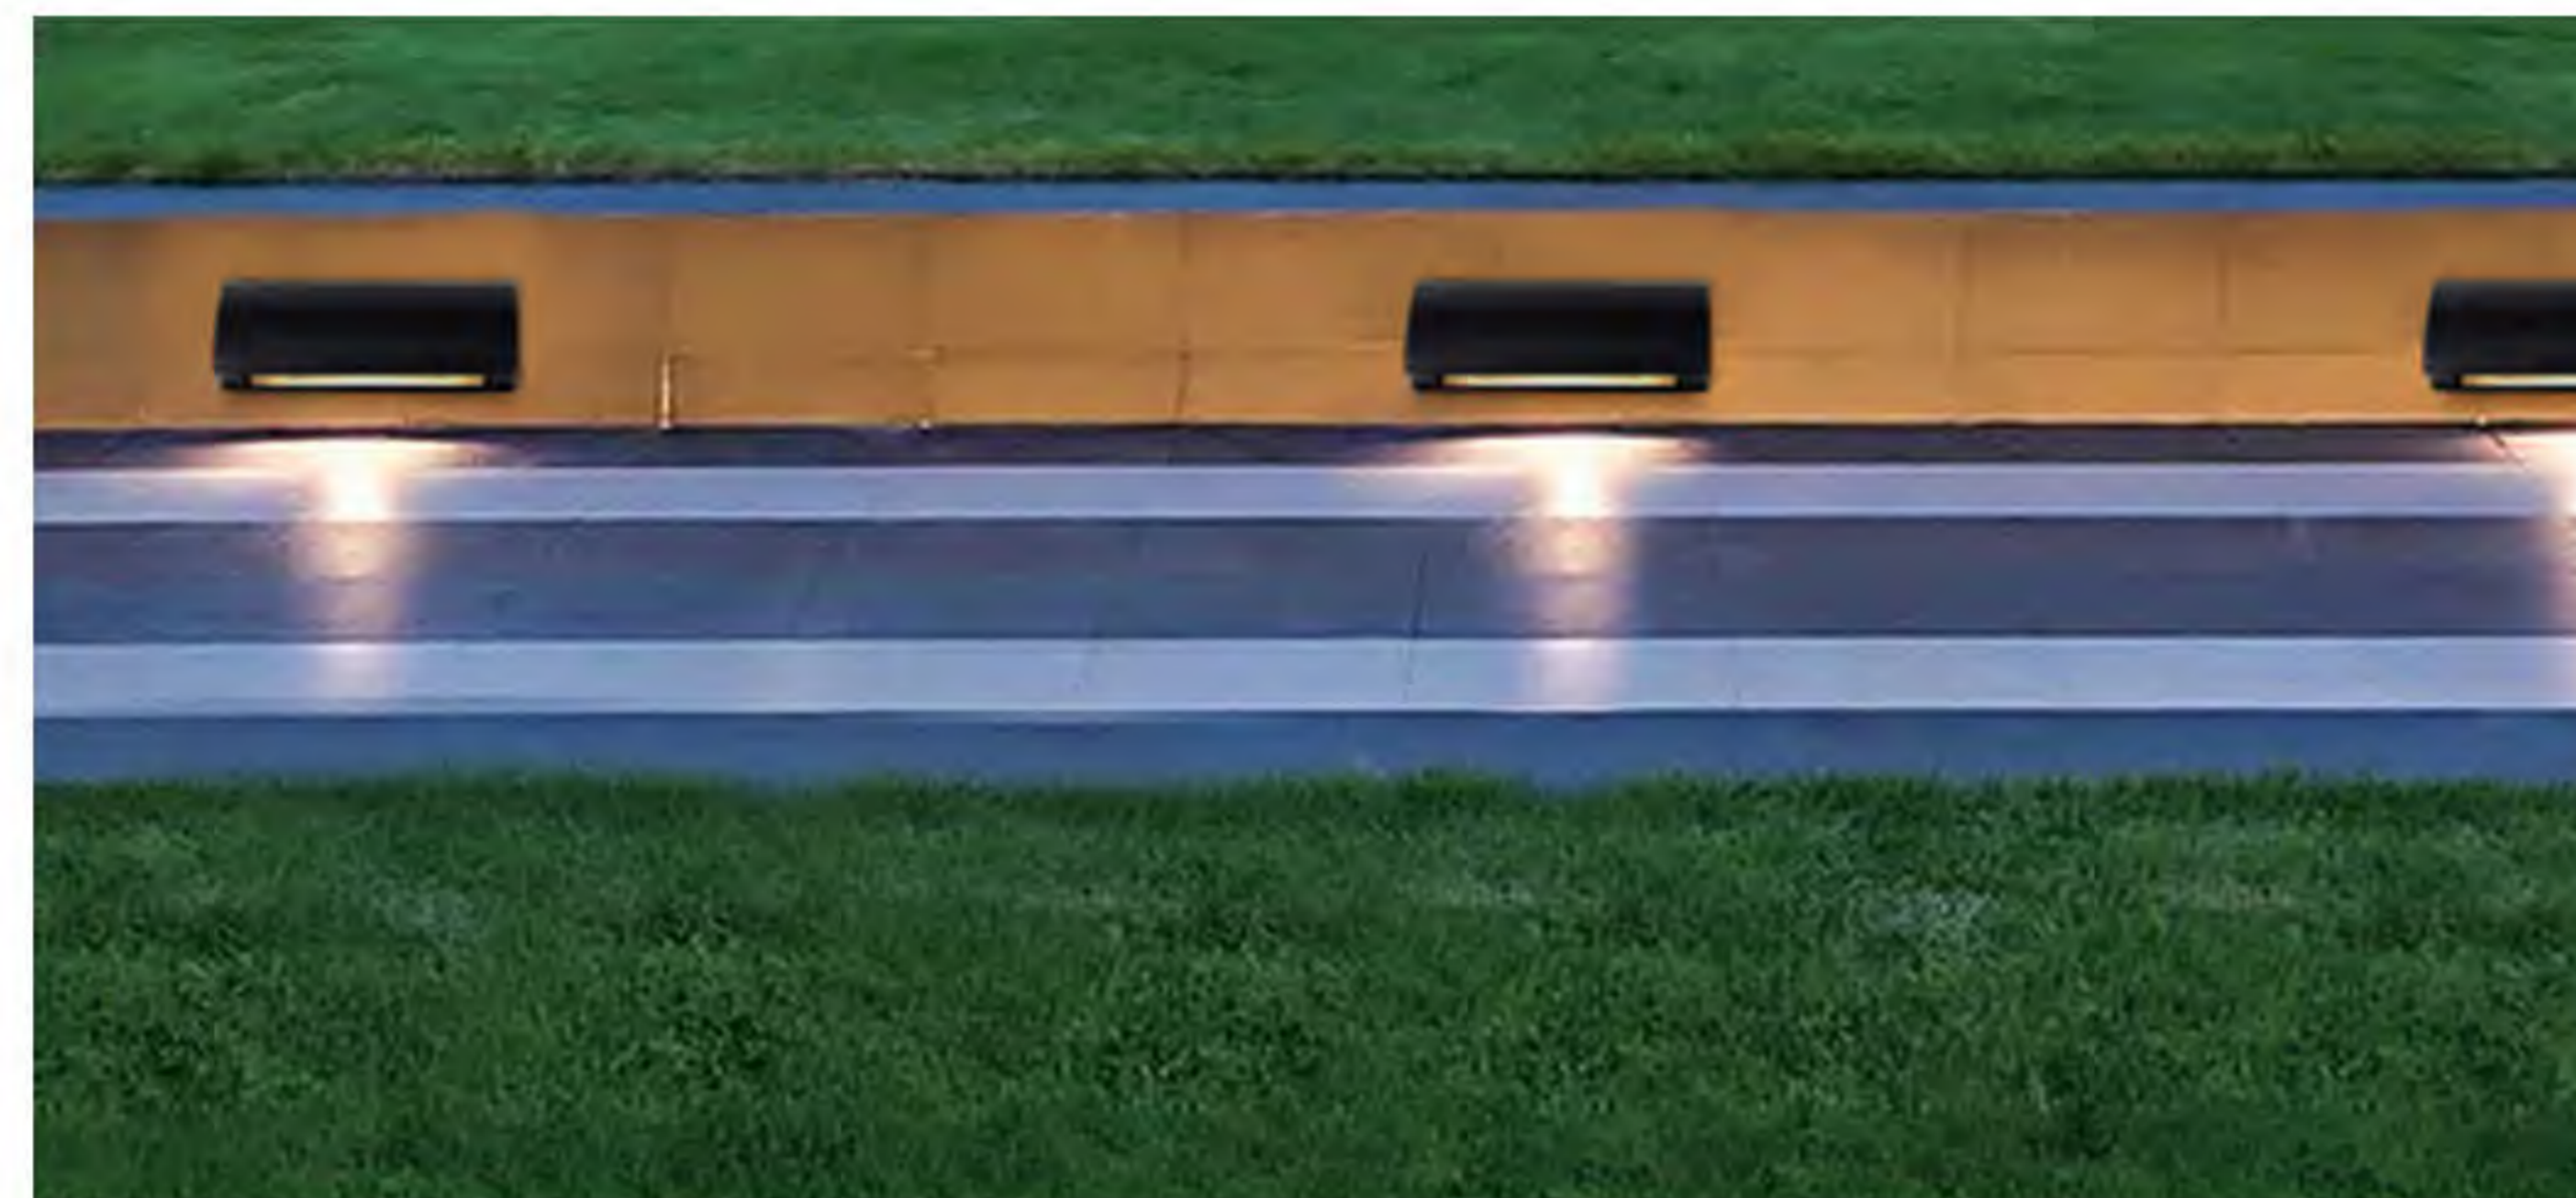

Technical Date (技术参数)

Item No.	Lamp Type	Power	LM	CCT	PF	Voltage	CRI	A	B	C (mm)
MB18-QJ02	LED	4W	280	2700K-6000K	0.6	AC110-265V	80-90	95	95	32
MB18-QJ03	LED	6W	420	2700K-6000K	0.6	AC110-265V	80-90	175	65	32

MB18-QJ04

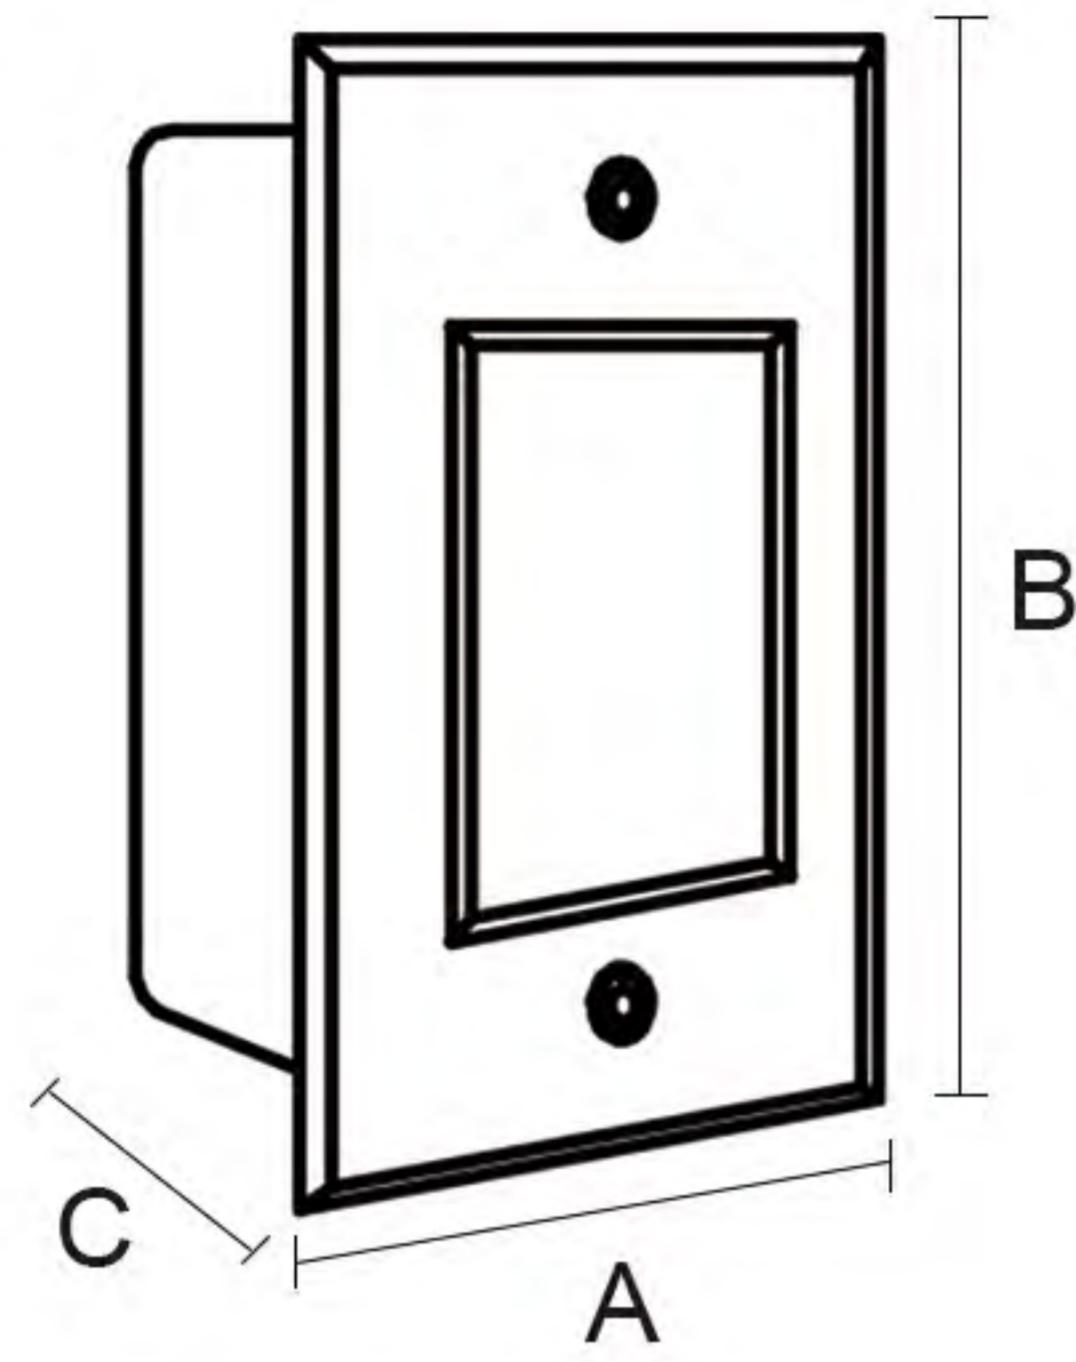

Features&Benefit (功能和优点)


Category (品类)	Step Light
Diffuser Material (扩散器材质)	PC
Cover Material (面盖材质)	Aluminum
Operating mode (运行)	Built in
Steuerbar (开关)	On/Off
IP (防水等级)	54
Mounting type (安装类型)	Recessed
Mounting location (安装位置)	Wall
Application environment (应用环境)	Indoor/Outdoor
Cut out (预埋件)	60*100*50mm
Body color (表面颜色)	Black/Dark Gray/Sliver Gray



Product Description (产品描述)

Suitable for building facades, underground parking lot entrances and exits, parks, corridors, staircases, passages, courtyards and other various scenes; the lamps and lanterns adopt a downward light-emitting method, the light is soft and not harsh.

Lightmap (光影图)

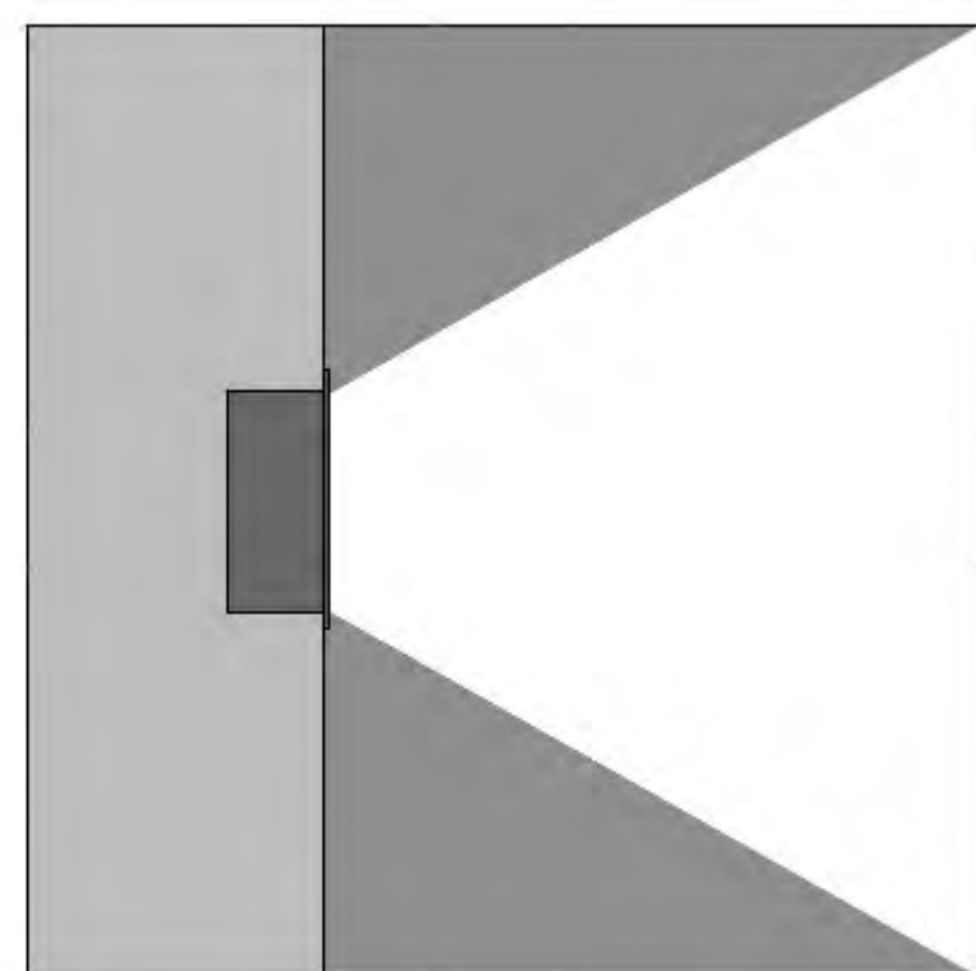

side view (侧面图)




Technical Date (技术参数)

Item No.	Lamp Type	Power	LM	CCT	PF	Voltage	CRI	A	B	C (mm)
MB18-QJ04	LED	3W	210	2700K-6000K	0.6	AC110-265V	80-90	75	115	50


MB18-QJ05/MB18-QJ06



MB18-QJ05

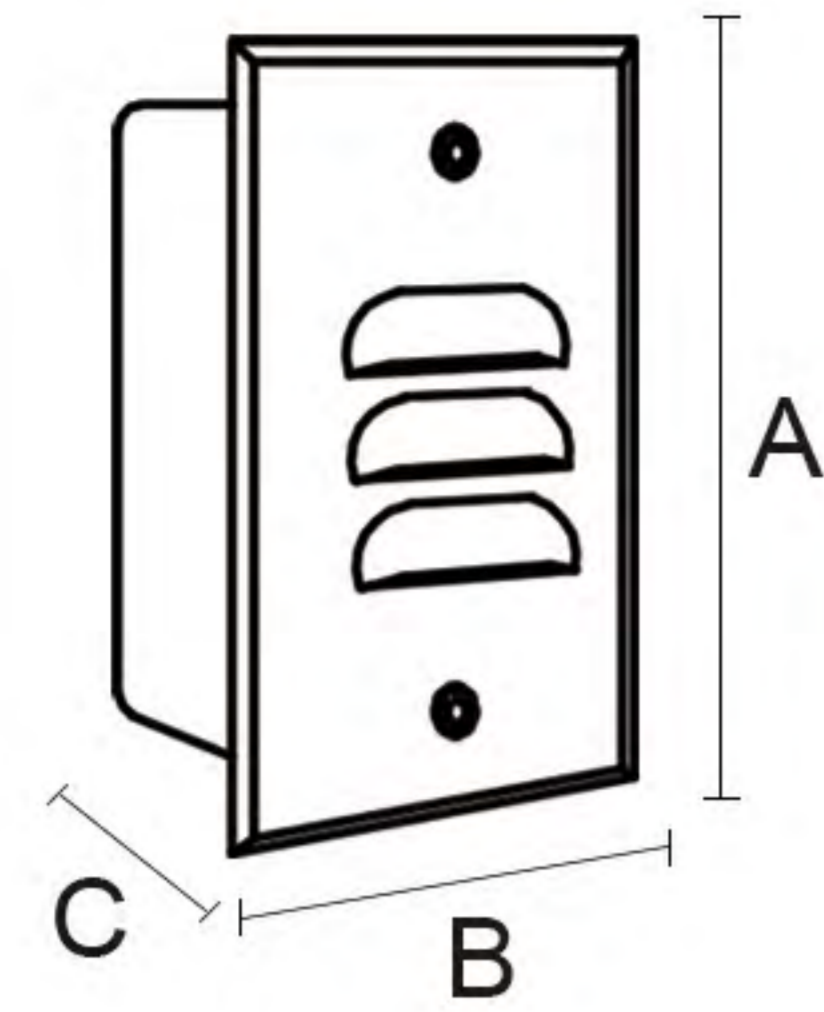

MB18-QJ06

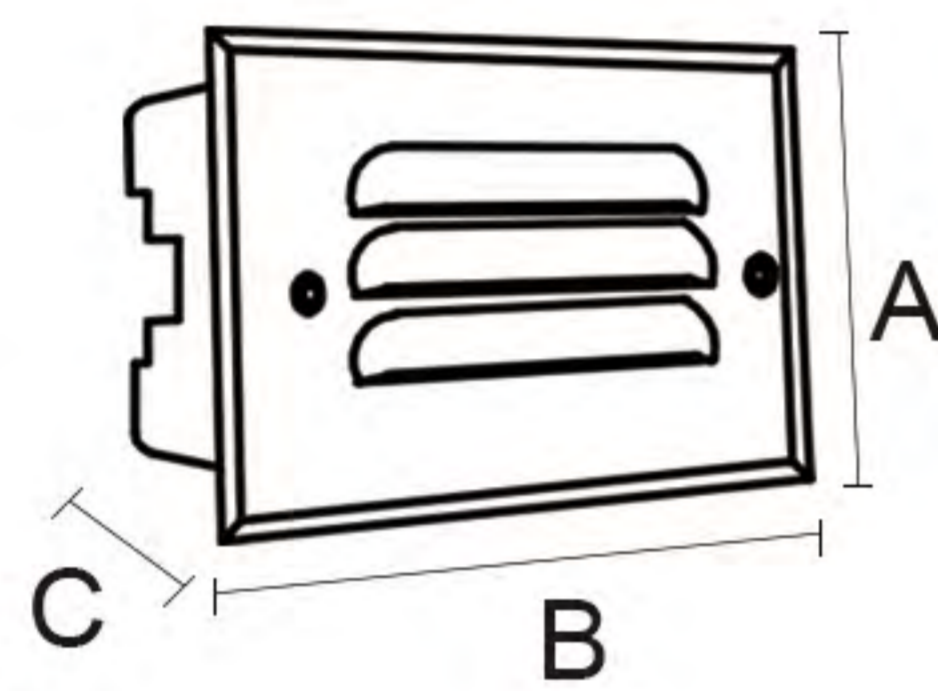

Features&Benefit (功能和优点)


Category (品类)	Step Light
Diffuser Material (扩散器材质)	PC
Cover Material (面盖材质)	Aluminum
Operating mode (运行)	Built in
Steuerbar (开关)	On/Off
IP (防水等级)	54
Mounting type (安装类型)	Recessed
Mounting location (安装位置)	Wall
Application environment (应用环境)	Indoor/Outdoor
Cut out (预埋件)	60*100*50mm/100*60*50mm
Body color (表面颜色)	Black/Dark Gray/Sliver Gray



Product Description (产品描述)

Suitable for building facades, underground parking lot entrances and exits, parks, corridors, staircases, passages, courtyards and other various scenes; the lamps and lanterns adopt a downward light-emitting method, the light is soft and not harsh.

Lightmap (光影图)

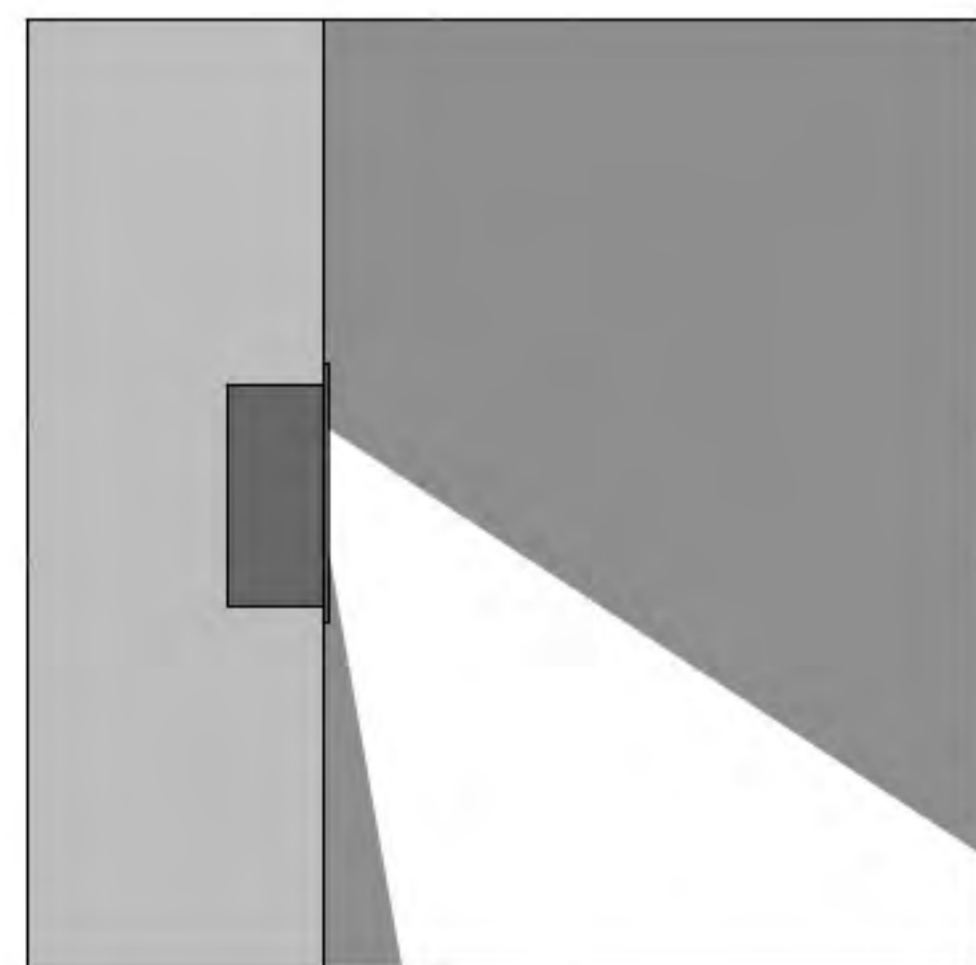

side view (侧面图)



Technical Date (技术参数)

Item No.	Lamp Type	Power	LM	CCT	PF	Voltage	CRI	A	B	C (mm)
MB18-QJ05	LED	3W	210	2700K-6000K	0.6	AC110-265V	80-90	75	115	50
MB18-QJ06	LED	3W	210	2700K-6000K	0.6	AC110-265V	80-90	115	75	50

MB18-QJ07/MB18-QJ08


Features&Benefit (功能和优点)

Category (品类)	Step Light
Diffuser Material (扩散器材质)	PC
Cover Material (面盖材质)	Aluminum
Operating mode (运行)	Built in
Steuerbar (开关)	On/Off
IP (防水等级)	54
Mounting type (安装类型)	Recessed
Mounting location (安装位置)	Wall
Application environment (应用环境)	Indoor/Outdoor
Cut out (预埋件)	60*100*50mm/100*60*50mm
Body color (表面颜色)	Black/Dark Gray/Sliver Gray




Product Description (产品描述)


Suitable for building facades, underground parking lot entrances and exits, parks, corridors, staircases, passages, courtyards and other various scenes; the lamps and lanterns adopt a downward light-emitting method, the light is soft and not harsh.

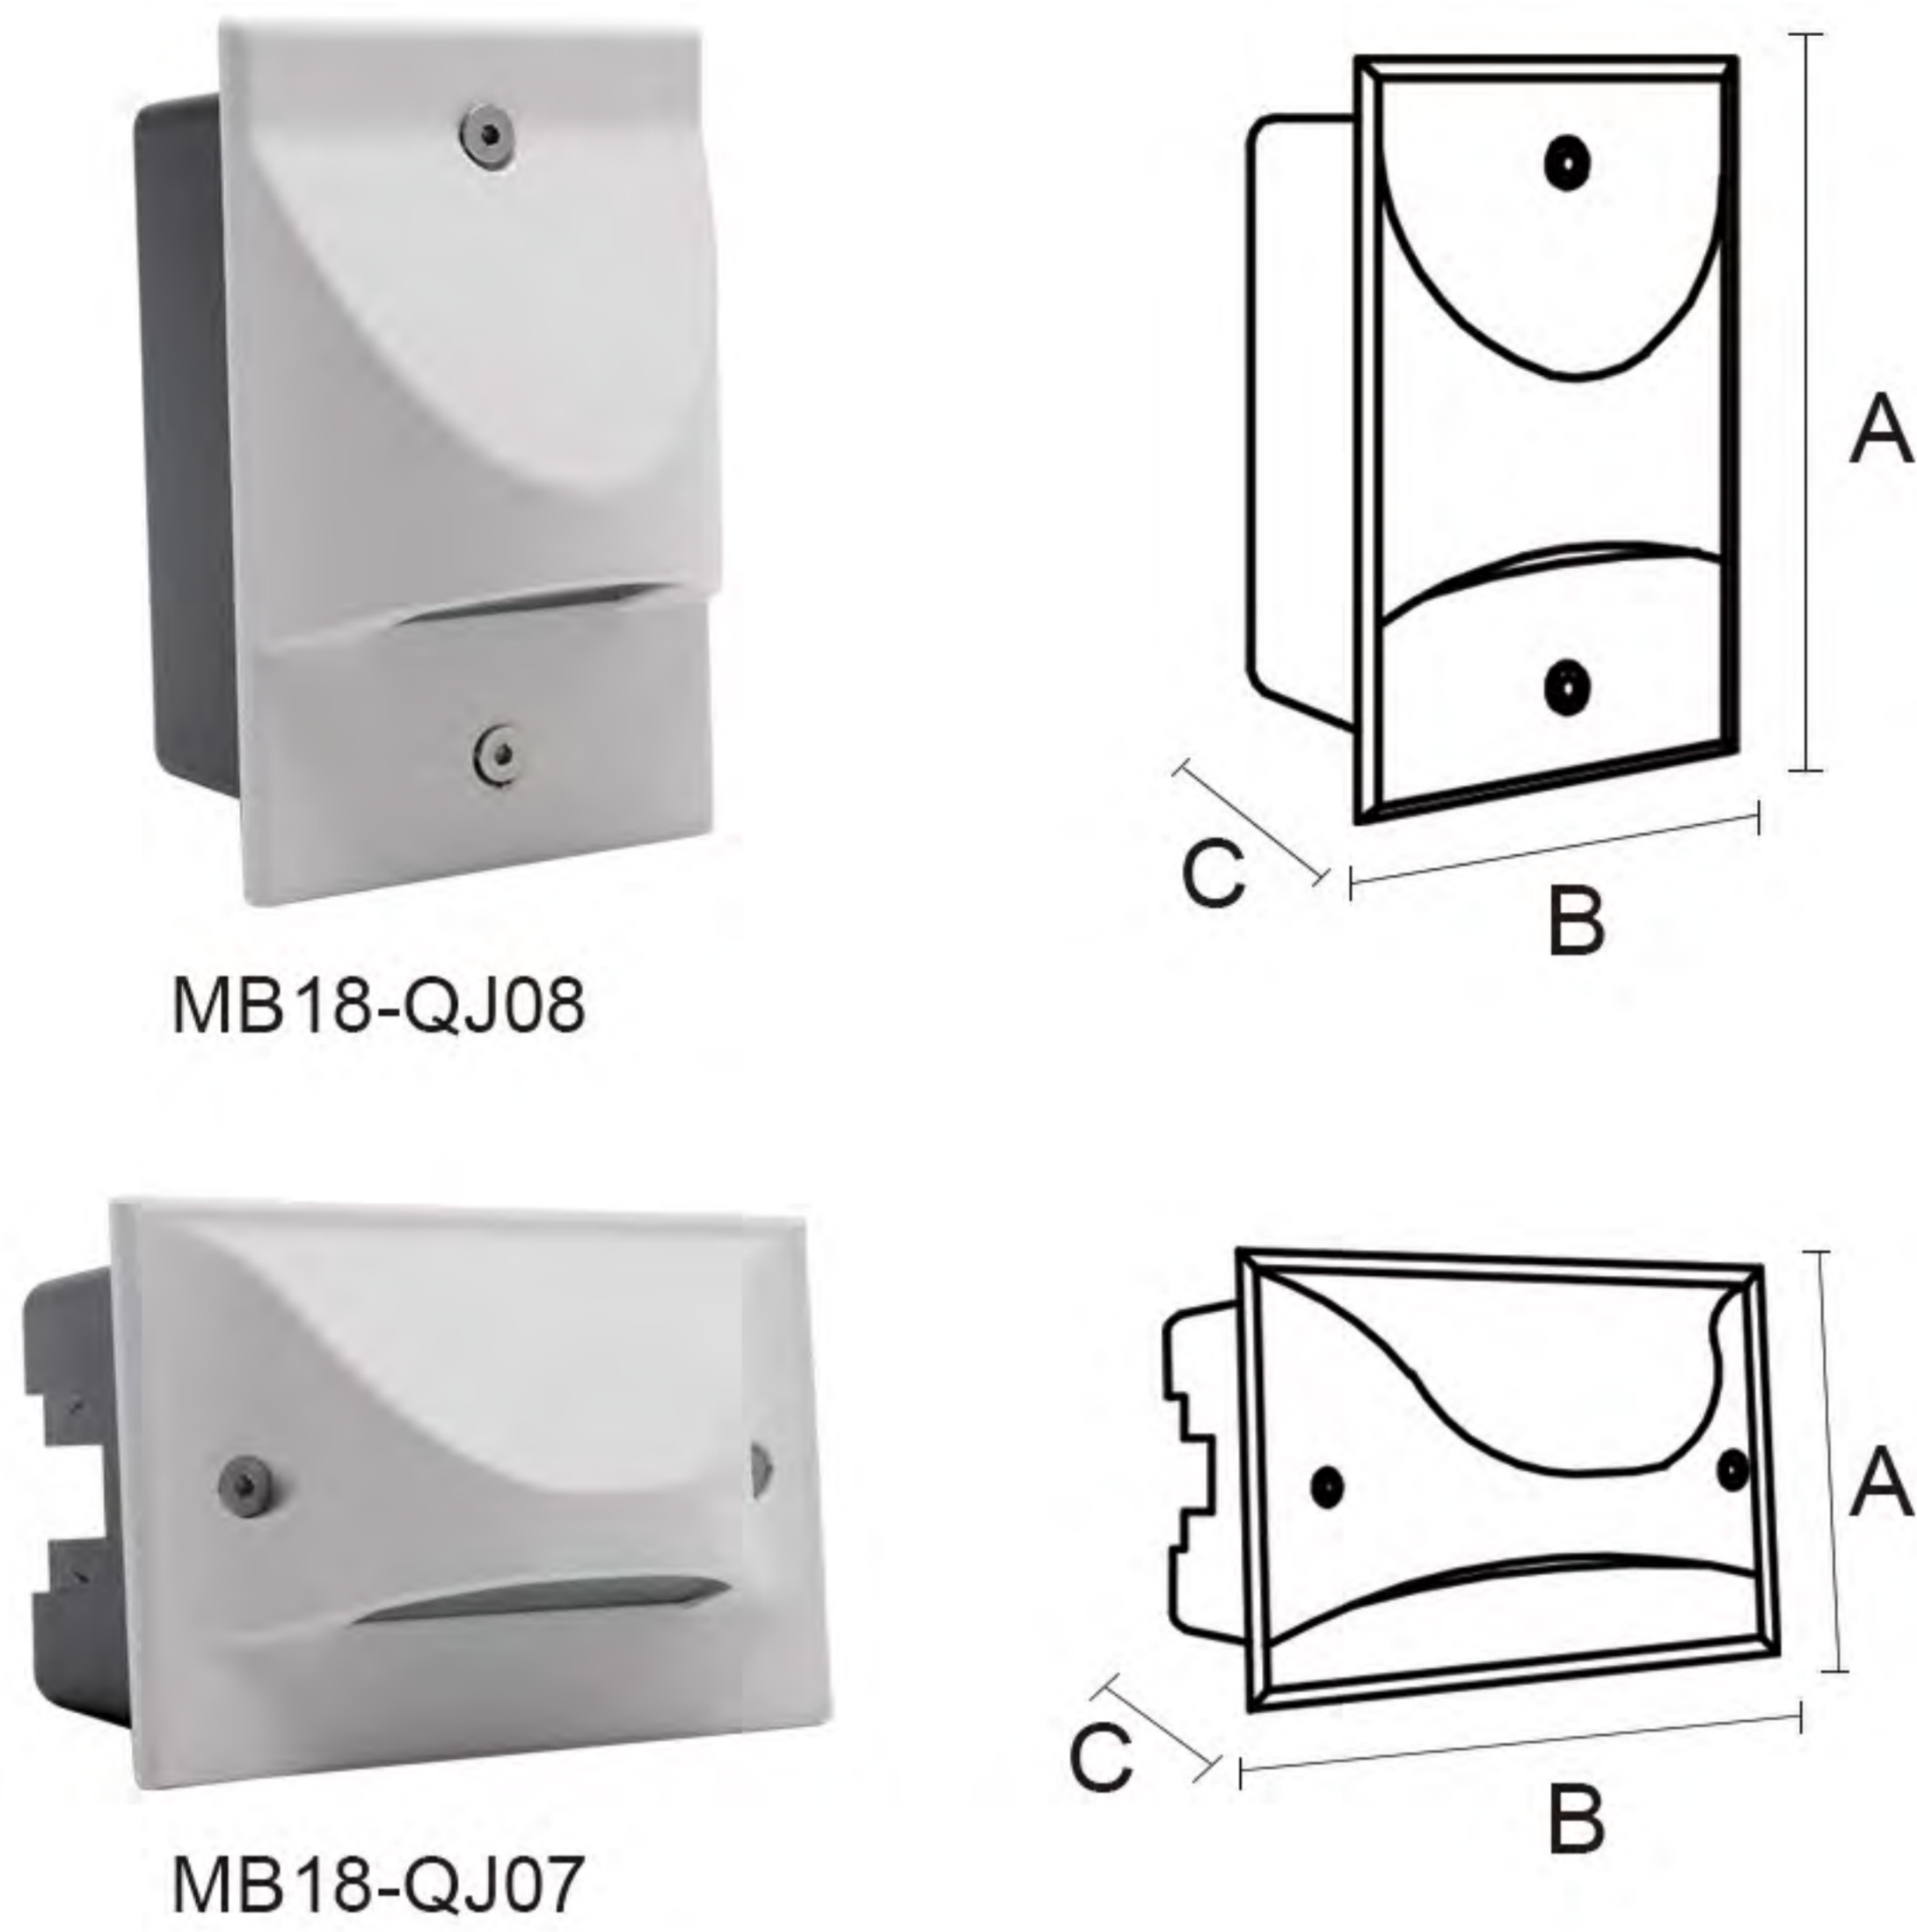

Lightmap (光影图)

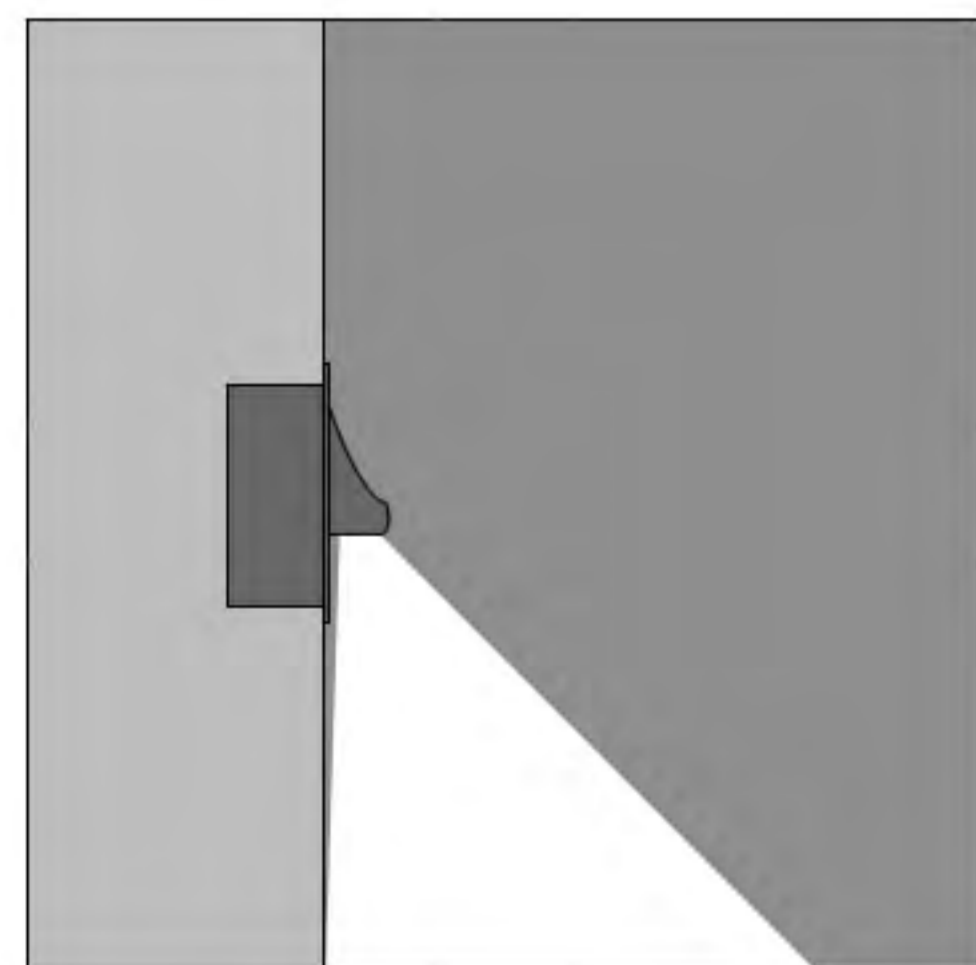

side view (侧面图)

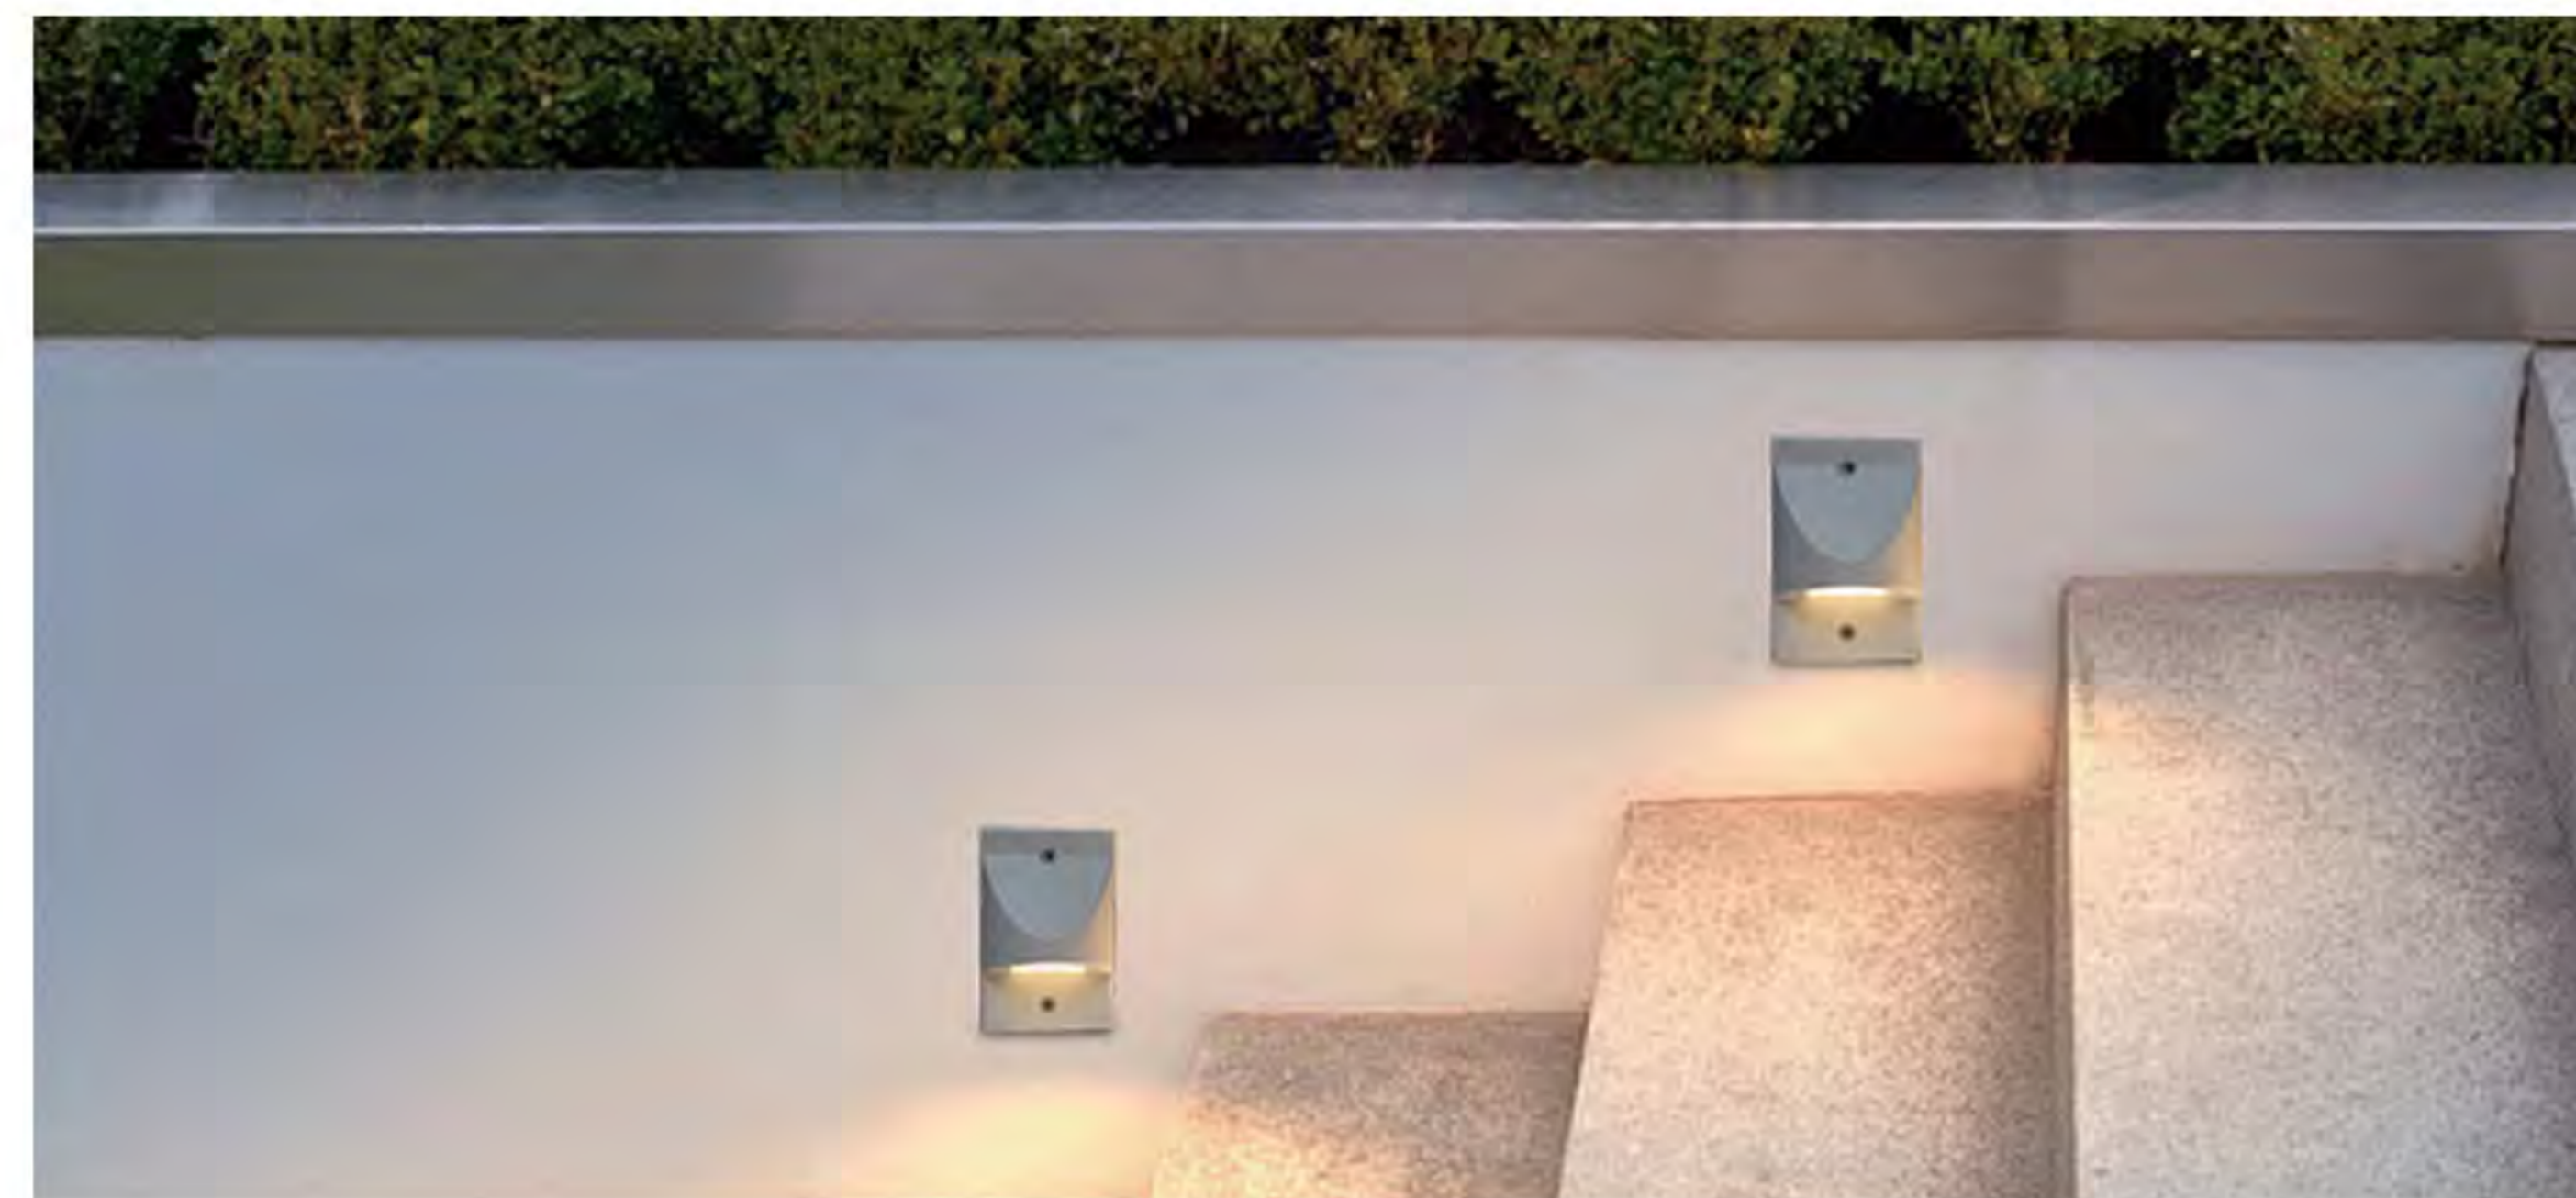

Technical Date (技术参数)

Item No.	Lamp Type	Power	LM	CCT	PF	Voltage	CRI	A	B	C (mm)
MB18-QJ07	LED	3W	210	2700K-6000K	0.6	AC110-265V	80-90	115	75	50
MB18-QJ08	LED	3W	210	2700K-6000K	0.6	AC110-265V	80-90	75	115	50

MB18-QJ09/MB18-QJ10

Features&Benefit (功能和优点)

Category (品类)	Step Light
Diffuser Material (扩散器材质)	PC
Cover Material (面盖材质)	Aluminum
Operating mode (运行)	Built in
Steuerbar (开关)	On/Off
IP (防水等级)	54
Mounting type (安装类型)	Recessed
Mounting location (安装位置)	Wall
Application environment (应用环境)	Indoor/Outdoor
Cut out (预埋件)	60*100*50mm/100*60*50mm
Body color (表面颜色)	Black/Dark Gray/Sliver Gray



Product Description (产品描述)



Suitable for building facades, underground parking lot entrances and exits, parks, corridors, staircases, passages, courtyards and other various scenes; the lamps and lanterns adopt a downward light-emitting method, the light is soft and not harsh.




MB18-QJ09



MB18-QJ10

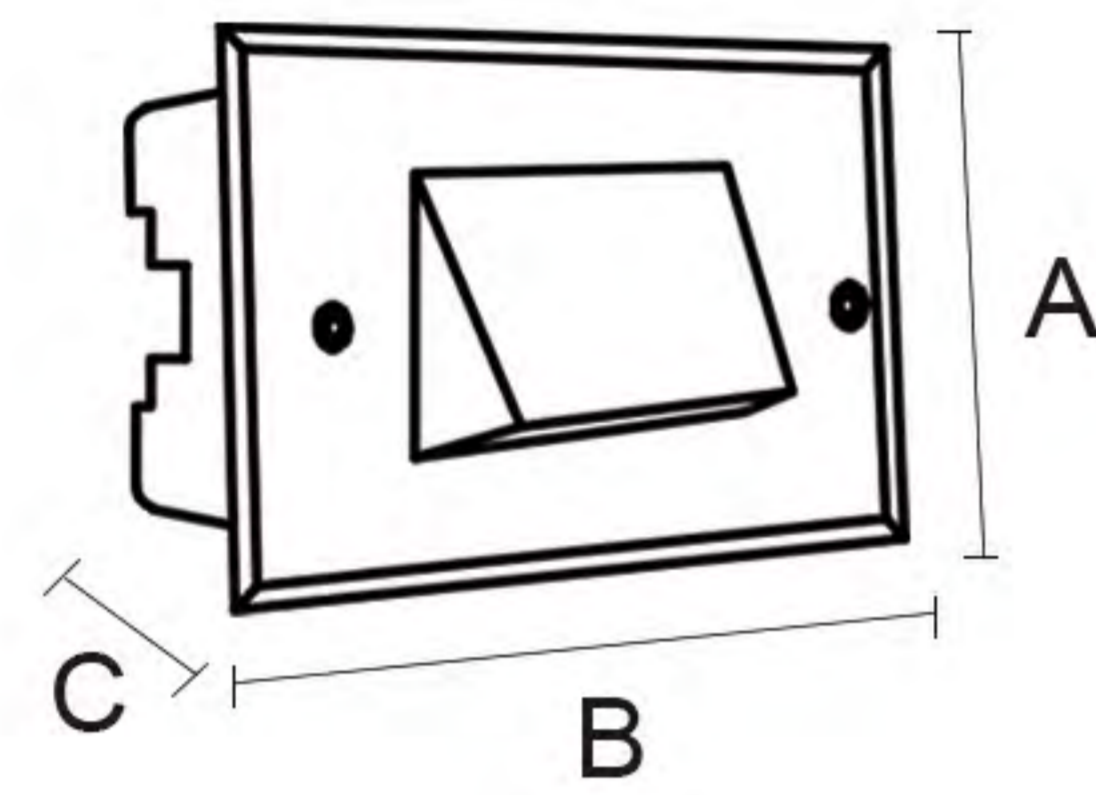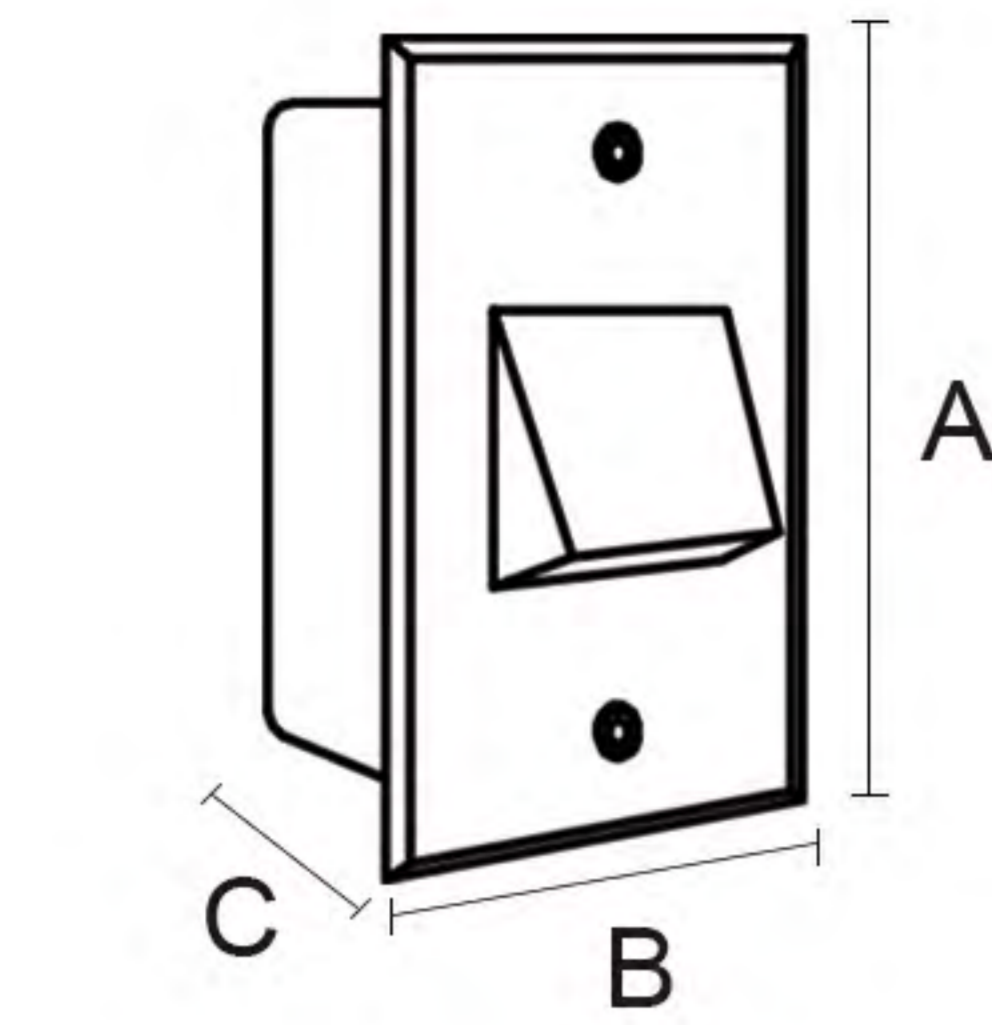

Lightmap (光影图)

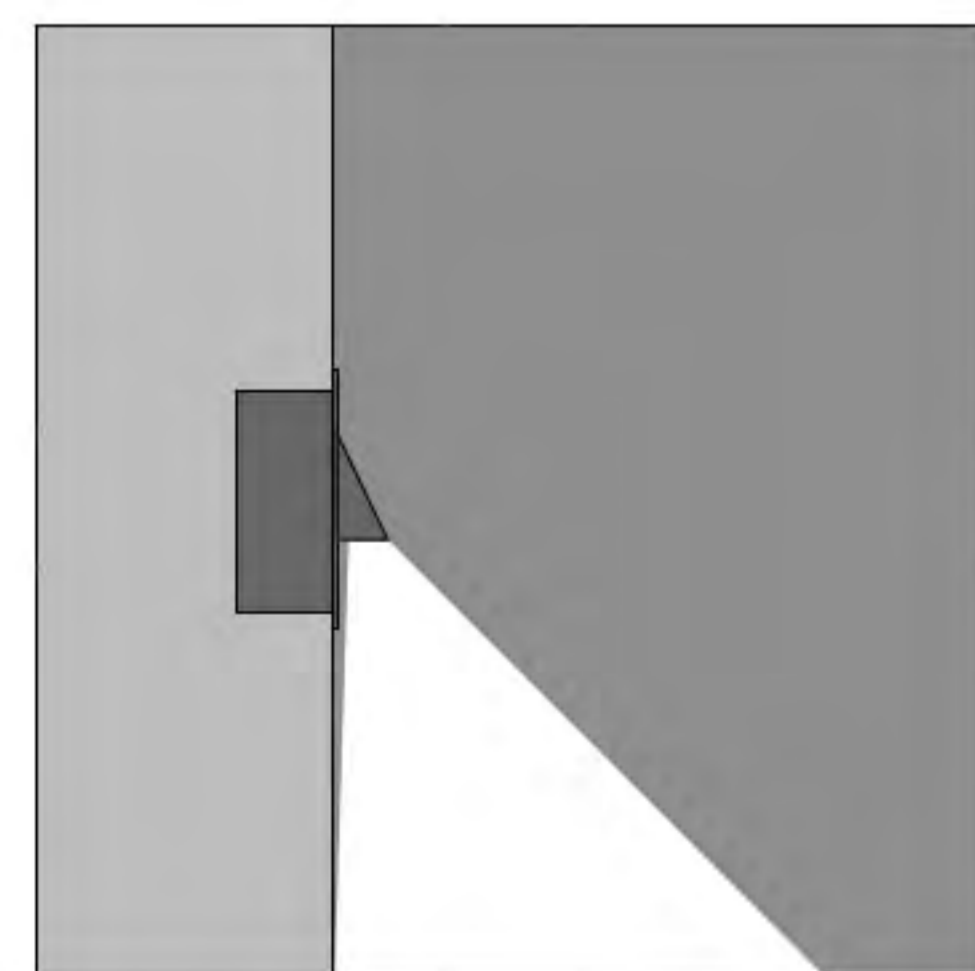


side view (侧面图)



Technical Date (技术参数)

Item No.	Lamp Type	Power	LM	CCT	PF	Voltage	CRI	A	B	C (mm)
MB18-QJ09	LED	3W	210	2700K-6000K	0.6	AC110-265V	80-90	75	115	50
MB18-QJ10	LED	3W	210	2700K-6000K	0.6	AC110-265V	80-90	115	75	50

MB18-QJ11

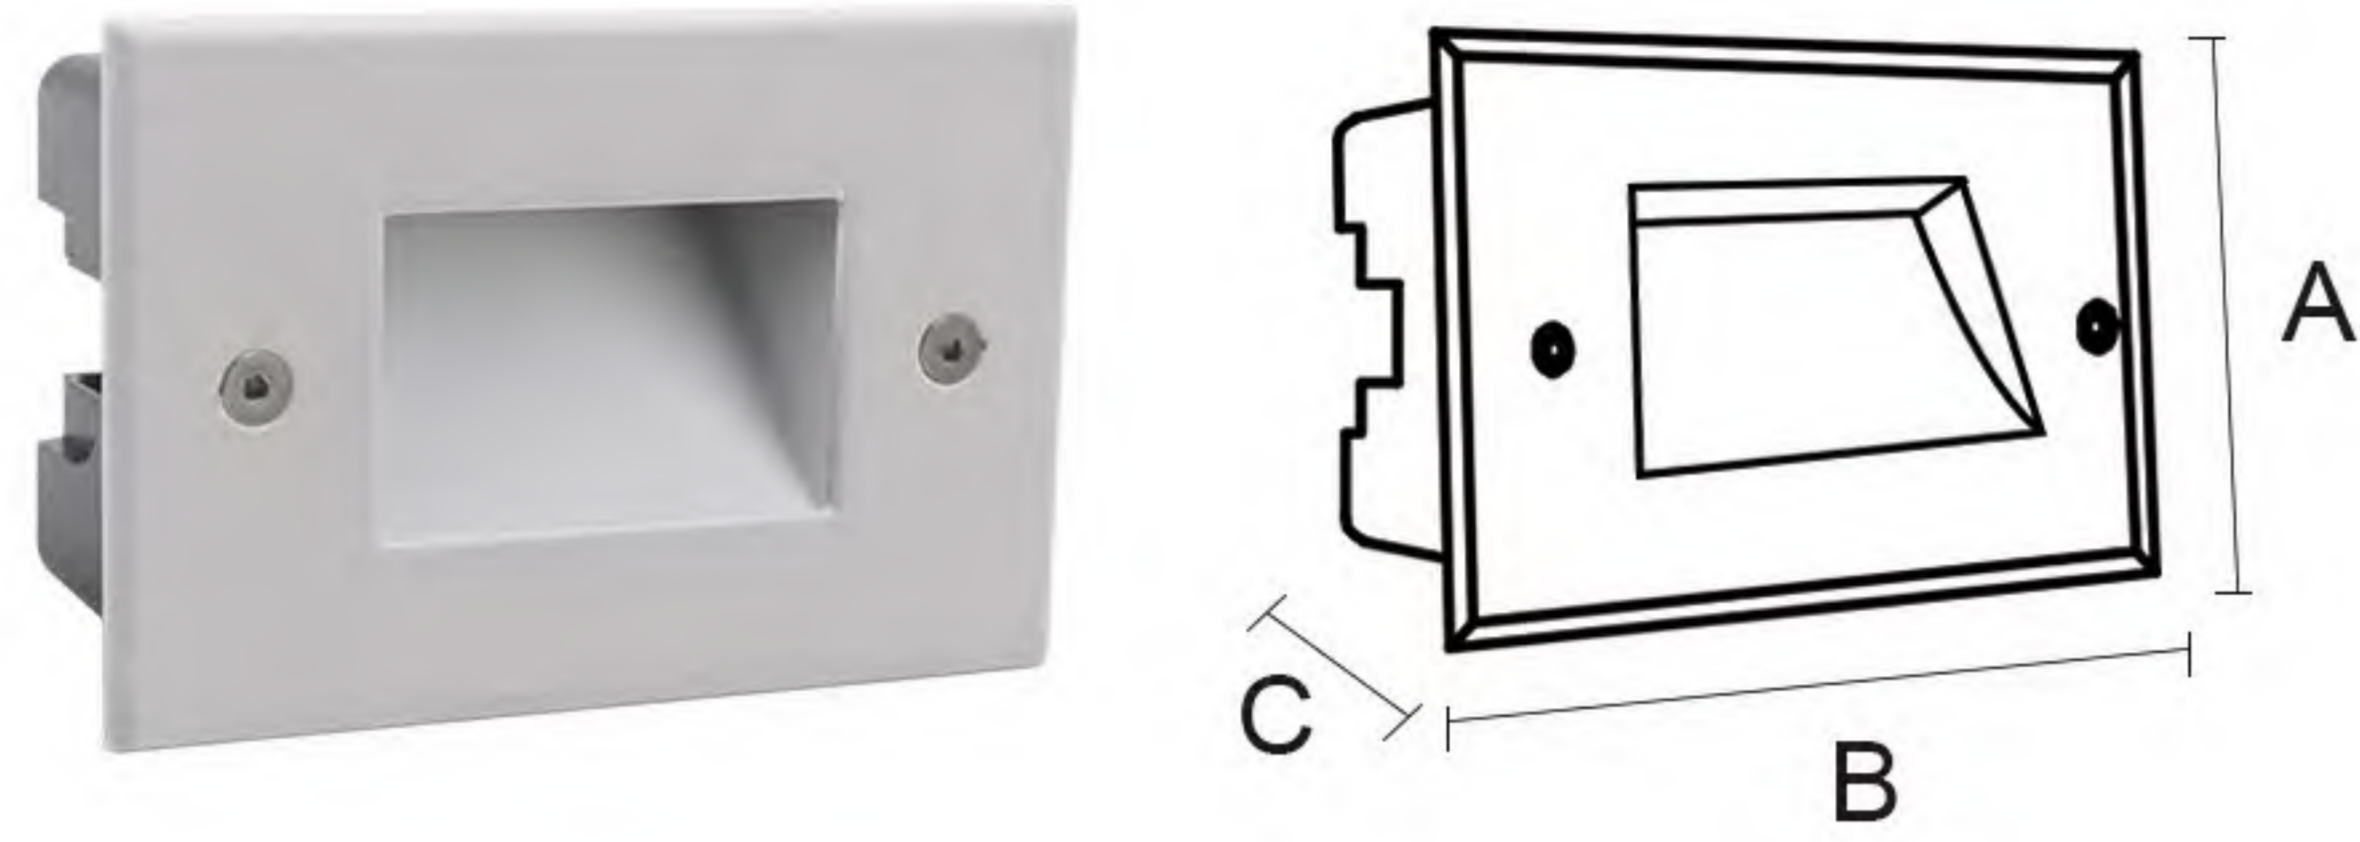

Features&Benefit (功能和优点)


Category (品类)	Step Light
Diffuser Material (扩散器材质)	PC
Cover Material (面盖材质)	Aluminum
Operating mode (运行)	Built in
Steuerbar (开关)	On/Off
IP (防水等级)	54
Mounting type (安装类型)	Recessed
Mounting location (安装位置)	Wall
Application environment (应用环境)	Indoor/Outdoor
Cut out (预埋件)	100*60*50mm
Body color (表面颜色)	Black/Dark Gray/Sliver Gray



Product Description (产品描述)

Suitable for building facades, underground parking lot entrances and exits, parks, corridors, staircases, passages, courtyards and other various scenes; the lamps and lanterns adopt a downward light-emitting method, the light is soft and not harsh.

Lightmap (光影图)

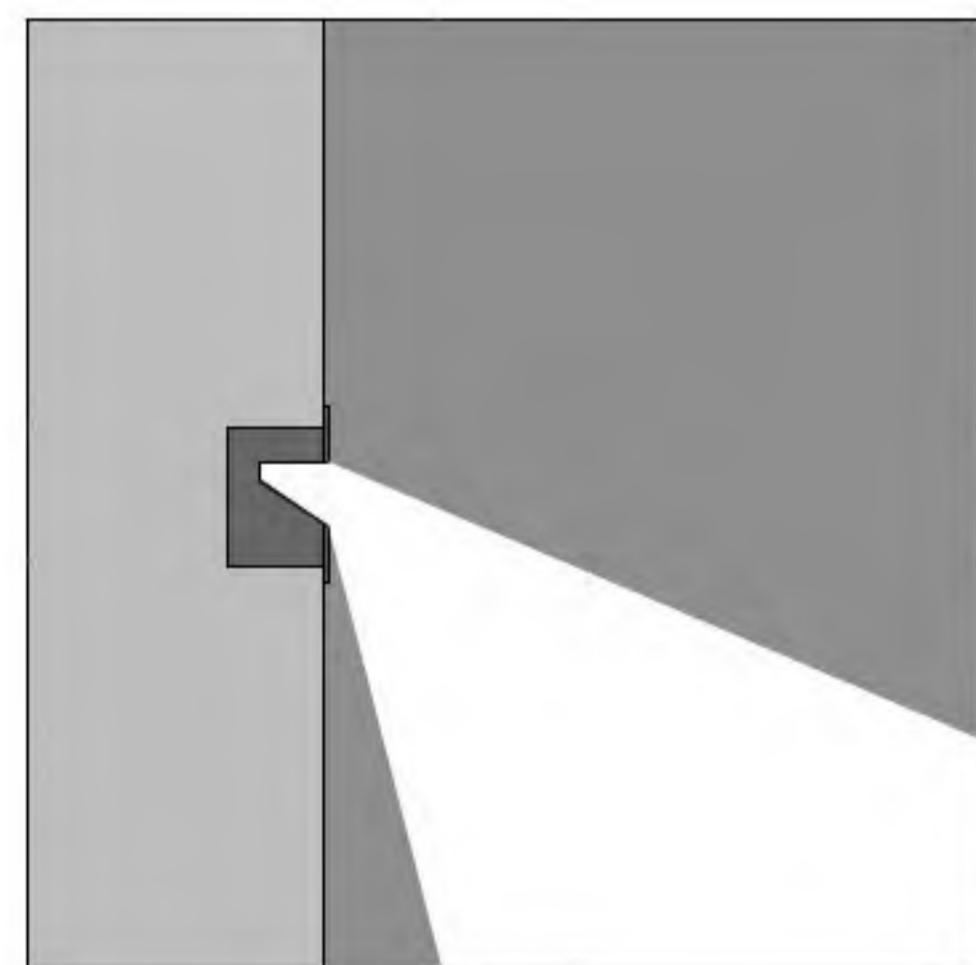

side view (侧面图)



Technical Date (技术参数)

Item No.	Lamp Type	Power	LM	CCT	PF	Voltage	CRI	A	B	C (mm)
MB18-QJ11	LED	3W	210	2700K-6000K	0.6	AC110-265V	80-90	115	75	50



MB18-QJ12



MB18-QJ12



MB18-QJ12-1

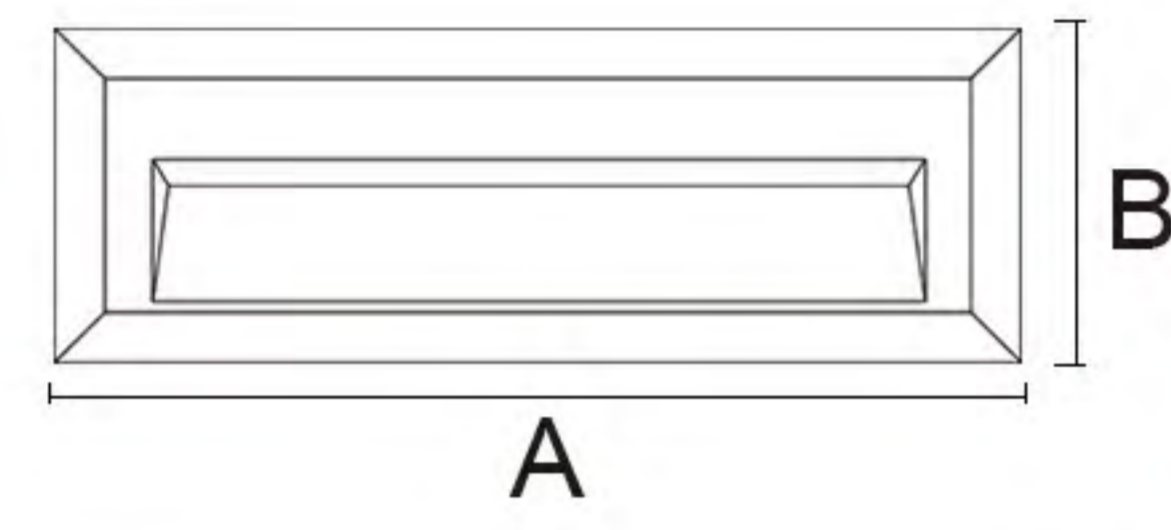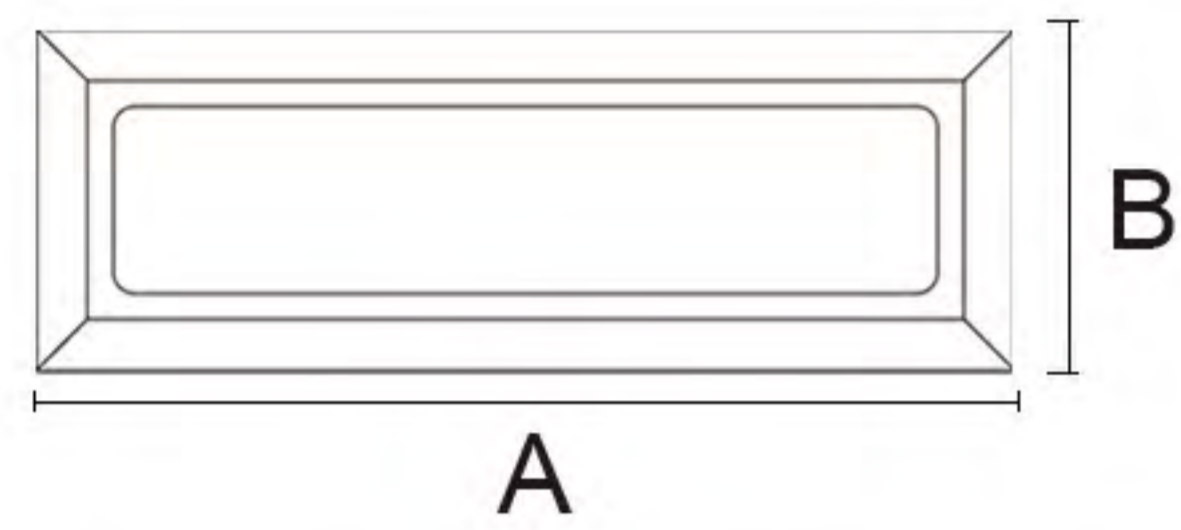

Features&Benefit (功能和优点)


Category (品类)	Step Light
Diffuser Material (扩散器材质)	PC
Cover Material (面盖材质)	Aluminum
Operating mode (运行)	Built in
Steuerbar (开关)	On/Off
IP (防水等级)	54
Mounting type (安装类型)	Wall mounted
Mounting location (安装位置)	Wall
Application environment (应用环境)	Indoor/Outdoor
Body color (表面颜色)	Black/Dark Gray/Sliver Gray




Product Description (产品描述)

Suitable for building facades, underground parking lot entrances and exits, parks, corridors, staircases, passages, courtyards and other various scenes; the lamps and lanterns adopt a downward light-emitting method, the light is soft and not harsh.

Lightmap (光影图)

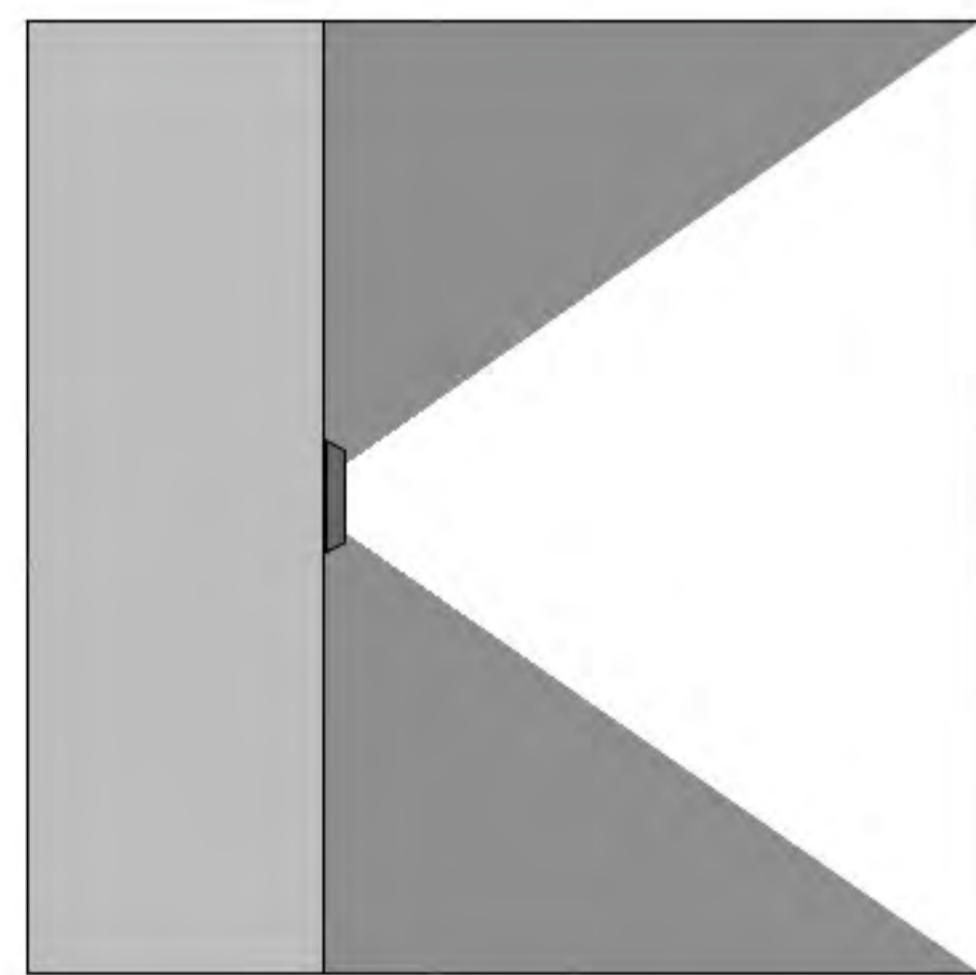

side view (侧面图)

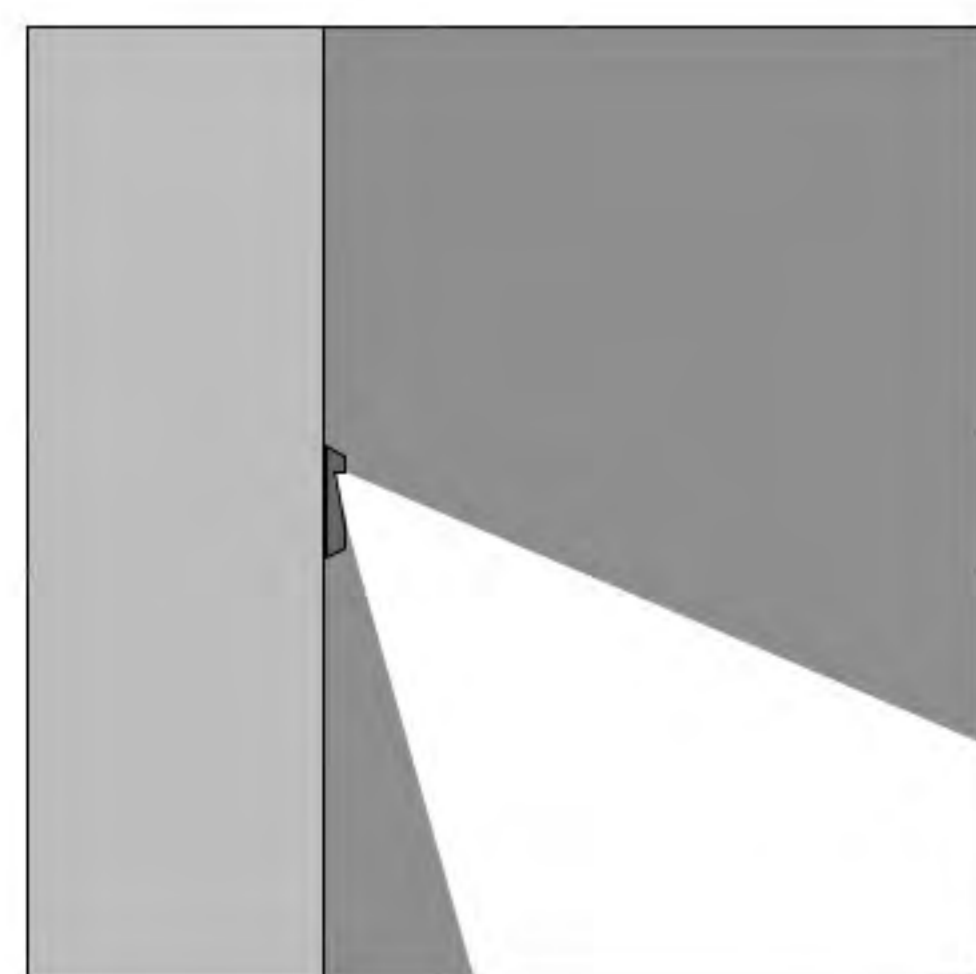


side view (侧面图)



Technical Date (技术参数)

Item No.	Lamp Type	Power	LM	CCT	PF	Voltage	CRI	A	B	C (mm)
MB18-QJ12	LED	6W	420	2700K-6000K	0.6	AC110-265V	80-90	230	80	25
MB18-QJ12-1	LED	6W	420	2700K-6000K	0.6	AC110-265V	80-90	230	80	25

MB18-QJ13

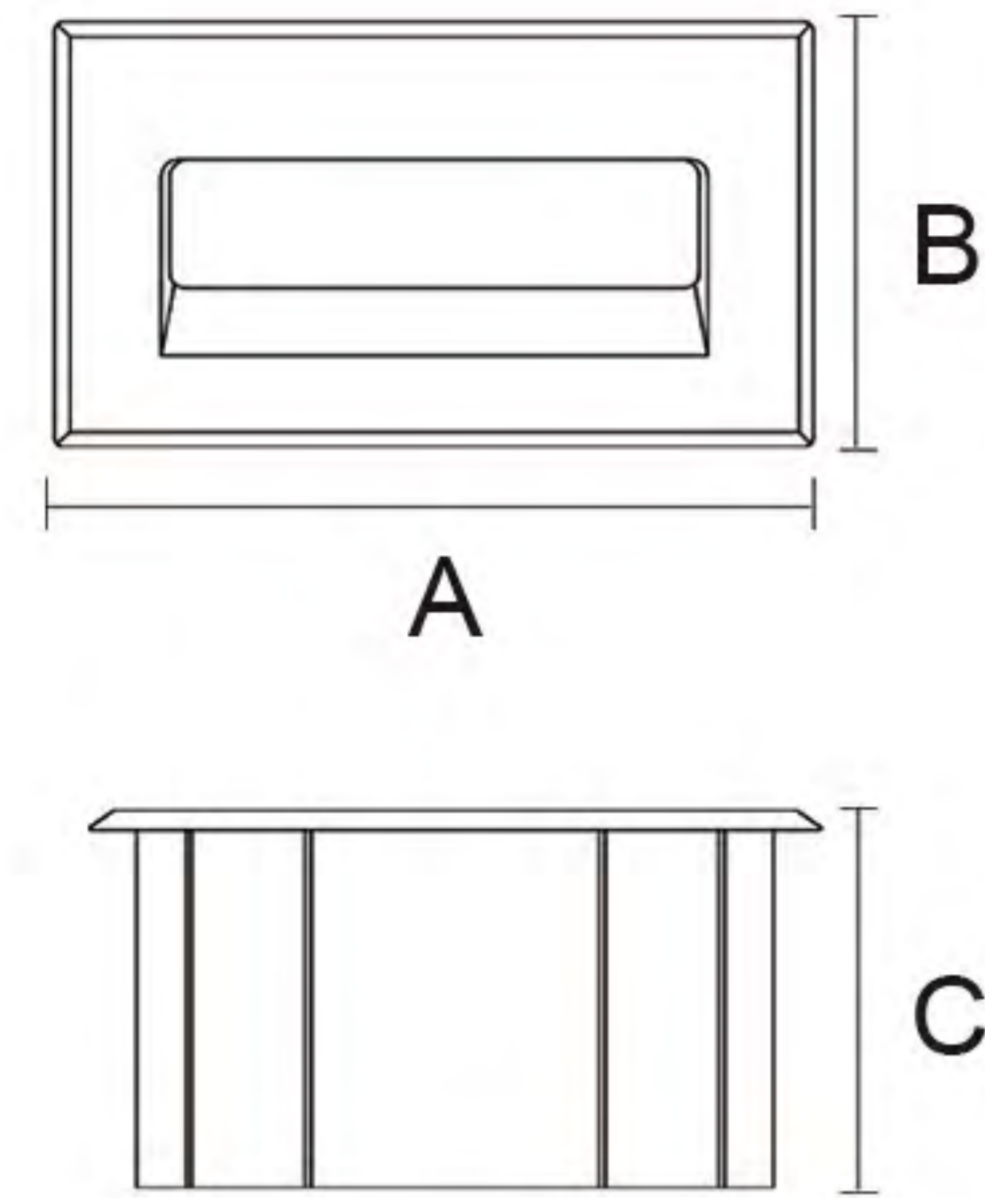

Features&Benefit (功能和优点)


Category (品类)	Step Light
Diffuser Material (扩散器材质)	PC
Cover Material (面盖材质)	Aluminum
Operating mode (运行)	Built in
Steuerbar (开关)	On/Off
IP (防水等级)	54
Mounting type (安装类型)	Recessed
Mounting location (安装位置)	Wall
Application environment (应用环境)	Indoor/Outdoor
Cut out (预埋件)	78*40*60mm/123*40*60mm
Body color (表面颜色)	Black/Dark Gray/Sliver Gray



Product Description (产品描述)

Suitable for building facades, underground parking lot entrances and exits, parks, corridors, staircases, passages, courtyards and other various scenes; the lamps and lanterns adopt a downward light-emitting method, the light is soft and not harsh.

Lightmap (光影图)

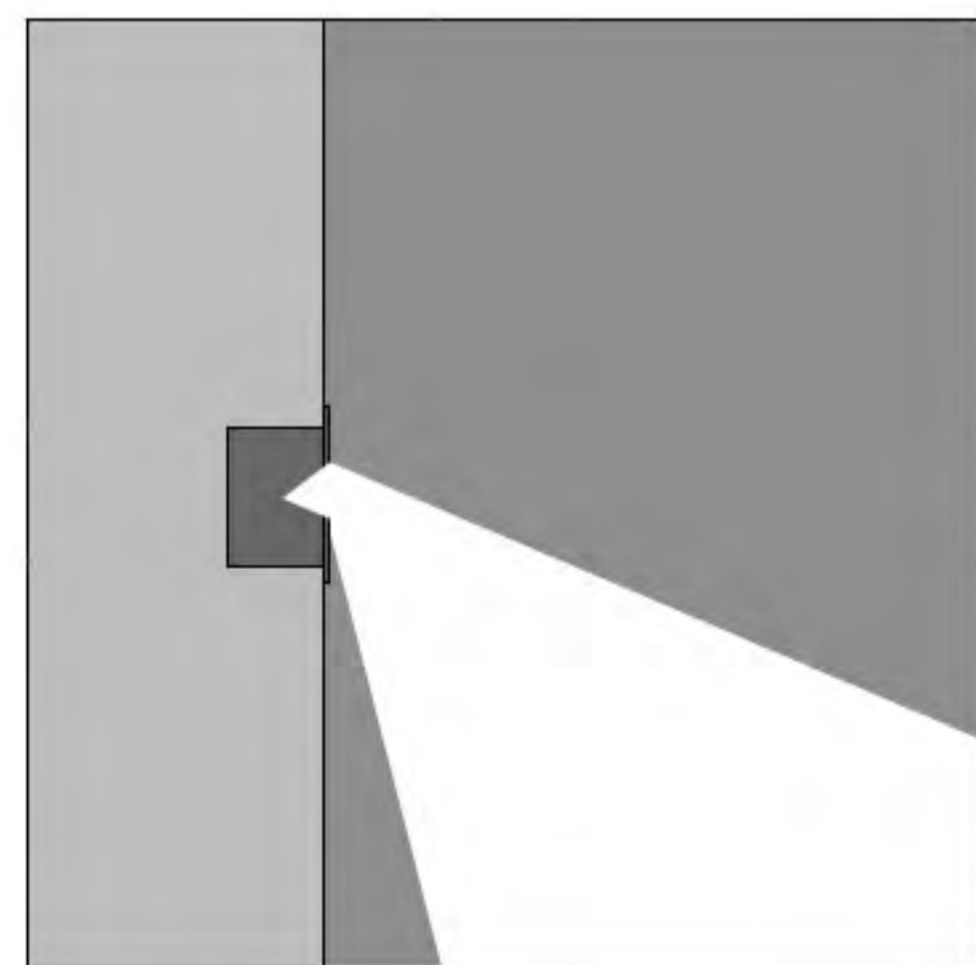

side view (侧面图)



Technical Date (技术参数)

Item No.	Lamp Type	Power	LM	CCT	PF	Voltage	CRI	A	B	C (mm)
MB18-QJ13	LED	3W	210	2700K-6000K	0.6	AC110-265V	80-90	90	50	65
MB18-QJ13-1	LED	3W	210	2700K-6000K	0.6	AC110-265V	80-90	135	50	65


MB18-QJ14



MB18-QJ14



MB18-QJ14-1

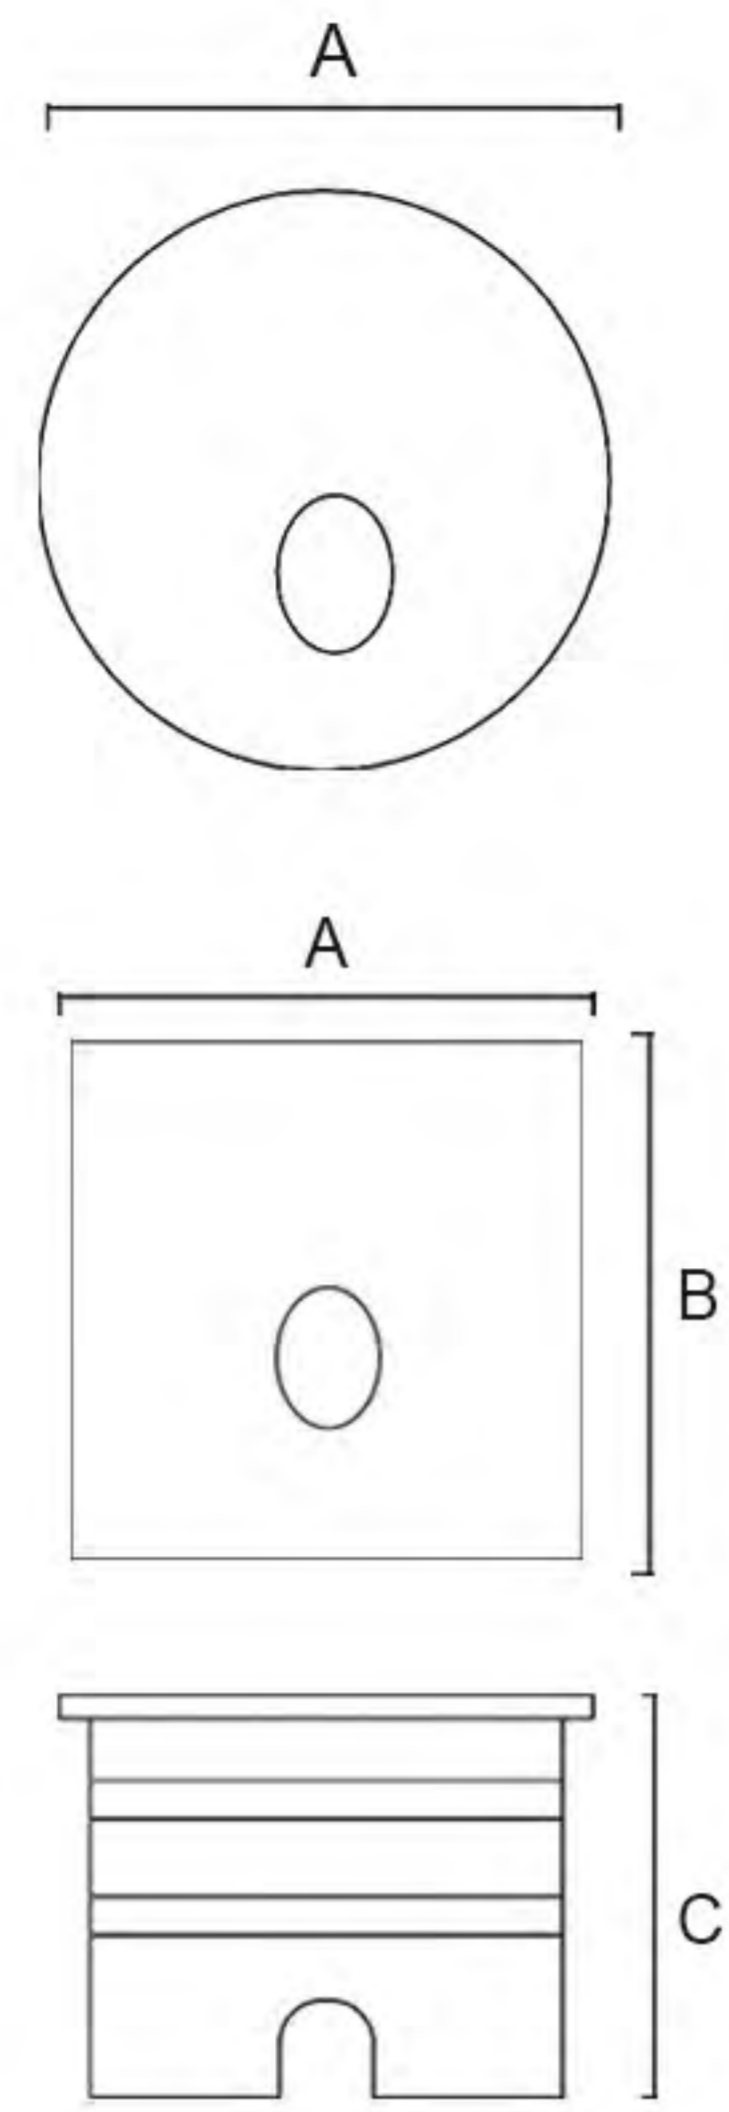

Features&Benefit (功能和优点)


Category (品类)	Step Light
Diffuser Material (扩散器材质)	Acrylic
Cover Material (面盖材质)	Aluminum
Operating mode (运行)	Built in
Steuerbar (开关)	On/Off
IP (防水等级)	54
Mounting type (安装类型)	Recessed
Mounting location (安装位置)	Wall
Application environment (应用环境)	Indoor/Outdoor
Cut out (预埋件)	Ø63*56mm/63*63*56mm
Body color (表面颜色)	Black/Dark Gray/Sliver Gray




Product Description (产品描述)

Suitable for building facades, underground parking lot entrances and exits, parks, corridors, staircases, passages, courtyards and other various scenes; the lamps and lanterns adopt a downward light-emitting method, the light is soft and not harsh.

Lightmap (光影图)

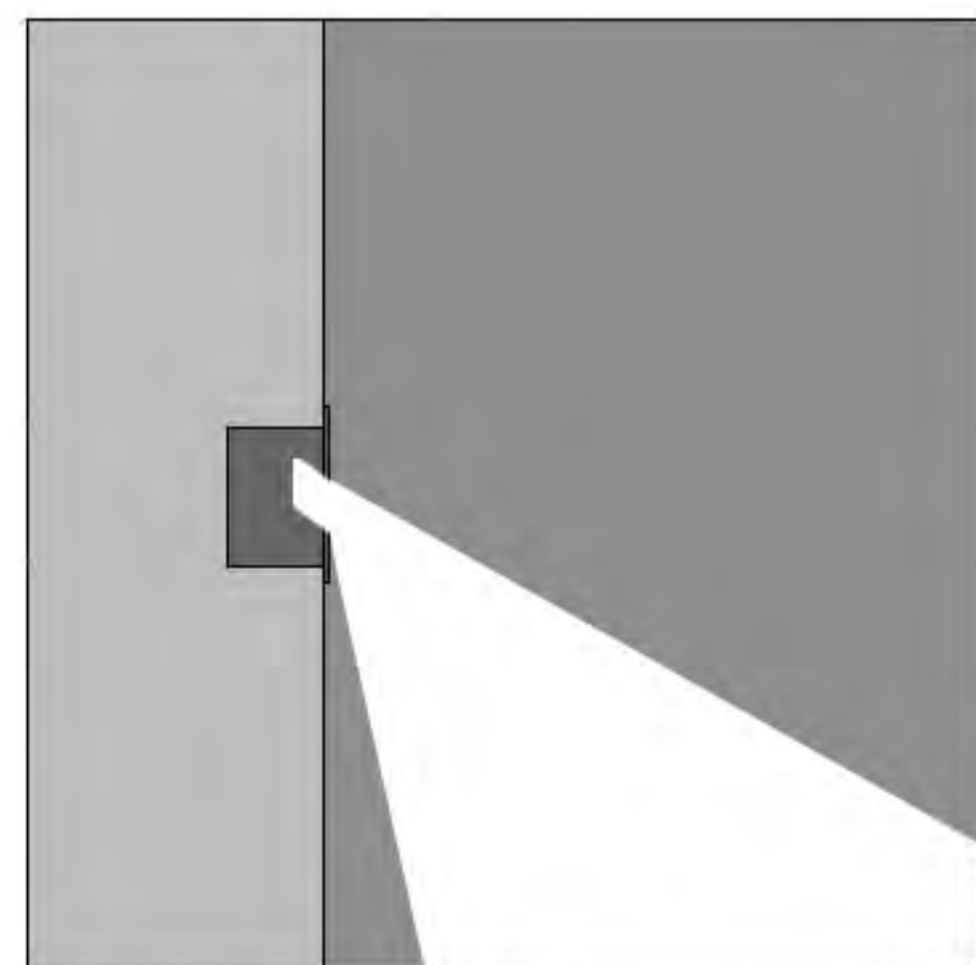


side view (侧面图)

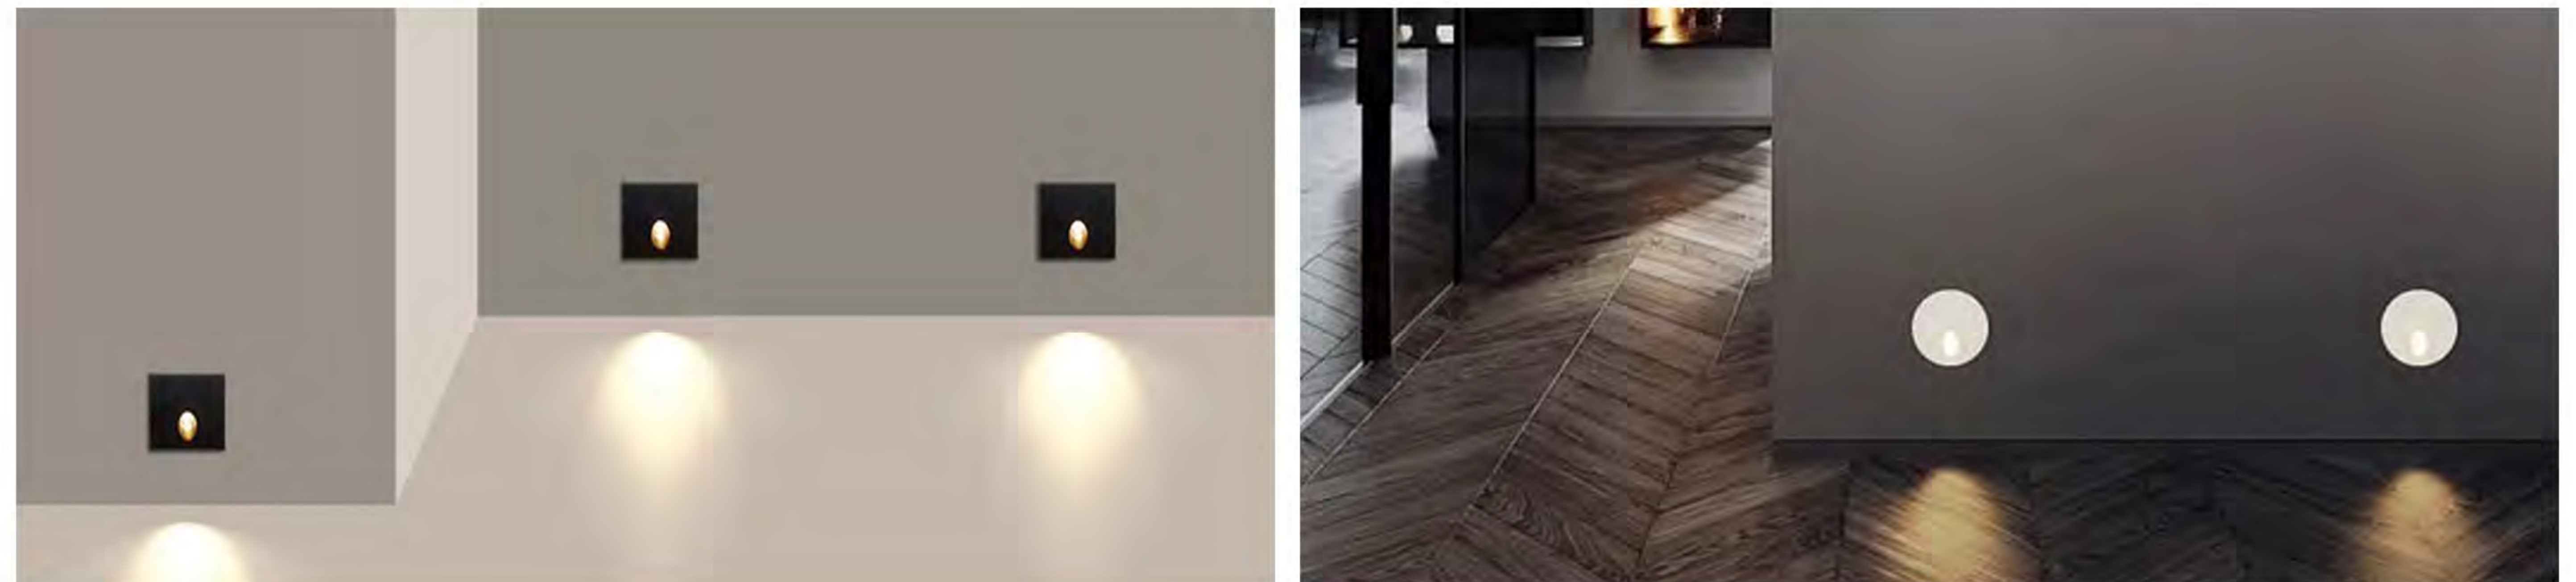

Technical Date (技术参数)

Item No.	Lamp Type	Power	LM	CCT	PF	Voltage	CRI	A	B	C (mm)
MB18-QJ14	LED	2W	140	2700K-6000K	0.6	AC110-265V	80-90	Ø70	-	60
MB18-QJ14-1	LED	2W	140	2700K-6000K	0.6	AC110-265V	80-90	70	70	60

MB18-QJ16

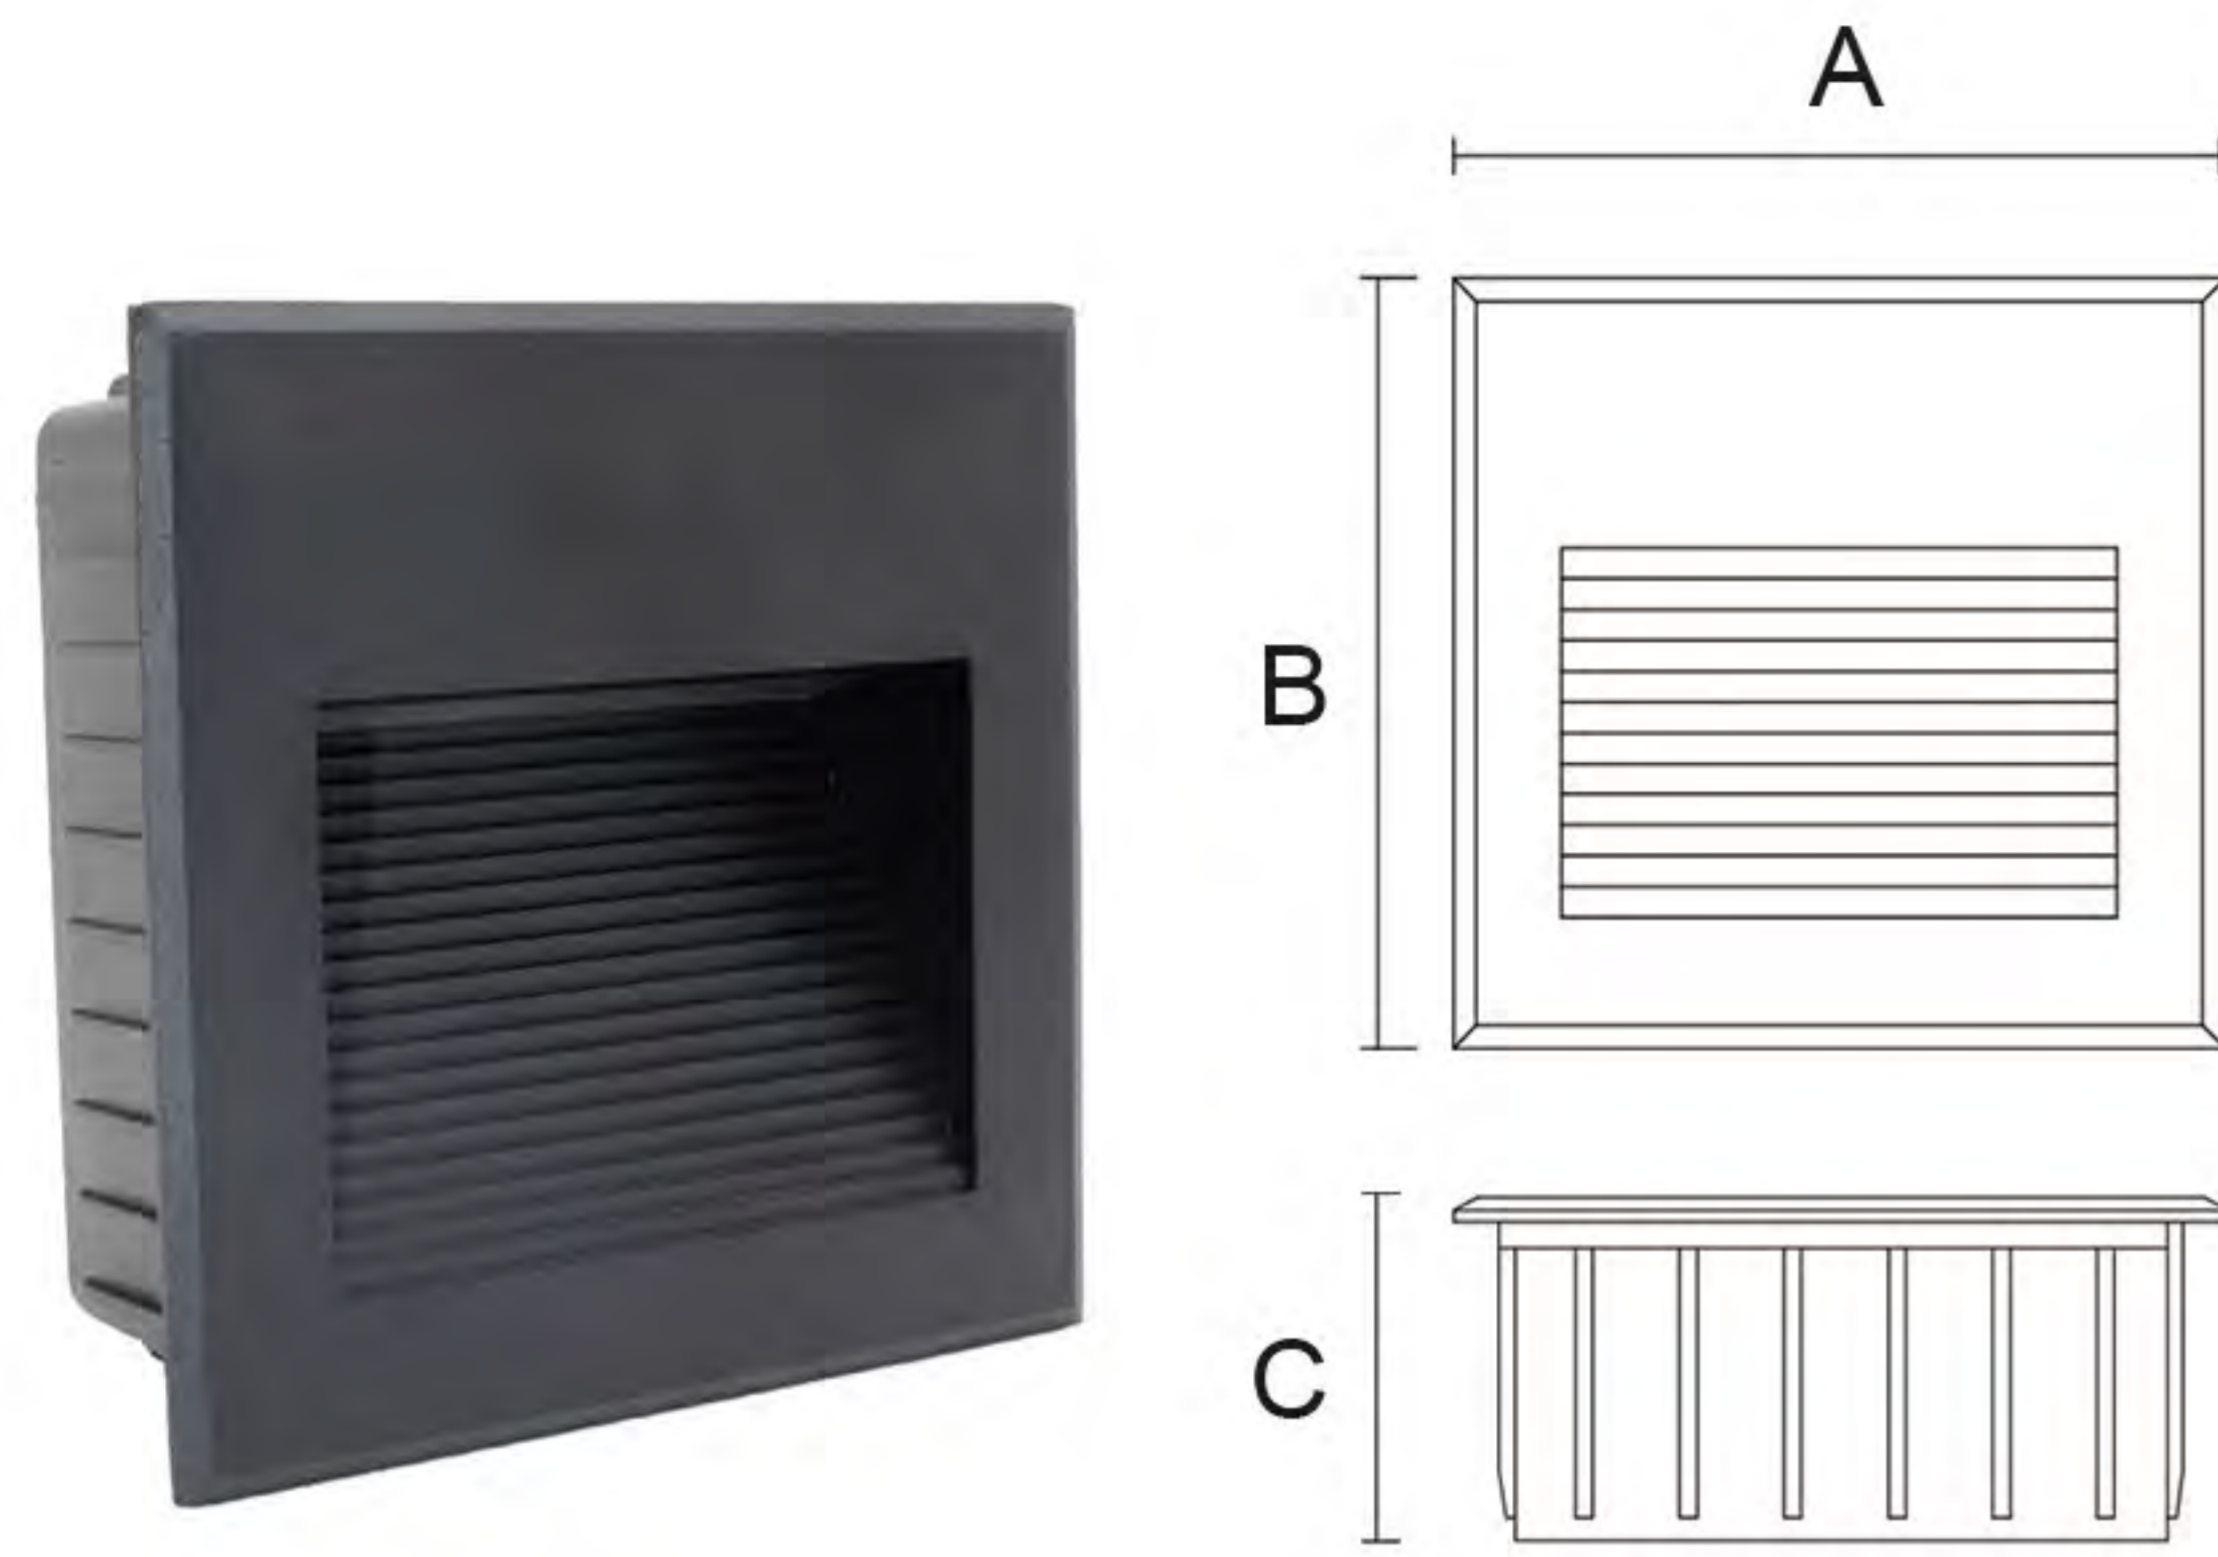

Features&Benefit (功能和优点)


Category (品类)	Step Light
Diffuser Material (扩散器材质)	Glass
Cover Material (面盖材质)	Aluminum
Operating mode (运行)	Built in
Steuerbar (开关)	On/Off
IP (防水等级)	54
Mounting type (安装类型)	Recessed
Mounting location (安装位置)	Wall
Application environment (应用环境)	Indoor/Outdoor
Cut out (预埋件)	150*150*60mm/105*105*60mm/ 155*155*50mm/215*215*55mm
Body color (表面颜色)	Black/Dark Gray/Sliver Gray




Product Description (产品描述)

Suitable for building facades, underground parking lot entrances and exits, parks, corridors, staircases, passages, courtyards and other various scenes; the lamps and lanterns adopt a downward light-emitting method, the light is soft and not harsh.

Lightmap (光影图)

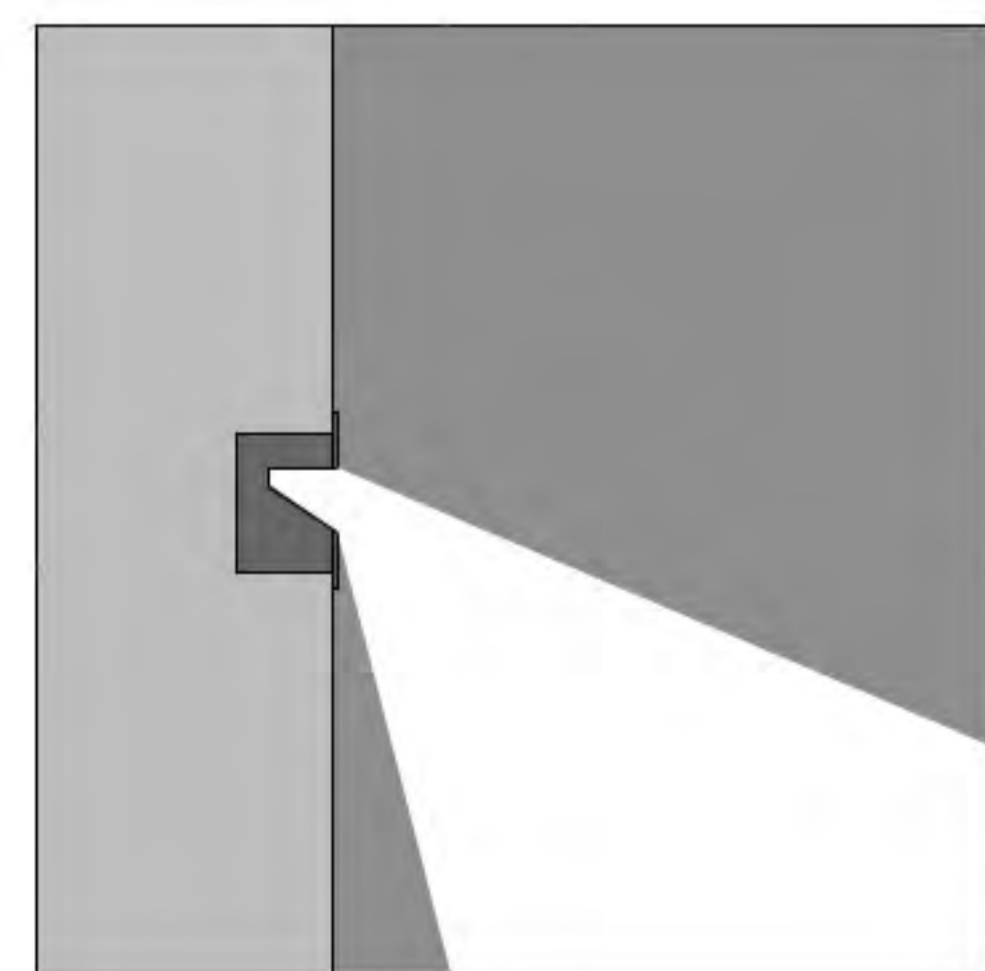


side view (侧面图)

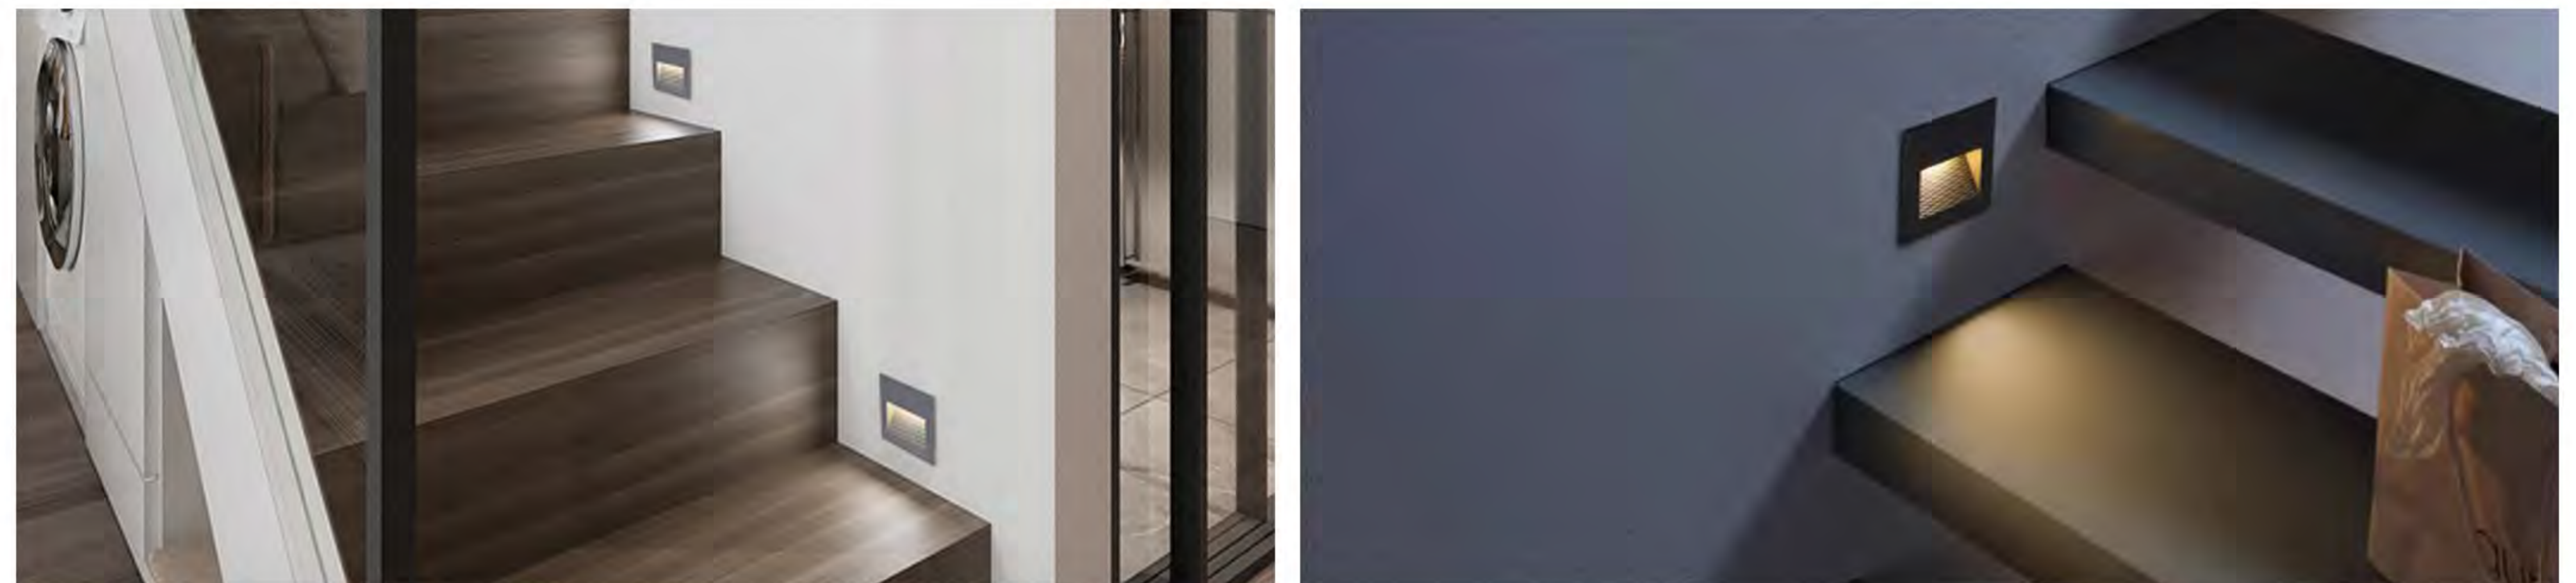

Technical Date (技术参数)

Item No.	Lamp Type	Power	LM	CCT	PF	Voltage	CRI	A	B	C (mm)
MB18-QJ16	LED	7W	490	2700K-6000K	0.6	AC110-265V	80-90	160	160	63
MB23-0305110	LED	5W	350	2700K-6000K	0.6	AC110-265V	80-90	110	110	65
MB23-0305220	LED	10W	700	2700K-6000K	0.6	AC110-265V	80-90	220	220	60

MB18-QJ17

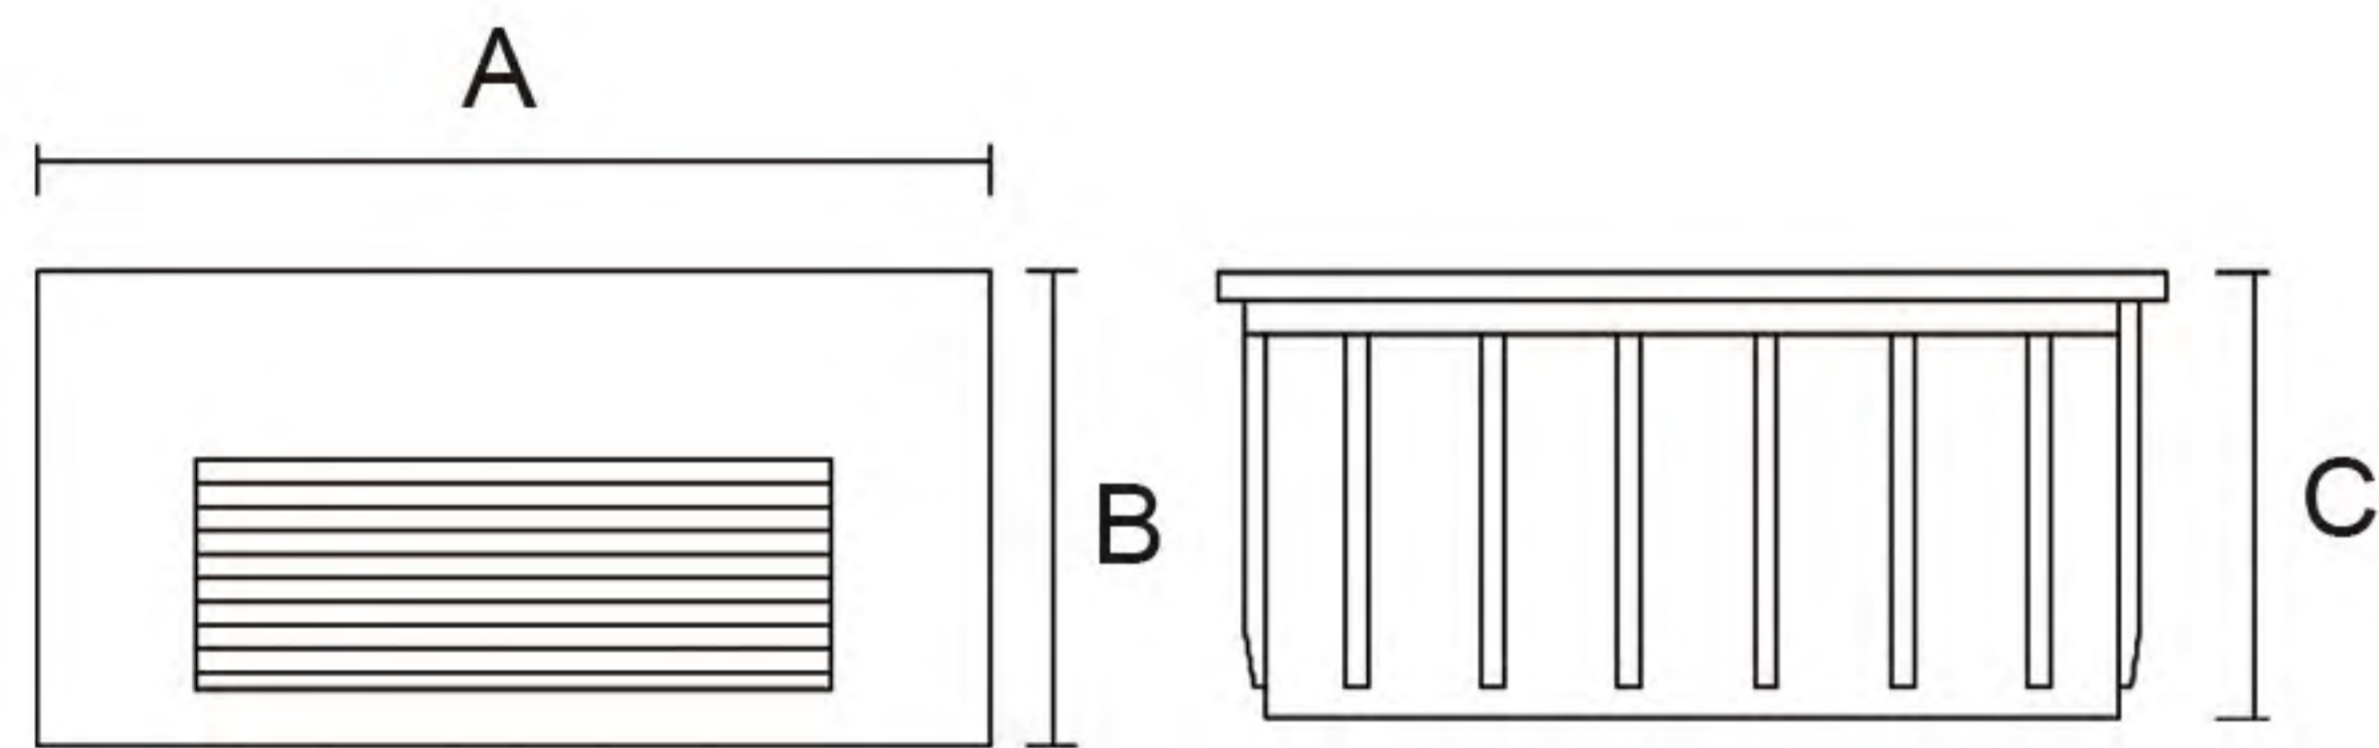

Features&Benefit (功能和优点)


Category (品类)	Step Light
Diffuser Material (扩散器材质)	Glass
Cover Material (面盖材质)	Aluminum
Operating mode (运行)	Built in
Steuerbar (开关)	On/Off
IP (防水等级)	54
Mounting type (安装类型)	Recessed
Mounting location (安装位置)	Wall
Application environment (应用环境)	Indoor/Outdoor
Cut out (预埋件)	110*43*50mm/135*67*50mm
Body color (表面颜色)	Black/Dark Gray/Sliver Gray




Product Description (产品描述)

Suitable for building facades, underground parking lot entrances and exits, parks, corridors, staircases, passages, courtyards and other various scenes; the lamps and lanterns adopt a downward light-emitting method, the light is soft and not harsh.

Lightmap (光影图)

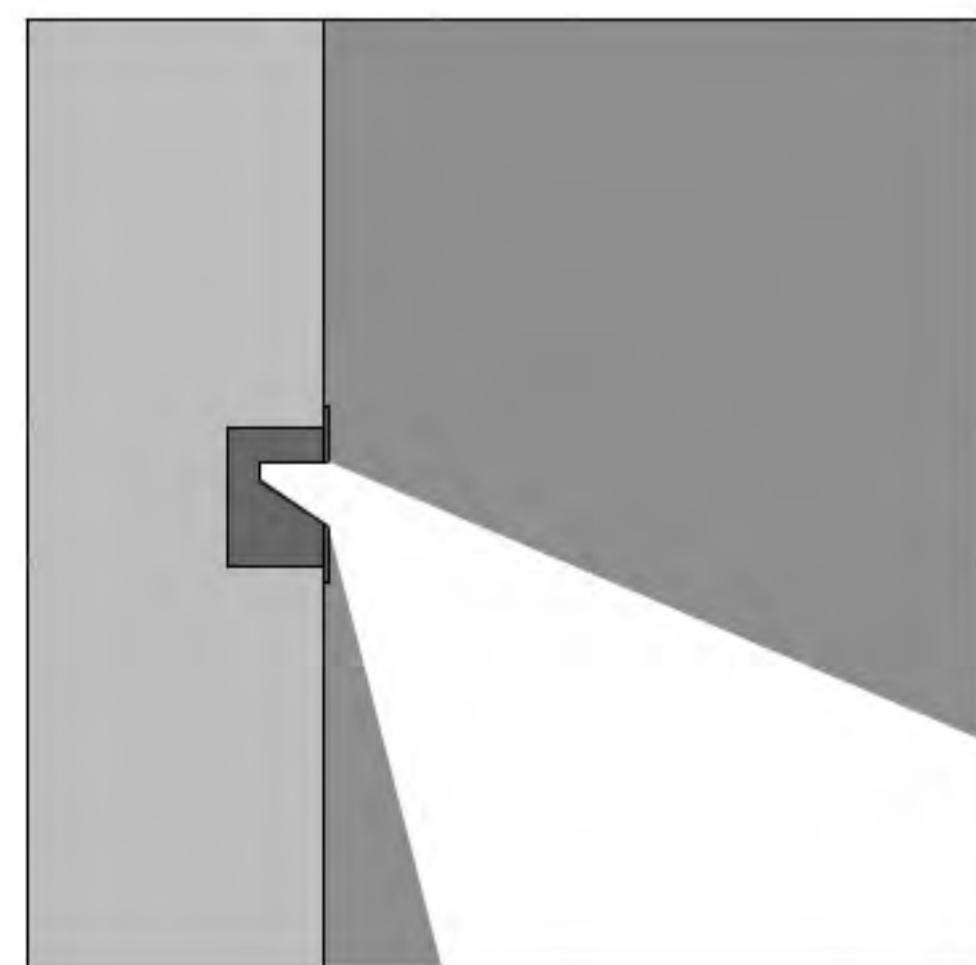

side view (侧面图)

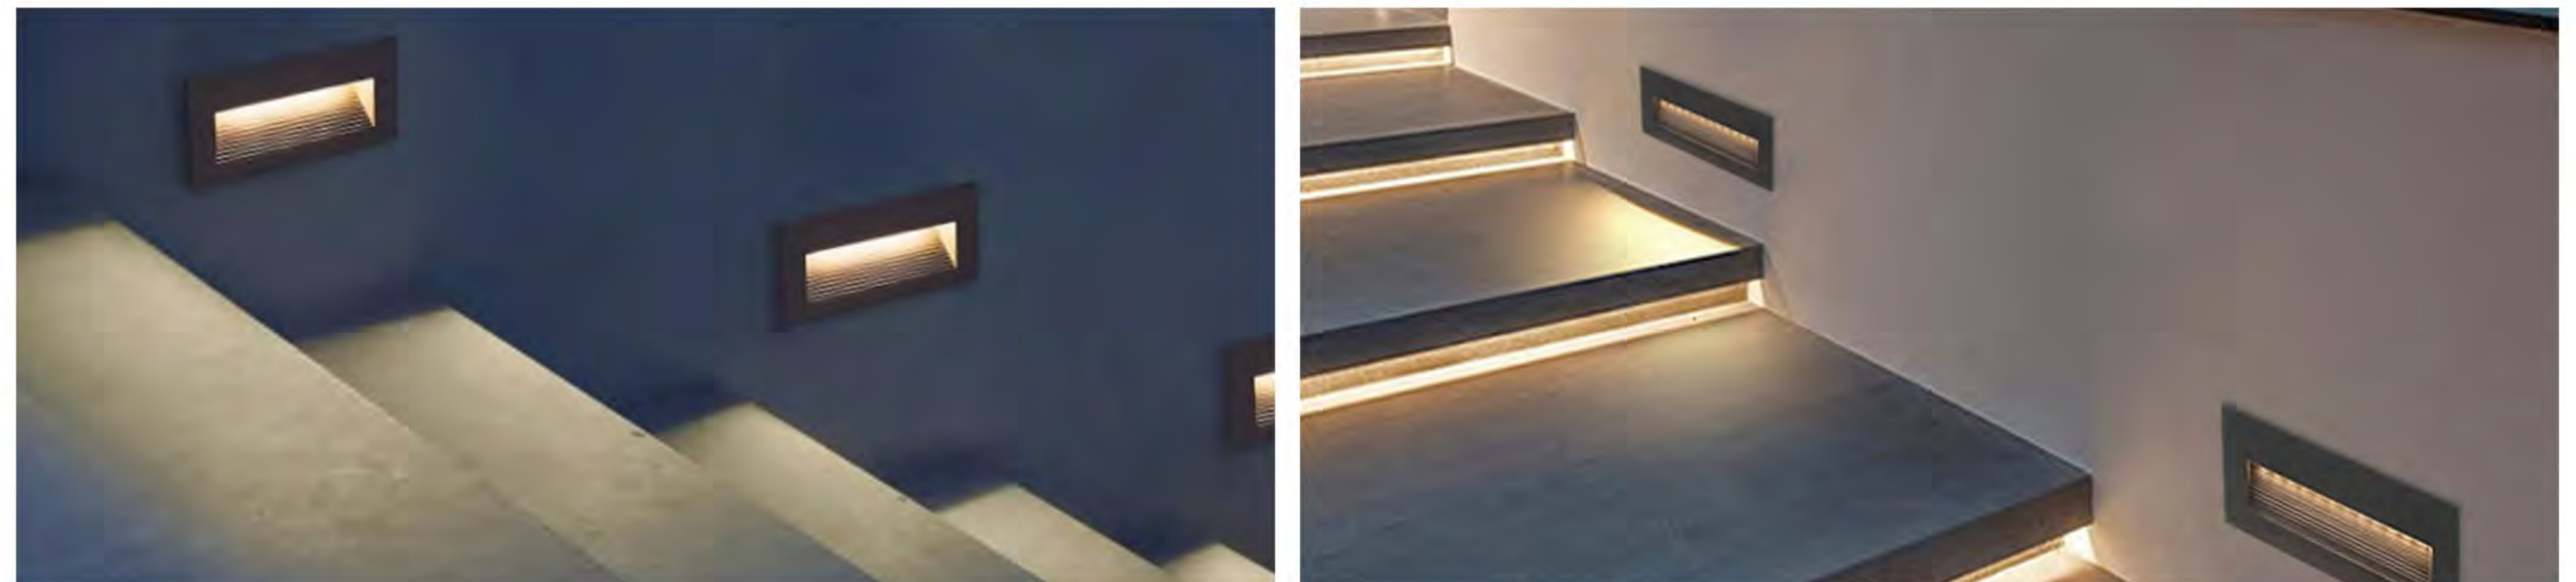


Technical Date (技术参数)

Item No.	Lamp Type	Power	LM	CCT	PF	Voltage	CRI	A	B	C (mm)
MB18-QJ17	LED	3W	210	2700K-6000K	0.6	AC110-265V	80-90	110	45	55
MB18-QJ18	LED	3W	210	2700K-6000K	0.6	AC110-265V	80-90	147	72	55


MB23-0301/MB23-0302



MB23-0301

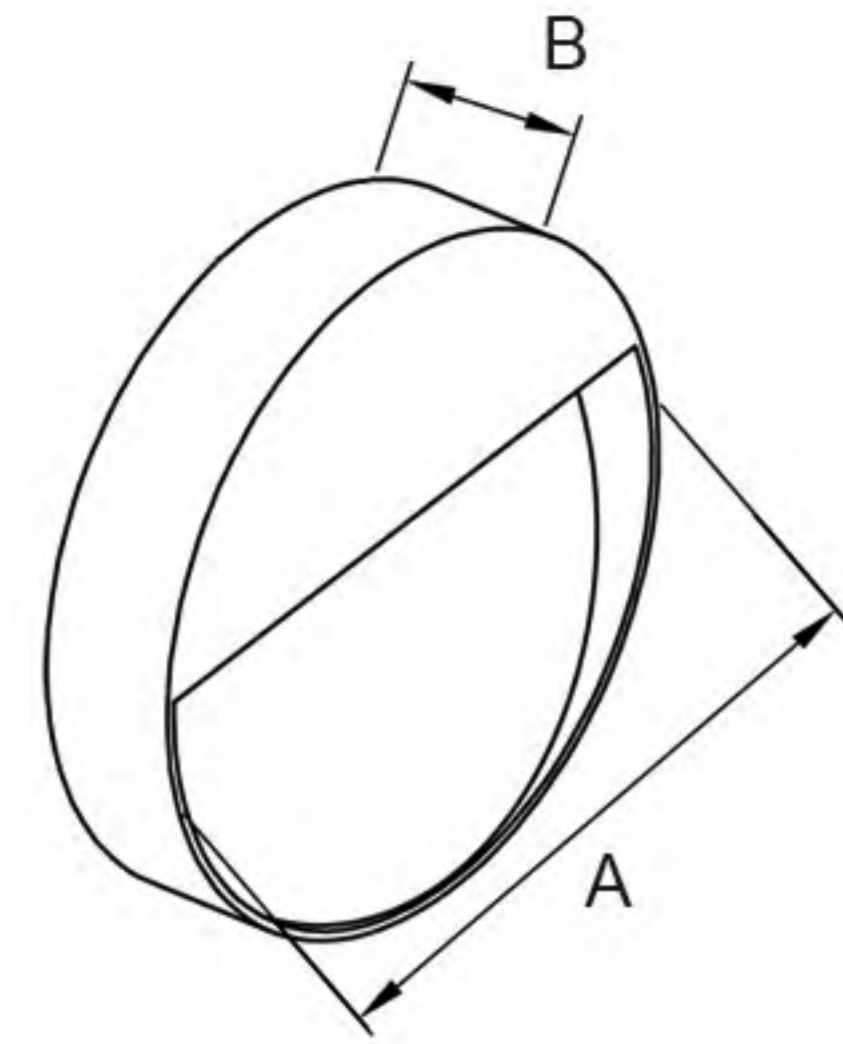

MB23-0302

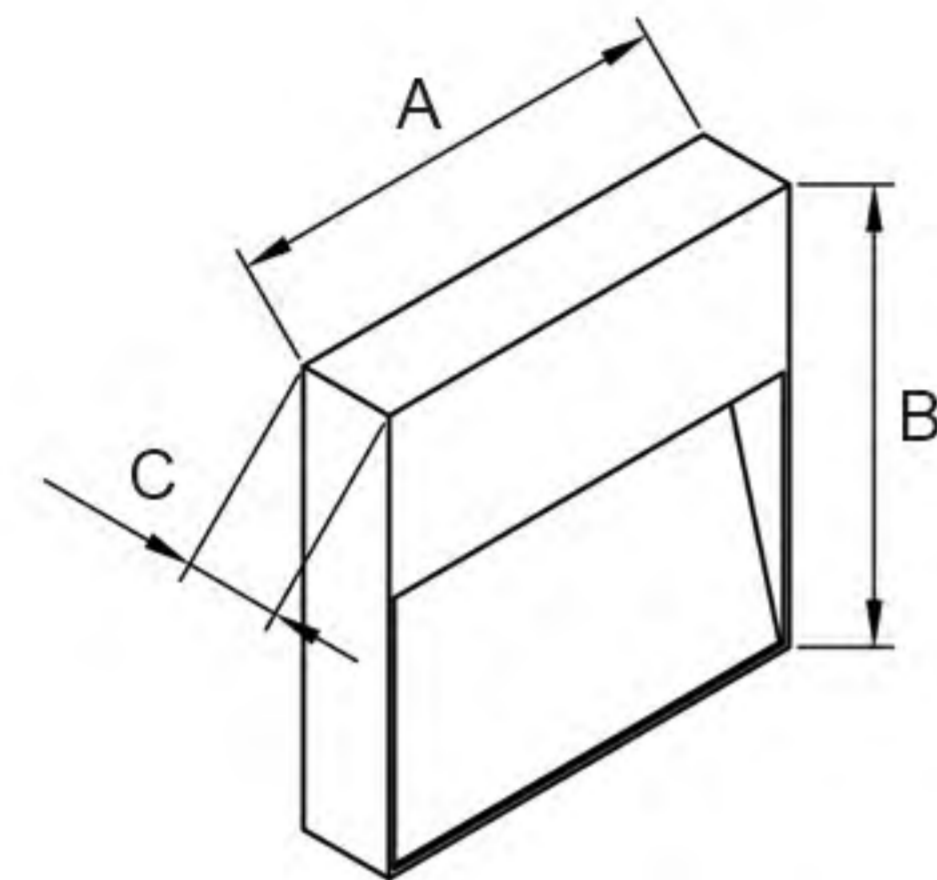

Features&Benefit (功能和优点)


Category (品类)	Step Light
Diffuser Material (扩散器材质)	Glass
Cover Material (面盖材质)	Aluminum
Operating mode (运行)	Built in
Steuerbar (开关)	On/Off
IP (防水等级)	54
Mounting type (安装类型)	Wall mounted
Mounting location (安装位置)	Wall
Application environment (应用环境)	Indoor/Outdoor
Body color (表面颜色)	Black/Dark Gray/Sliver Gray





Product Description (产品描述)

Suitable for building facades, underground parking lot entrances and exits, parks, corridors, staircases, passages, courtyards and other various scenes; the lamps and lanterns adopt a downward light-emitting method, the light is soft and not harsh.

Lightmap (光影图)

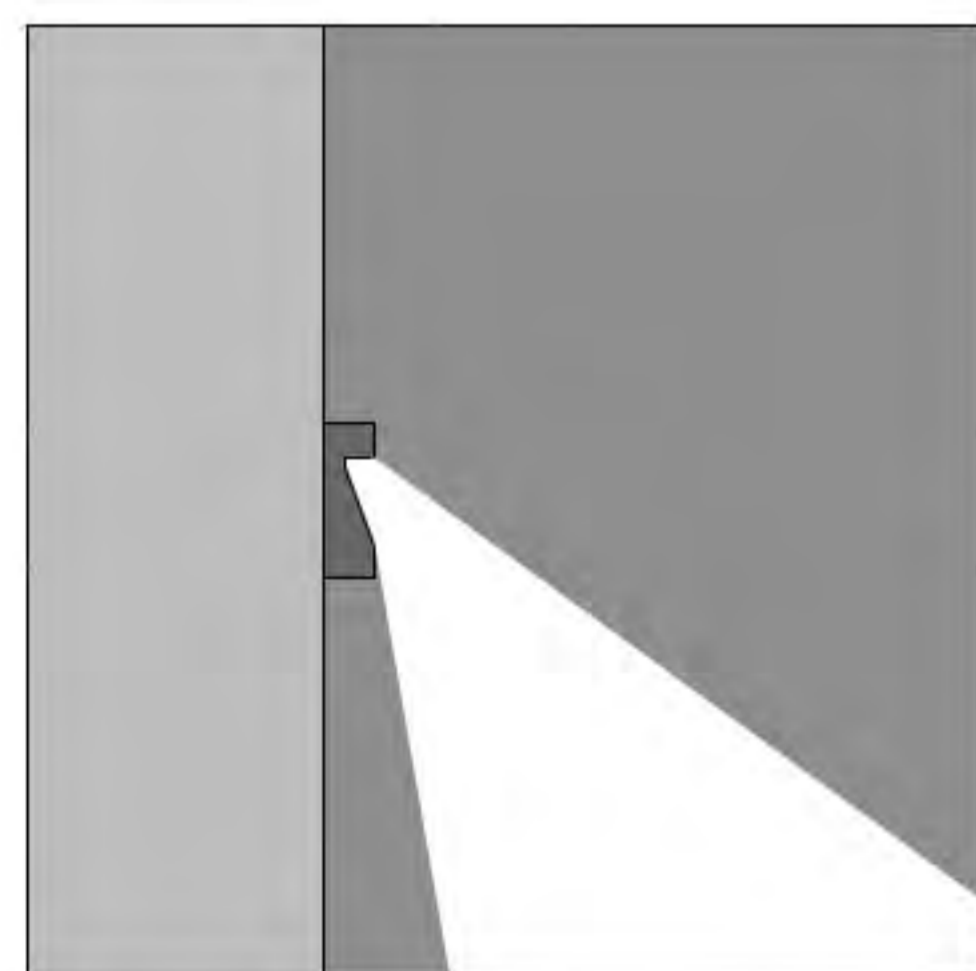


side view (侧面图)

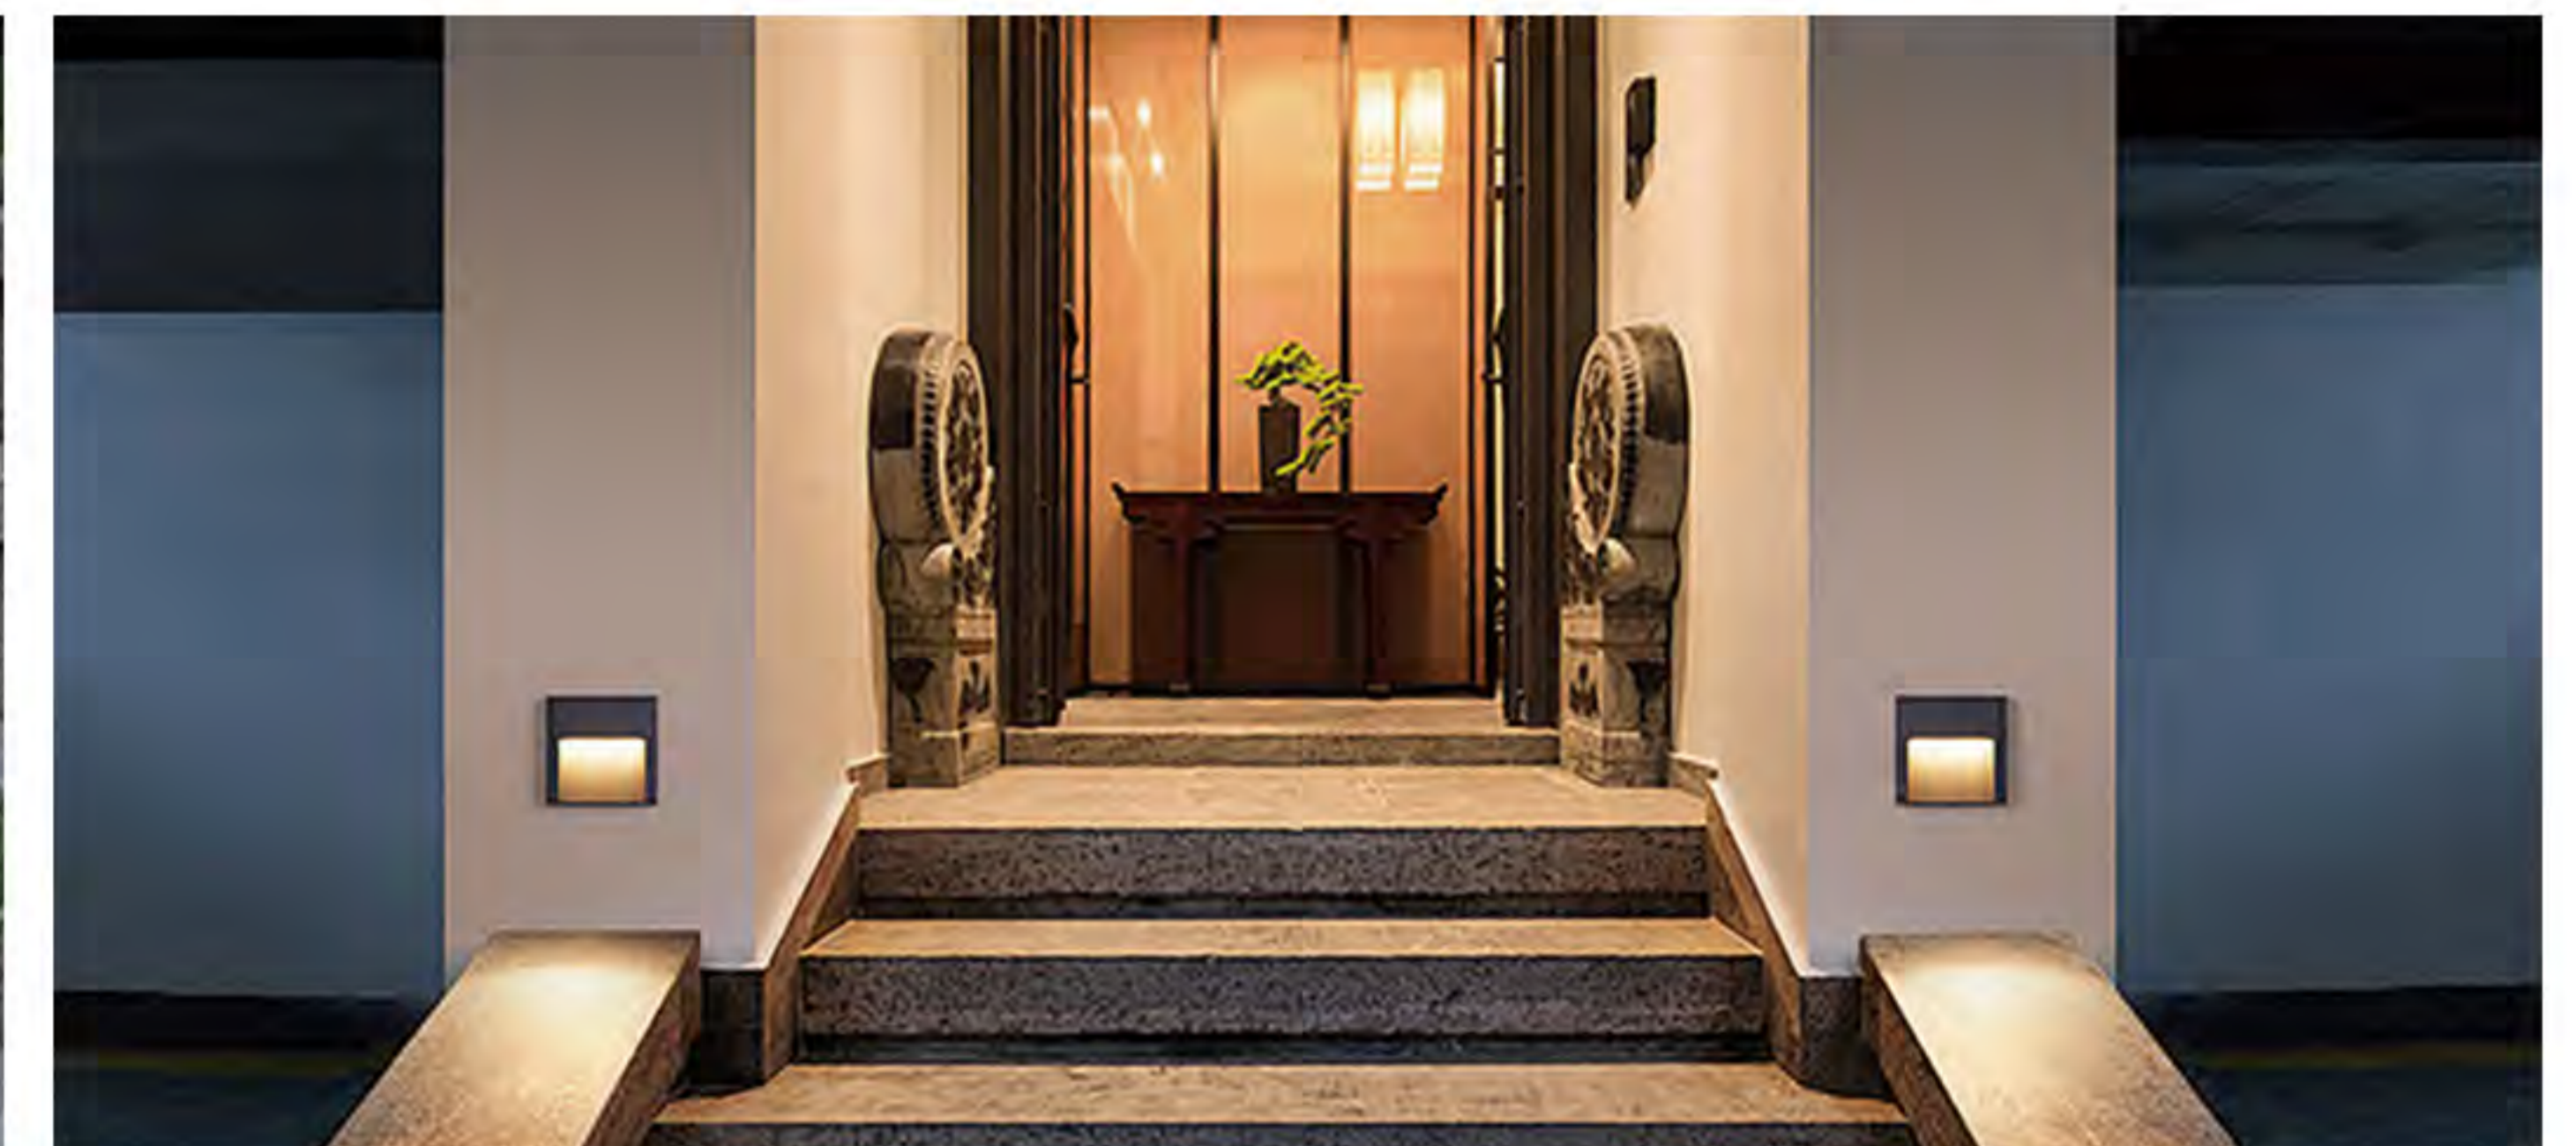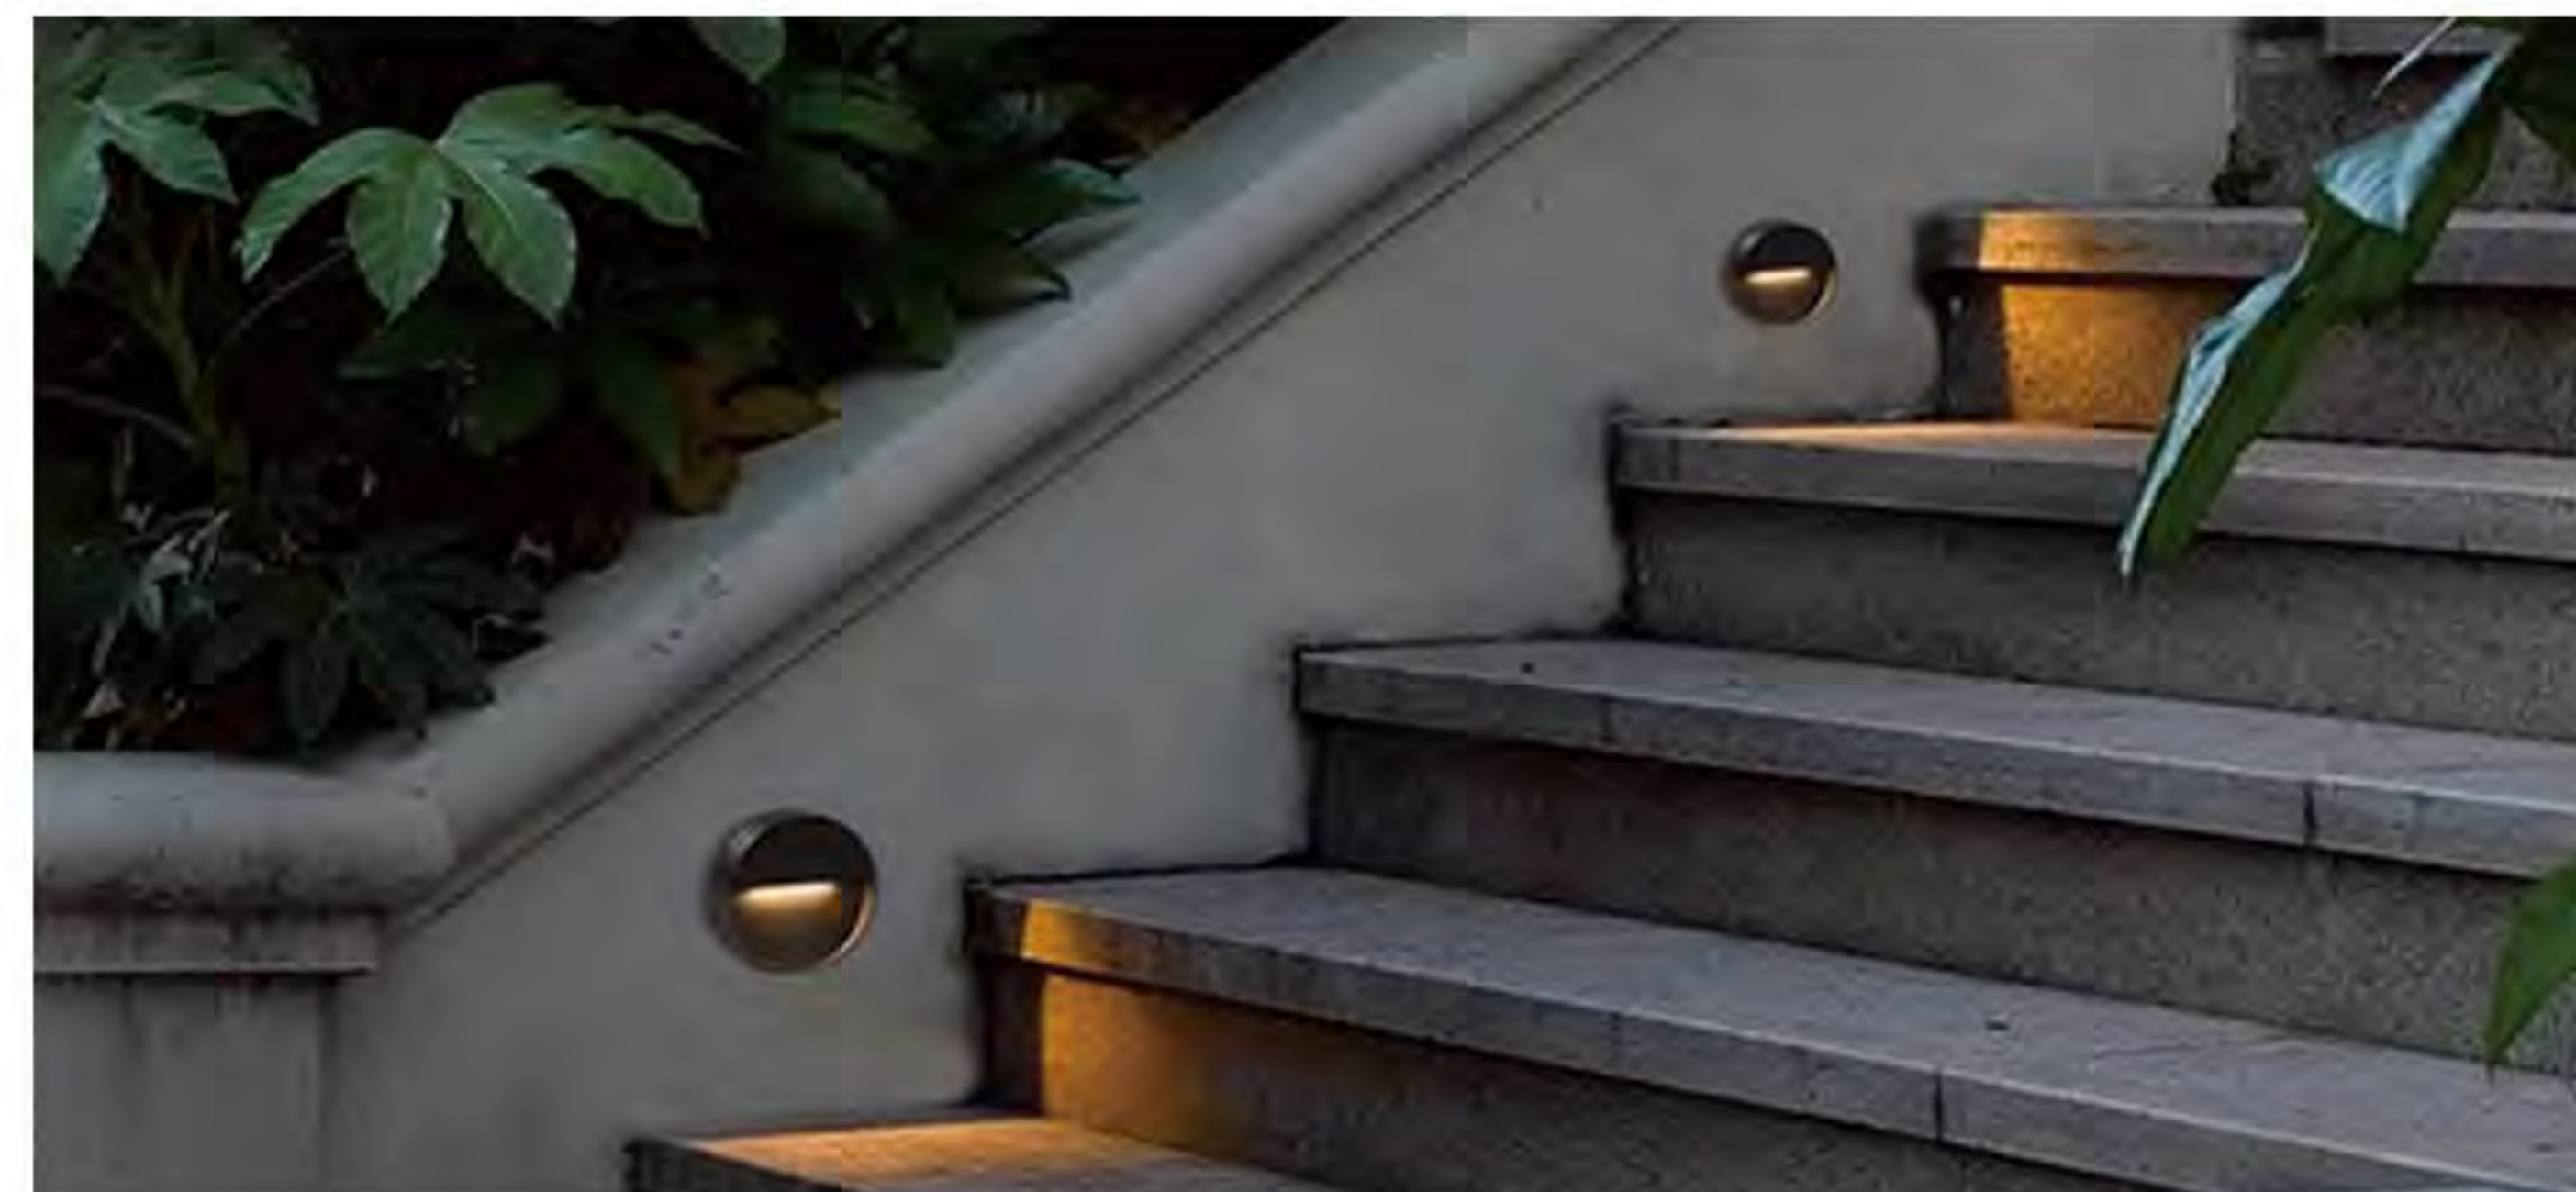

Technical Date (技术参数)

Item No.	Lamp Type	Power	LM	CCT	PF	Voltage	CRI	A	B	C (mm)
MB23-0301120	LED	3W	210	2700K-6000K	0.6	AC110-265V	80-90	Ø117	32	-
MB23-0301150	LED	7W	490	2700K-6000K	0.6	AC110-265V	80-90	Ø150	32	-
MB23-0301200	LED	10W	700	2700K-6000K	0.6	AC110-265V	80-90	Ø200	32	-
MB23-0302120	LED	3W	210	2700K-6000K	0.6	AC110-265V	80-90	117	120	32
MB23-0302150	LED	7W	490	2700K-6000K	0.6	AC110-265V	80-90	150	150	32
MB23-0302200	LED	10W	700	2700K-6000K	0.6	AC110-265V	80-90	200	200	32

MB23-0303

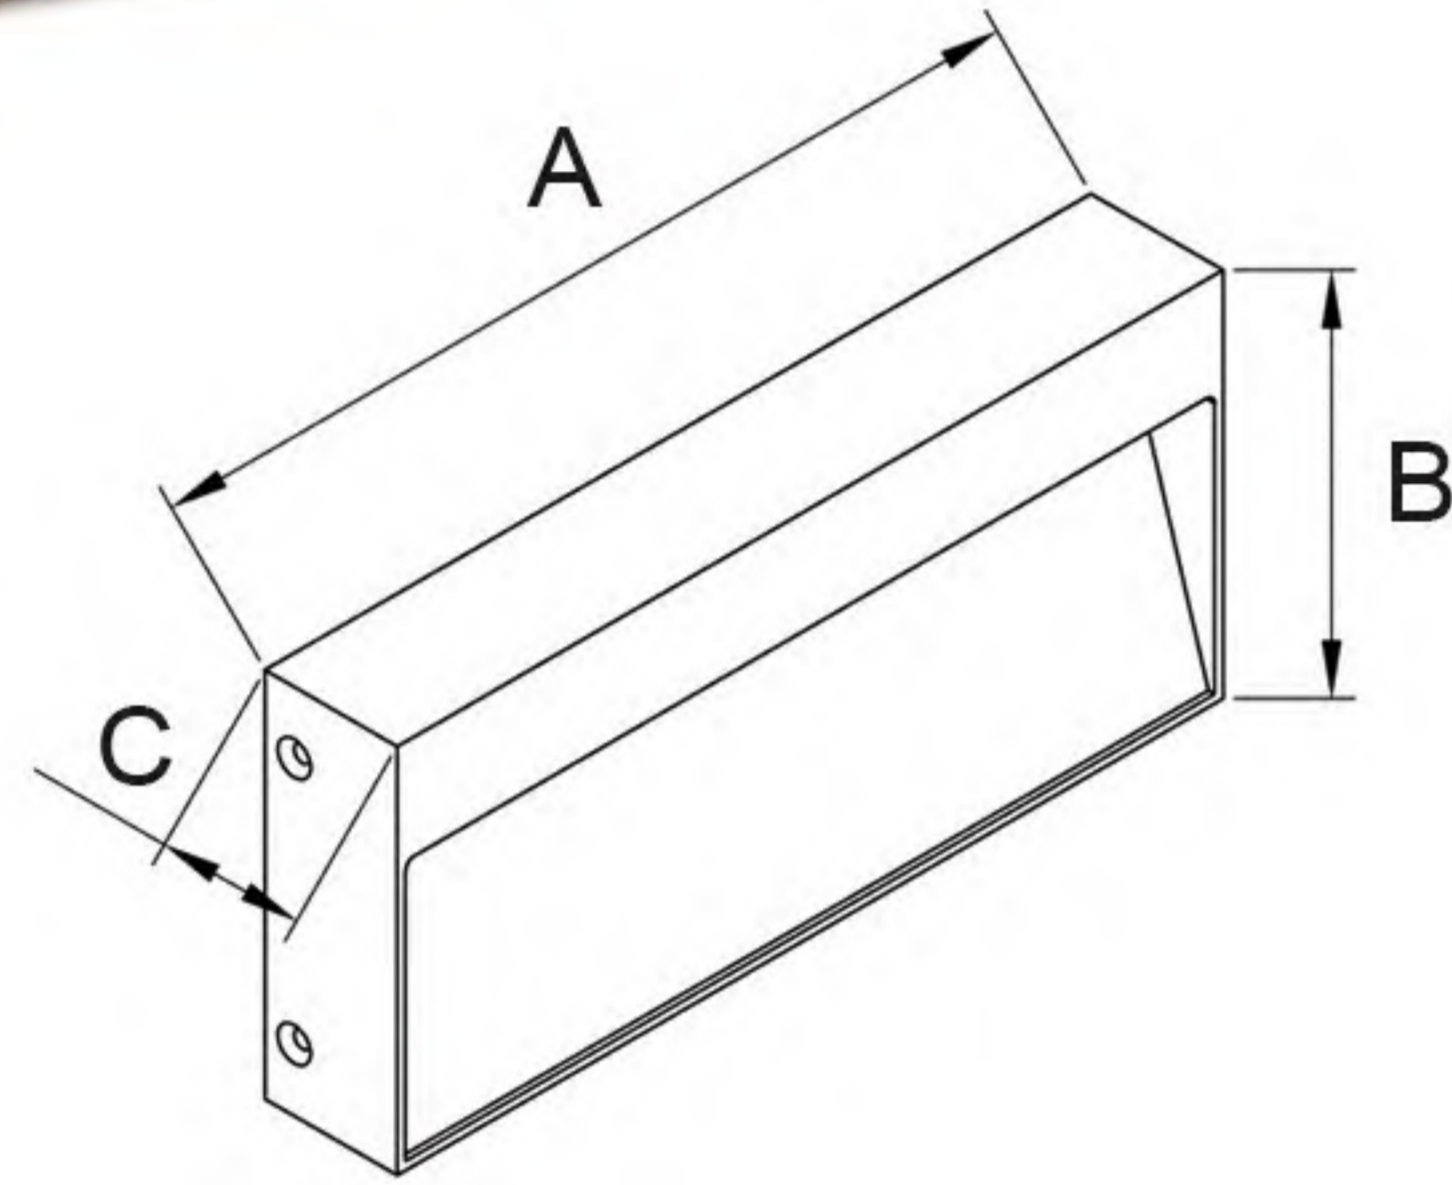

Features&Benefit (功能和优点)


Category (品类)	Step Light
Diffuser Material (扩散器材质)	Glass
Cover Material (面盖材质)	Aluminum
Operating mode (运行)	Built in
Steuerbar (开关)	On/Off
IP (防水等级)	54
Mounting type (安装类型)	Wall mounted
Mounting location (安装位置)	Wall
Application environment (应用环境)	Indoor/Outdoor
Body color (表面颜色)	Black/Dark Gray/Sliver Gray



Product Description (产品描述)

Suitable for building facades, underground parking lot entrances and exits, parks, corridors, staircases, passages, courtyards and other various scenes; the lamps and lanterns adopt a downward light-emitting method, the light is soft and not harsh.

Lightmap (光影图)

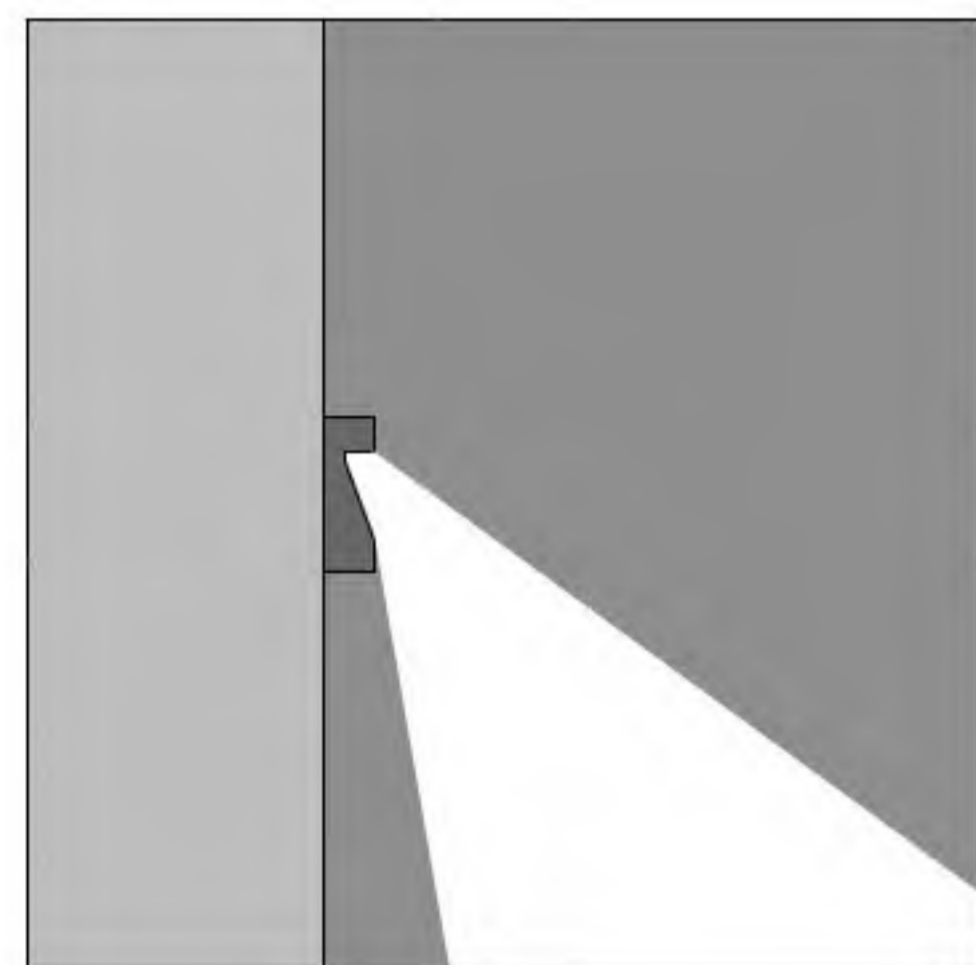


side view (侧面图)



Technical Date (技术参数)

Item No.	Lamp Type	Power	LM	CCT	PF	Voltage	CRI	A	B	C (mm)
MB23-0303	LED	10W	700	2700K-6000K	0.6	AC110-265V	80-90	200	90	32

MB23-0304

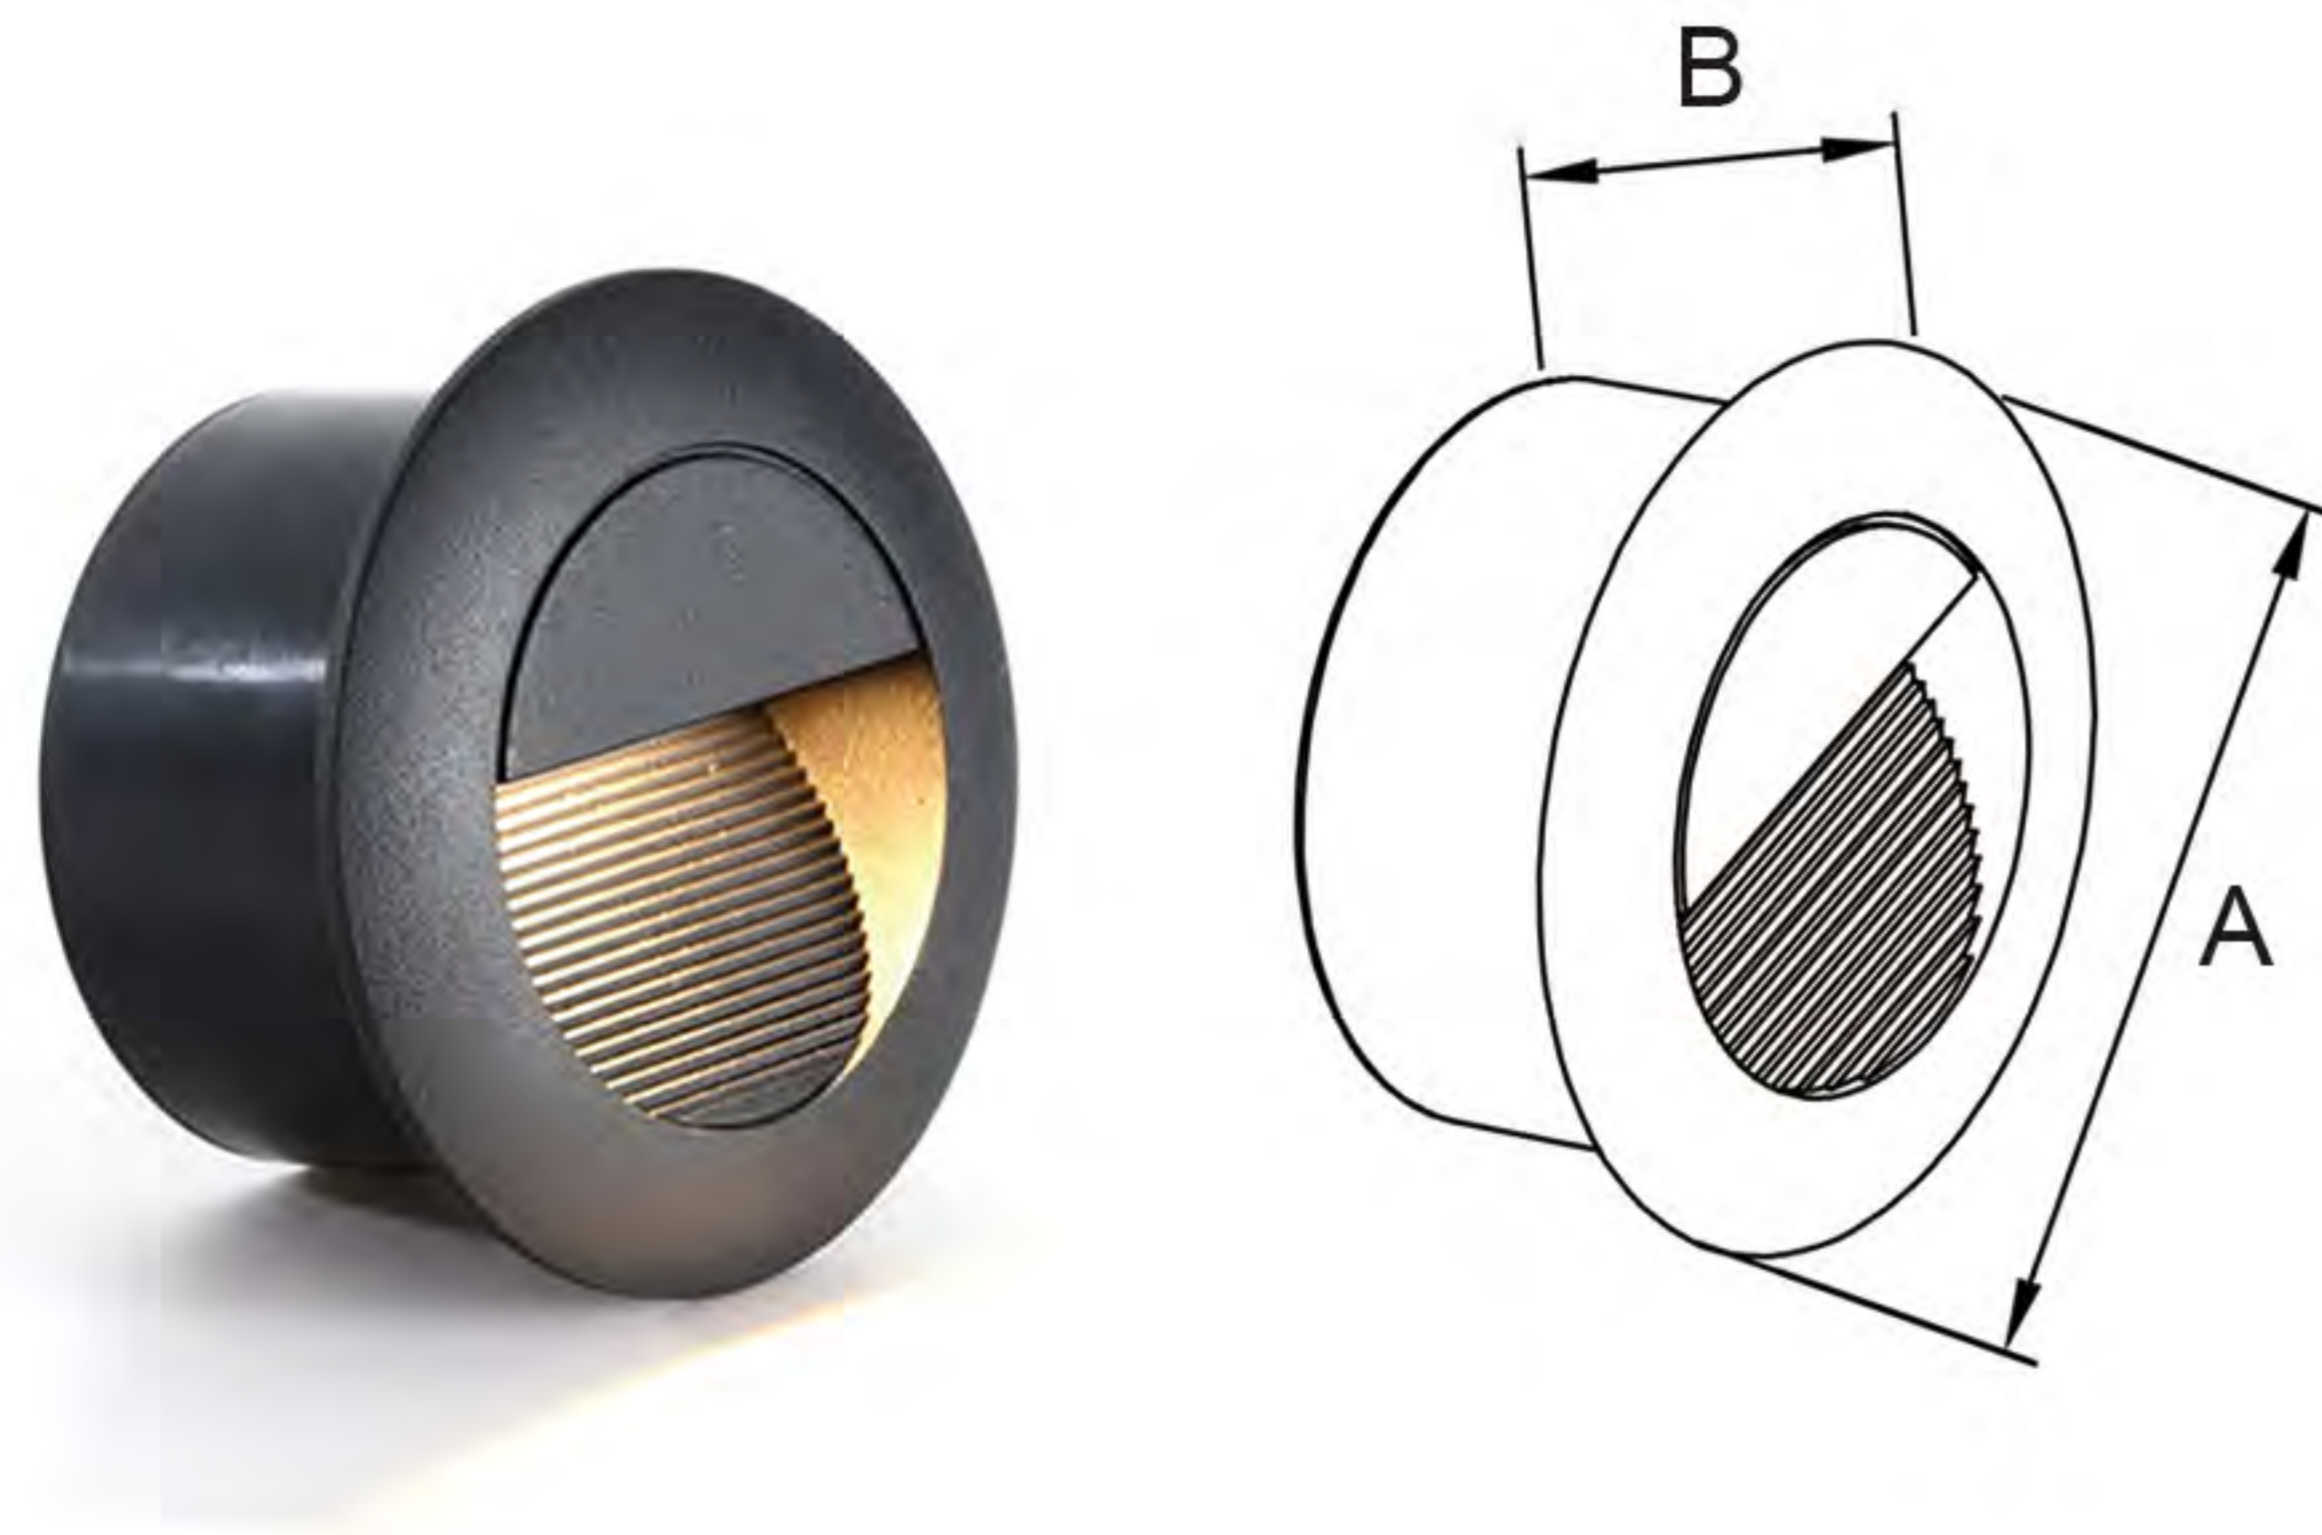

Features&Benefit (功能和优点)


Category (品类)	Step Light
Diffuser Material (扩散器材质)	Glass
Cover Material (面盖材质)	Aluminum
Operating mode (运行)	Built in
Steuerbar (开关)	On/Off
IP (防水等级)	54
Mounting type (安装类型)	Recessed
Mounting location (安装位置)	Wall
Application environment (应用环境)	Indoor/Outdoor
Cut out (预埋件)	Ø63*H50mm/Ø77*H50mm/Ø120*H50mm
Body color (表面颜色)	Black/Dark Gray/Sliver Gray




Product Description (产品描述)

Suitable for building facades, underground parking lot entrances and exits, parks, corridors, staircases, passages, courtyards and other various scenes; the lamps and lanterns adopt a downward light-emitting method, the light is soft and not harsh.

Lightmap (光影图)

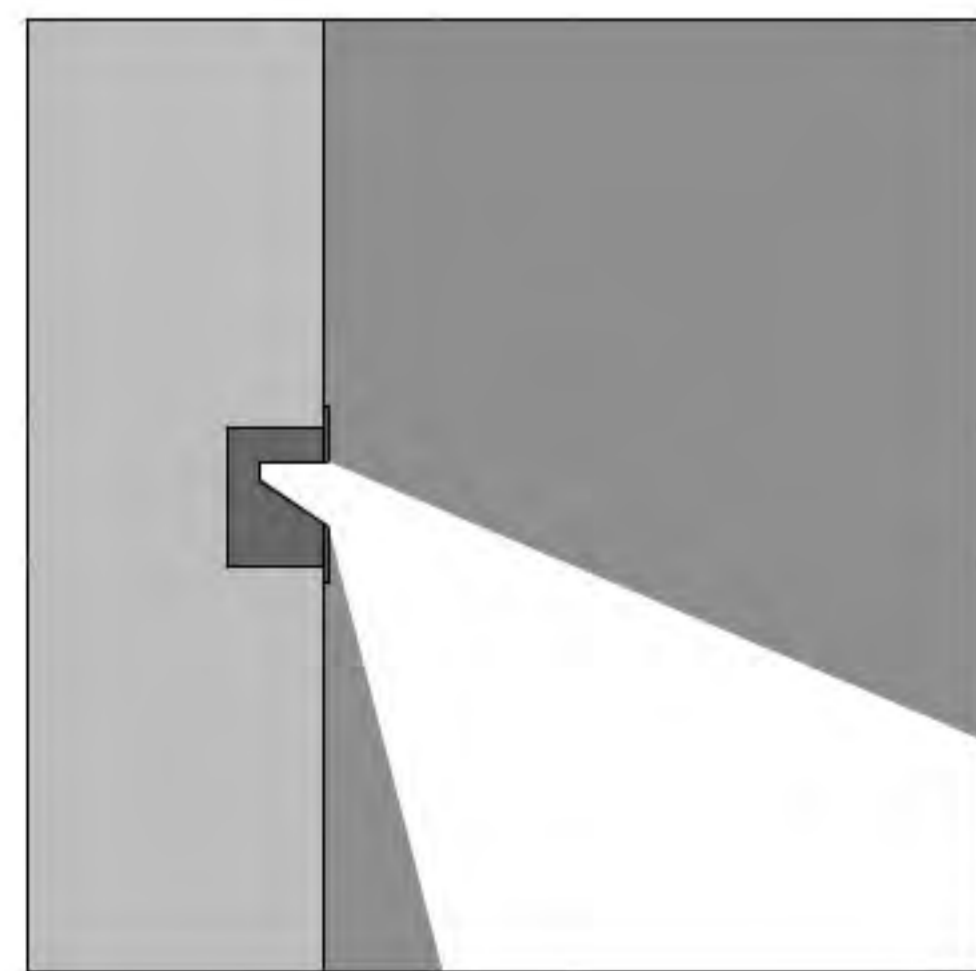


side view (侧面图)

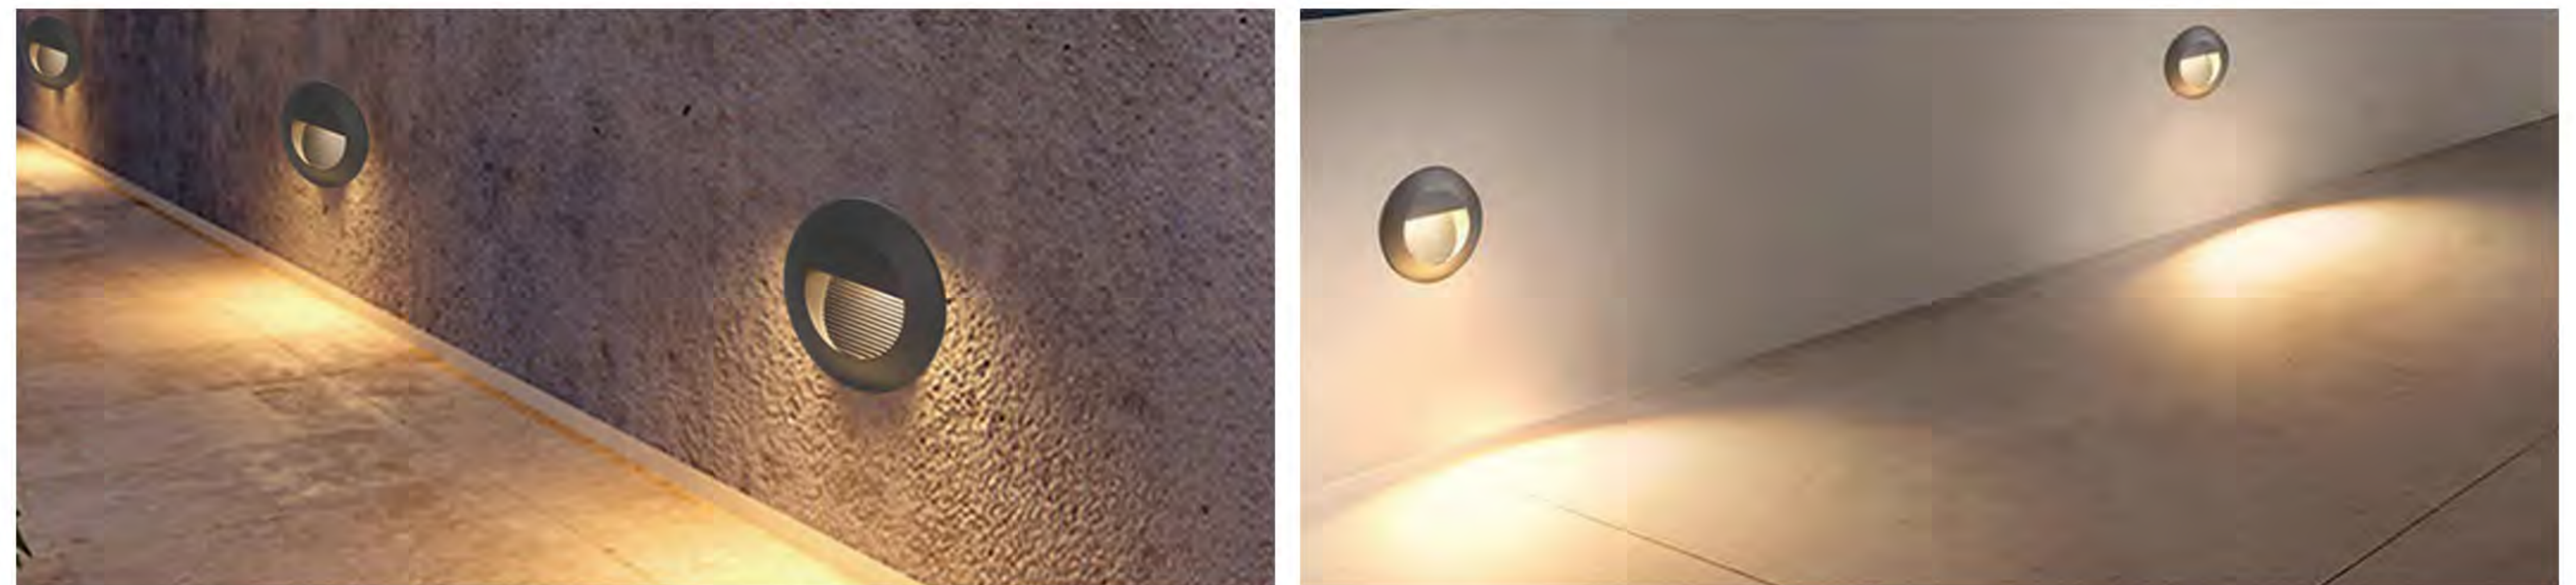

Technical Date (技术参数)

Item No.	Lamp Type	Power	LM	CCT	PF	Voltage	CRI	A	B	C (mm)
MB23-030468	LED	3W	210	2700K-6000K	0.6	AC110-265V	80-90	Ø68	55	-
MB23-030482	LED	3W	210	2700K-6000K	0.6	AC110-265V	80-90	Ø82	55	-
MB23-0304125	LED	5W	350	2700K-6000K	0.6	AC110-265V	80-90	Ø125	55	-

MB23-0311

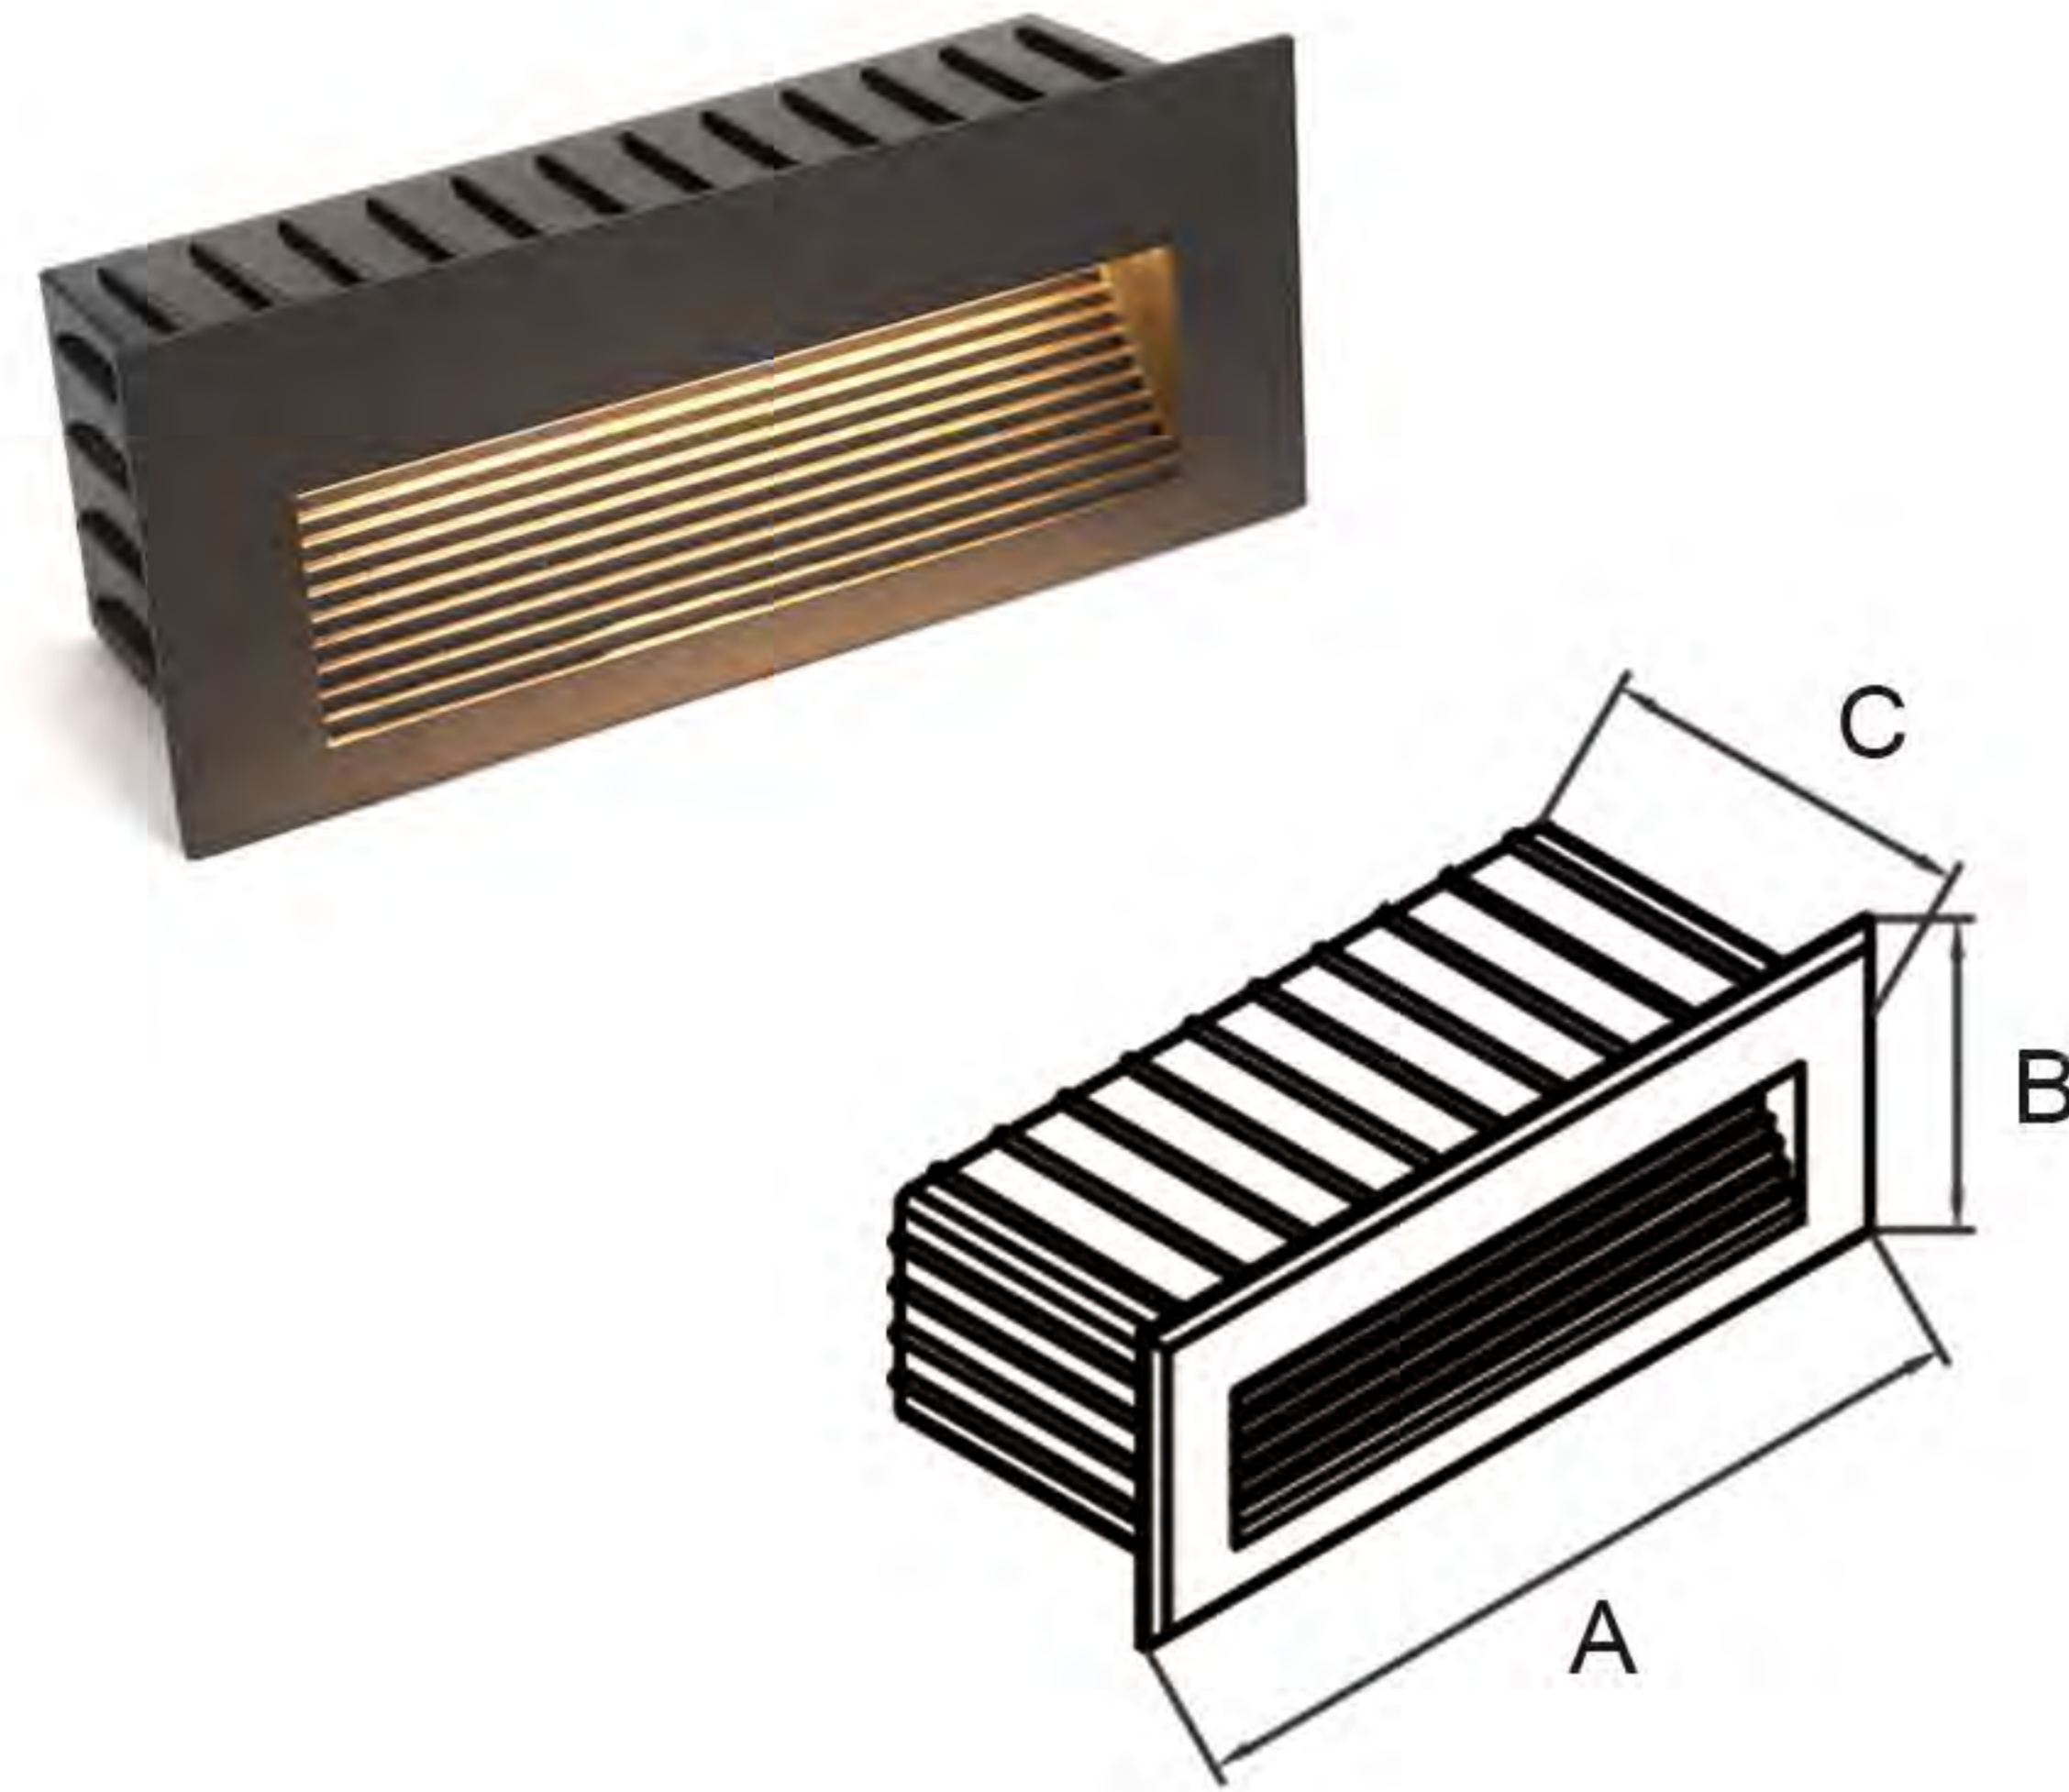

Features&Benefit (功能和优点)


Category (品类)	Step Light
Diffuser Material (扩散器材质)	Glass
Cover Material (面盖材质)	Aluminum
Operating mode (运行)	Built in
Steuerbar (开关)	On/Off
IP (防水等级)	54
Mounting type (安装类型)	Recessed
Mounting location (安装位置)	Wall
Application environment (应用环境)	Indoor/Outdoor
Cut out (预埋件)	130*40*50mm/157*85*55mm/160*53*50mm/ 170*70*45mm/185*67*46mm/205*105*55mm/ 240*72*50mm/247*63*50mm
Body color (表面颜色)	Black/Dark Gray/Sliver Gray



Product Description (产品描述)

Suitable for building facades, underground parking lot entrances and exits, parks, corridors, staircases, passages, courtyards and other various scenes; the lamps and lanterns adopt a downward light-emitting method, the light is soft and not harsh.

Lightmap (光影图)

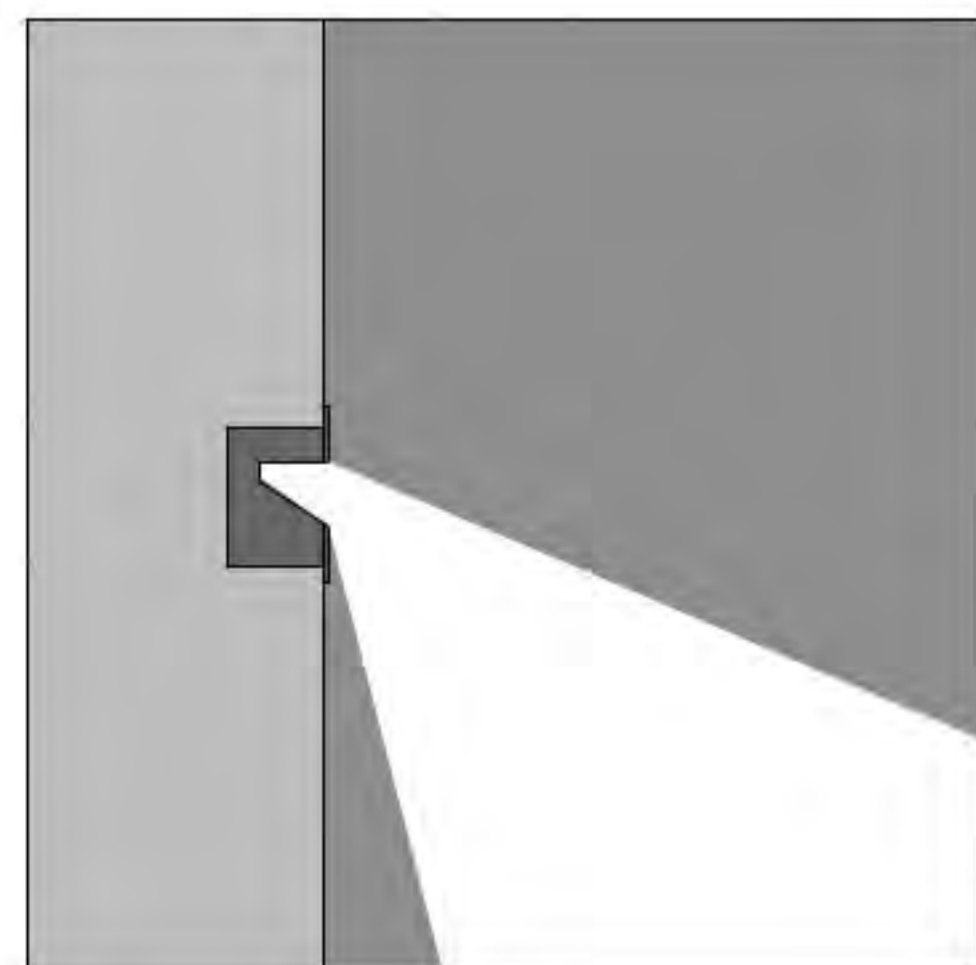


side view (侧面图)

Technical Date (技术参数)

Item No.	Lamp Type	Power	LM	CCT	PF	Voltage	CRI	A	B	C (mm)
MB23-0311	LED	5W	350	2700K-6000K	0.6	AC110-265V	80-90	135	50	55
MB23-0312	LED	7W	490	2700K-6000K	0.6	AC110-265V	80-90	162	100	58
MB23-0313	LED	7W	490	2700K-6000K	0.6	AC110-265V	80-90	170	70	55
MB23-0314	LED	7W	490	2700K-6000K	0.6	AC110-265V	80-90	180	86	50
MB23-0315	LED	10W	700	2700K-6000K	0.6	AC110-265V	80-90	206	86	50
MB23-0316	LED	10W	700	2700K-6000K	0.6	AC110-265V	80-90	215	125	57
MB23-0317	LED	10W	700	2700K-6000K	0.6	AC110-265V	80-90	250	95	55
MB23-0318	LED	10W	700	2700K-6000K	0.6	AC110-265V	80-90	255	75	55

MB23-0321

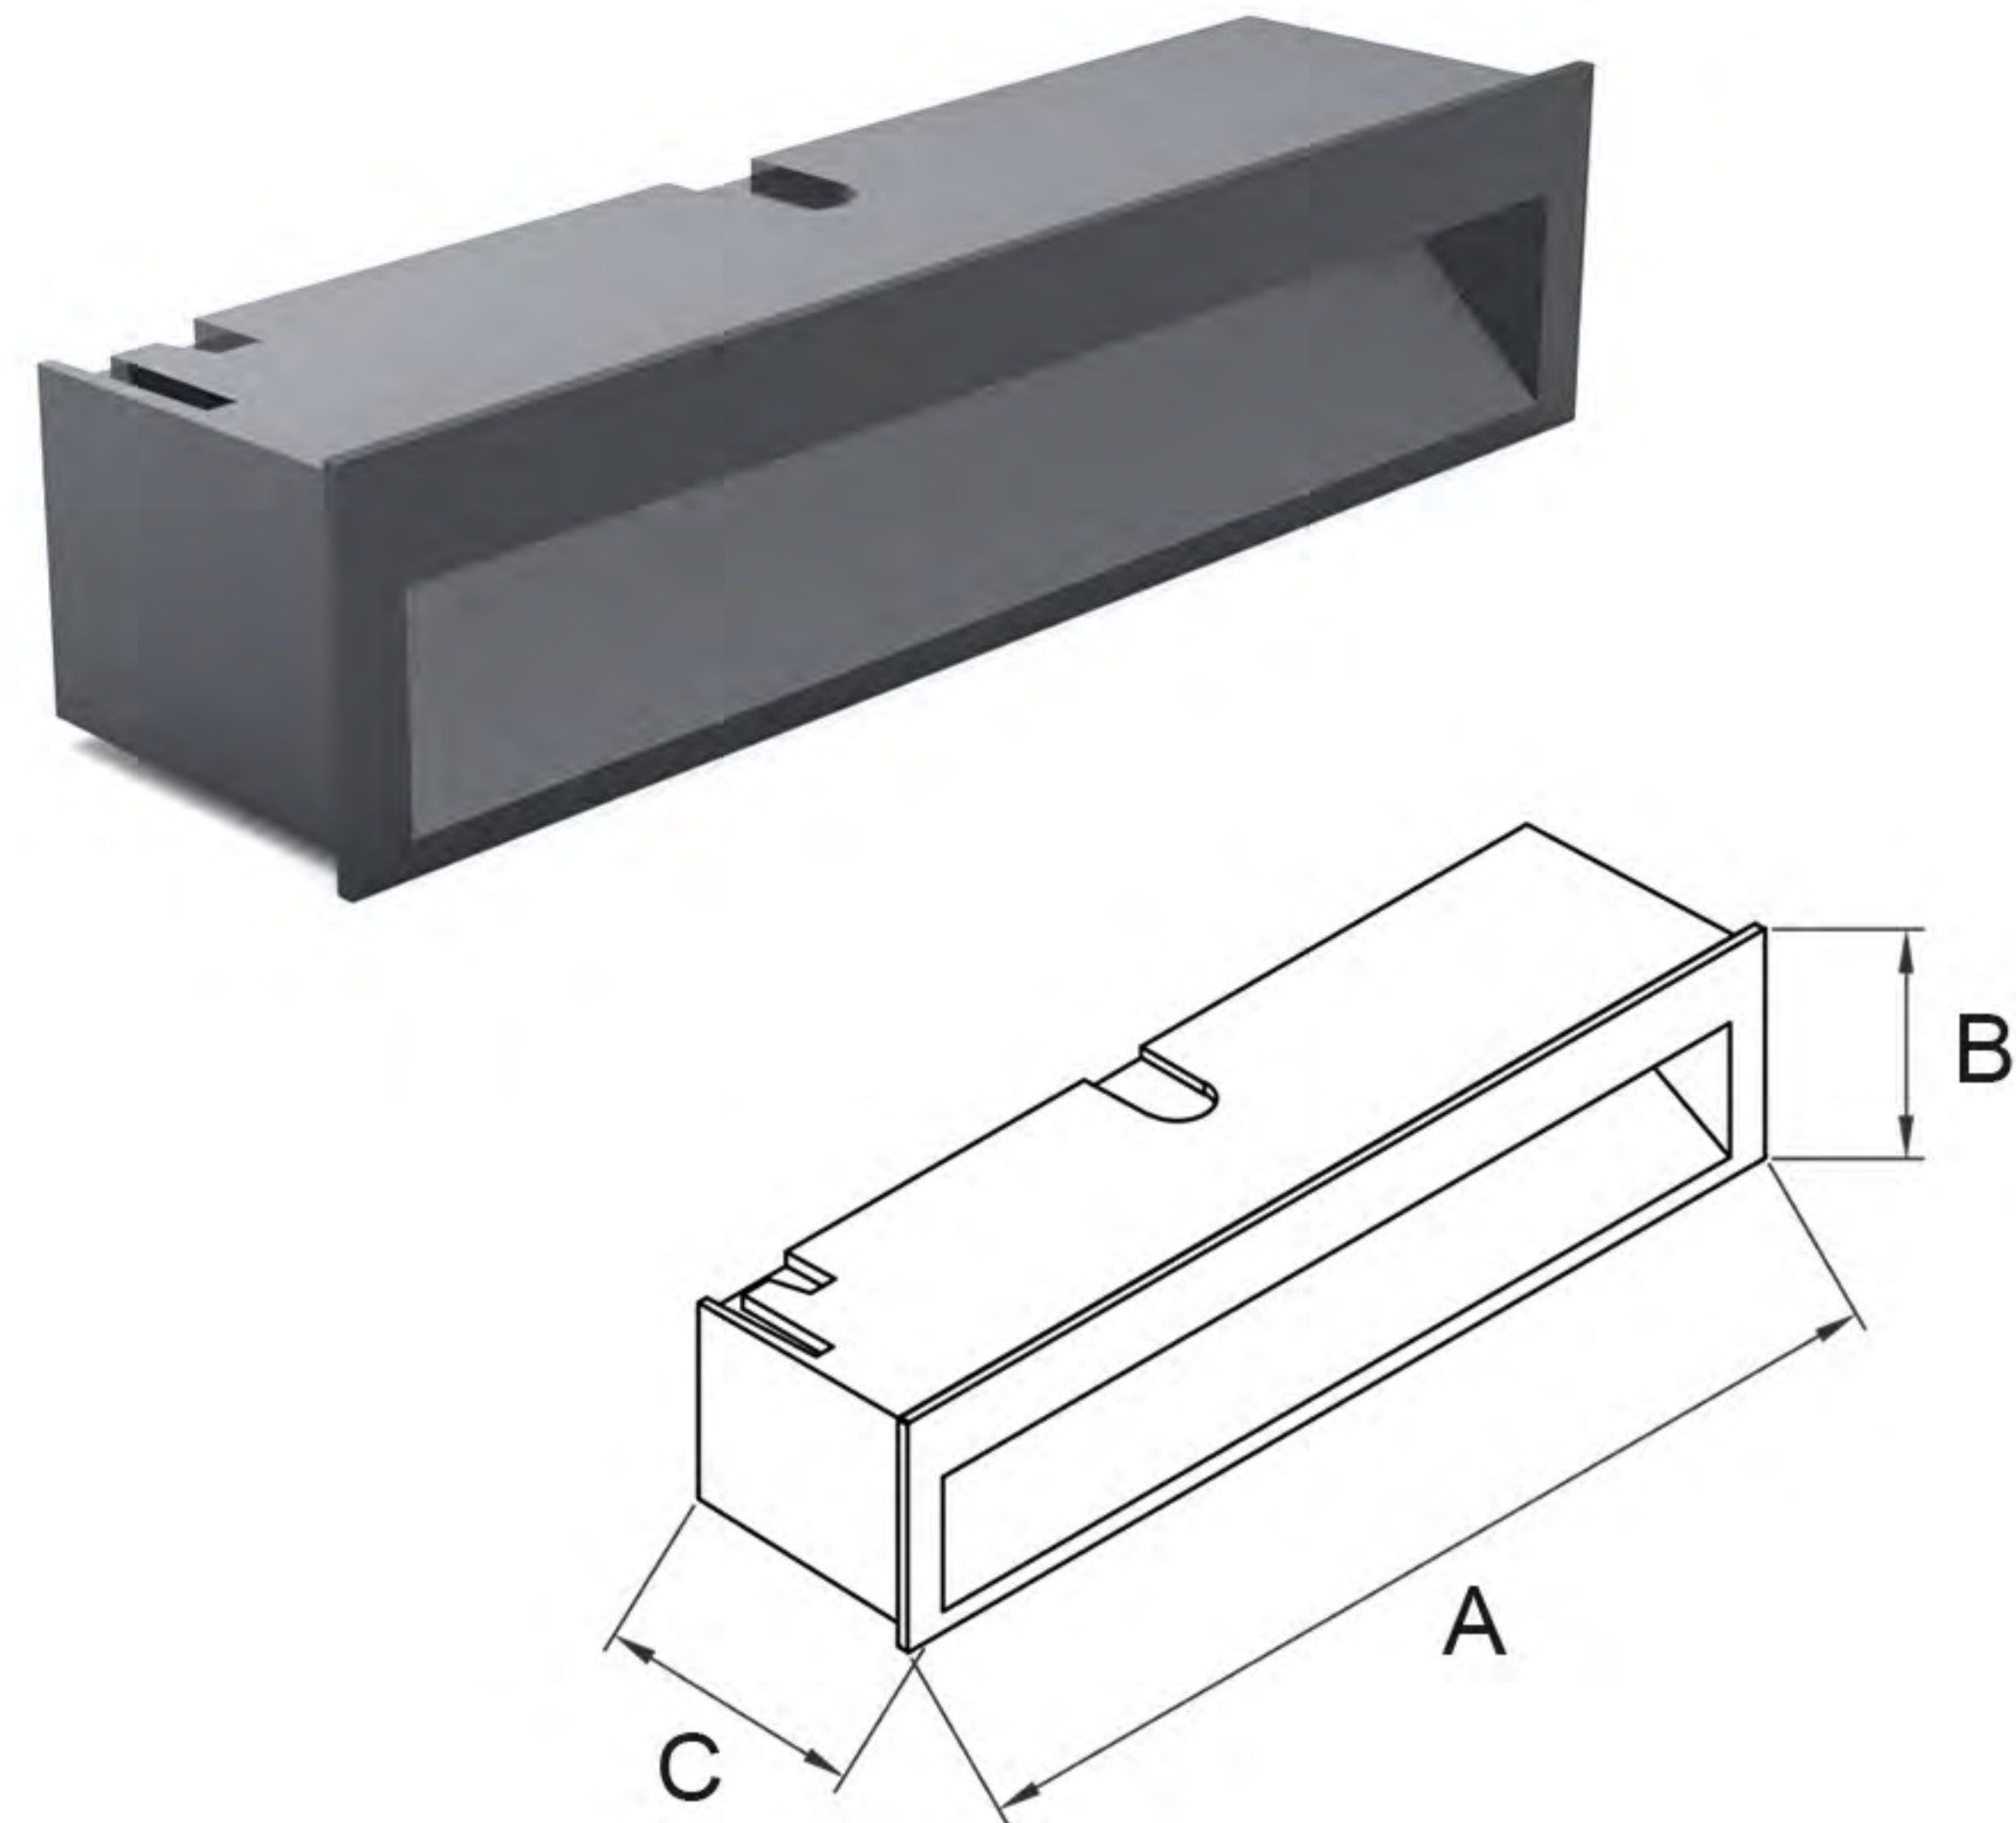

Features&Benefit (功能和优点)


Category (品类)	Step Light
Diffuser Material (扩散器材质)	Glass
Cover Material (面盖材质)	Aluminum
Operating mode (运行)	Built in
Steuerbar (开关)	On/Off
IP (防水等级)	54
Mounting type (安装类型)	Recessed
Mounting location (安装位置)	Wall
Application environment (应用环境)	Indoor/Outdoor
Cut out (预埋件)	207*62*70mm/277*62*70mm
Body color (表面颜色)	Black/Dark Gray/Sliver Gray



Product Description (产品描述)

Suitable for building facades, underground parking lot entrances and exits, parks, corridors, staircases, passages, courtyards and other various scenes; the lamps and lanterns adopt a downward light-emitting method, the light is soft and not harsh.

Lightmap (光影图)

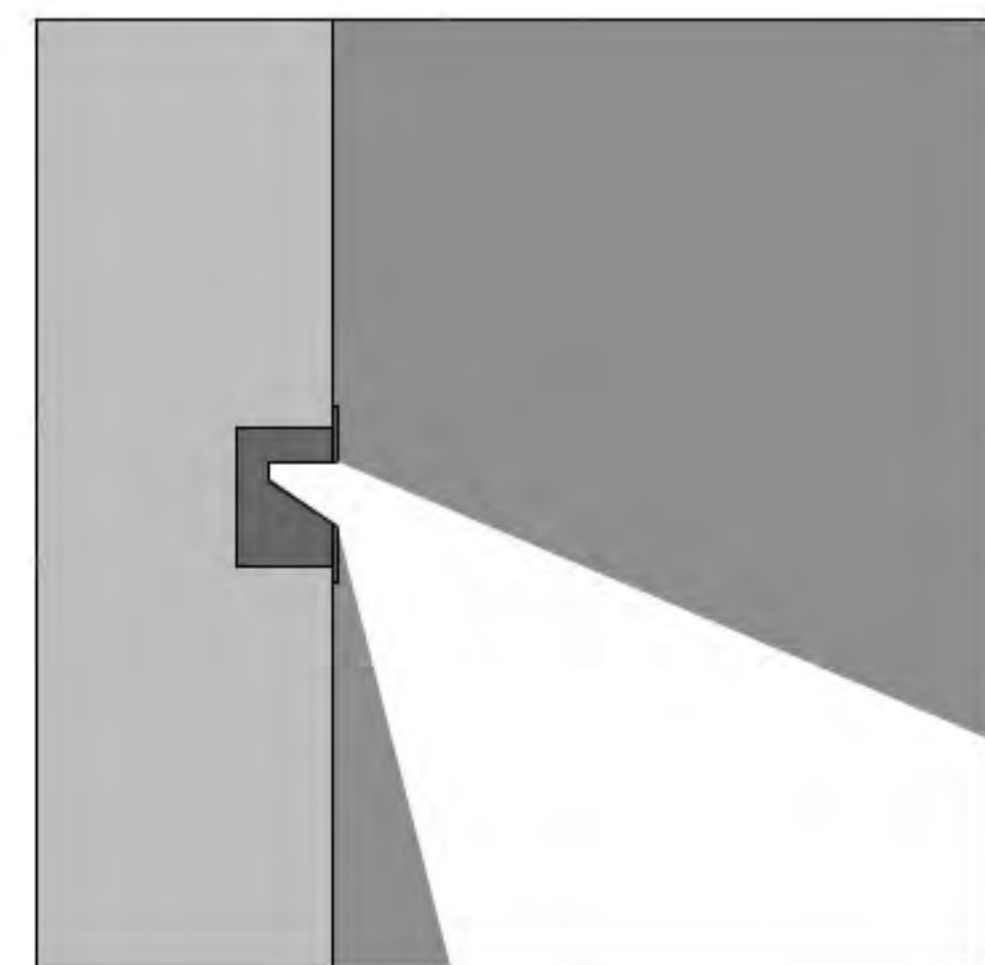


side view (侧面图)



Technical Date (技术参数)

Item No.	Lamp Type	Power	LM	CCT	PF	Voltage	CRI	A	B	C (mm)
MB23-0321	LED	5W	350	2700K-6000K	0.6	AC110-265V	80-90	210	65	73
MB23-0322	LED	10W	700	2700K-6000K	0.6	AC110-265V	80-90	280	65	73

MB-50113L

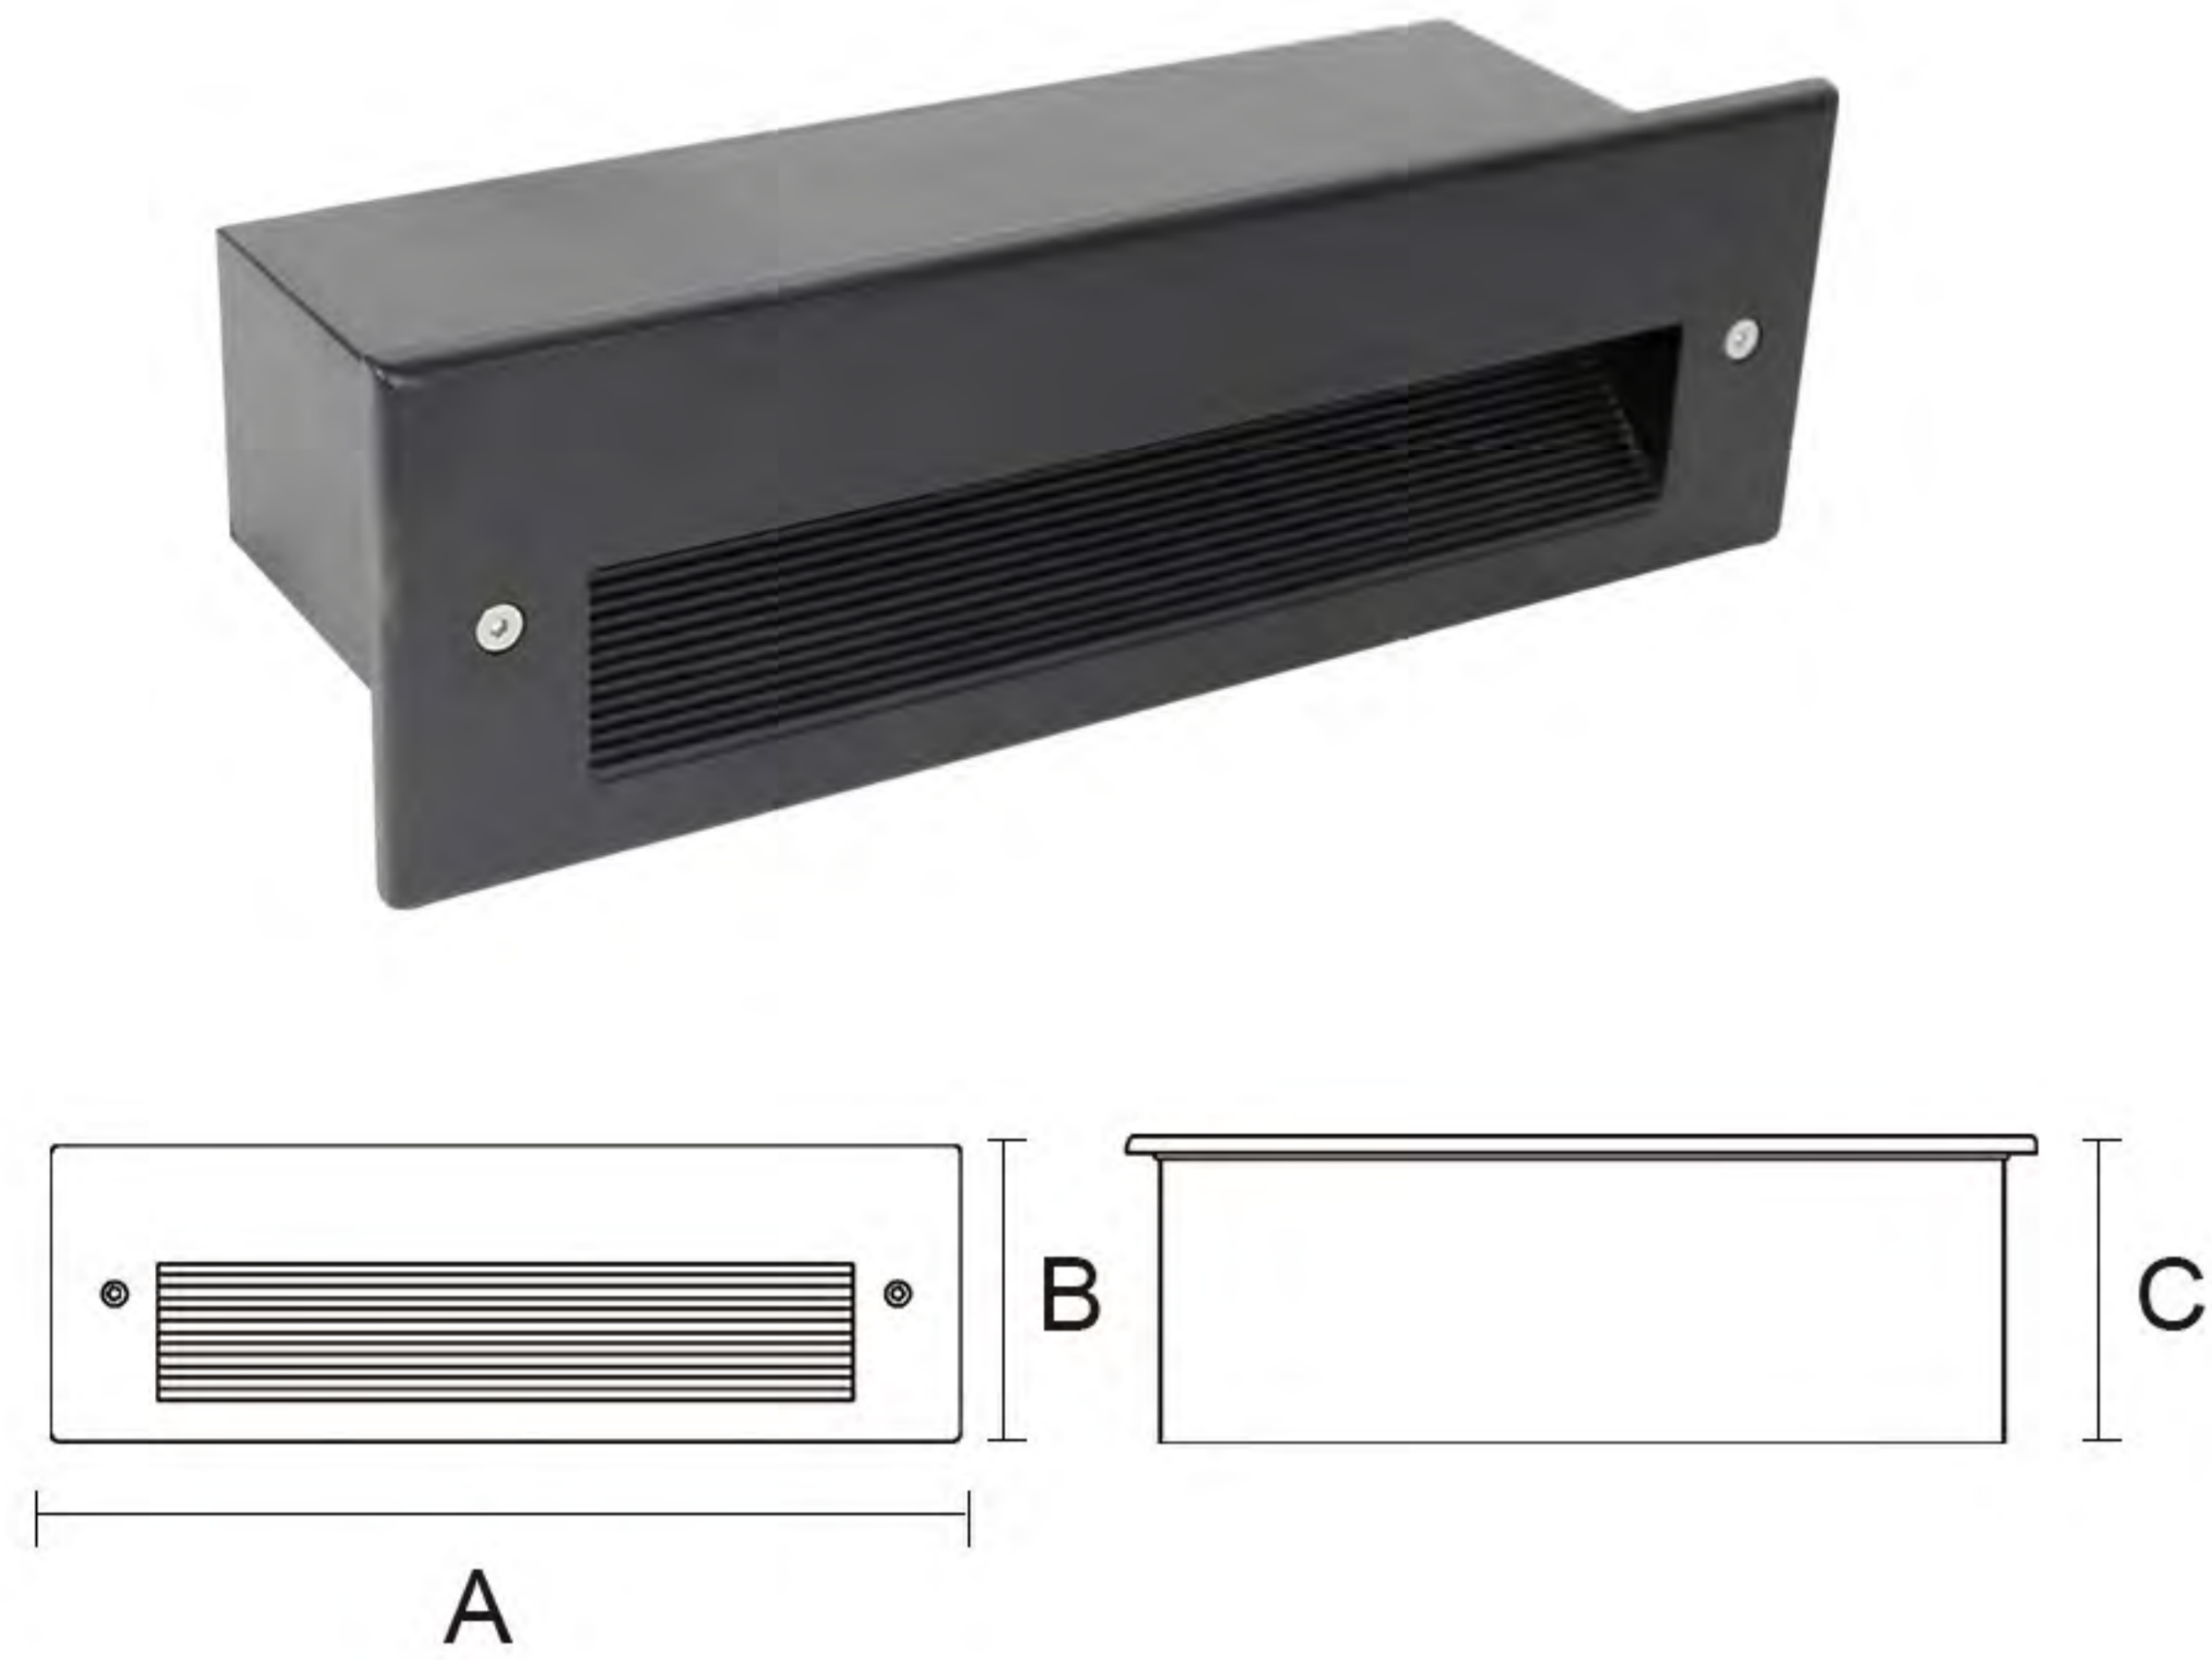

Features&Benefit (功能和优点)


Category (品类)	Step Light
Diffuser Material (扩散器材质)	PC
Cover Material (面盖材质)	Aluminum
Operating mode (运行)	Built in
Steuerbar (开关)	On/Off
IP (防水等级)	65
Mounting type (安装类型)	Recessed
Mounting location (安装位置)	Wall
Application environment (应用环境)	Indoor/Outdoor
Cut out (预埋件)	295*75*105mm
Body color (表面颜色)	Black/Dark Gray/Sliver Gray



Product Description (产品描述)

Suitable for building facades, underground parking lot entrances and exits, parks, corridors, staircases, passages, courtyards and other various scenes; the lamps and lanterns adopt a downward light-emitting method, the light is soft and not harsh.

Lightmap (光影图)

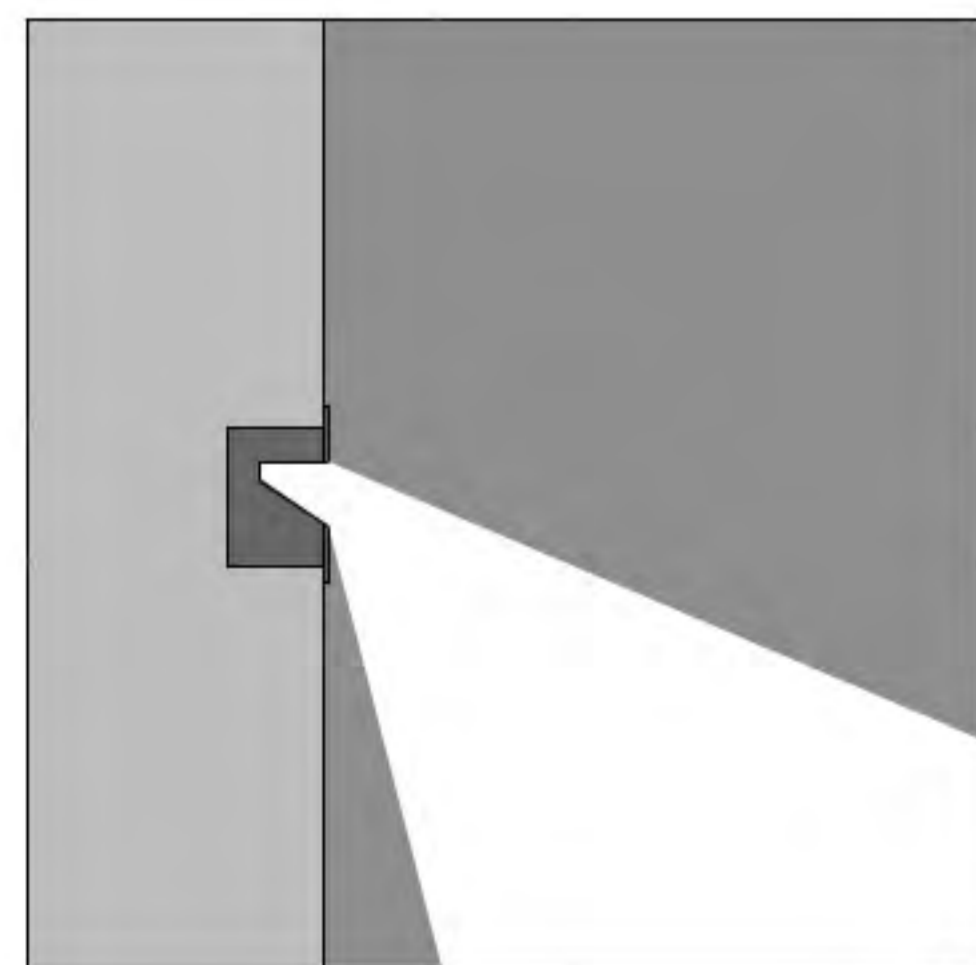


side view (侧面图)



Technical Date (技术参数)

Item No.	Lamp Type	Power	LM	CCT	PF	Voltage	CRI	A	B	C (mm)
MB-50113L	LED	10W-20W	700	2700K-6000K	0.6	AC110-265V	80-90	320	105	115

MB-50112

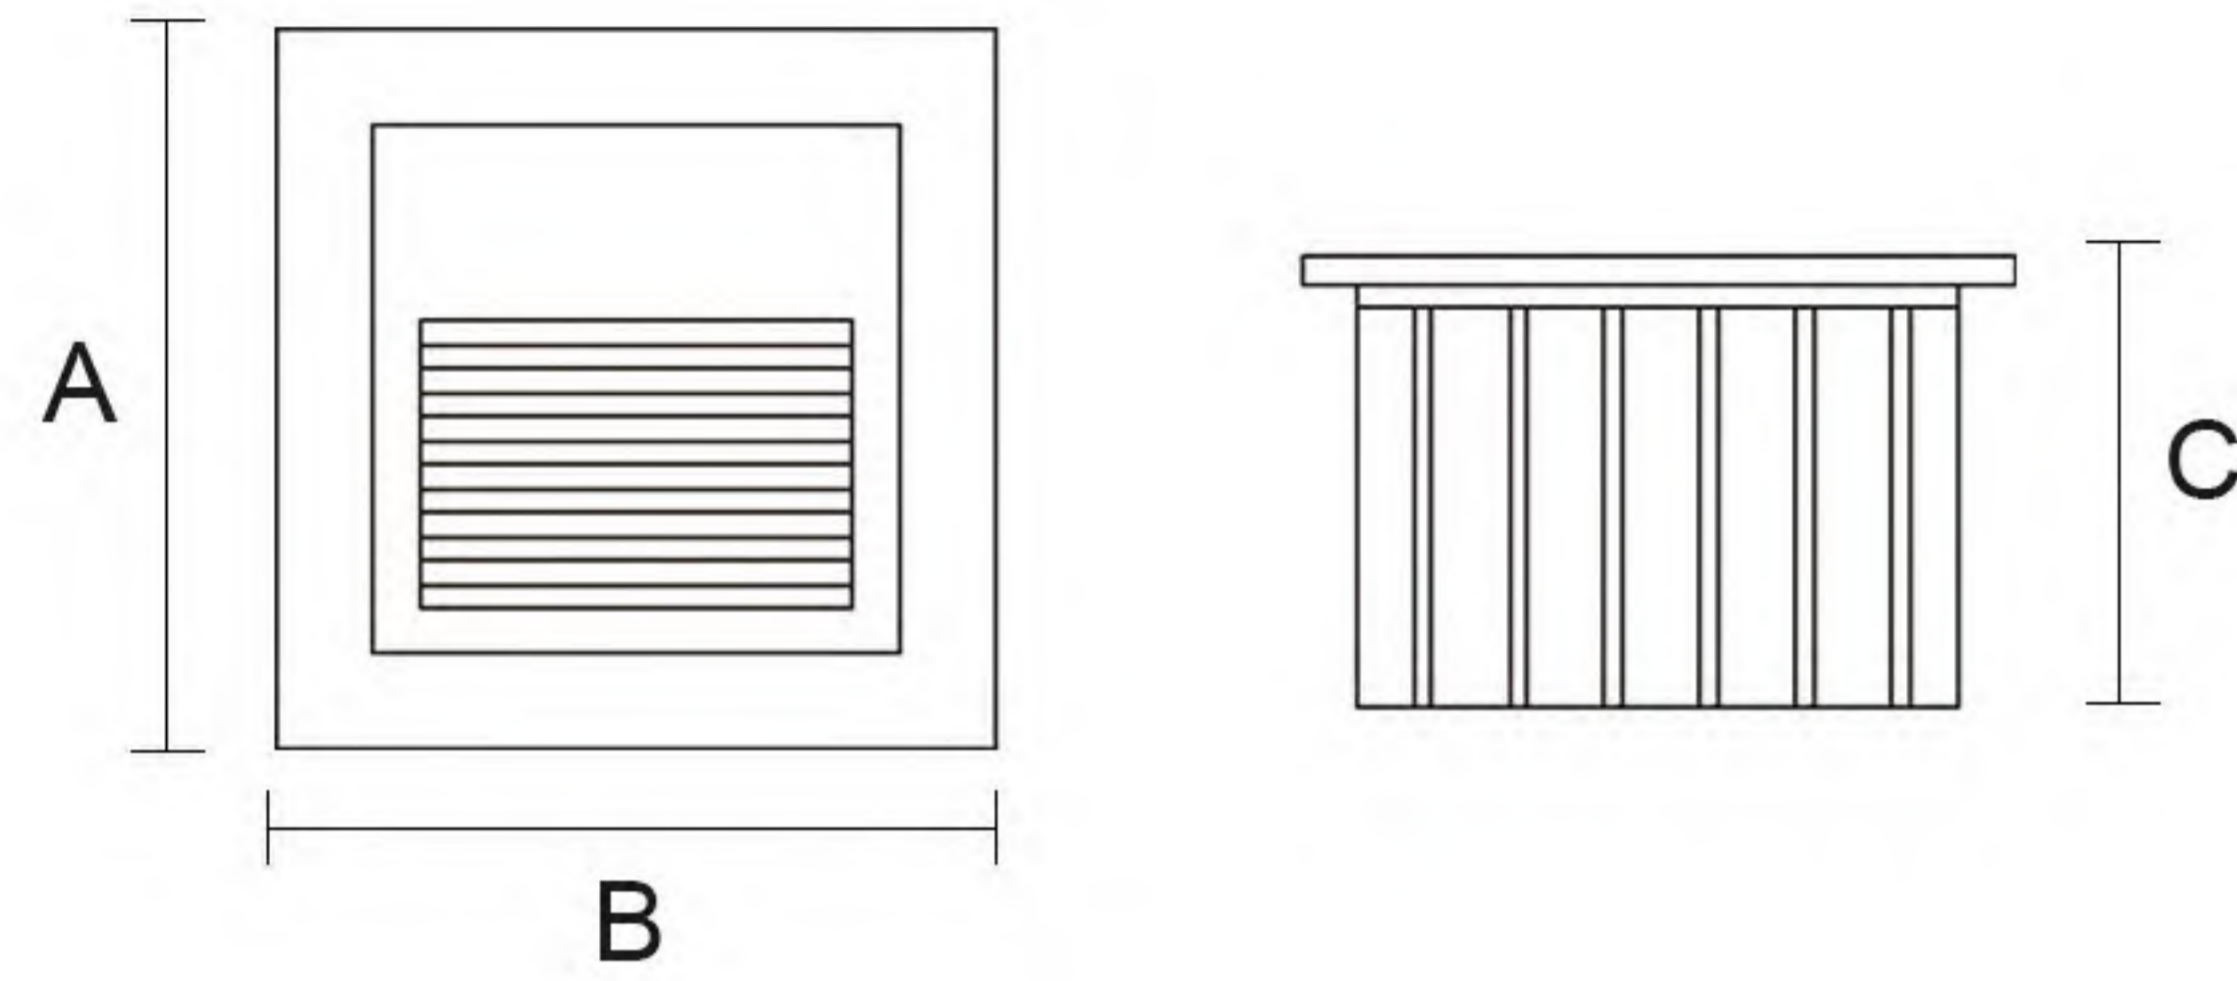

Features&Benefit (功能和优点)


Category (品类)	Step Light
Diffuser Material (扩散器材质)	Glass
Cover Material (面盖材质)	Aluminum
Operating made (运行)	Built in
Steuerbar (开关)	On/Off
IP (防水等级)	54
Mounting type (安装类型)	Recessed
Mounting location (安装位置)	Wall
Application environment (应用环境)	Indoor/Outdoor
Cut out (预埋件)	76*76*50mm
Body color (表面颜色)	Black/Dark Gray/Sliver Gray



Product Description (产品描述)

Suitable for building facades, underground parking lot entrances and exits, parks, corridors, staircases, passages, courtyards and other various scenes; the lamps and lanterns adopt a downward light-emitting method, the light is soft and not harsh.

Lightmap (光影图)

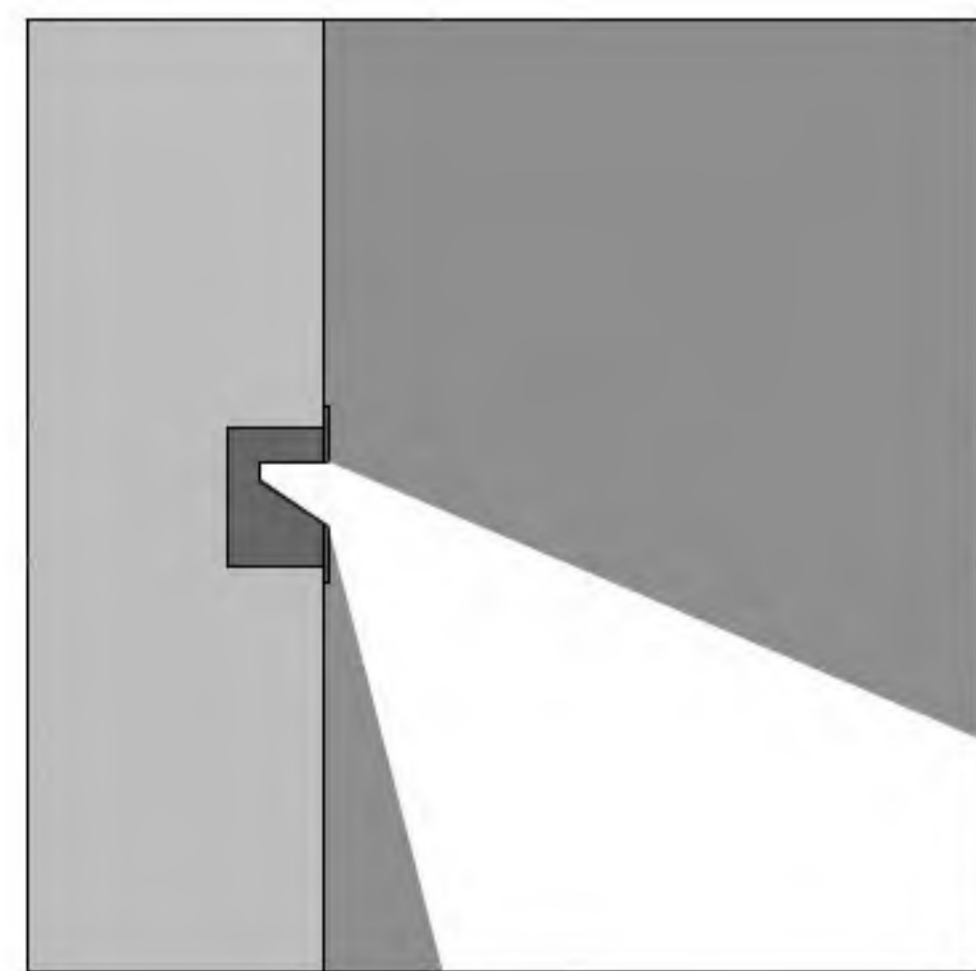


side view (侧面图)



Technical Date (技术参数)

Item No.	Lamp Type	Power	LM	CCT	PF	Voltage	CRI	A	B	C (mm)
MB-50112	LED	2W	140	2700K-6000K	0.6	AC110-265V	80-90	90	90	55

MB-50113/MB-50114

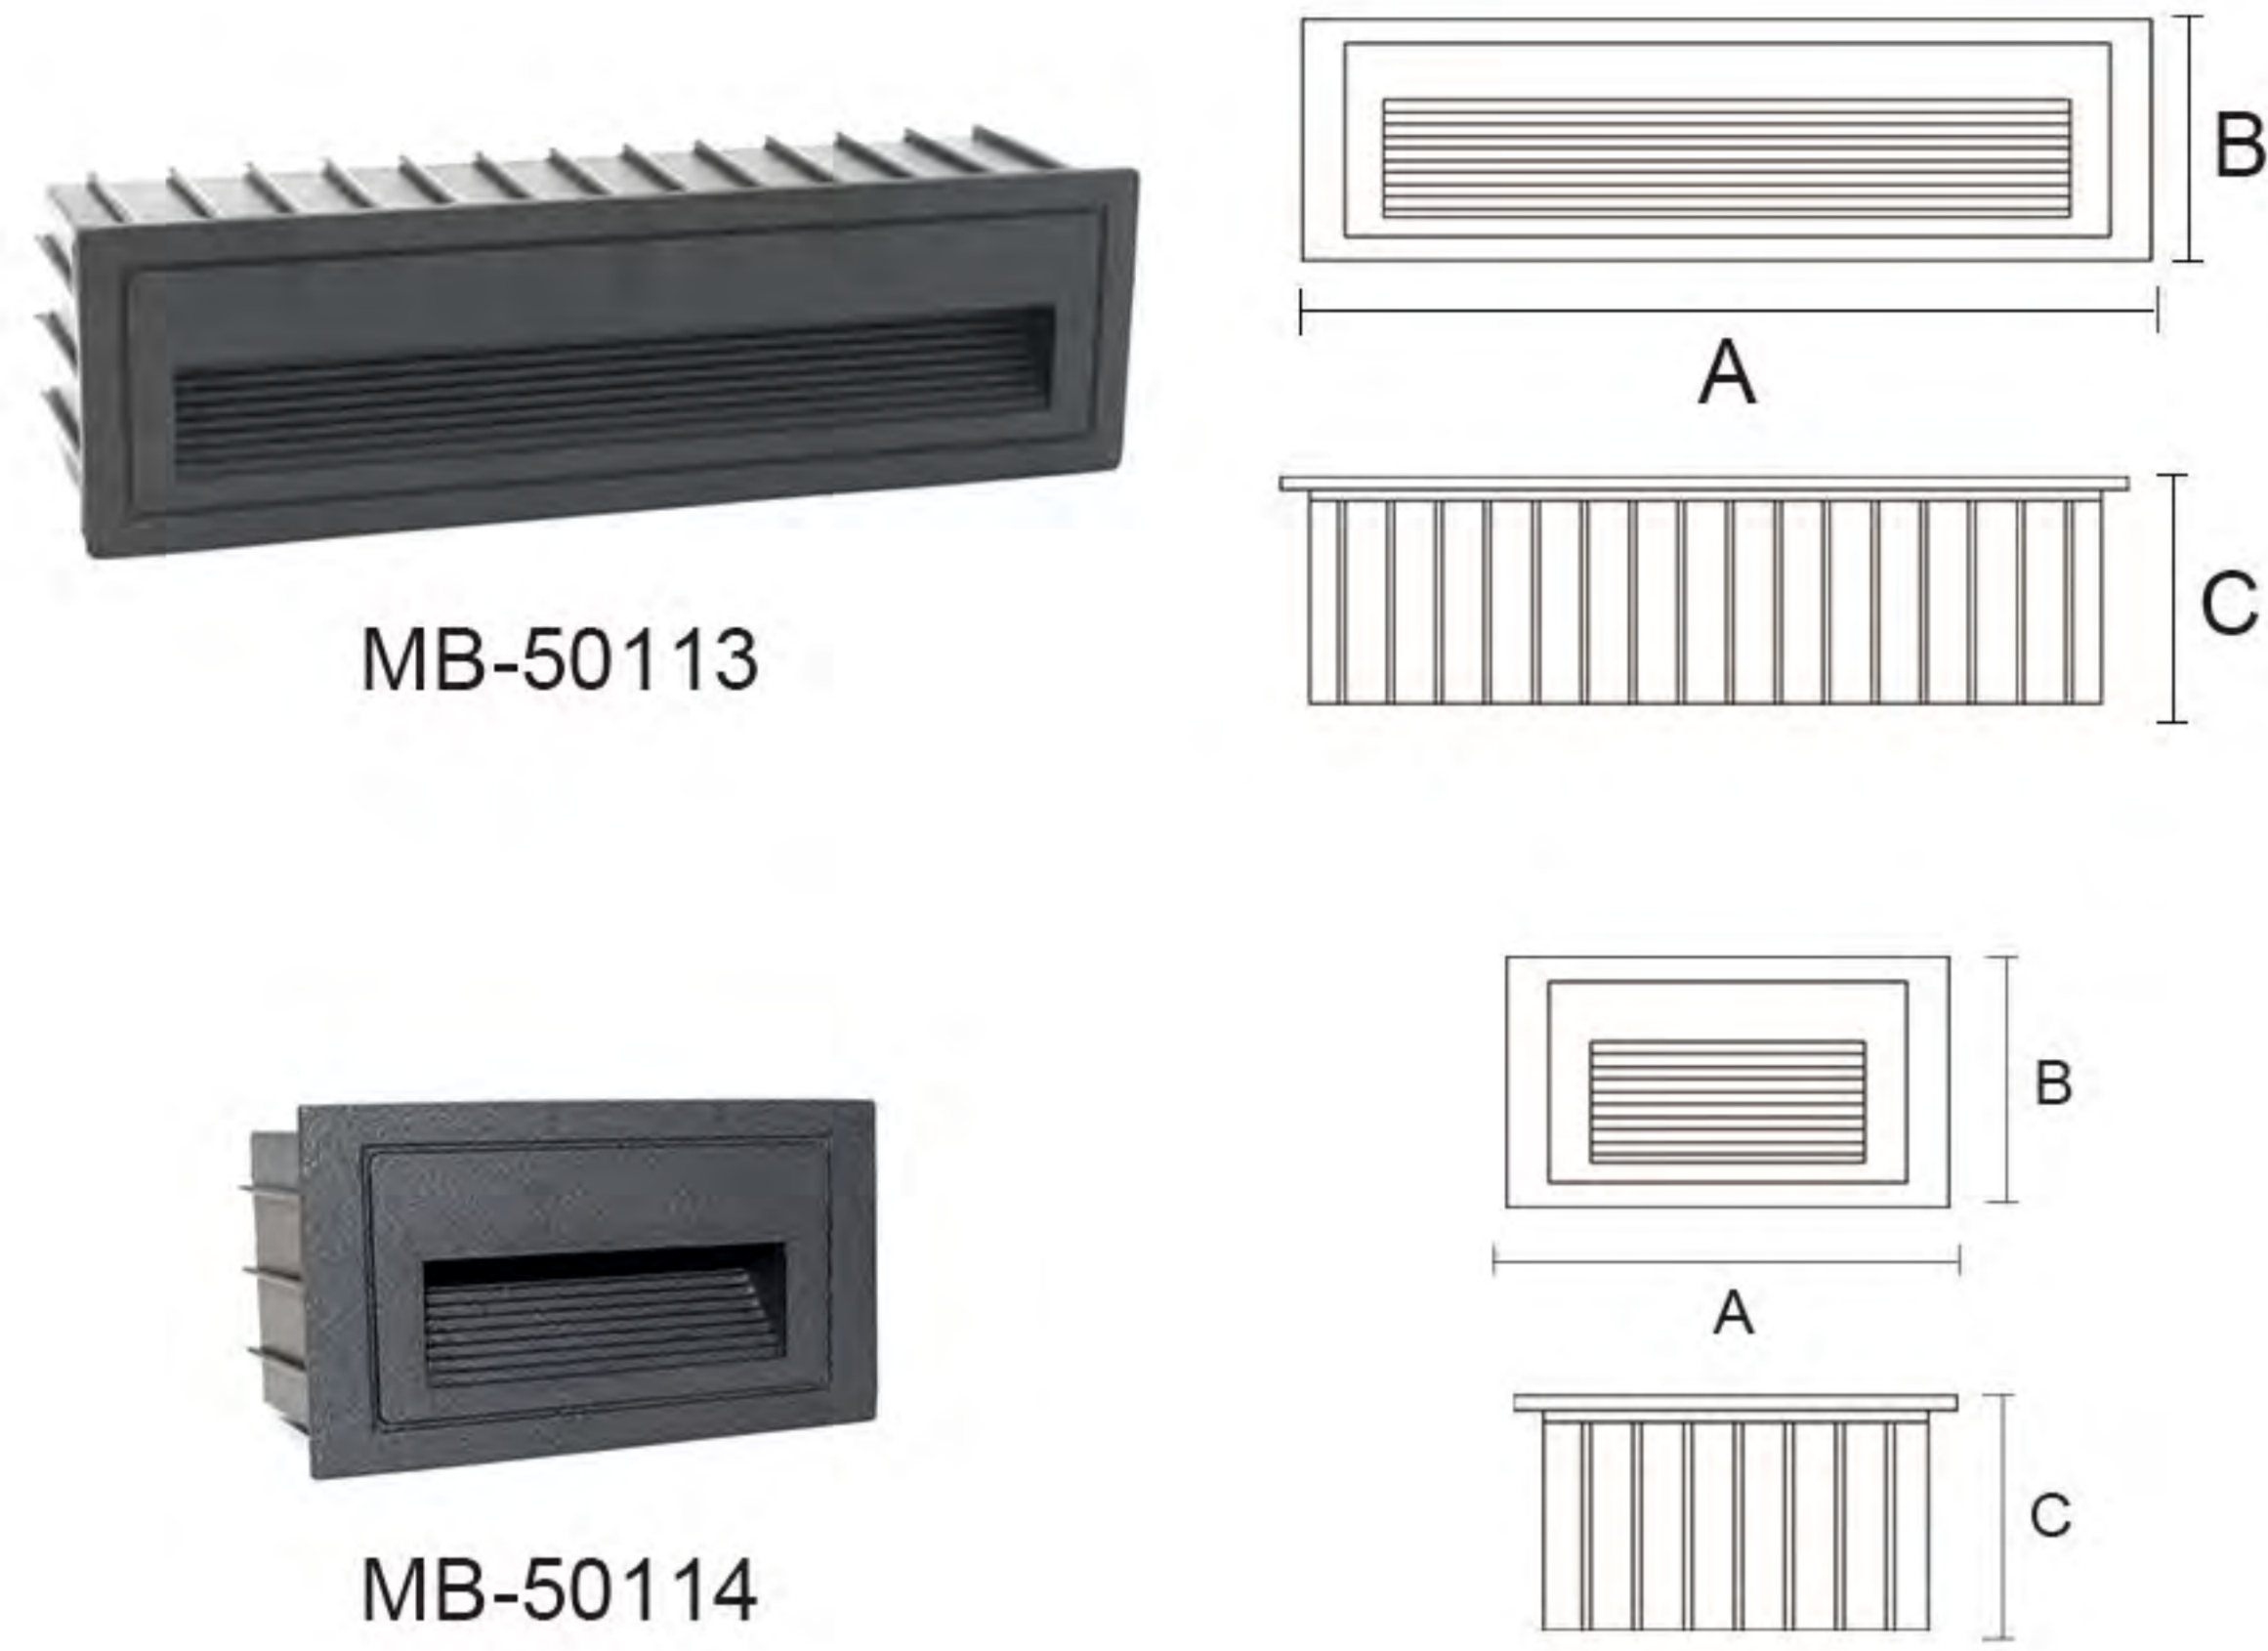

Features&Benefit (功能和优点)


Category (品类)	Step Light
Diffuser Material (扩散器材质)	Acrylic
Cover Material (面盖材质)	Aluminum
Operating mode (运行)	Built in
Steuerbar (开关)	On/Off
IP (防水等级)	54
Mounting type (安装类型)	Recessed
Mounting location (安装位置)	Wall
Application environment (应用环境)	Indoor/Outdoor
Cut out (预埋件)	200*50*55mm/100*50*55mm
Body color (表面颜色)	Black/Dark Gray/Sliver Gray



Product Description (产品描述)

Suitable for building facades, underground parking lot entrances and exits, parks, corridors, staircases, passages, courtyards and other various scenes; the lamps and lanterns adopt a downward light-emitting method, the light is soft and not harsh.

Lightmap (光影图)

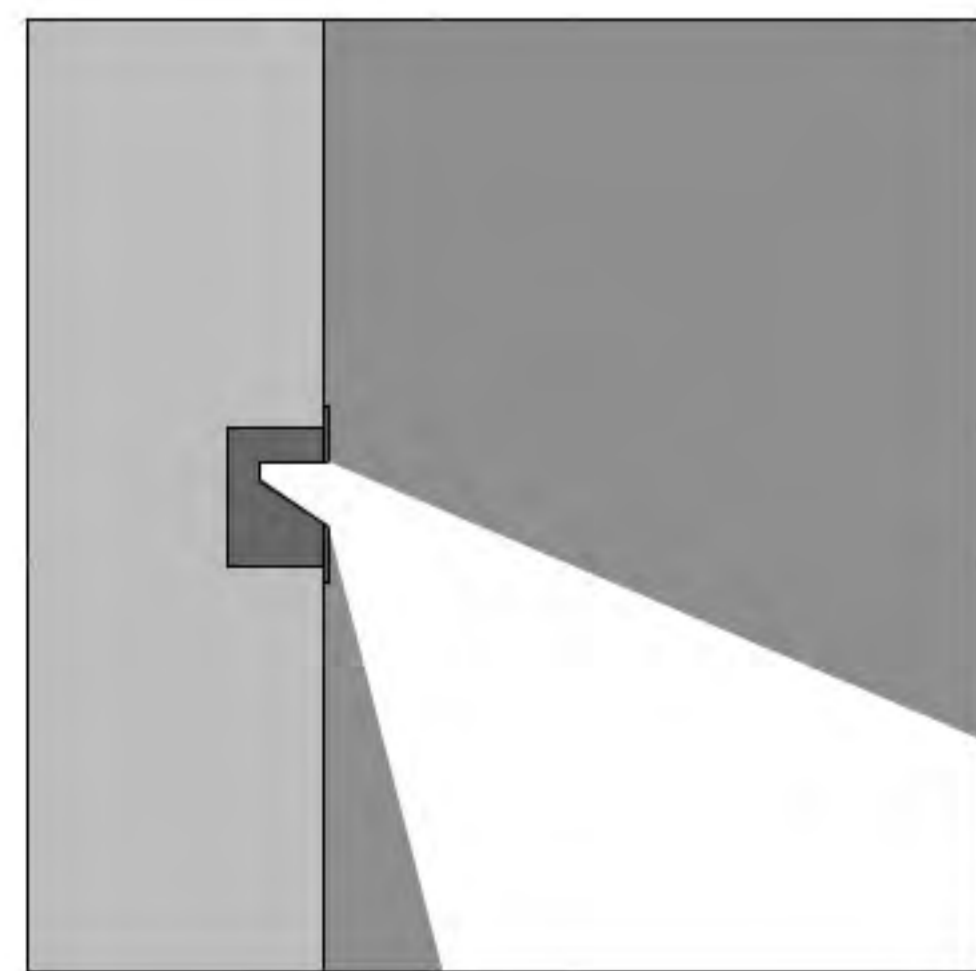

side view (侧面图)



Technical Date (技术参数)

Item No.	Lamp Type	Power	LM	CCT	PF	Voltage	CRI	A	B	C (mm)
MB-50113	LED	4W	280	2700K-6000K	0.6	AC110-265V	80-90	210	60	55
MB-50114	LED	2W	140	2700K-6000K	0.6	AC110-265V	80-90	105	60	55



MB-50115/MB-50116



MB-50115



MB-50116

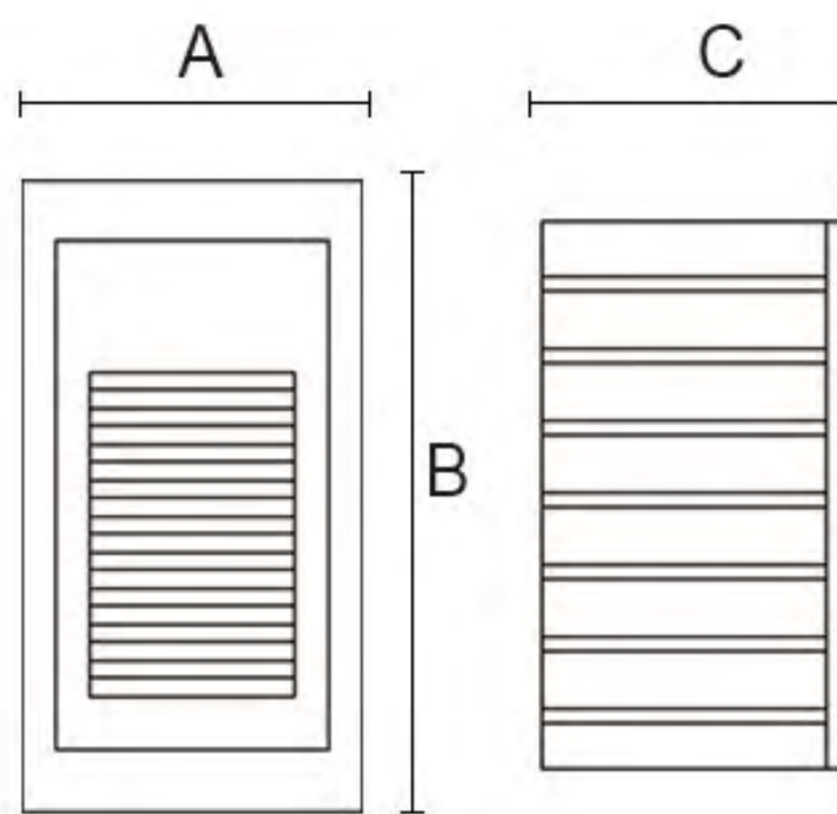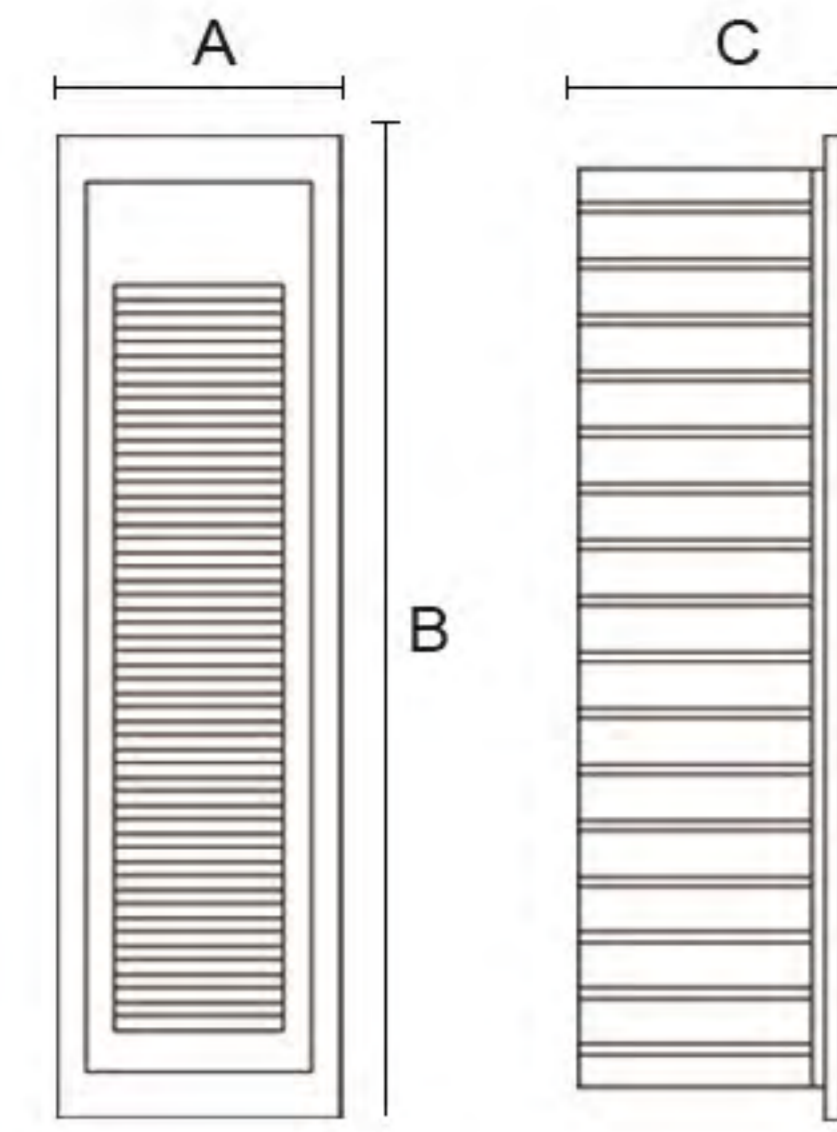

Features&Benefit (功能和优点)


Category (品类)	Step Light
Diffuser Material (扩散器材质)	Acrylic
Cover Material (面盖材质)	Aluminum
Operating mode (运行)	Built in
Steuerbar (开关)	On/Off
IP (防水等级)	54
Mounting type (安装类型)	Recessed
Mounting location (安装位置)	Wall
Application environment (应用环境)	Indoor/Outdoor
Cut out (预埋件)	50*200*55mm/50*100*55mm
Body color (表面颜色)	Black/Dark Gray/Sliver Gray




Product Description (产品描述)

Suitable for building facades, underground parking lot entrances and exits, parks, corridors, staircases, passages, courtyards and other various scenes; the lamps and lanterns adopt a downward light-emitting method, the light is soft and not harsh.

Lightmap (光影图)

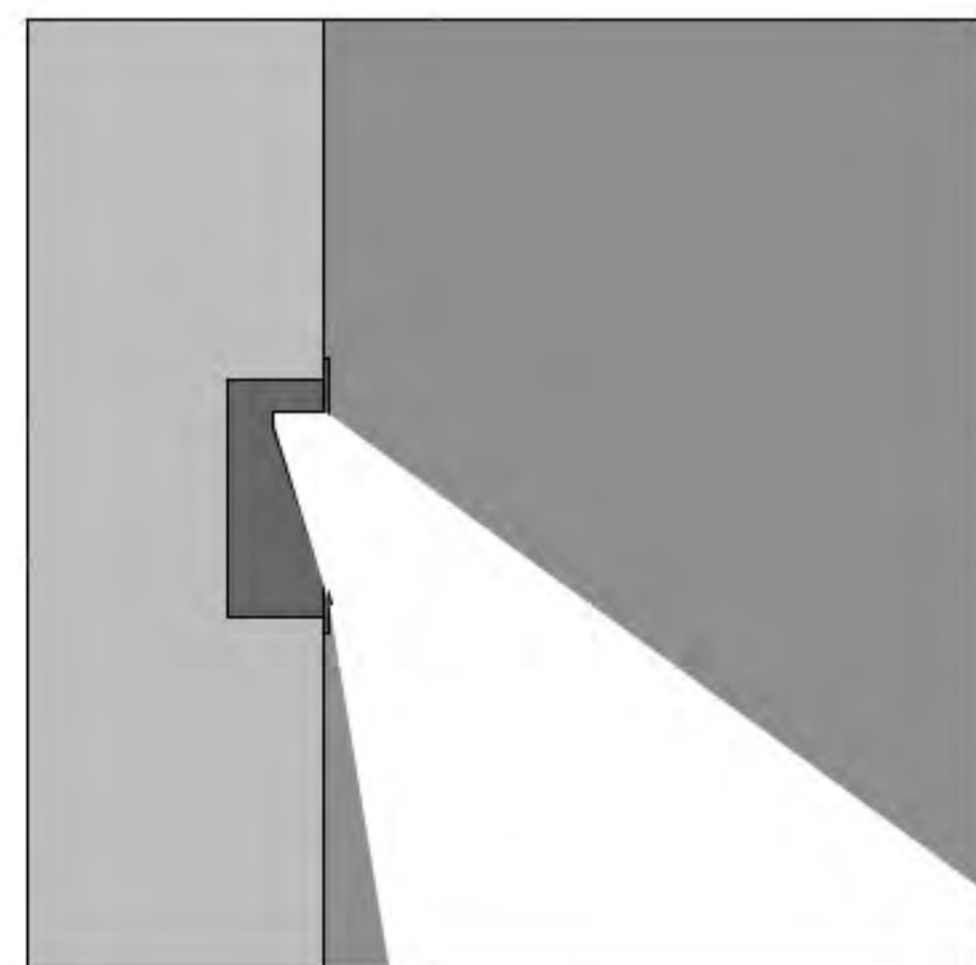

side view (侧面图)

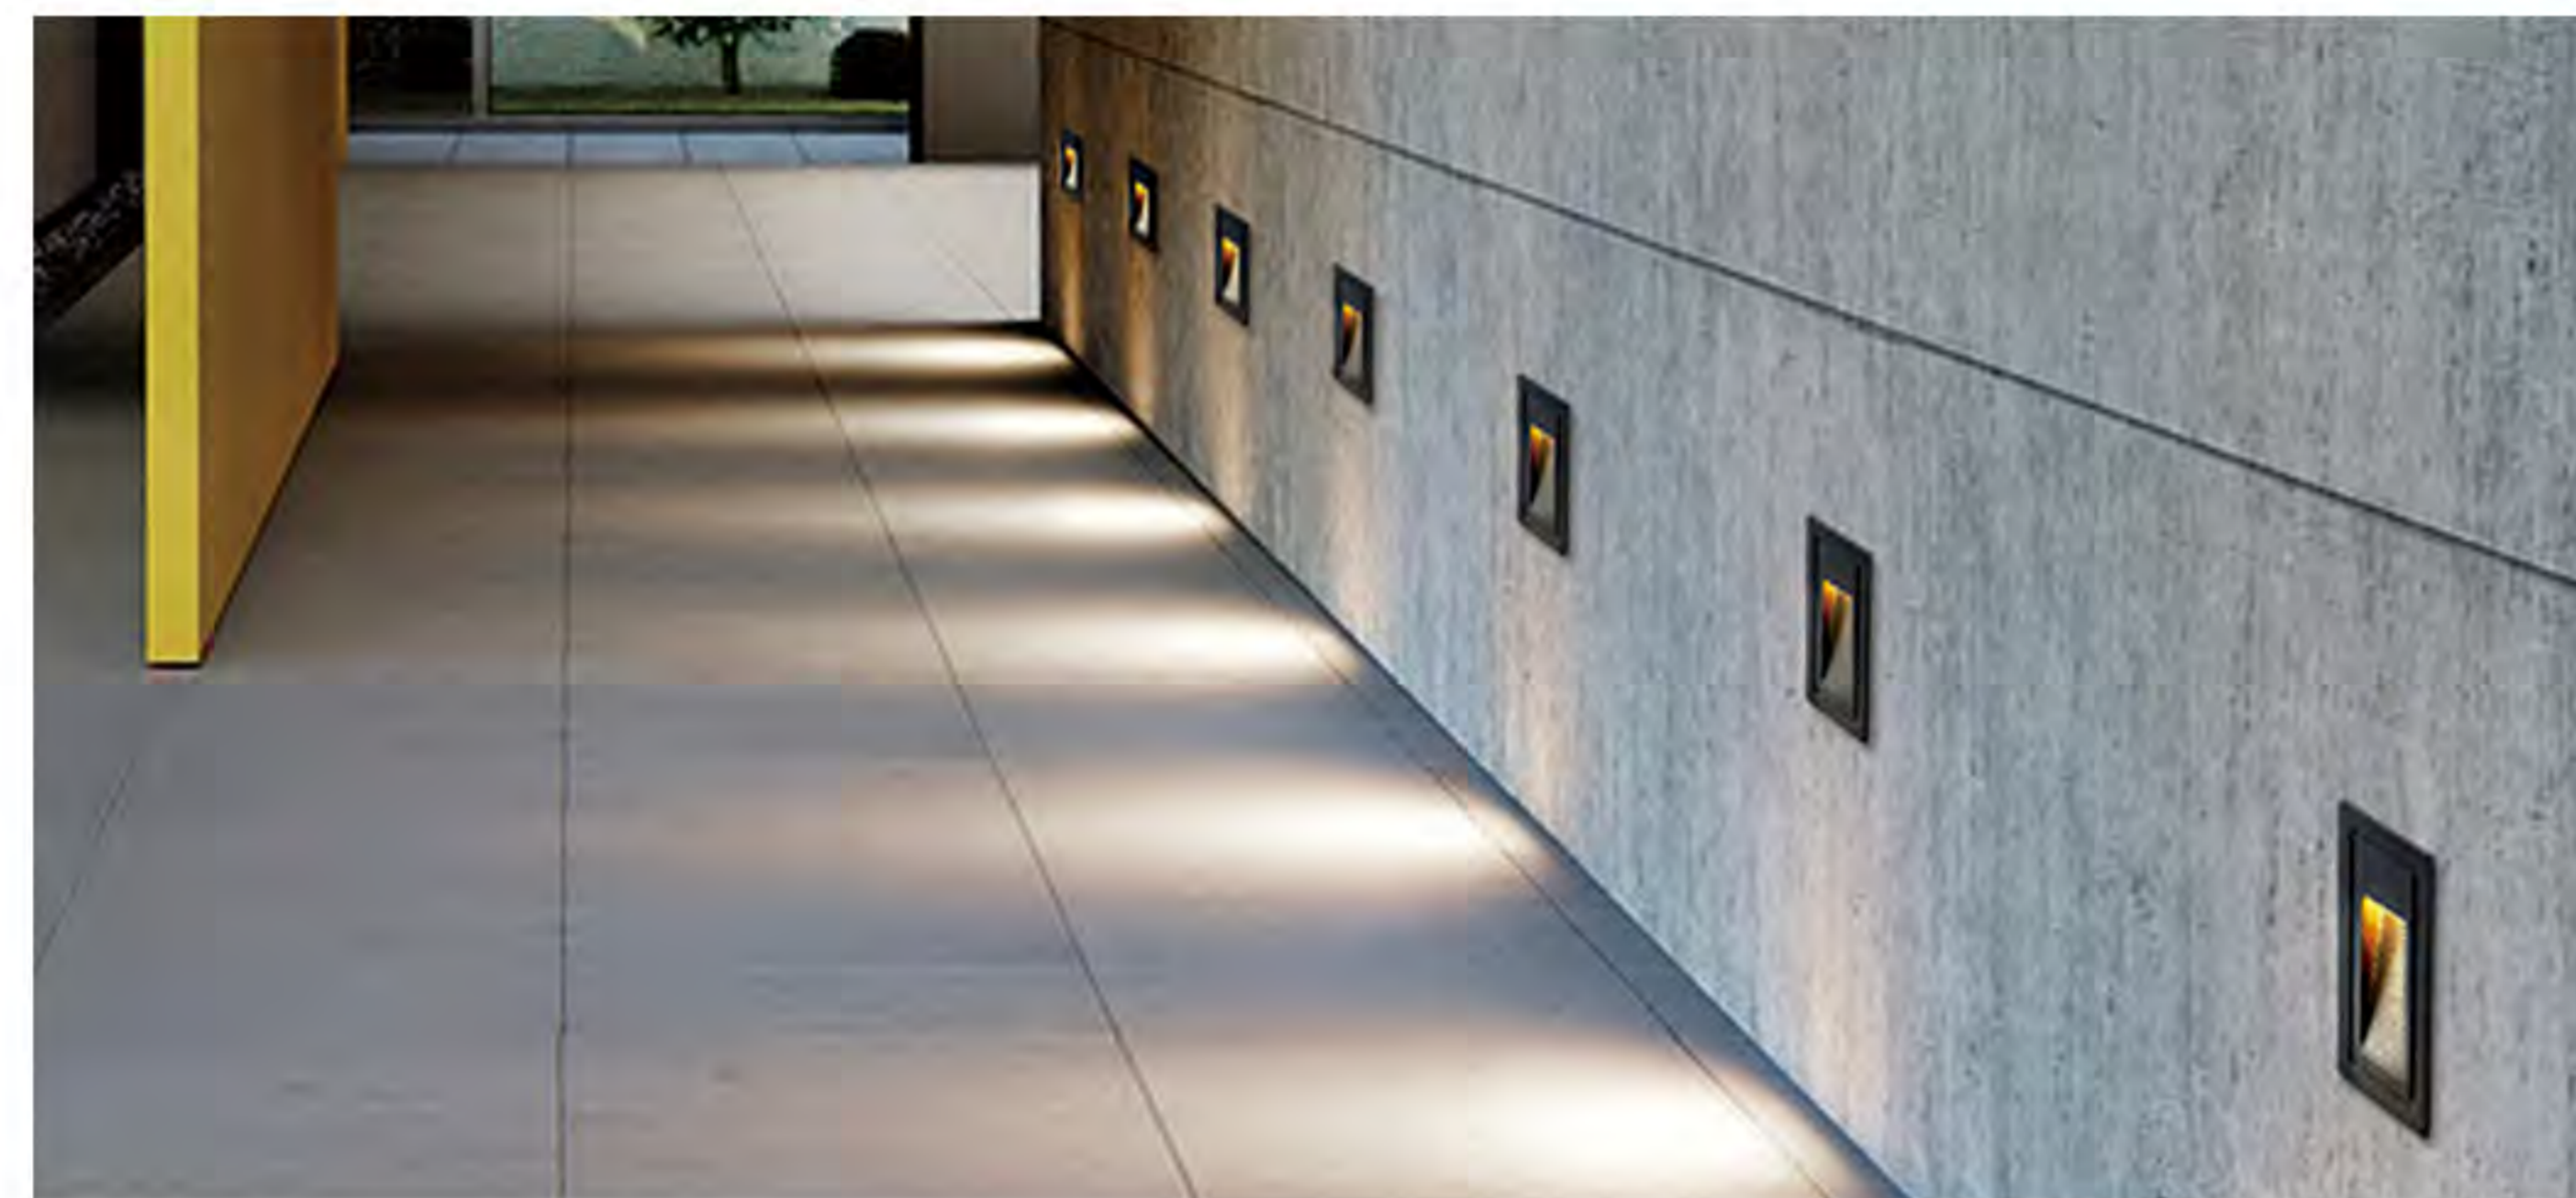

Technical Date (技术参数)

Item No.	Lamp Type	Power	LM	CCT	PF	Voltage	CRI	A	B	C (mm)
MB-50115	LED	2W	140	2700K-6000K	0.6	AC110-265V	80-90	60	210	55
MB-50116	LED	2W	140	2700K-6000K	0.6	AC110-265V	80-90	60	105	55



MB LIGHTING
TFB LIGHTING

Guangzhou Huaen Lighting Co.,Ltd

TEL: +86-18665613129

Email: info@china-customization.com

Website: <https://www.tfbcustomlighting.com>