

RIGID CORE  
SPC FLOORING

# 2021 BUYING GUIDE



## SAVE THE PLANET



Stop cutting trees, use eco-friendly new material floors, bring back the green world !

## WE CARE MORE TO OUR ENVIRONMENT

We care enough for the living, we care enough for the environmental protecting. We have responsibility to protect the forests, which is the basis of human existence. Hanflor work with you to build green home together. This planet could be much brighter tomorrow.

## WE CARE ABOUT YOUR HEALTH

Hanflor has strict quality control system to avoid any harmful ingredient contains in the floors. It is our duty to get necessary global certificates such as CE, SGS, Pro-position 65, ASTM for our LVT, SPC, WPC, ESPC product series, to bring you worry-less purchasing.

## IMPLEMENT THE SLOGAN “WALK ON GREEN”





## YOUR BEST FLOORING SUPPLIER

18 years focus on vinyl flooring industry, 12 years Alibaba Golden Supplier, 87% of our products exported to West Europe & North America countries. Hanflor is always pursuing bring Water-proofing / VoC-free / Kids-free / Pets-free Eco-friendly vinyl flooring to world-wide market.

Netherlands, UK, Canada, Norway, Australia, etc. Hanflor product series cover both residential use and high end level commercial use with authentic & HD appears of wood planks and stone tiles. We make every single plank and tile as a piece of art in your daily life. Hanflor sales team provide the most responsive professional TO DOOR SERVICE from our factory plant to your sweet home, warehouse and job site.

75,000

Covering a land-area of about 75,000 square meters

68

Annual production capacity reaches 68 million squaremeters

## POWERFUL MANUFACTURING



Hanflor has its own factory which covers a 24 million square meters production capacity, but also have 4 more brother factories bringing you totally 68 million square meters capacity.





## CONSTANT TEMPERATURE LABORATORY

Guarantee the high quality of goods. Quality control starts with raw materials and runs through the entire production process, including inspection before shipment. All tests are referring to EU and ASTM standards.

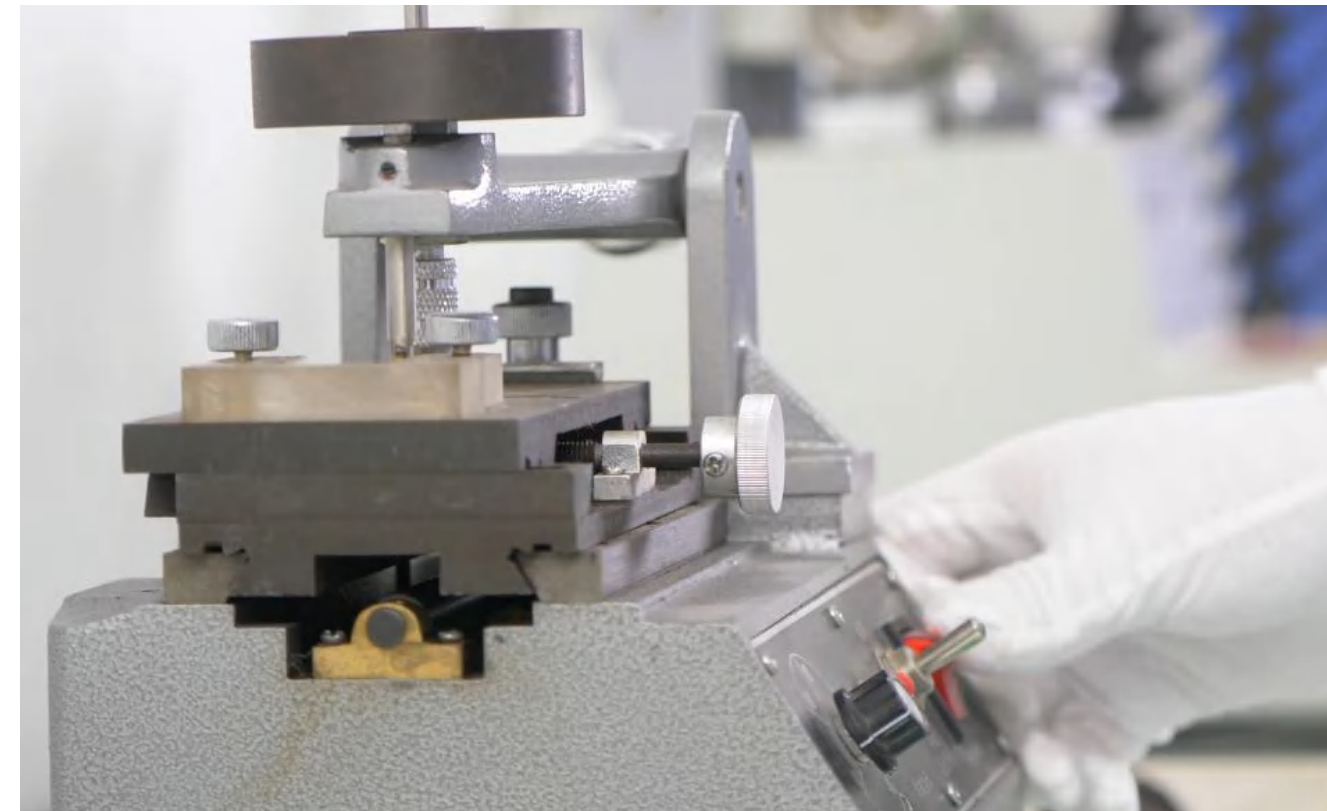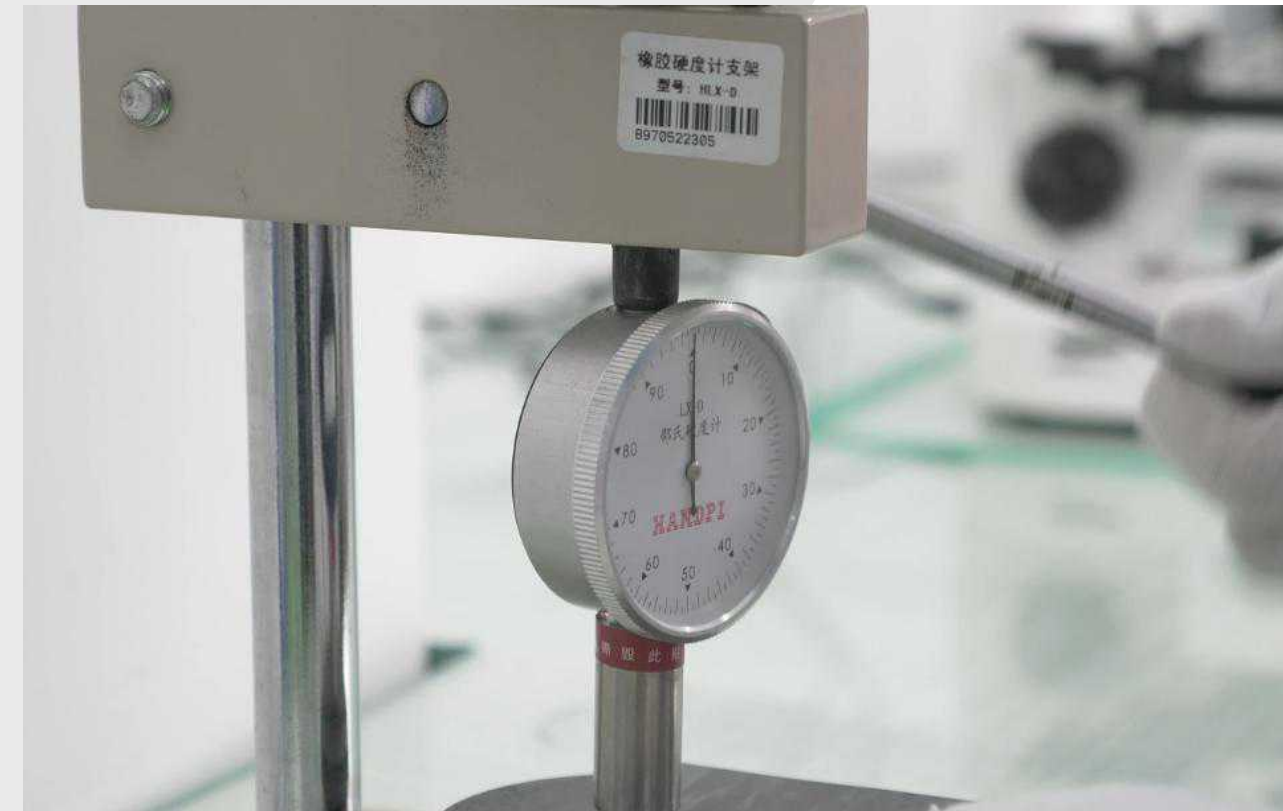



## COMPANY CERTIFICATIONS

Integrated Quality management systems are our priority and we have made sure our production lines follow world-class standards. Our aim is to grow as a respected company by delivering quality products and service.







## GLOBAL CIENTS

18 years focus on flooring industry. Serve customers from more than 50 countries.





## CEO & Founder

Darren Woo

He has been involved in the flooring industry for 18 years. Darren has unique insights into the current situation and future development of the flooring industry.

He emphasized that continuous high-quality products and services are the best guarantee to impress customers. We believe that quality not only refers to the quality of the product itself, but also includes the selection of raw materials, environmental protection in the production process, energy saving in packaging and transportation, and response efficiency of after-sales service. We pass the hanflor brand temperature through practical actions, promote the sound development of the supply and demand relationship in the industry, and practice the harmonious symbiosis between human and nature.



Young / Passion / Creative

## SALES TEAM

INTEGRITY / DEDICATION / PROFESSIONAL





## SALES ELITE

Customer's request is the first execution force.



Cindy

VP ( Sales )

15 years of customer service experiences.10 years of sales team leadership experience.Deep seen of the flooring industry, keen sense of flooring trends.Good at providing development support & solution.



Lily

Sales Director (B2B)

8 years of sales & customer service experiences.Deep understanding of flooring market. Good at providing customers with overall interior decoration solutions & budget control.



Alex

Super Sales

5years rich customer service experiences.Mainly serve customers in the Western Europe. High degree of product professionalism.Familiar with flooring applications in local market. Good at providing purchasing solutions.



Beck

key Account Manager

4 years of key customer service experiences. Full score in customer satisfaction survey for two consecutive years. Customers served are mainly in the US & Europe.



Luna

Sales Manager

8 years of sales & customer service experience. Have a better understanding on business of supermarket and brand chain store. Devoting to providing more professional, competitive, easily achievable, and suitable flooring solutions.



Lawrence

Sales Star

Mainly serve customers in Canada, Southeast Asia, Brazil and other regions. Familiar with popular designs and specifications in different countries.Good at solving logistics and shipping issues for customers and provide the best costs-saving solutions.




William

Sales Star

Serving customers in South America, US and Asia. Mainly serve small-scale and medium-sized customers(contractor, end-user), good at quick response and product recommendation.



Responsible to customers. Our sales staff will track every link of order production, and pass this information to customers in a timely manner in the form of pictures or videos to achieve production visualization.

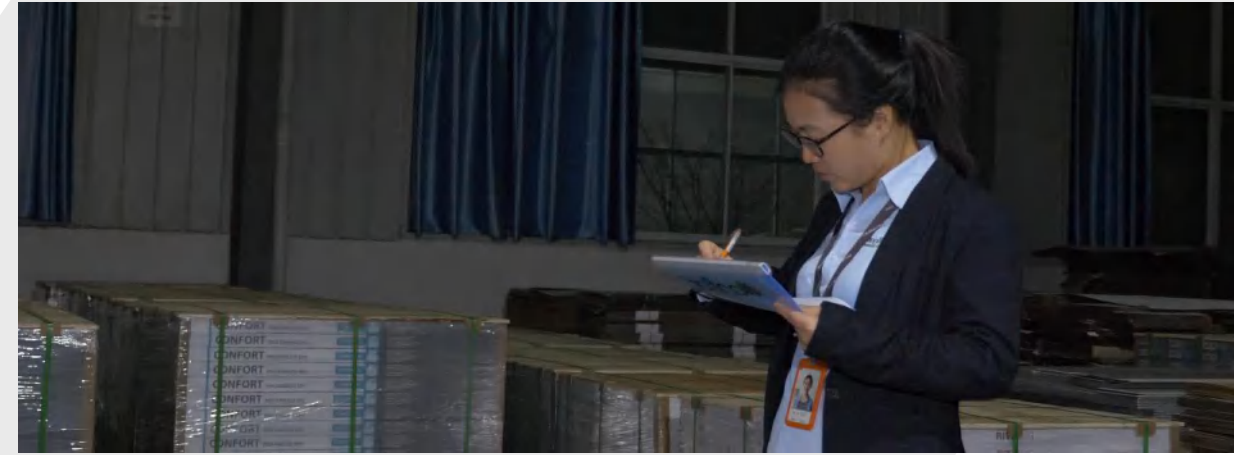



## HANFLOR FLOORINGS

### NATURE APPRECIATION

Drawing Design Inspiration From Nature Blooming Natural Aesthetics  
DIY to create your own flooring world, rich style to your interior areas.

### CUSTOM UNIQUE BEAUTY

Take Your Interior' s Aesthetic Into Your Own  
Realistic visual effects, let you enjoy the natural beauty of authentic wood.  
Incredible performance makes you even more in love with them.

### AESTHETICS

Beautiful Ground Is Life Aesthetics  
This is a space art displayed on the ground. The rich design sense, personalized  
overall layout combines the stunning aesthetics.

## RIGID CORE SPC FLOORING

SPC vinyl is the most durable vinyl flooring option available.Commercial spaces use these floors because they hold up so well to high-traffic use. The innovative core is a stone-plastic composite that offers dimensional stability: no expanding or contracting. Rigid core planks are sturdy and dense, meaning you can't crush or dent them. With the addition of a thick wear layer, scratches and scrapes aren't a problem either.

Hanflor Rigid Core/SPC is the best solution for commercial flooring.Combining the strength of stone and luxury of wood design.SPC flooring has high impact resistance.Great dimensional stability.Hanflor SPC can bear the temperature difference from -75°C to 80°C and the shrinkage≤0.002% , curling≤0.01mm with EN434 standard.







# PRODUCT CERTIFICATIONS





TECHINICAL DATA  
TEST REPORT

Thickness	EN428	5.5mm(with1.5 Underlay)
Wearlayer	EN429	0.3mm
Square/pc	EN426	0.22311m <sup>2</sup>
Weight/pc	EN430	1.85kg
Dimensional Stability	EN434	0.065%
Curling	EN434	0.4mm
Residual Indentation	EN433	s0.1mm
Light Stability	ISO 105-B02:Method 3	≥6
Castor Chair	EN 425	Typ W
Reaction to Fire	EN 13501-1	Bf-S1
Slip Resistance	DIN 51130 EN13893	R10 DS
Wear Resistance	EN 660-2	Group T
Thermal Resistance	EN 12667 :2001	0.038m <sup>2</sup> KW
Chemical Resistance	EN423	Resistant
Sound Absorption	EN ISO717-2	20db/21db
Fungal Resistance	EN ISO 846	No growth
Uiliztion		Recyclable

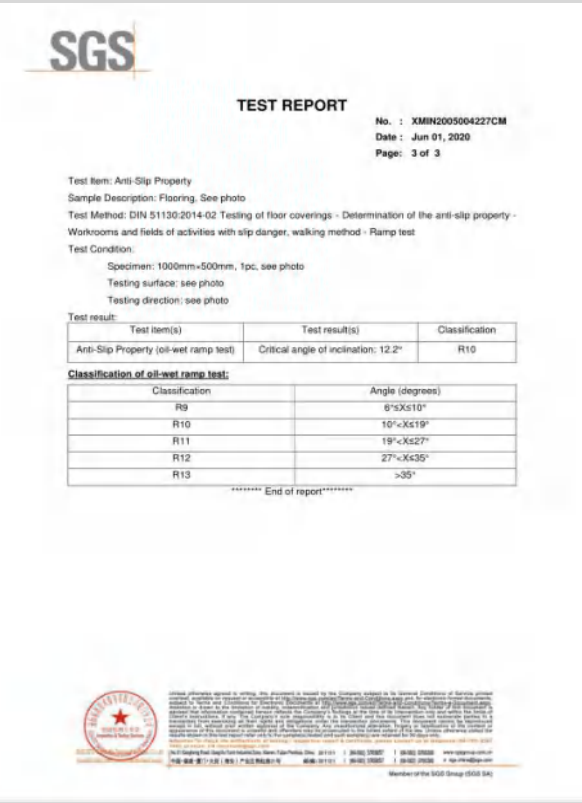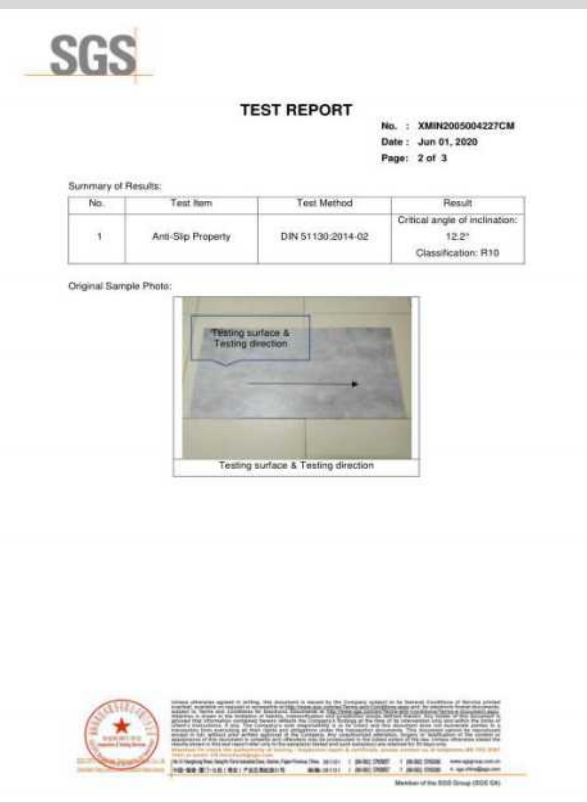



Item	SPC	LVT	WPC
Rigid core for click with easy & fast installation	√	×	√
Pre- attached underlayment(EVA/IXPE )	√	×	√
Suitable for small imperfections under floor	√	×	√
Little under floor preparation required	√	×	√
Stable in high temperature environment	√	×	×
Install on big area without T-mouldings for transition	√	×	×
Stable in rooms with sun lights	√	√	√
Perfect sound absorbent	√	√	√
Water proof , install in bathroom & laundry room	√	√	√
Core with free of plasticizers	√	×	×
Core with free of formaldehyde	√	√	√
Indentations & Impact resistance	√	×	×
Easy to install with click system	√	×	√



VALINGE®



**WEAR LAYER**

Protects against scratches  
Easy to clean  
Stain resistant

**LUXURY VINYL PRINT**

High-quality imagery  
Exceptional durability

**RIGID CORE**



100% waterproof  
Stone plastic composite  
Great for uneven subfloors

**ATTACHED UNDERLAYMENT\***


No extra underlayment necessary  
Absorbs sounds  
Adds comfort underfoot

\*Varies by product. Not all products include attached underlayment.

SPC FLOORINGS

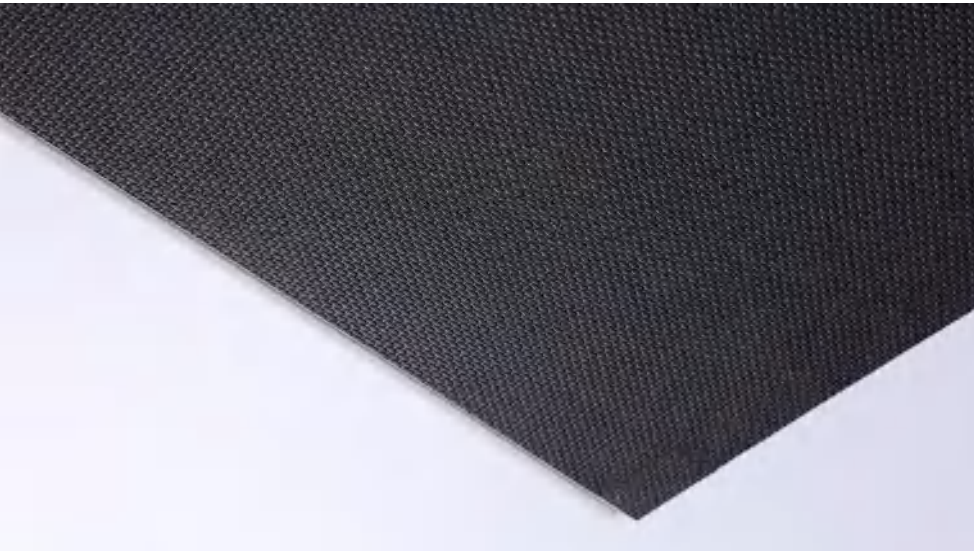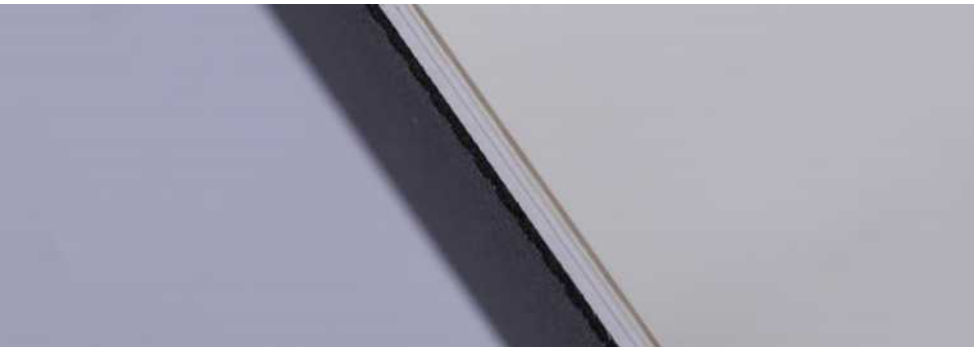

Size	183mm x 1219.2mm(7.2" x 48")
Thickness	5.5mm x 0.3mm (with 1.5mm Underlay)
Package	9 pcs / box







RTS 20801



RTS 20802



RTS 20803




RTS 20804




RTS 20805



RTS 20806

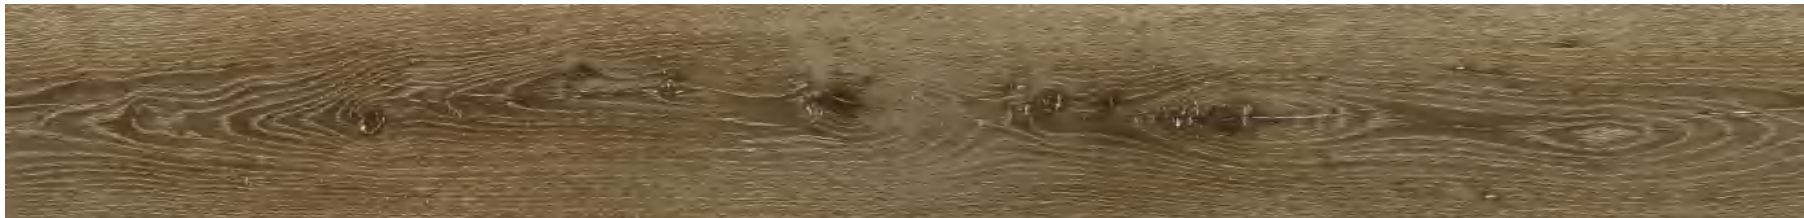

RTS 20807

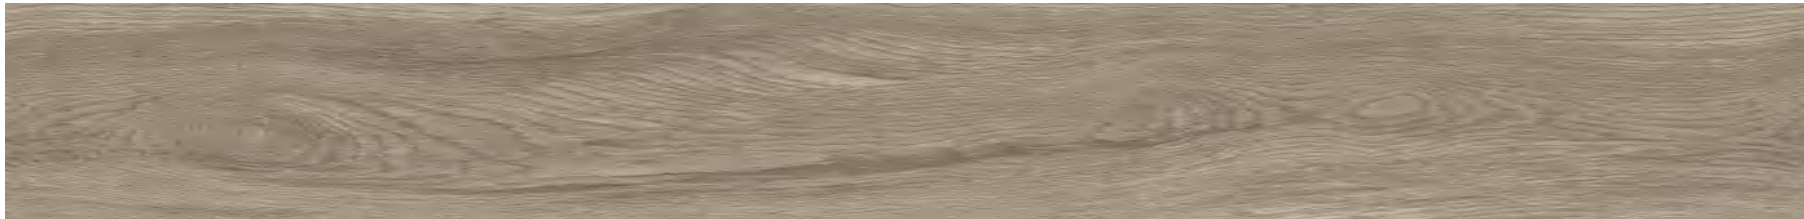


MOQ

100m²

walk on Green



RTS 20801







RTS 20802


MOQ

100m<sup>2</sup>

walk on Green



RTS 20803







RTS 20804




MOQ

100m<sup>2</sup>

walk on Green



RTS 20805







RTS 20806


MOQ

100m<sup>2</sup>

walk on Green



RTS 20807





Detailed installation instructions. The following are the product installation steps.

## INSTALLATION INSTRUCTIONS

walk on Green

At least 48 hours prior to installation, place the new rigid core SPC flooring in the room for acclimation. During installation, you can mix planks from different boxes to blend the dye lots/patterns to create a more uniform appearance.

**Good to Know**  
You may install vinyl over vinyl if the existing floor is one layer thick.

### Instructions

#### ***Step 1: Remove the Baseboards***

Start by removing the baseboards. First, cut through any paint sealing the baseboards to the wall using a utility knife. Then use a pry bar to gently loosen the baseboards.



#### ***Step 2: Prep Your Subfloor***

Prep your subfloor so that it's clean, dry and level within 3/16-inch change per 10 feet. Use a self-leveler on low spots and/or sand high spots of wood or concrete. Don't sand vinyl flooring as it may contain asbestos. Self-leveler is available in powder and pre-mixed form and is used to create a flat, smooth surface in flooring projects. The strength of the product is similar to concrete. Self-leveler dries fast, so you have to work quickly.

#### **Plan the Floor**

Keep in mind that some walls are bowed, so it's important to create a starting line that's square to the room.

### Instructions

#### ***Step 3: Mark the Center of the Room***

Mark the center of each wall and snap lines between them with a chalk line.



#### ***Step 4: Measure the Walls***

Measure from the center to the starting wall using a tape measure, subtracting the 5/16-inch expansion gap, and mark this distance at each end of the wall. Snap a chalk line between these two marks to get a straight line against the wall.



#### ***Step 5: Calculate the Width***

Finally, calculate the width of the last row. If it'll be less than 1/3 of a plank, cut about 1/3 of the plank off the first row to create even starting and finishing rows.





Detailed after-sales installation instructions. The following are the product installation steps. If you have any installation problems, please feel free to contact our salesman.

## INSTALLATION INSTRUCTIONS

walk on Green

### ***The First Row***

Getting the first row down properly will help ensure a successful vinyl flooring installation project.

Instructions

### ***Step 6: Score the First Row of Planks***

Score and cut the tongue off the first row of rigid core SPC floorings using a utility knife. Set the first plank in place on the starting line with the cut side toward the wall, maintaining the expansion gap.



### ***Step 7: Place the Planks***


Hold the next plank at a slight angle against the previous plank's end and fold down to click it into place. To cut the last piece to fit, score it with a utility knife and snap the plank.

The end piece must be at least 6 inches long. If it's not, cut a bit off the first plank and slide the row. You can also use excess cut pieces to start rows if the pieces are at least 6 inches long.




### ***The Second Row Onward***

The joints of your vinyl flooring must be staggered at least 6 inches. Measure and cut your first piece accordingly, using a cut end from the first row if necessary.

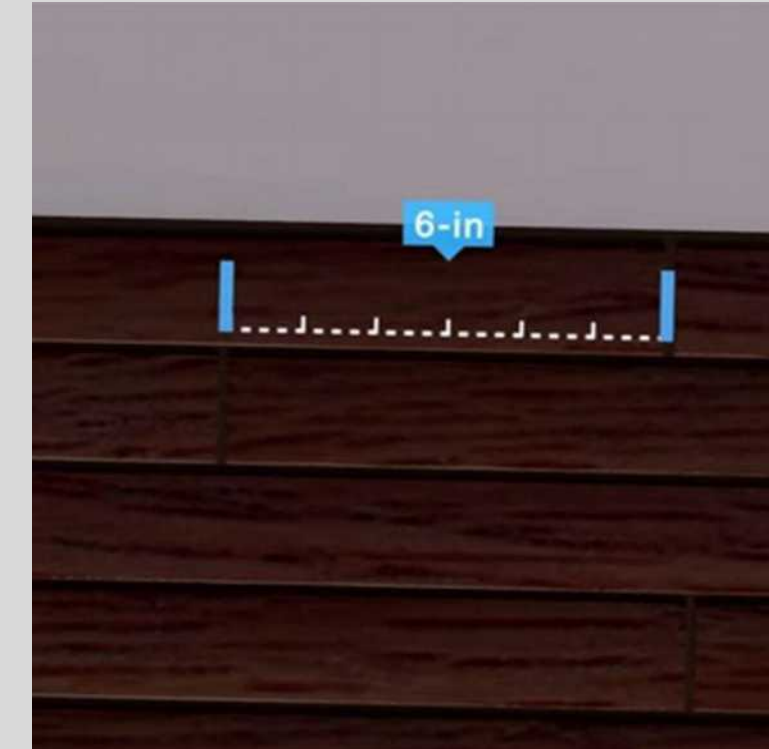

### ***Step 8: Insert the Tongue***

Insert the tongue of the first piece into the groove of the previous row's first plank and rotate down to click together.

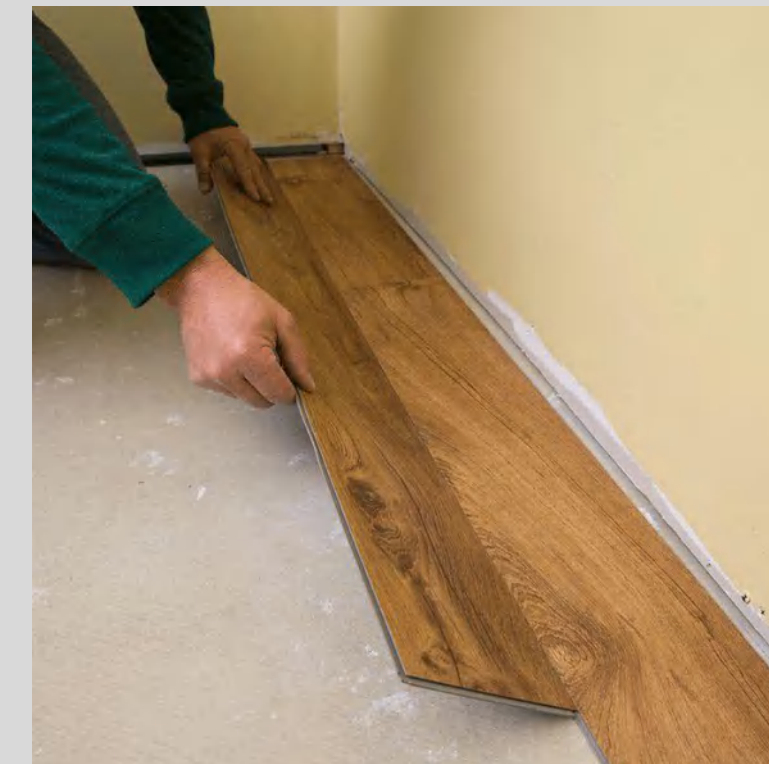


### ***Step 9: Connect the Short End***

For the next piece, connect the short end first and then the long end. You should feel it lock. Continue the installation, making sure to stagger the joints by 6 inches and maintain the expansion gap.



### ***Step 10: Install Under Door Jambs***

To get under door jambs, slightly bend the planks into place, and use a pull bar or tapping block to lock the joint if necessary.

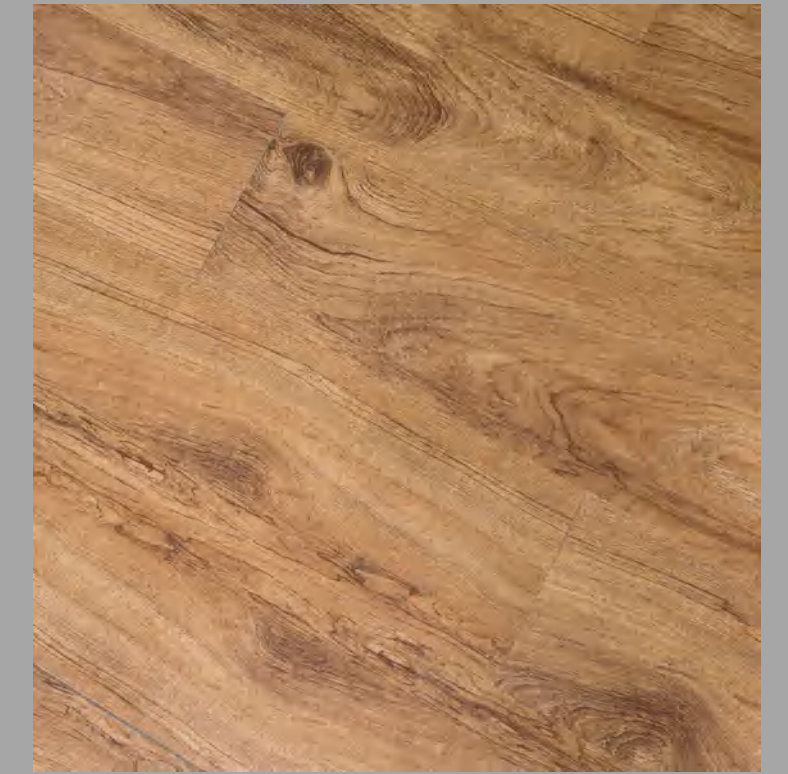





Your luxury rigid core SPC flooring only takes a few simple care and maintenance steps to keep your hanflor luxury vinyl or fiberglass sheet vinyl flooring looking beautiful for years to come.

## ***Regular Cleaning***

Hanflor rigid core SPC flooring outperforms other flooring types in heat, sun, and water resistance, so you can live more and worry less. Thanks to its high durability and water resistance, luxury vinyl is exceptionally easy to keep clean and looking like new. Use these best practices for regular care and maintenance to extend the life of your floor even further:

- When cleaning vinyl flooring, use a soft bristle broom to remove loose dirt.
- Damp-mop as needed with clean water and a nonabrasive floor cleaner.
- Harsh cleaning chemicals should not be used on vinyl flooring.

## ***Preventing Stains, Scuffs and Scratches***

- Spills should be cleaned up immediately
- Wash the floor with nonabrasive floor cleaner
- Never push, pull, or drag furniture across vinyl floors. Always lift and carry
- Heavy furniture or appliances that are not moved often should be equipped with flat, non-staining floor protectors
- Avoid using a vacuum with a beater bar
- For spot stain treatment, use a diluted bleach solution that is 1 part bleach, 10 parts water

For extra protection, invest in high-quality floor mats for an extra layer of protection. Place the mats at entrances and exits to collect and trap corrosive substances that can be tracked in, such as dirt, sand, oil, grit, asphalt and even driveway sealer.

# CARE OF MAINTENANCE



## ***Cleaning Tactics to Avoid***

The following cleaning products may cause additional damage to your vinyl flooring and should be avoided:

- Soap-based detergents
- Abrasive or mop and shine products
- Floor wax
- Vacuum cleaner with a rotating beater bar
- Ammonia or bleaches\*

\*For spot treatment, a diluted 1/10 solution of bleach/water is tolerable for stain removal.



# PLACE AN ORDER



You can visit our shop on alibaba.com for purchasing

Quick access to our alibaba shop

**Online Order** [https://www.alibaba.com/product-detail/Ready-to-Ship-bestselling-DIY-100\\_1600174994533.html?spm=a2747.manage.0.0.7ef071d2q09EH6](https://www.alibaba.com/product-detail/Ready-to-Ship-bestselling-DIY-100_1600174994533.html?spm=a2747.manage.0.0.7ef071d2q09EH6)



## Contact salesman to place an order

Please list the following points to hanflor salesman to get a quotation

- Item number
- Quantity needed
- Detailed shipping address
- Expected delivery time

# PAYMENT



## Online payment

① Pay to hanflor account

② Turn to Alibaba online order

within 3-5 days

# SHIPMENT




During the shipping period, we will keep you updated on the shipping status. To make sure that you know where are your goods and when you may receive them. The shipping time depends on the shipping way/line you chose.



China warehouse & agent

within 7 days



To door address


Contact us for details



Destination port

Contact us for details

# RECEIVE GOODS



Service after you receive the goods

- Product warranty policy
- Installation Instructions
- Maintenance Instructions
- Free product consultation


To help us on improving our product and service, we may contact you by email/phonecall/Instant chat after you received the goods, we do appreciate your suggestions.



## SERVICE EXTENSION




Suggestions on decoration scheme and overall solution provision

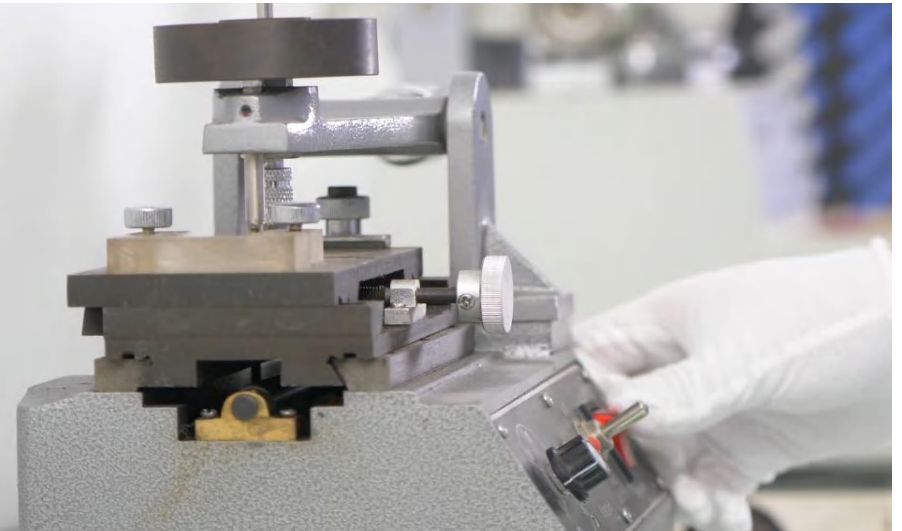

Provide product testing and quality control services



New trend product introduce

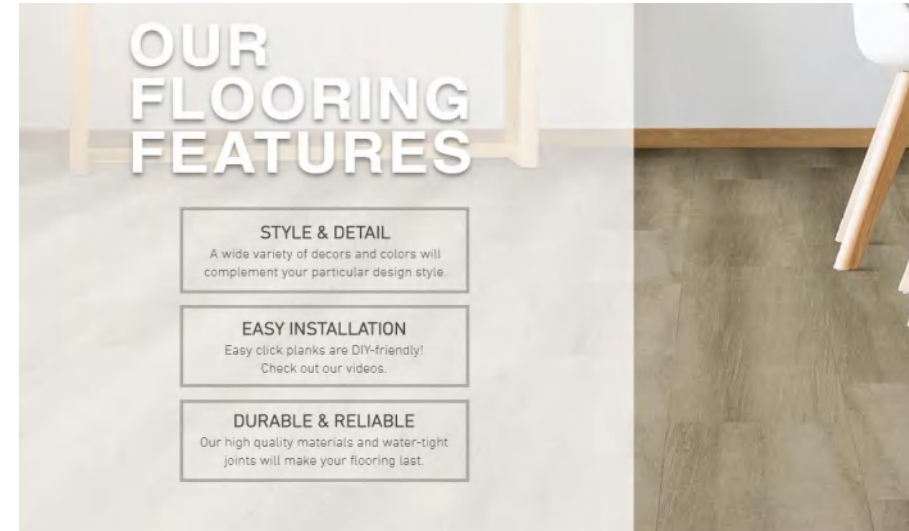

Provide product marketing materials

## CUSTOMER DEVELOPMENT SUPPORT



- **Market intelligence sharing**
- **Professional flooring knowledge support**
- **New product development support**



VIDEO COLLECTION



Company Promo ▼



Lab Introduction ▼



Installation Instruction ▼



Website: [www.hanflor.com](http://www.hanflor.com) | Facebook: @Hanflor China  
Tel: 86-571-85265001 | Fax: 86-571-85265096 | Email: [info@hanhent.com](mailto:info@hanhent.com)

HANHENT INTERNATIONAL (CHINA) CO.,LTD.  
HANGZHOU HANHENT INDUSTRIES CO.,LTD.  
3F Building 1, No. 181 Wuchang Avenue, Hangzhou, China 310023