


UniOP eTOP310

The UniOP eTOP Series 300 combines state-of-the-art features and performance with an outstanding design. They are the ideal choice for HMI applications including factory and building automation. The eTOP310 features an industry-standard 10.4" TFT display with full vector graphic capabilities. This is the ideal product for high-end HMI applications. Connections include Ethernet and USB.

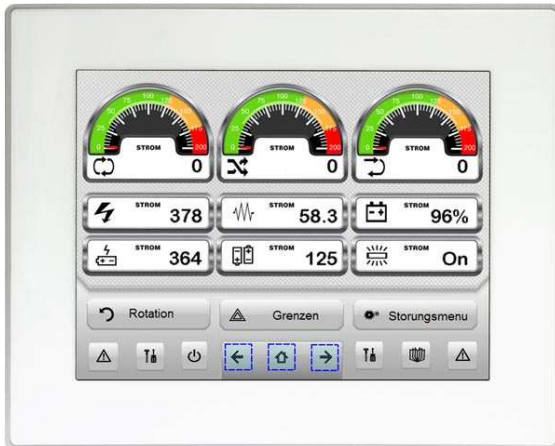

- 10.4" TFT color display, LED backlight
- 640x480 pixel (VGA) resolution, 64K colors
- Advanced vector graphics
- Resistive touchscreen
- 64 MB user memory
- 10/100 Ethernet interface
- USB interface
- Connection to bus systems using optional plug-in modules
- Slim design. Mounting depth less than 50mm

Highlights

The eTOP Series 300 HMI panels are fully compatible with UniOP Designer 6 software.

- Powerful and intuitive programming with the UniOP Designer 6 software.
- Supports more than 150 communication drivers.
- Built-in Ethernet port for communication with devices, programming the HMI from Designer and retrieving data from computers.
- USB host port for the connection of flash drives. Flash drives can be used for upgrading applications and firmware.
- Optional plug-in modules for fieldbus systems and networks. Compatible with TCM and SCM modules.
- Dual-driver communication capability.
- Vector graphic capabilities including the support of multiple layers and object transparency.
- Data display in numerical, text, bargraph, analog gauges and graphic image formats. Dynamic object properties supported.
- Data acquisition and trend presentation. Trend data can be transferred to a host computer using the Ethernet connection.
- Recipe data storage. Recipe data can be transferred to a host computer using the Ethernet connection or copied to flash drives via USB connection.
- Multilanguage applications. Far East languages are supported. The number of runtime languages is limited only by the available memory. All text information in the application can be exported to files in Unicode format for easier translation.
- Powerful macro editor to configure touchscreen operation
- Alarms and historical alarm list. Alarm and event information can be printed or transferred to a host computer.
- Eight level password protection.
- Report printing to serial printer. Reports are freely configurable using Designer.
- Ethernet-based UniNet network to share data between UniOP HMIs and to serve data using UniNet OPC Server.



Everything for your HMI running


✉ sales@vicpas.com

☎ +86-15876525394


Technical Data

Display		Hardware Real Time Clock	Yes, with battery back-up
Type	TFT	Screen saver	Yes
Resolution	640x480, VGA	Buzzer	Yes, audible feedback for touchscreen
Active display area	10.4" diagonal		
Colors	64K	Ratings	
Backlight	LED	Power supply voltage	24 Vdc (18 to 30 Vdc)
Brightness	250 Cd/m ² typ.	Current consumption	0.8 A at 24 Vdc(max.)
Dimming	Yes	Fuse	Automatic
		Weight	Approx 2.1 Kg
Memory		Battery	Rechargeable Lithium battery, not user-replaceable
User memory	64 MB internal Flash		
		Environmental Conditions	
Front panel		Operating temperature	0 to 50 °C
Touchscreen	Analog resistive	Storage temperature	-20 to +70 °C
User LED indicators	1	Operating and storage humidity	5 – 85 % relative humidity, non-condensing
System LED indicators	4	Protection class	IP65 (front panel) IP20 (rear)
		Dimensions	
Interfaces		Faceplate LxH	287x232 mm
Ethernet port	10/100 Mbit	Cutout AxB	276x221 mm
USB port	Host interface, version 1.1	Depth D+T	42mm+4mm
PC/Printer port	RS-232, RS-485, RS-422, software configurable		
PLC port	RS-232, RS-485, RS-422, software configurable	Approvals	
Aux port	Yes, fieldbus and controller modules	CE	Emission EN 61000-6-4 Immunity EN 61000-6-2 for installation in industrial environments
		UL	UL508 Listed Haz. Loc. Class I, Division 2, Groups A,B,C and D.
Functionality			
Vector graphics	Yes		
Object dynamics (hide/show)	Yes		
TrueType fonts	Yes		
Dual driver capability	Yes		
Video input	No		
Data acquisition and trends	Yes		
Multilanguage	Yes, number of run-time languages limited only by available memory		
Recipe memory	Yes. Flash memory storage limited only by available memory		
UniNet network	Client/Server		
Alarms	1024		
Event list	1024		
Password	Yes		

Dimensions

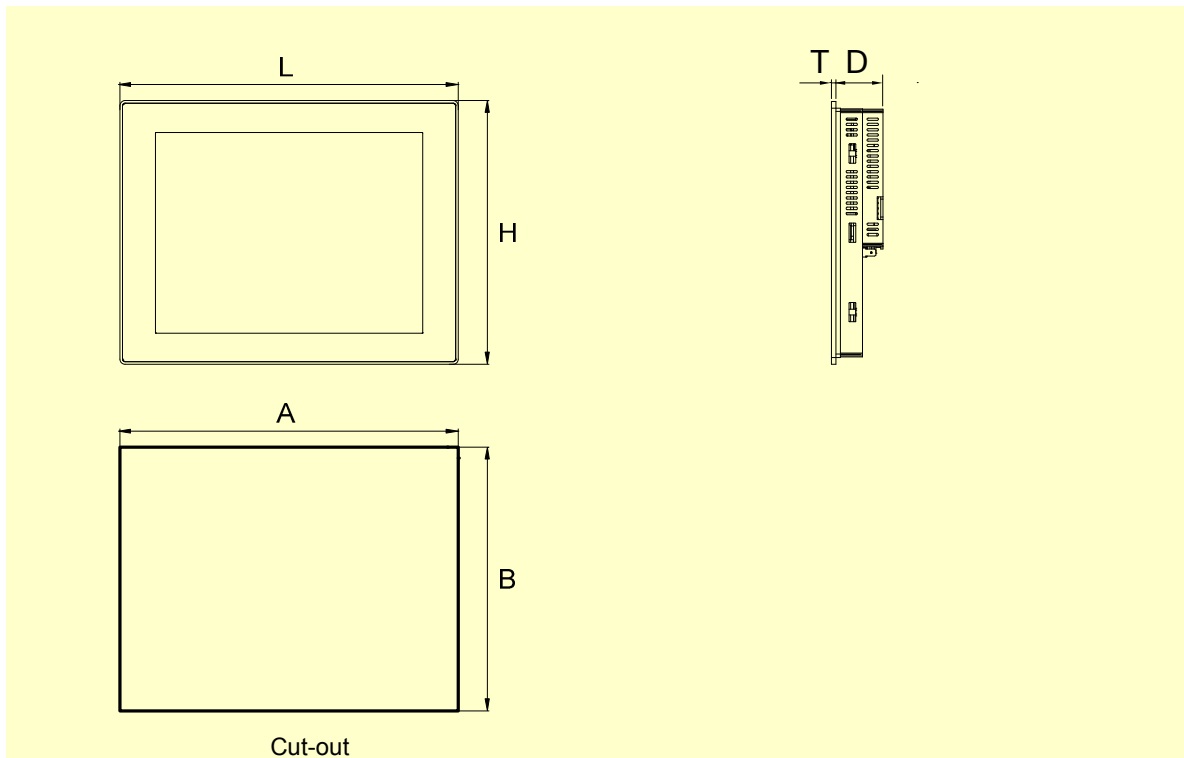

Connections

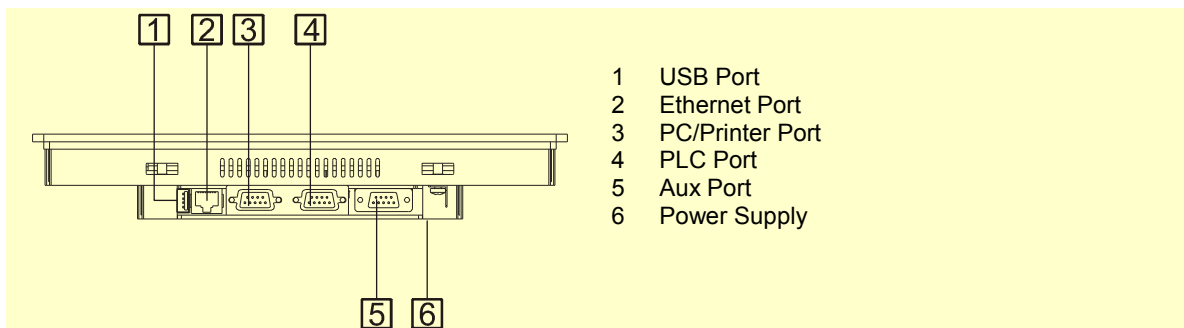

Ordering Information

Model	Part Number	Description
eTOP310	ETOP310U101	10.4" TFT color touchscreen with Ethernet and USB interfaces. White front panel.
	ETOP310U201	10.4" TFT color touchscreen with Ethernet and USB interfaces. Silver front panel.
	ETOP310U301	10.4" TFT color touchscreen with Ethernet and USB interfaces. Black front panel.
PROT-14		Disposable protection foil for 10.4" eTOP touch panels (10 pieces).
PROT-20		Disposable protection foil for 10.4" eTOP touch panels (10 pieces). UV resistant.

ptn0317

Ver. 1.5

Copyright © 2009-2014 Exor International S.p.A. – Verona, Italy

Subject to change without notice.

The information contained in this document is provided for informational purposes only. While efforts were made to verify the accuracy of the information contained herein, it is provided "as is" without warranty of any kind.

www.uniop.comptn0317-5.doc - 21.02.2014
UniOP eTOP310