



Conductive Face (導通面)
FPC-Type Cable

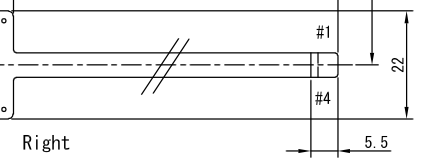

Part Number: N010-0554-T015

Generally Specs.

Transparency	80% Typ.
HAZE	5% Typ.
Pin Life	100,000 words min.
Finger Life	1,000,000 times min.
Linearity	1.5% max. [initial value]
	3.0% max. [after environmental & life test]

RoHS compliant

DATE DOCUMENT CONTROL SECTION

Connector Pin Assignment	
Pin #	Description
#1	Top
#2	Right
#3	Bottom
#4	Left

- NOTE
1. Tolerance: ±0.5. (指定なき公差は±0.5とする。)
 2. Pen & Finger input type. (本品はペン/指入力兼用タイプ。)
 3. Cable contact is Au. (by RoHS (Pb Free))

				TITLE Touch Panel	
				DRAW. NO. XXJ-711	
				CUST.	
				FUJITSU COMPONENT LIMITED	
EDIT.	DATE	DESIG.	CHECK	DESCRIPTION	
DESIG.	20041229	T. Nakajima	CHECK	APPR.	/