


Conductive Face (導通面)
FPC-Type Cable

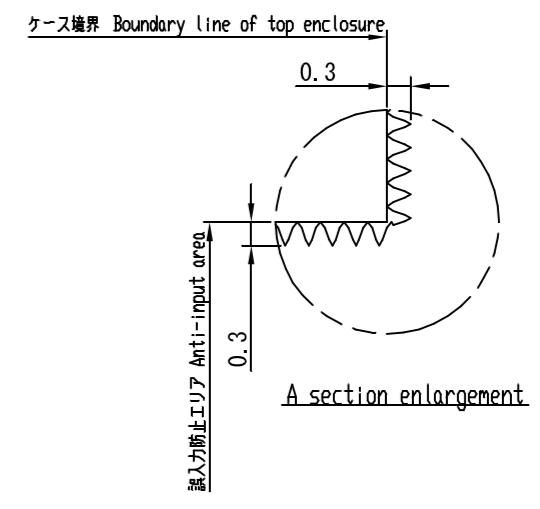

A section enlargement

Generally Specs.

Transparency	80% Typ.
HAZE	5% Typ.
Pen Life	100,000 words min.
Linearity	2.0% min. [initial value] 4.0% min. [after environmental & life test]

N010-0554-T506

Connector Pin Assignment

Pin #	Description
#1	Top
#2	Right
#3	Bottom
#4	Left

NOTE
 1. Tolerance: ±0.5. (指定なき公差は±0.5とする。)
 2. Pen & Finger input type. (本品はペン/指入力兼用タイプ。)

				TITLE Touch Panel	
				DRAW. NO. XXJ-471-3	
				CUST.	
EDIT	DATE	DESIG.	CHECK	DESCRIPTION	
DESIG.	20021203	T. Nakajima	CHECK	APPR.	FUJITSU COMPONENT LIMITED
					1/1

DATE DOCUMENT CONTROL SECTION