



GP2601-TC11 CE RoHS REACH

GP2601T - TFT Color

12.1" Operator Interface with serial port and industrial network connectivity support

The **GP2601T** is a high resolution operator interface touch screen. This unit provides 36% more viewing area than a GP2501 10.1 inch HMI unit in the same panel cutout. Single and two dimensional bar code readers interface directly to this unit via the tool port or serial port. The CompactFlash™ Port provides large non-volatile memory storage for production data, imported jpegs, recipes, historical alarming and machine maintenance information.

The **GP2001** family offers one of the largest selections of on HMI serial protocol connectivity available. Various optional industrial network interfaces such as DH+, Profibus, Modbus Plus, etc. are also available. Data logging to compact flash and a local printer port enables the GP2001 series to offer a low cost production data storage and reporting solution.

FEATURES

- 12.1 inch touch screen
- TFT 256 Color LCD
- 800 x 600 pixels
- Printer Port
- CompactFlash™ Port
- One RS-232/422 Com Port
- Barcode reader support
- System alarm output
- Optional Communication Module Interface

INFORMATION

Powerful secure data collection and sharing





Various HMI software solutions available to match your needs:

- Advanced featured Graphics Editor for drawing objects, animation, creating pre-configured operator objects, scripting, etc.
- Recipes Trending, Data Logging, Alarm/Event Management, Security, etc.
- Multi-level security password features
- Graphic file import: BMP, JPEG, EMF, PNG
- Time-scheduler for production shift monitoring

COMMUNICATION

Versatile interfaces support flexible and expanding control system needs

■ **SIO 1ch (COM1)** To connect various controllers

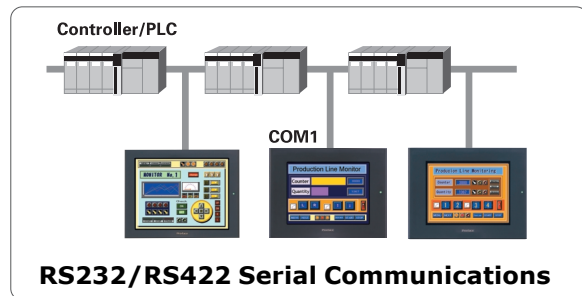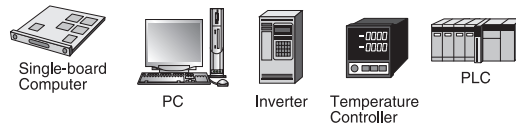

CONNECTIVITY - LARGEST SELECTION OF PROTOCOLS AVAILABLE!

Popular Controllers Supported:

<p>Schneider Twido Quantum Momentum Micro & Nano 984/884</p> <p>Toshiba V Series Prosec EX, T Provisor</p> <p>Yokogawa FA, FCN, FCJ UT Series</p> <p>Omron Symac Series</p>	<p>Rockwell SLC500 PLC-5 Control Logix MicroLogix Compact Logix FR Inverters</p> <p>Mitsubishi MELSEC-A MELSEC-FX MELSEC-Q MELSEC-QNA</p> <p>Koyo Kostac DL205, 305, 405 DL05 Series</p>	<p>GE Fanuc Series 90-30 Series 90-70 PowerMate (Motion Controller) Fanuc Series 16, 18, 16i, 18i, 21i</p> <p>Fuji Electric Panadac 7000 Micrex-F Flex-PC Temperature controllers</p> <p>Siemens Simatic-S5 Simatic-S7-200, 300, 400 Simatic-505</p> <p>Toyoda Toyopuc PC2/3</p>	<p>Popular Protocols</p> <p>Profibus Modbus Plus Interbus S Data Highway Plus CanOpen Remote I/O DeviceNet Modbus RTU DH485</p> <p>... and MORE</p>
---	---	--	---

GP2601T SPECIFICATIONS


FUNCTIONAL SPECIFICATIONS

Model	GP2601-TC11	
Display	Type	TFT Color LCD
	Colors	256 colors, No blink/64 colors, 3-speed blink
	Backlight	User replaceable CCFL (Service life: 50,000 hrs. or more at 25°C and 24 hrs. operation)
	Resolution	800 x 600 pixels
	Effective Display Area (mm)	(W)246.0mm [9.69in.] x (H)184.5mm [7.27in.]
Memory	Brightness Control	4 levels of adjustment available via touch panel
	Application	4 MB FLASH FEPRM
	Data Backup	128KB SRAM - uses a lithium battery
Interfaces	Serial (COM 1) Interface	RS-232C/RS-422 configurable, 25 pin D-sub, Data Transmission Speed: 2400 to 115.2 kbps
	Tool Connector	8-pin mini Din for programming or barcode readers
	Certifications	CE, CUL, UL Cl 1 Div 2 Groups A, B, C, D
	CF Card Interface	1 slot (CompactFlash™)
	Expansion Interface	Yes - for optional communication modules

GENERAL SPECIFICATIONS

Electrical	Rated Voltage	100VAC to 240VAC
	Rated Voltage Range	85VAC to 265VAC
	Power Consumption	50VA or less (AC IN 100V), and 85VA or less (AC IN 240V)
Environmental	Ambient Operating Temp.	0°C to 50°C
	Storage Temperature	-20°C to 60°C
	Storage Humidity	10%RH to 90%RH (non-condensing, wetbulb temperature: 39°C or less)
	Vibration Resistance	IEC61131-2 compliant. When vibration is NOT continuous: 10Hz to 57Hz 0.075mm, 57Hz to 150Hz 9.8m/s ² When vibration is continuous: 10Hz to 57Hz 0.035mm, 57Hz to 150Hz 4.9m/s ² X,Y, Z direction for 10 times (80min.)
Structural	Ratings	(For front panel of installed unit) Equivalent to IP65f, Nema #250 Type 4x/12
	External Dimensions	W317mm[12.48in.] x H243mm [9.57in.] x D58mm [2.28in.] (main unit only)
	Weight	3.5kg (7.72lb) or less (main unit only)

EXTERNAL DIMENSIONS

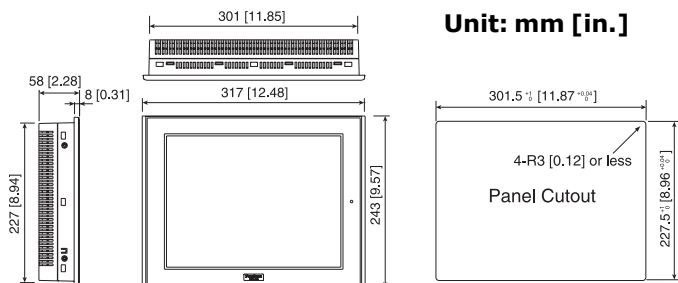

OPTIONAL COMM. MODULES

CA3-MBPALL-41	Modbus Plus interface module
CA1-PFSALL-21	Profibus DP Slave interface module
CA1-DNSALL-21	DeviceNet Slave Interface module
CA1-COSALL-21	CANopen Slave Interface module
QPI-ABD-201*	AB Data Highway Plus interface module
QPI-ABR-201*	AB 1771 Remote I/O interface module
*PSL-CONV00	Required adapter when using QPI communication modules

ORDERING INFORMATION

ORDER NUMBER	DESCRIPTION
GP2601-TC11	12.1" Color TFT, Universal AC powered, serial communications

OPTIONAL ACCESSORIES

PSL-DF00	Screen protection sheets, qty 5
PS600-BU00	Backlight replacement
GPW-CB02	Data transfer cable, GP to PC 9 Pin RS-232 D-Sub
GPW-CB03	Data transfer cable, GP to PC USB port

Xycom Automation, Inc.
a Pro-face America Company
734-429-4971
Fax: 734-429-1010
<http://www.xycom.com>

Customer Support Hotline:
734-944-0482



© 2005 Xycom Automation, Inc. Is a wholly owned subsidiary of Pro-face America, Inc. Specifications may change without notice. Xycom Automation is a trademark of Xycom Automation. Other brand or product names are the property of their respective owners.



California Proposition 65 Warning—Lead and Lead Compounds

Advertencia de la Proposición 65 de California—Plomo y compuestos de plomo

Avertissement concernant la Proposition 65 de Californie—Plomb et composés de plomb

⚠ WARNING: This product can expose you to chemicals including lead and lead compounds, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to: www.P65Warnings.ca.gov.

⚠ ADVERTENCIA: Este producto puede exponerle a químicos incluyendo plomo y compuestos de plomo, que es (son) conocido(s) por el Estado de California como causante(s) de cáncer y defectos de nacimiento u otros daños reproductivos. Para mayor información, visite : www.P65Warnings.ca.gov.

⚠ AVERTISSEMENT: Ce produit peut vous exposer à des agents chimiques, y compris plomb et composés de plomb, identifiés par l'État de Californie comme pouvant causer le cancer et des malformations congénitales ou autres troubles de l'appareil reproducteur. Pour de plus amples informations, prière de consulter: www.P65Warnings.ca.gov.

All trademarks are the property of Schneider Electric SE, its subsidiaries, and affiliated companies.

Schneider Electric USA, Inc.
800 Federal Street
Andover, MA 01810 USA
888-778-2733
www.schneider-electric.us

Todas las marcas comerciales son propiedad de Schneider Electric SE, sus filiales y compañías afiliadas.

Importado en México por:
Schneider Electric México, S.A. de C.V.
Av. Ejercito Nacional No. 904
Col. Palmas, Polanco 11560 México, D.F.
55-5804-5000
www.schneider-electric.com.mx

Toutes les marques commerciales sont la propriété de Schneider Electric SE, ses filiales et compagnies affiliées.

Schneider Electric Canada, Inc.
5985 McLaughlin Road
Mississauga, ON L5R 1B8 Canada
800-565-6699
www.schneider-electric.ca