

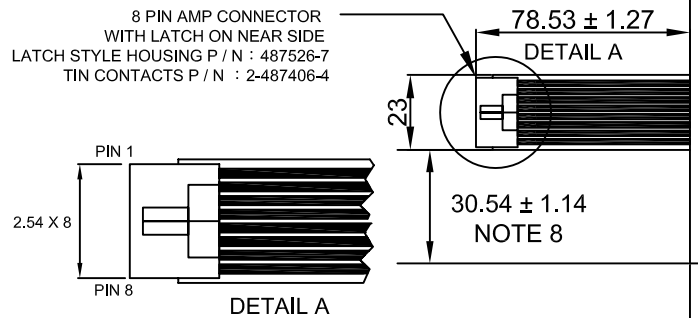



NOTE:

- 1.BACKER PANEL TO BE MADE FROM .062"(INCH) CHEMICALLY STRENGTHENED GLASS.
- 2.FRONT SURFACE TO BE HARD COATED TO GENERATE 2% - 5% HAZE,WITH 80% CLARITY.
- 3.PANEL LIGHT TRANSMISSION TO BE 80% ± 2%.
- 4.ALL ARTWORK TRACES ARE TO BE LOCATED OUTSIDE TOUCH VIEW AREA DIMENSIONS.
- 5.ALL ITO ACTIVE AREA TO BE LOCATED INSIDE TOUCH ACTIVE AREA DIMENSIONS.
- 6.MODIFIED TAIL LENGTH TO ACCOUNT FOR ENLARGED GLASS PANEL.
- 7.CABLE IS ATTACHED TO THE LEFT SIDE OF TOUCH PANEL AS SHOWN.
- 8.TAIL CONNECTOR:PITCH 2.54mm.

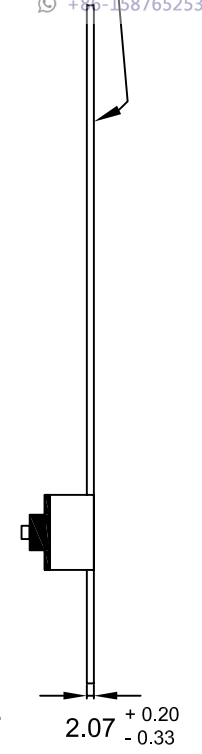

CONNECTOR PINOUT	
PIN NO	ASSIGNMENT
1	Top excite
2	Top sense
3	Left sense
4	Left excite
5	Bottom excite
6	Bottom sense
7	Right sense
8	Right excite

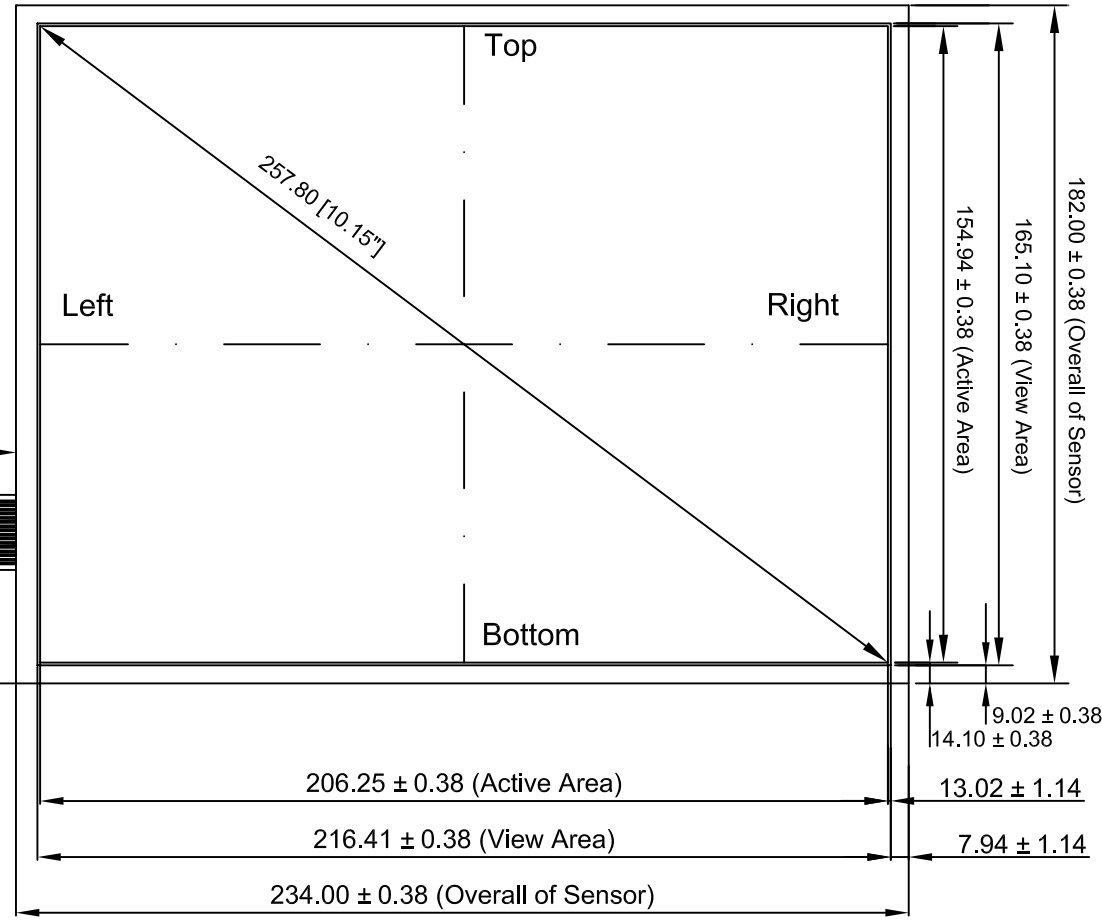

LAYER CONSTRUCTION

P/N	COVERSHEET TYPE	GLASS THICKNESS	FINISHED PART THICKNESS
8WR1042AW2	ANTI-GLARE CLEAR	1.8	2.1 ± 0.2

宇鴻光電股份有限公司 ATouch Technologies Co., Ltd.		
MODEL NUMBER		8WR104-2
DRAWN BY	DIMENSION UNIT	ISSUE DATE
KEN JHUANG	mm	12 / 20 / 07
CHECKED BY	SCALE	REV
MELISSA WEI	NOT TO SCALE	E