



NOTES:

- ALL DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS SHOWN ARE PROJECTED DISTANCES.
- GLASS THICKNESS: 4 mm NOMINAL.
- TRANSDUCERS ARE LOCATED AT THE POSITIONS SHOWN. GLASS IS BEVELED UNDER TRANSDUCERS.
- CABLES ARE ROUTED ALONG THE EDGE OF THE GLASS.
- THE TOUCH ACTIVE AREA IS LESS THAN THE VIEWABLE AREA TO FACILITATE SEALING.
- ARRAY PATTERNS ARE CENTERED ON GLASS WITH A TOLERANCE OF ± 1.3mm.

CONNECTION CHART			
PIN	SIGNAL	INSULATION COLOR	JACKET COLOR
1	GROUND	OVERALL SHIELD	
2	KEY		
3	Y RECEIVE+	BLU	BLK
4	Y TRANSMIT+	BLU	GRY
5	Y RECEIVE-	BLK	BLK
6	Y TRANSMIT-	YEL	GRY
7	GROUND	INNER SHIELD	
8	X TRANSMIT-	RED	RED
9	X RECEIVE-	RED	BLK
10	X TRANSMIT+	GRN	RED
11	X RECEIVE+	WHT	BLK
12	KEY		

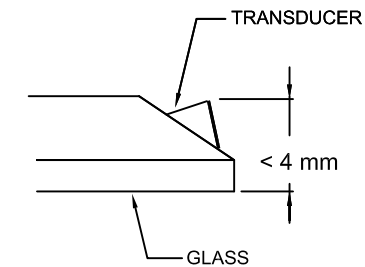

宇鴻光電股份有限公司 ATouch Technologies Co., Ltd.		
P/N: SAW24042G5		
DRAWN BY JOHNSON TZENG	DIMENSION UNIT mm	ISSUE DATE 09 / 16 / 09
CHECKED BY	SCALE NOT TO SCALE	REV 2