

# C-more Operator Panels Overview

## Getting started

Installing the software and configuring the **C-more** panel is simple. You will need the following to successfully connect, configure and send a project to the panel:

- **C-more** touch panel - 6", 8", 10", 12" or 15" model
- **C-more** Programming Software, p/n EA9-PGMSW
- **C-more** programming cable, USB or Ethernet
- 12-24 VDC switching power supply or the optional **C-more** AC Power Adapter, p/n EA-AC
- Personal Computer - to run **C-more** programming software
- PLC communications cable (serial or Ethernet) to connect the **C-more** Touch Panel to your controller

Part Number	Description	Price
<b>EA9-T6CL-R</b>	<b>C-more</b> EA9 series touch screen interface panel, 6-inch color TFT (5.7 inch viewable screen), base model, 64k colors, 320 x 240 pixel QVGA screen resolution, 800 MHz CPU, 12-24 VDC powered, NEMA 4/4X, IP65 (when mounted correctly; for indoor use only), non-replaceable LED backlight. Includes (1) serial port, USB 2.0 Type A and B ports, supports SD memory card, no Ethernet support. Compatible with EA9-PGMSW programming software version 5.0 or later.	\$499.00
<b>EA9-T6CL</b>	<b>C-more</b> EA9 series touch screen interface panel, 6-inch color TFT (5.7 inch viewable screen), 64k colors, 320 x 240 pixel QVGA screen resolution, 800 MHz CPU, 12-24 VDC powered, NEMA 4/4X, IP65 (when mounted correctly; for indoor use only), non-replaceable LED backlight. Includes (3) serial ports, USB 2.0 Type A and B ports and Ethernet port; supports SD memory card. Compatible with EA9-PGMSW programming software version 5.0 or later.	\$699.00
<b>EA9-T8CL</b>	<b>C-more</b> EA9 series touch screen interface panel, 8-inch color TFT (8.4 inch viewable screen), 64k colors, 800 x 600 pixel SVGA screen resolution, 800 MHz CPU, 12-24 VDC powered, NEMA 4/4X, IP65 (when mounted correctly; for indoor use only), non-replaceable LED backlight. Includes (3) serial ports, USB 2.0 Type A and B ports and Ethernet port; supports SD memory card. Compatible with EA9-PGMSW programming software version 5.0 or later.	\$999.00
<b>EA9-T10CL</b>	<b>C-more</b> EA9 series touch screen interface panel, 10-inch color TFT (10.4 inch viewable screen), 64k colors, 800 x 600 pixel SVGA screen resolution, 800 MHz CPU, 12-24 VDC powered, NEMA 4/4X, IP65 (when mounted correctly; for indoor use only), non-replaceable LED backlight. Includes (3) serial ports, USB 2.0 Type A and B ports and Ethernet port; supports SD memory card. Compatible with EA9-PGMSW programming software version 5.0 or later.	\$1,290.00
<b>EA9-T12CL</b>	<b>C-more</b> EA9 series touch screen interface panel, 12-inch color TFT (12.1 inch viewable screen), 64k colors, 800 x 600 pixel SVGA screen resolution, 800 MHz CPU, 12-24 VDC powered, NEMA 4/4X, IP65 (when mounted correctly; for indoor use only), non-replaceable LED backlight. Includes (3) serial ports, USB 2.0 Type A and B ports and Ethernet port; supports (2) SD memory cards. Includes HDMI video out. Compatible with EA9-PGMSW programming software version 5.0 or later.	\$1,790.00
<b>EA9-T15CL</b>	<b>C-more</b> EA9 series touch screen interface panel, 15-inch color TFT (15 inch viewable screen), 64k colors, 1024 x 768 pixel XGA screen resolution, 800 MHz CPU, 12-24 VDC powered, NEMA 4/4X, IP65 (when mounted correctly; for indoor use only), non-replaceable LED backlight. Includes (3) serial ports, USB CR-272.0 Type A and B ports and Ethernet port; supports (2) SD memory cards. Includes HDMI video out. Compatible with EA9-PGMSW programming software version 5.0 or later.	\$1,999.00
<b>EA9-PGMSW</b>	<b>C-more</b> Windows-based programming software on CD for the <b>C-more</b> EA9 series touch panels. Requires Windows XP Pro 32-bit, Windows 7 (Pro, Ultimate, 32 or 64-bit) or Windows 8 (Pro, Ultimate, 32 or 64-bit). Requires USB or Ethernet connection to touch panel. Cables sold separately. (Does not support <b>C-more</b> EA7 series panels.)	\$99.00
<b>USB-CBL-AB3</b>	Standard 3-ft. (0.9m) USB 2.0 cable, A-type connector to B-type connector, used to connect personal computer to any <b>C-more</b> touch panel for setup and programming. (Note: Touch panels require a power source for configuration and operation.)	\$7.50
<b>USB-CBL-AB6</b>	Standard 6-ft. (1.8m) USB 2.0 cable, A-type connector to B-type connector, used to connect personal computer to any <b>C-more</b> touch panel for setup and programming. (Note: Touch panels require a power source for configuration and operation.)	\$9.50
<b>USB-CBL-AB10</b>	Standard 10-ft. (3 meter) USB 2.0 cable, A-type connector to B-type connector, used to connect personal computer to any <b>C-more</b> touch panel for setup and programming. (Note: Touch panels require a power source for configuration and operation.)	\$18.00
<b>USB-CBL-AB15</b>	Standard 15-ft. (4.6m) USB 2.0 cable, A-type connector to B-type connector, used to connect personal computer to any <b>C-more</b> touch panel for setup and programming. (Note: Touch panels require a power source for configuration and operation.)	\$22.50

Company  
Information

Control Systems  
Overview

CLICK PLC

Do-More  
PLCs Overview

Do-More H2  
PLC

Do-More T1H  
PLC

DirectLOGIC  
PLCs Overview

DirectLOGIC  
DL05/06

DirectLOGIC  
DL105

DirectLOGIC  
DL205

DirectLOGIC  
DL305

DirectLOGIC  
DL405

Productivity  
Controller  
Overview

Productivity  
3000

Universal  
Field I/O

Software

C-More  
HMI

C-More Micro  
HMI

ViewMarq  
Industrial  
Marquees

Other HMI

Communications

Appendix  
Book 1

Terms and  
Conditions

# C-more Selection Guide & Specifications

Model	6" TFT color w/ base features	6" TFT color w/ full features	8" TFT color w/ full features	10" TFT color w/ full features	12" TFT color w/ full features	15" TFT color w/ full features
Specification						
Part Number	EA9-T6CL-R	EA9-T6CL	EA9-T8CL	EA9-T10CL	EA9-T12CL	EA9-T15CL
Price	\$499.00	\$699.00	\$999.00	\$1,290.00	\$1,790.00	\$1,999.00
Display Actual Size and Type	5.7" TFT color		8.4" TFT color	10.4" TFT color	12.1" TFT color	15.0" TFT color
Display Viewing Area	4.54" x 3.40" [115.2 mm x 86.4 mm]		6.71" x 5.03" [170.4 mm x 127.8mm]	8.31" x 6.24" [211.2 mm x 158.4 mm]	9.69" x 7.26" [246.0 mm x 184.5 mm]	11.97" x 8.98" [304.1 mm x 228.0 mm]
Weight	1.56 lb [710g]	1.59 lb [720g]	2.93 lb [1330g]	4.19 lb [1900g]	4.89 lb [2200g]	6.50 lb [2950g]
Screen Pixels	320 x 240 (QVGA)		800 x 600 (SVGA)			1024 x 768 (XGA)
Display Brightness	280 nits (typ)		310 nits (typ)	280 nits (typ)		
LCD Panel Dot Pitch	0.18 mm x 0.18 mm		0.213 mm x 0.213 mm	0.264 mm x 0.264 mm	0.3075 mm x 0.3075 mm	0.297 mm x 0.297 mm
Color Scale	65,536 colors					
Backlight Average Lifetime*	50,000 hours @ 25°C					
Touch Panel Type**	Four-wire analog resistive, single touch					
Project Memory	26MB			82MB		
Number of Screens	Up to 999 screens – limited by project memory					
Realtime Clock	Realtime Clock Built into panel, backed up for 30 days at 25°C					
Calendar - Month / Day / Year	Yes - monthly deviation 60 sec (Reference)					
Serial Port 1	15-pin D-sub female - RS232C, RS-422/485					
Serial Port 2	N/A	3-wire terminal block - RS-485				
Serial Port 3	N/A	RJ-12 modular jack - RS-232C				
USB Port - Type B	USB 2.0 High speed (480 Mbps) Type B - Download/Program					
USB Port - Type A	USB 2.0 High speed (480 Mbps) Type A -for USB device options					
Ethernet Port	N/A	Ethernet Port Ethernet 10/100 Base-T, auto MDI/MDI-X				
Audio Line Out	N/A	3.5 mm mini jack – requires amplifier and speaker(s)				
Mic In (Future)	N/A	3.5 mm mini jack				
SD Card Slot	1 slot supports max 2 GB (SD,) max 32 GB (SDHC)				2 slots support max 2 GB (SD), max 32 GB (SDHC)	
HDMI Video Out	N/A				Yes	
HDMI Supported Resolution	N/A				800 x 600 (SVGA)	1024 x 768 (XGA)
Supply Power	10.2-26.4 VDC Class 2, or use the AC/DC Power Adapter, EA-AC, to power the touch panel from a 100-240 VAC, 50/60 Hz power source. Reverse Polarity Protected					
Power Consumption	16.0 W 1.30 A @ 12VDC 0.66 A @ 24VDC		18.0 W 1.50 A @ 12VDC 0.75 A @ 24VDC	18.0 W 1.50 A @ 12VDC 0.75 A @ 24VDC	21.0 W 1.75 A @ 12VDC 0.88 A @ 24VDC	29.0 W 2.40 A @ 12VDC 1.20 A @ 24VDC
Internal Fuse (non-replaceable)	4.0 A		6.3 A			
Operating Temperature	0 to 50 °C (32 to 122 °F) Maximum surrounding air temperature rating: 50°C (122°F) IEC 60068-2-14 (Test Nb, Thermal Shock)					
Storage Temperature	-20 to +60°C (-4 to +140 °F) IEC 60068-2-1 (Test Ab, Cold) IEC 60068-2-2 (Test Bb, Dry Heat) IEC 60068-2-14 (Test Na, Thermal Shock)					
Humidity	5–95% RH (non-condensing)					
Environment	For use in Pollution Degree 2 environment, no corrosive gases permitted					
Noise Immunity	NEMA ICS3-304 ( EN61131-2 ) RFI (145MHz, 440Mhz 10W @ 10cm) Impulse 1000V @ 1mS pulse EN61000-4-2 (ESD), EN61000-4-3 (RFI) EN61000-4-4 (FTB) EN61000-4-5 (Serge) EN61000-4-6 (Conducted) EN61000-4-8 (Power frequency magnetic field immunity)					
Withstand Voltage	1000 VAC, 1 min. (FG to Power supply )					
Insulation Resistance	> 10M ohm @ 500VDC (FG to Power supply )					
Vibration	IEC60068-2-6 (Test Fc)					
Shock	IEC60068-2-27 (Test Ea)					
Emission	EN55011 Class A (Radiated RF emission)					
Enclosure	NEMA 250 type 4/4X indoor use only UL50 type 4X indoor use only IP-65 indoor use only (When mounted correctly)					
Agency Approvals	UL508, E157382 CE (EN61131-2), RoHS (2011/65/EU) CUL Canadian C22.2					
NOTES:	*The backlight average lifetime is defined as the average usage time it takes before the brightness becomes 50% of the initial brightness. The lifetime of the backlight depends on the ambient temperature. The lifetime will decrease under low or high temperature usage. **The touchscreen is designed to respond to a single touch. If it is touched at multiple points at the same time, an unexpected object may be activated.					

# C-more 8" TFT Color Touch Panel - Full Model


Part No. EA9-T8CL

**C-more** EA9 series touch screen interface panel, 8-inch color TFT (8.4 inch viewable screen), 64k colors, 800 x 600 pixel SVGA screen resolution, 800 MHz CPU, 12-24 VDC powered, NEMA 4/4X, IP65 (when mounted correctly; for indoor use only), non-replaceable LED backlight. Includes (3) serial ports, USB 2.0 Type A and B ports and Ethernet port; supports SD memory card. Compatible with EA9-PGMSW programming software version 5.0 or later.

## Features

- 8.4" diagonal color TFT (Thin Film Transistor) LCD display with 64K colors
- 800 x 600 pixel resolution
- 310 NITS display brightness
- 50,000 hour average backlight half-life
- Analog resistive (1024 X 1024) touch screen allowing unlimited touch areas
- USB port B (program/download) and USB port A (USB device options)
- Ethernet 10/100 Base-T port (program/download & PLC communication)
- Remote Internet Access
- Serial PLC interface (RS-232/422/485)
- One built-in SD memory card slot
- 12-24 VDC powered, 110VAC power adapter (optional)
- Audio Line Out, stereo - requires amplifier and speaker(s)
- 26MB project memory
- Data logging
- 0 to 50°C [32 to 122°F] operating temperature range
- NEMA 4/4X, IP65 compliant when mounted correctly, indoor use only
- Slim design saves panel space
- UL, cUL & CE agency approvals
- 2-year warranty from date of purchase


Function	Available
Ethernet	Yes
USB	Yes
SD Card	Yes
Audio Out	Yes
HDMI Video Out	No




**\$999.00**

## Dimensions

inches / [mm]

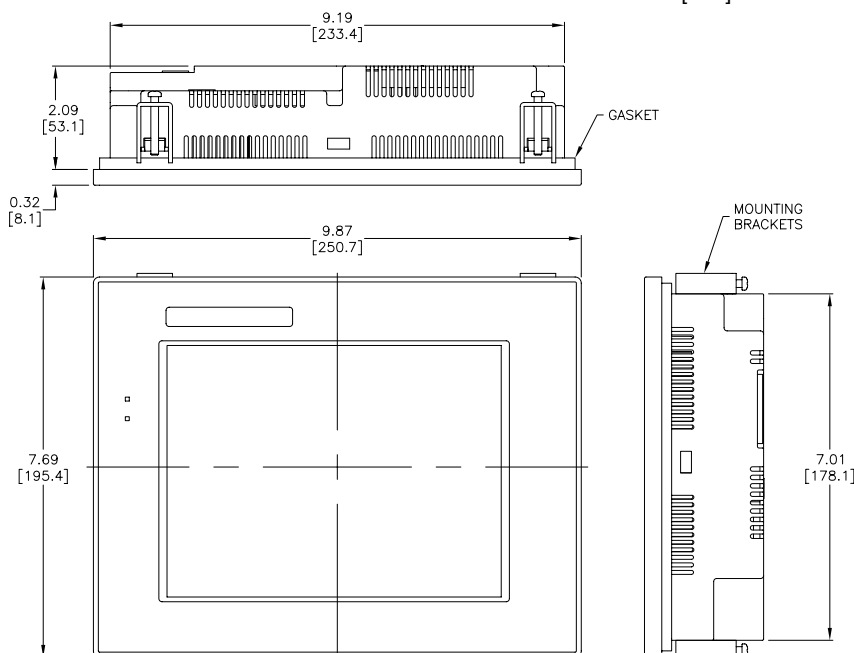

## Mounting Cutout

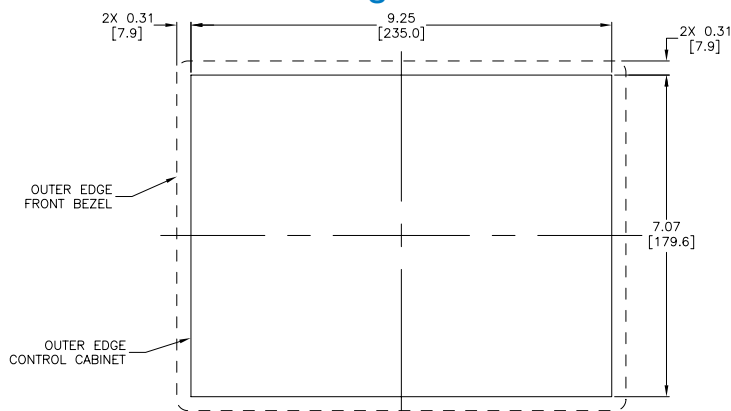

Company  
Information

Control Systems  
Overview

CLICK PLC

Do-More  
PLCs Overview

Do-More H2  
PLC

Do-More T1H  
PLC

DirectLOGIC  
PLCs Overview

DirectLOGIC  
DL05/06

DirectLOGIC  
DL105

DirectLOGIC  
DL205

DirectLOGIC  
DL305

DirectLOGIC  
DL405

Productivity  
Controller  
Overview

Productivity  
3000

Universal  
Field I/O

Software

C-More  
HMI

C-More Micro  
HMI

ViewMarq  
Industrial  
Marquees


Other HMI

Communications

Appendix  
Book 1

Terms and  
Conditions

# C-more Communication Ports

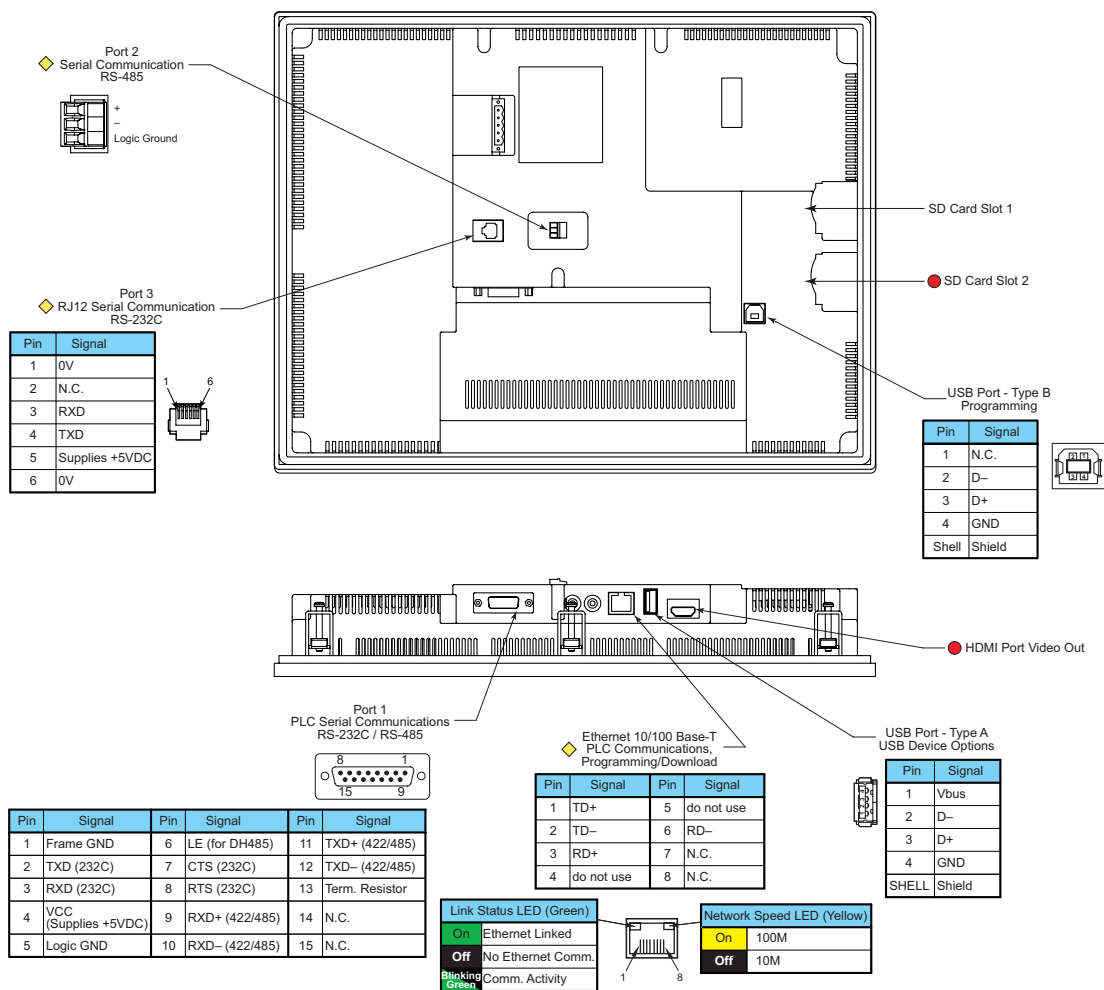

◆ Note: Device is not available on Base Feature touch panel EA9-T6CL-R  
● Note: Device is only available on touch panels EA9-T12CL and EA9-T15CL.

## Ethernet Port

The Ethernet port has several uses:

- Download program to panel
- Communicate to PLCs/PCs
- Send e-mail
- Access FTP server
- Act as a Web server
- Remote Internet Access

The Ethernet port has an RJ-45 8-wire modular connector with green and yellow LEDs.

- The yellow LED indicates network speed; off for a 10 Mbps connection and illuminated for a 100 Mbps connection.
- The green LED indicates link status and illuminates when a link is established.

Note: The base panels (-R part numbers) do not include an Ethernet port, and do not have these capabilities.

## USB Port B

Program **C-more** via the USB programming port. It's fast and easy, with no baud rate settings, parity, or stop bits to worry about. We stock standard USB cables for your convenience. USB Port B can be used to upload or download projects to and from a PC.

## USB Port A

The Universal Serial Bus (USB) Port A is a standard feature for all models and can be used to connect various USB HID (Human Input Device) devices to the panel, such as:

- USB pen drives, (USB-FLASH)
- USB keyboards
- USB barcode scanners
- USB card scanners

**C-more** can log data to the USB pen drive as well as load projects to the panel from the pen drive. You can also back up project files and panel firmware.

## Sound Interface (Audio Line Out)

When attached to an amplifier and speaker(s), **C-more** can play warning sounds or pre-recorded messages such as: "conveyor is jammed". **C-more** supports WAV type files. The output is stereo.

## Serial Port

**Port 1** - Connect to your serial controller network via Port 1. Port 1 is a 15-pin port that supports RS-232 or RS-422/485.

**Port 2** - Connect your RS-485 network via Port 2. Port 2 is provided with a 3-wire removable terminal block.

**Port 3** - Connect to your RS-232C device via Port 3. Port 3 is an RJ12 connection.

## HDMI Video Out

EA9-T12CL and EA9-T15CL include an HDMI Type A port to provide video output to a projector or remote monitor.


# c-more Communication Protocols & Cables

Compatibility Table				
PLC Family	Model		Protocols	
Allen-Bradley	MicroLogix 1000, 1100, 1200, 1400, 1500, SLC 5-01/02/03		DH485/AIC/AIC+	
	MicroLogix 1000, 1100, 1200, 1400 and 1500 SLC 5-03/04/05		DF1 Half Duplex; DF1 Full Duplex	
	ControlLogix™, CompactLogix™, FlexLogix™			
	PLC-5		DF1 Full Duplex	
	ControlLogix, CompactLogix, FlexLogix - Tag Based		DF1 Half Duplex; DF1 Full Duplex	
	ControlLogix, CompactLogix, FlexLogix - Generic I/O Messaging		EtherNet/IP Server	
	ControlLogix, CompactLogix, FlexLogix - Tag Based		EtherNet/IP Client	
	Micrologix 1100, 1400 & SLC5/05, all via native Ethernet port			
	MicroLogix 1000, 1100, 1200, 1400,1500 & SLC 5-03/04/05, all via ENI Adapter			
	Micro 800 series		Modbus RTU	
		Modbus TCP		
Modbus RTU	Modbus RTU devices		Modbus RTU	
Modbus TCP/IP	Modbus TCP/IP devices		Modbus TCP/IP	
GE	90/30, 90/70, Micro 90, VersaMax Micro		SNPX	
Mitsubishi	FX Series		FX Direct	
	Q02, Q02H, Q06H, Q12H, Q25H		Q CPU	
	Q, QnA Serial		QnA Serial	
	Q, QnA Ethernet		QnA Ethernet	
Omron	C200 Adapter, C500		Host Link	
	CJ1/CS1 Serial, CJ1/CS1 Ethernet		FINs	
Modicon	984 CPU, Quantum 113 CPU, AEG Modicon Micro Series 110 CPU: 311-xx, 411-xx, 512-xx, 612-xx		Modbus RTU	
Siemens	S7-200 CPU, RS-485 Serial		PPI	
	S7-200 CPU, S7-300 CPU, S7-400, S7-1200 CPU; Ethernet		Ethernet ISO over TCP	
Productivity Series	all		AutomationDirect P3000 Serial AutomationDirect P3000 Ethernet	
Do-more	all		Do-more Serial Do-more Ethernet	
	all		AutomationDirect Modbus (CLICK)	
DirectLOGIC	DL05/DL06	all	K-Sequence	
			Direct NET	
			Modbus (Koyo addressing)	
	DL105	all	DirectLOGIC Ethernet	
			K-Sequence	
			K-Sequence	
	DL205	D2-230	K-Sequence	
		D2-240	K-Sequence	
			Direct NET	
		D2-250/D2-250-1/D2-260	K-Sequence	
			Direct NET	
			Modbus (Koyo addressing)	
		D2-240/D2-250-1/D2-260 using D2-DCM	Direct NET	
			Modbus (Koyo addressing)	
			DirectLOGIC Ethernet	
	DL305	D3-330/330P (Requires the use of a Data Communications Unit)	Direct NET	
		D3-340	Direct NET	
		D3-350	K-Sequence	
			Direct NET	
		D3-350 using D3-DCM	Modbus (Koyo addressing)	
			Direct NET	
		D3-350 using D3-DCM	Modbus (Koyo addressing)	
			DL405	D4-430
		D4-440		Direct NET
	K-Sequence			
	D4-450	Direct NET		
		K-Sequence		
	Direct NET			
	All with D4-DCM	Modbus (Koyo addressing)		
		Direct NET		
	H4-ECOM/H4-ECOM100	Modbus (Koyo addressing)		
		DirectLOGIC Ethernet		
H2-WinPLC (Think & Do) Live V5.2 or later and Studio any version		Think & Do Modbus RTU (serial port)		
H2-WinPLC (Think & Do) Live V5.5.1 or later and Studio V7.2.1 or later		Think & Do Modbus TCP/IP (Ethernet port)		


Cable Description	Cable Part Number	Price
AutomationDirect Productivity Series, Do-more, CLICK, DirectLOGIC PLC RJ-12 port, DL05, DL06, DL105, DL205, D3-350, D4-450 & H2-WinPLC (RS-232C)	<b>EA-2CBL</b>	\$20.00
DirectLOGIC (VGA Style) 15-pin port, DL06, D2-250 (250-1), D2-260 (RS-232C)	<b>EA-2CBL-1</b>	\$20.00
DirectLOGIC PLC RJ-11 port, D3-340 (RS-232C)	<b>EA-3CBL</b>	\$20.00
DirectLOGIC DL405 PLC 15-pin D-sub port, DL405 (RS-232C)	<b>EA-4CBL-1</b>	\$20.00
DirectLOGIC PLC 25-pin D-sub port, DL405, D3-350, DL305, DCU and all DCM's (RS-232C)	<b>EA-4CBL-2</b>	\$20.00
Allen-Bradley MicroLogix 1000, 1100, 1200, 1400 & 1500 (RS-232C)	<b>EA-MLOGIX-CBL</b>	\$30.00
Allen-Bradley SLC 5-03/04/05 ControlLogix, CompactLogix, FlexLogix, DF1 port (RS-232C)	<b>EA-SLC-232-CBL</b>	\$20.00
Allen-Bradley PLC-5 DF1 port (RS-232C)	<b>EA-PLC5-232-CBL</b>	\$20.00
Allen-Bradley SLC 500 DH485 port (RS-485A)	<b>EA-DH485-CBL</b>	\$20.00
GE 90/30, 90/70, Micro 90, VersaMax Micro 15-pin D-sub port (RS-422A)	<b>EA-90-30-CBL</b>	\$20.00
MITSUBISHI FX Series 25-pin port (RS-422A)	<b>EA-MITSU-CBL</b>	\$20.00
MITSUBISHI FX Series 8-pin mini-DIN (RS-422A)	<b>EA-MITSU-CBL-1</b>	\$20.00
OMRON Host Link C200 Adapter, C500 (RS-232C)	<b>EA-OMRON-CBL</b>	\$20.00

## Example Cables:

**EA-2CBL**



**EA-2CBL-1**





# C-more Computer Programming Connections

Using the **C-more** Programming Software EA9-PGMSW for project development, the touch panel can be connected to a PC (personal computer) in one of several ways:

- Connect a USB Programming Cable such as (USB-CBL-AB15) from a USB port type A on the PC to the USB type B programming port on the C-more touch panel. The USB connection is for direct connection only and does not support USB hubs.
- Connect the **C-more** touch panel to a PC with a Cat5 Ethernet cable via an Ethernet switch. Multiple panels can be programmed in this configuration.

Following are the minimum system requirements for running **C-more** Programming Software, p/n EA9-PGMSW, on a PC:

- USB or Ethernet connection to touch panel (cables sold separately).
- Operating System - Windows 7 (Pro, Ultimate, 32 or 64-bit) or Windows 8 (Pro, Ultimate, 32 or 64-bit)

## USB Programming Cable



Part No. USB-CBL-AB15

\$22.50

Other lengths available see  
USB-CBL-AB3, USB-CBL-AB6, USB-CBL-AB10

## Stride™ Ethernet Switch



Message is sent  
out only from  
the port connected to  
destination device

Part No. SE-SW5U


\$99.00

**NOTE: Regarding Ethernet access to a C-more panel.**


If you intend to take advantage of the methods of remote access to the panel, including the web server, PC remote access, FTP, iPhone or iPad app, you need to consider the security exposure in order to minimize the risks to your process and your C-more panel.

Security measures may include password protection, changing the ports exposed on your network, including a VPN in your network, and other methods. Security should always be carefully evaluated for each installation.


### USB Connectivity

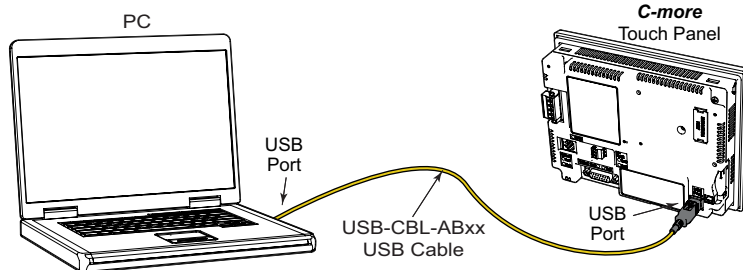

### Ethernet Connectivity via a Hub or Switch

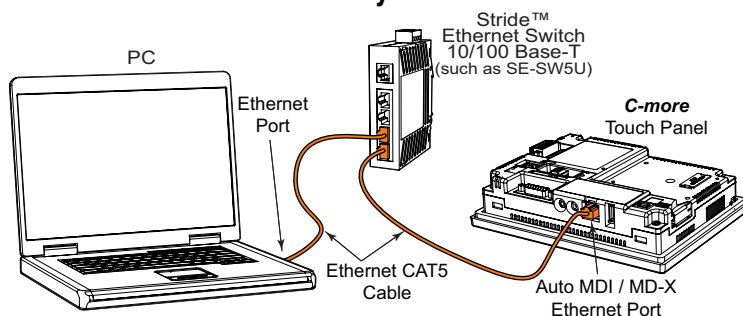

### Ethernet Direct Connection

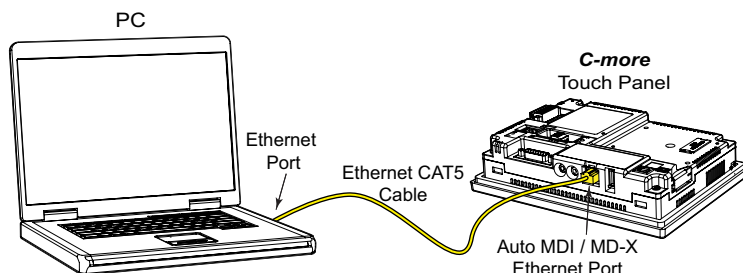


# C-more Power Connection Wiring

## Providing Power to the Touch Panel

- Connect a dedicated 12–24 VDC Class 2 power supply to the DC connector on the rear of the **C-more** touch panel. Connect the ground terminal to a proper equipment ground.
- or, install a **C-more** AC Power Adapter (EA-AC) to the rear of the touch panel and connect an AC voltage source of 100–240 VAC, 50/60 Hz, to its AC connector.
- then, turn on the power source and check the LED status indicators on the front and rear of the **C-more** touch panel for proper operation.

### DC Wiring

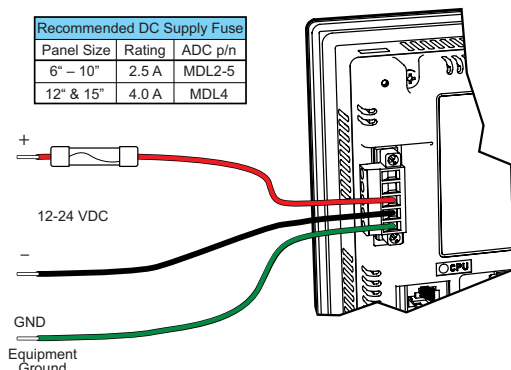


Recommended DC Supply Fuse		
Panel Size	Rating	ADC p/n
6" – 10"	2.5 A	MDL2-5
12" & 15"	4.0 A	MDL4



**Recommended Power Supply:**  
AutomationDirect Part No. PSC-24-060

DC-CON Tightening Torque	
Power connector screw torque	70.4 oz-in [0.5 Nm]
Power connector mounting torque	56 oz-in [0.4 Nm]

### AC Wiring

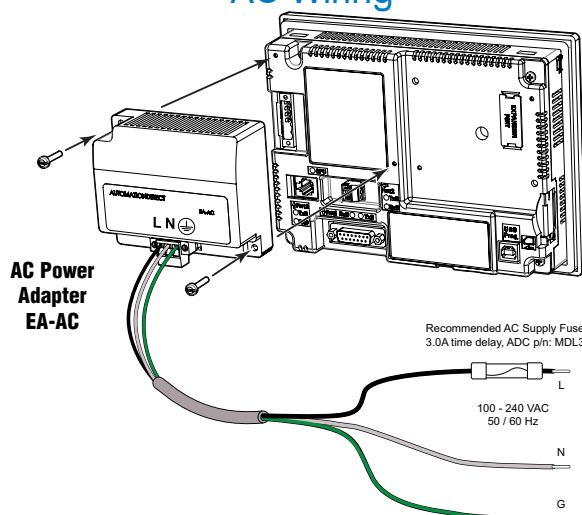

EA-AC Tightening Torque	
Power supply cable torque	71 - 85 oz-in [0.5 - 0.6 Nm]
Power connector mounting torque	71 - 85 oz-in [0.5 - 0.6 Nm]
Mounting flange screw torque	57 - 71 oz-in [0.4 - 0.5 Nm]

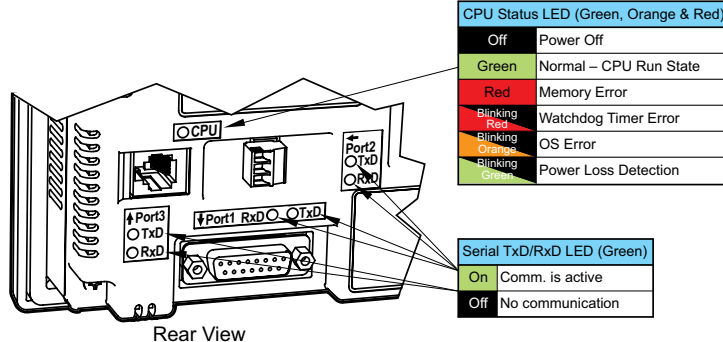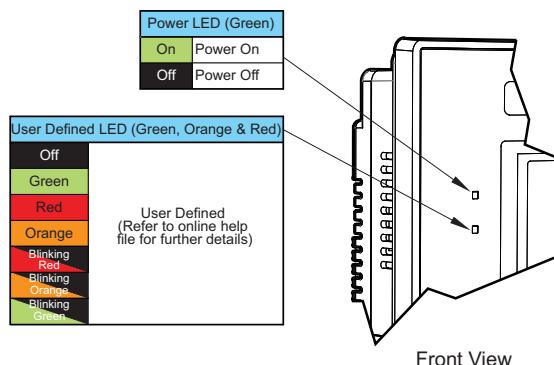

**WARNING:** To minimize the risk of potential safety problems, you should follow all applicable local and national codes that regulate the installation and operation of your equipment. These codes vary from area to area and it is your responsibility to determine which codes should be followed, and to verify that the equipment, installation, and operation are in compliance with the latest revision of these codes.

Equipment damage or serious injury to

personnel can result from the failure to follow all applicable codes and standards. We do not guarantee the products described in this publication are suitable for your particular application, nor do we assume any responsibility for your product design, installation, or operation.

If you have any questions concerning the installation or operation of this equipment, or if you need additional information, please call us at 1-800-633-0405 or 770-844-4200.

This publication is based on information that was available at the time it was printed.

At Automationdirect.com® we constantly strive to improve our products and services, so we reserve the right to make changes to the products and/or publications at any time without notice and without obligation. This publication may also discuss features that may not be available in certain revisions of the product.


# C-more Accessories

## Accessories

The *C-more* touch panels can be enhanced with the accessories below:

Part Number	Description	Price
<b>EA-AC</b>	AC/DC Adapter for <i>C-more</i> EA7 and EA9 series touch panels; powered from a 100-240 VAC, 50/60 Hertz power source. Provides 24VDC at 1.5A. Power Fault features help protect data being logged to Compact Flash or SD card during power failures. <i>C-more</i> EA7 series panels must have firmware version 1.21 Build 6.18E or higher for proper operation.	\$74.00
<b>EA-6-COV2</b>	Non-glare protective overlay, 6-inch, protects <i>C-more</i> touch screen and helps reduce glare from external light sources. Compatible with <i>C-more</i> EA7 and EA9 series and <i>C-more</i> Micro-Graphic 6-inch panels. Package of 3.	\$37.00
<b>EA-8-COV2</b>	Non-glare protective overlay, 8-inch, protects <i>C-more</i> touch screen and helps reduce glare from external light sources. Compatible with <i>C-more</i> EA7 and EA9 series 8-inch panels. Package of 3.	\$40.00
<b>EA-10-COV2</b>	Non-glare protective overlay, 10-inch, protects <i>C-more</i> touch screen and helps reduce glare from external light sources. Compatible with <i>C-more</i> EA7 and EA9 series 10-inch panels. Package of 3.	\$45.50
<b>EA-12-COV2</b>	Non-glare protective overlay, 12-inch, protects <i>C-more</i> touch screen and helps reduce glare from external light sources. Compatible with <i>C-more</i> EA7 and EA9 series 12-inch panels. Package of 3.	\$46.50
<b>EA-15-COV2</b>	Non-glare protective overlay, 15-inch, protects <i>C-more</i> touch screen and helps reduce glare from external light sources. Compatible with <i>C-more</i> EA7 and EA9 series 15-inch panels. Package of 3.	\$55.00
<b>EA-COMCON-3</b>	DSUB port adapter, 15-pin to 6-terminal RS-422/485, right angle connector, plugs into the 15-pin serial port on rear of touch panel to allow wire terminal connections for an RS-422/485 communication cable. Compatible with <i>C-more</i> EA7 series, EA9-T6CL(-R), and <i>C-more</i> Micro-Graphic 4 or 6-inch panels.	\$42.00
<b>EA-COMCON-3A</b>	DSUB port adapter, 15-pin to 6-terminal RS-422/485, straight connector, plugs into the 15-pin serial port on rear of touch panel to allow wire terminal connections for an RS-422/485 communication cable. Compatible with <i>C-more</i> EA9 series panels, <i>C-more</i> Micro EA3-T8CL and EA3-T10CL panels and EA1-S3x with EA1-MG-SP1. Not compatible with EA9-T6CL(-R) panels.	\$19.00
<b>EA-SD-CARD</b>	SD memory card for non-volatile storage, 2GB industrial grade. 70 degrees C maximum operating temperature makes it suitable for data logging in industrial applications. Recommended for the <i>C-more</i> EA9 series touch panels.	\$99.00
<b>USB-FLASH</b>	USB Flash drive, SanDisk, 4GB (SanDisk P/N SDCZ50-004G-A46). Recommended for use with the <i>C-more</i> touch panels and Productivity3000 controllers.	\$20.00

## Accessory Locations

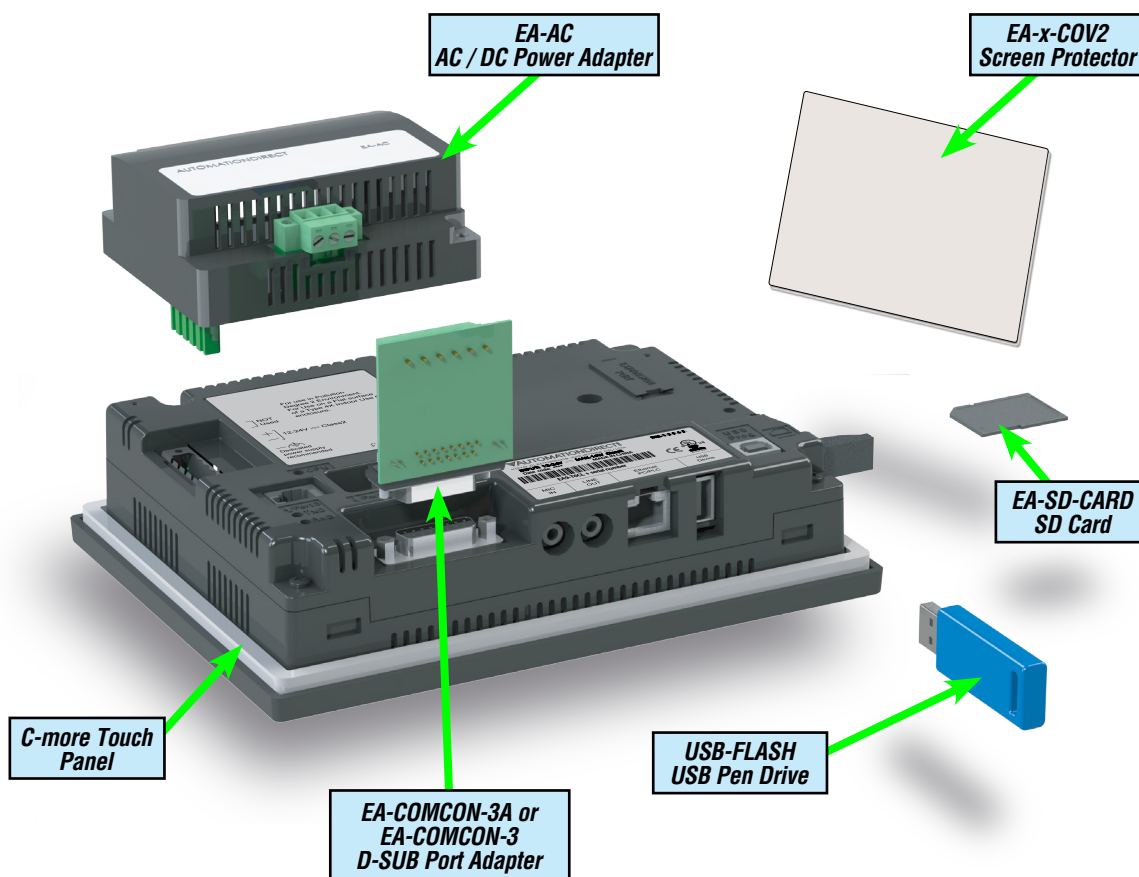

Company  
Information

Control Systems  
Overview

CLICK PLC

Do-More  
PLCs Overview

Do-More H2  
PLC

Do-More T1H  
PLC

DirectLOGIC  
PLCs Overview

DirectLOGIC  
DL05/06

DirectLOGIC  
DL105

DirectLOGIC  
DL205

DirectLOGIC  
DL305

DirectLOGIC  
DL405

Productivity  
Controller  
Overview

Productivity  
3000

Universal  
Field I/O

Software

C-More  
HMI

C-More Micro  
HMI

ViewMarq  
Industrial  
Marquees

Other HMI

Communications

Appendix  
Book 1

Terms and  
Conditions



# C-more Accessories

## AC/DC Power Adapter

The optional **C-more** AC/DC Power Adapter can be used to power the **C-more** touch panels from a 100-240 VAC, 50/60 Hertz, voltage source. The adapter provides 24 VDC @ 1.5 A to the touch panel's DC power connector and can be conveniently secured to the touch panel with two captive screws.

The adapter provides a power loss signal to the touch panel that causes the touch panel to stop writing data to SD memory devices providing a controlled shutdown for increased data logging reliability.

Part No. EA-AC


\$74.00

## Dimensions

inches / [mm]




## Overall Panel Depth w/ EA-AC Installed



EA9-T6CL-R = 2.99 [75.9]  
EA9-T6CL = 2.99 [75.9]  
EA9-T8CL = 3.51 [89.2]  
EA9-T10CL = 3.51 [89.2]  
EA9-T12CL = 3.35 [85.1]  
EA9-T15CL = 3.35 [85.1]

Units: inches[mm]

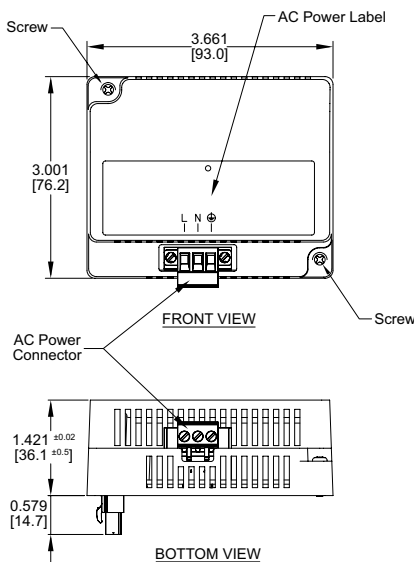

AC/DC Power Adapter Specifications			
<b>Part Number</b>	EA-AC	<b>Short Circuit Protection</b>	85VAC: 2.6 A, 100VAC: 2.8 A, 264VAC: 3.9 A
<b>Input Voltage &amp; Frequency</b>	100-240 VAC +10% -15%; 50/60 Hertz	<b>Static Electricity Discharge Resistance</b>	Compliant with IEC61000-4-2, Contact: 4 kV, Air: 8 kV
<b>Wire</b>	24-14 AWG, 60 / 75°C Copper. Tighten to 72 oz-in (0.5 Nm)	<b>Agency Approvals</b>	UL508 - UL Recognized for use with C-more panels, cUL, CE, EMC EN61132-2
<b>Permissible Momentary Power Failure</b>	Within 40ms	<b>Environment</b>	For use in pollution degree 2 environment
<b>Input Power</b>	68VA or less	<b>Grounding</b>	Ground resistance: less than 100 ohm
<b>Operating Temperature Range</b>	0°C to 50°C [32 to 122°F] Maximum surrounding temperature rating, 50°C	<b>Dimensions - inches [mm]</b>	3.00" (H) x 3.66" (W) x 1.42" (D) [76.2 mm x 93.0 mm x 36.1 mm] (Excluding DC Power Connector.)
<b>Storage Temperature Range</b>	-20 to 60°C [-4 to 140°F]	<b>Weight</b>	6.13 oz. [175 g]
<b>Operating &amp; Storage Humidity</b>	10-85% RH (non-condensing)	<b>Cooling Method</b>	Natural convection
<b>Noise Immunity</b>	1000VAC p-p (Pulse width 1 µs, rise time: 1 ns), with proper ground connection on AC terminal block.	<b>Removable AC Power Connector (included)</b>	EA-AC-CON or DECA Switchlab MC101-508-03G Secured with (2) captive M2.5 screws, torque to 70 oz-in [0.5 Nm]
<b>Hi-Pot</b>	1000VAC, 1 minute, with proper ground connection on AC terminal block.	<b>Output Voltage and Ripple</b>	21.6 - 26.4 VDC, Ripple < 100 mV p-p
<b>Insulation Resistance</b>	500VDC, 10 M ohm or above, with proper ground connection on AC terminal block.	<b>Output Current</b>	Maximum 1.5 A
<b>Vibration</b>	Compliant with IEC61131-2	<b>Inrush Current</b>	For 100VAC: 15A, 3ms or less For 240VAC: 20A, 3ms or less
<b>Shock</b>	Pulse shape: Sine half wave, Peak acceleration: 147 m/s² (15 G), X, Y, Z: 3 directions, 2 times each	<b>Mounting to Touch Panel</b>	Secure with (2) spring loaded captive M3-20 screws, torque to 50 oz-in [0.35 Nm]
<b>Thermal Protection</b>	140°C [284°F], with autorecovery	<b>Recommended External Fuse</b>	3.0A (ADC p/n: MDL3)

# C-more Accessories

## SD Card

**Part No.  
EA-SD-CARD**



**\$99.00**

SD memory card for non-volatile storage, 2GB industrial grade. 70 degrees C maximum operating temperature. Recommended for the C-more EA9 series touch panels. The SD card is the fastest option for writing data. If logged data is saved to external memory, AutomationDirect recommends using an EA-SD-CARD.

EA-SD-CARD Specifications	
<b>Operating Temperature</b>	0 to 70°C (32 to 158°F)
<b>Humidity</b>	20 to 85% (Non-condensing)
<b>Capacity</b>	2GB
<b>Speed Modes</b>	High-Speed Normal-Speed
<b>Interface</b>	SD Memory Card Specification Ver. 3.0
<b>Speed Class</b>	Class 6

## USB Pen Drive

**Part No.  
USB-FLASH**



**\$20.00**

USB flash drive for non-volatile storage, 4GB. Recommended for the C-more EA9 series touch panels.

Company  
Information

Control Systems  
Overview

CLICK PLC

Do-More  
PLCs Overview

Do-More H2  
PLC

Do-More T1H  
PLC

DirectLOGIC  
PLCs Overview

DirectLOGIC  
DL05/06

DirectLOGIC  
DL105

DirectLOGIC  
DL205

DirectLOGIC  
DL305

DirectLOGIC  
DL405

Productivity  
Controller  
Overview

Productivity  
3000

Universal  
Field I/O

Software

C-More  
HMI

C-More Micro  
HMI

ViewMarq  
Industrial  
Marquees

Other HMI

Communications

Appendix  
Book 1

Terms and  
Conditions

# C-more Accessories

## D-SUB 15-pin to Terminal Block Adapter - Right Angle

The EA-COMCON-3 adapter plugs into the 15-pin serial port on the rear of a panel to allow wire terminal connections for an RS-422/RS-485 communication cable. Compatible with all **C-more** EA7 series panels, EA9-T6CL(-R) panels and **C-more** Micro 4" and 6" panels. UL Recognized


**Part No.**  
**EA-COMCON-3**




**\$42.00**

### Dimensions

Units: inches [mm]

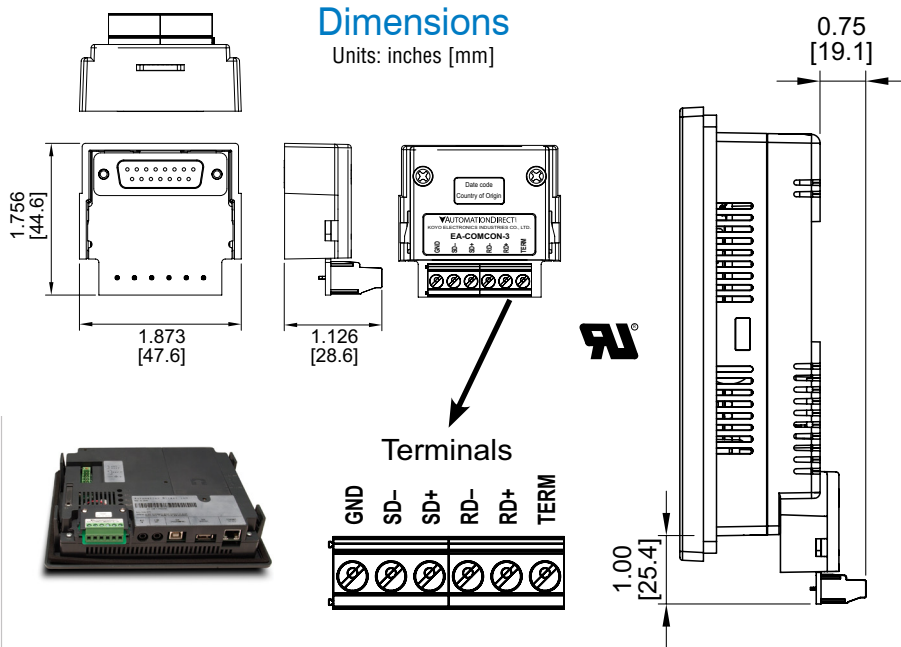

### Terminals



## D-SUB 15-pin to Terminal Block Adapter - Straight Through

The EA-COMCON-3A adapter plugs into the 15-pin serial port on the rear of a panel to allow wire terminal connections for an RS-422/RS-485 communication cable. Compatible with C-more EA9 series panels, C-more Micro EA3-T8CL and EA3-T10CL panels and EA1-S3x with EA1-MG-SP1. Not compatible with EA9-T6CL(-R) panels.


**Part No.**  
**EA-COMCON-3A**





**\$19.00**

### Dimensions

Units: inches [mm]

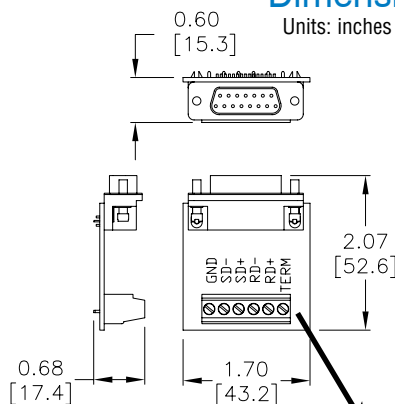

### Terminals

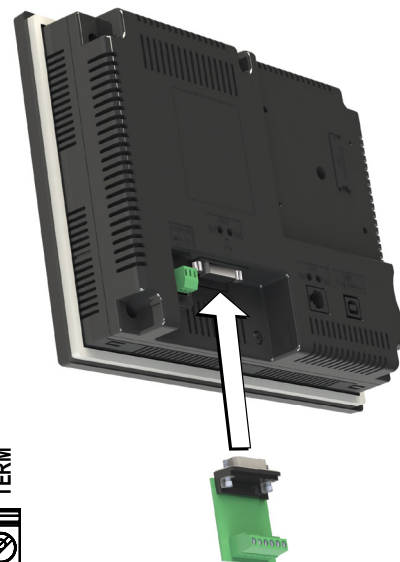

EA-COMCON-3 Wiring Specs	
Wire Size	Screw Torque
14-24 AWG	4.4 lb-in [0.5 Nm]


# C-more Accessories

## Non-glare Screen Covers (in packages of 3)


The non-glare screen covers are protective overlays used to protect the touch screen while helping to reduce the glare from external light sources.

Part Nos. EA-6-COV2, EA-8-COV2, EA-10-COV2, EA-12-COV2 and EA-15-COV2



### Dimensions inches / [mm]



EA-6-COV2	\$37.00
EA-8-COV2	\$40.00
EA-10-COV2	\$45.50
EA-12-COV2	\$46.50
EA-15-COV2	\$55.00

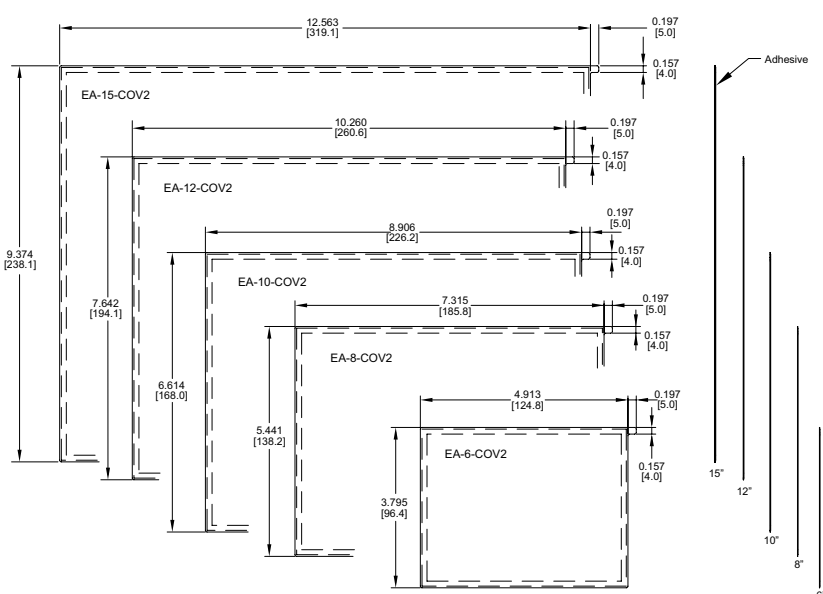

## Installation






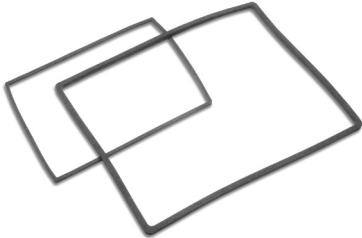


**NOTE:** The Protective Cover ships with a thin protective sheet on the face of the cover that needs to be carefully removed. If your panel is not clear, the protective sheet may not have been removed.

# C-more Replacement Parts

The optional replacement parts can be used to replace damaged, worn or lost **C-more** components.

## Replacement parts at a glance:

Part Number	Price		Description
<b>EA9-BRK</b>	\$27.00		Panel mounting brackets, replacement, for C-more EA9 series touch panels. Package of 8 brackets and screws.
<b>EA9-LBL</b>	\$24.00		Blank label insert for front bezel, replacement, for C-more EA9 series touch panels. Package of 10.
<b>EA9-3TB</b>	\$9.00		3-pole terminal block, replacement, for 3-wire RS485 communications port on C-more EA9 series panels. Package of 2.
<b>EA-DC-CON</b>	\$14.00		5-terminal DC power connector, replacement, for C-more EA7 and EA9 series touch panels
<b>EA-AC-CON</b>	\$7.50		3-terminal AC power connector, replacement, for C-more EA7 and EA9 series touch panels
<b>EA9-15-GSK</b>	\$25.00		Panel mounting gasket, replacement, for C-more EA9-T15CL 15-inch touch panel, NEMA 4/4X
<b>EA9-12-GSK</b>	\$20.00		Panel mounting gasket, replacement, for C-more EA9-T12CL 12-inch touch panel, NEMA 4/4X
<b>EA9-10-GSK</b>	\$19.00		Panel mounting gasket, replacement, for C-more EA9-T10CL 10-inch touch panel, NEMA 4/4X
<b>EA9-8-GSK</b>	\$17.00		Panel mounting gasket, replacement, for C-more EA9-T8CL 8-inch touch panel, NEMA 4/4X
<b>EA9-6-GSK</b>	\$15.00		Panel mounting gasket, replacement, for C-more EA9-T6CL(-R) 6-inch touch panels, NEMA 4/4X