Touch panel Individual Specification			unit
Terminals resistance	Top electrode	250~530	Ω
	Bottom electrode	220~690	Ω
Linearity		Max,1.5	%
Capacity		Max,200	nF
Chattering		Max,20	ms
Operation starting force		0.10~0.79	N
Transmission factor (Transparency)		Typ,81 Min,78	%

This drawing is applied to the specification with the same model number

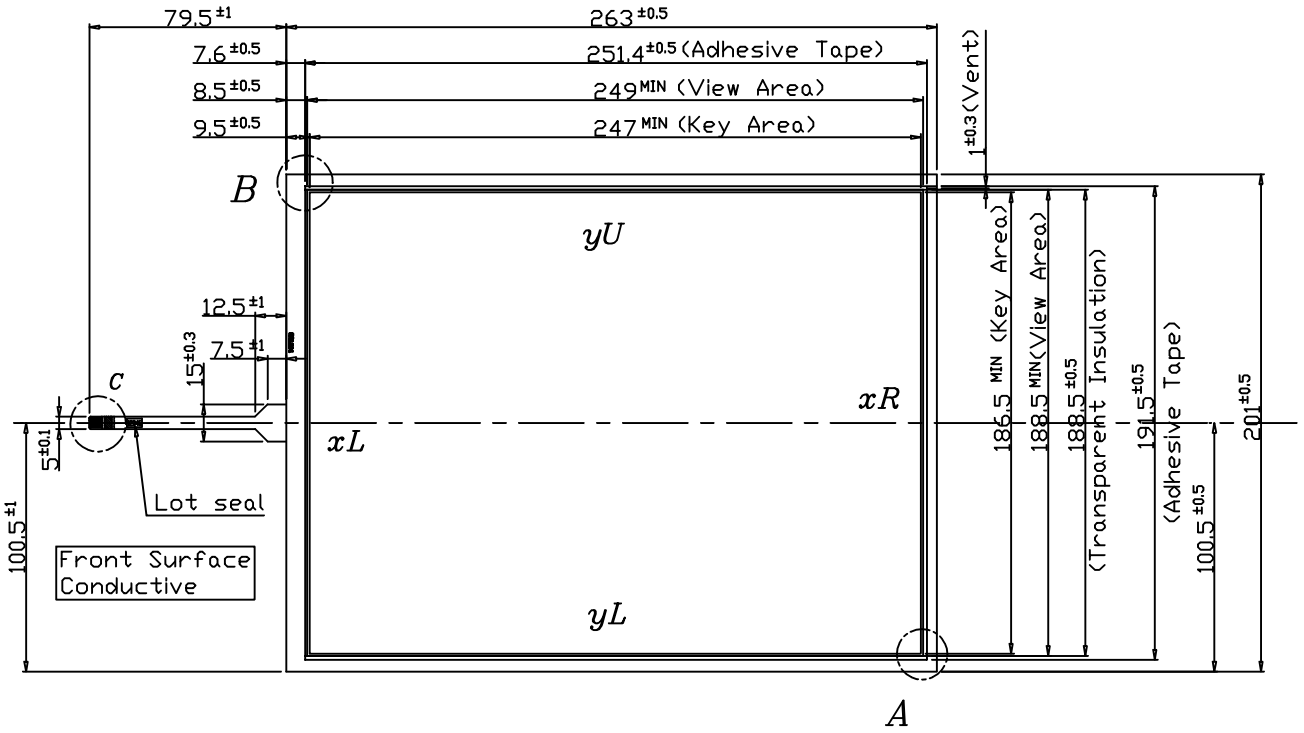

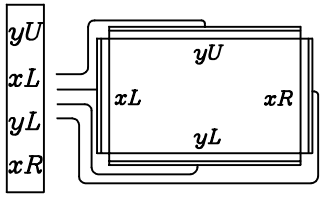

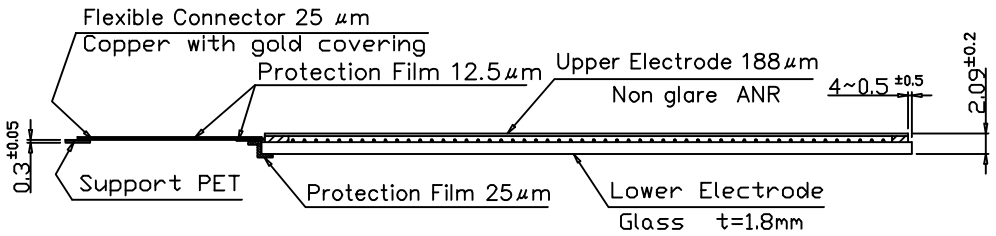

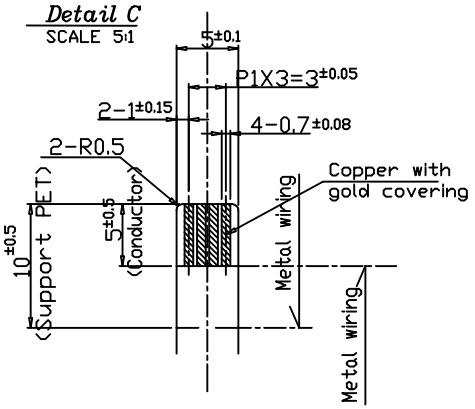

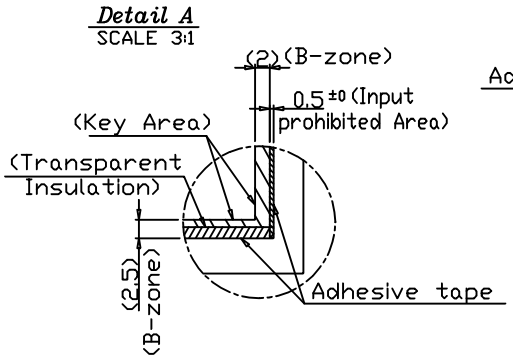

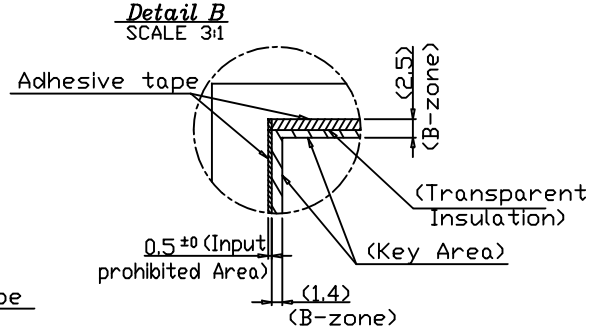

100-2580

(※)Only internal use for the control code				
			APPROVED :	DATE : 2008.6.19
			CHECKED :	TITLE : TOUCH PANEL
			CHECKED :	MODEL : GG12-01-4D
			DESIGNED : Yinjian Guo	CONTROL : V1
ISSUE	DATE	REVISIONS	GUNZE LIMITED ELECTRONIC Components Division	PART : T/P DRAWING
3 RD ANGLE PROJECTION				SCALE : 1/2
				DRAWING No. : GG12-01F4D-V1-01