



Front View

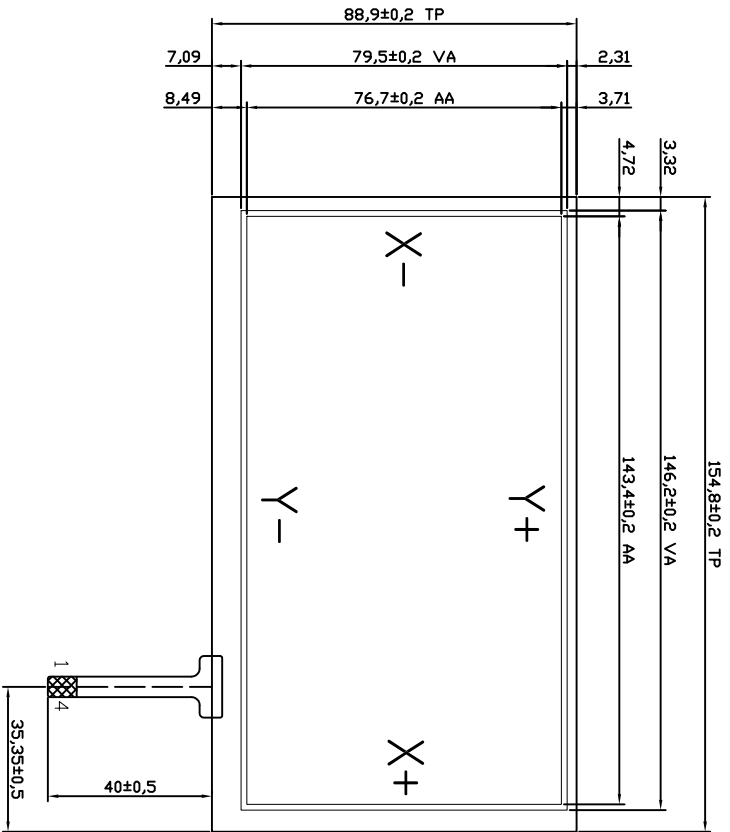

Back View

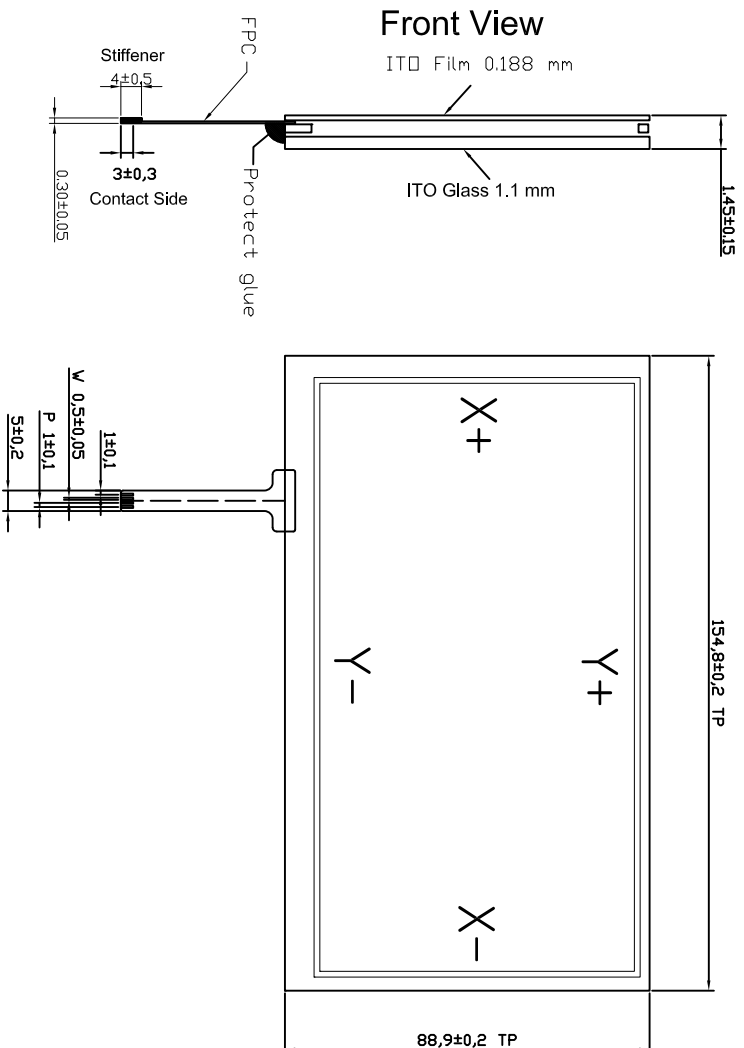

- Notes:
- 1.Type : Film/Glass/fpc tall
 - 2.Rated Voltage: 5V /1mA
 - 3.Insulation Resistance: >20MΩ(DC 25V)
 - 4.Linearity:<15%
 - 5.Operation Force: 30~150g
 - 6.Transparency:>85%
 - 7.Hitting Durability:>1000k
 - 8.Chattering:<15ms
 - 9.Operation Temperature: -20~70℃
 - 10.Storage Temperature: -30~80℃(Toyoko ITD Film)
- 35~85℃(DIke KA Type ITD Film)

Pin	T/P
1	X-
2	Y-
3	X+
4	Y+

REV./DATE	REVISED DESCRIPTIONS	DIMENSION UNIT	mm	MODEL NO.	GP-06SF-4M-NA01A	CUSTOMER APPROVED	NOTE
1	DRAWN	STEVE	ISSUE DATE	2013/03/06	SCALE	-/-	
2	CHECK	MIKE	CUSTOMER ID	GTOUCH			
3	APPROVED	SCOTT					



坤巨資訊股份有限公司
Groovy Technology Corp.