




Front View

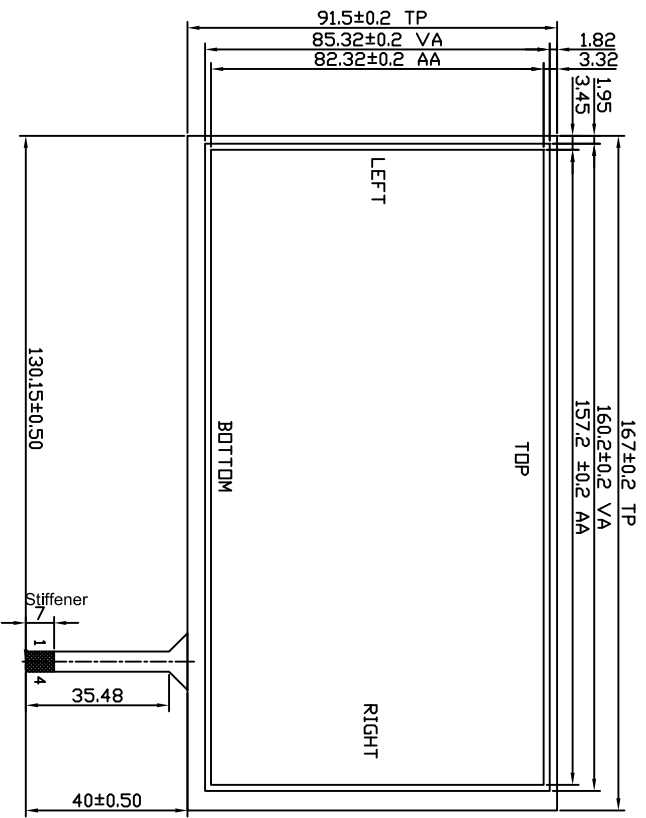

Back View

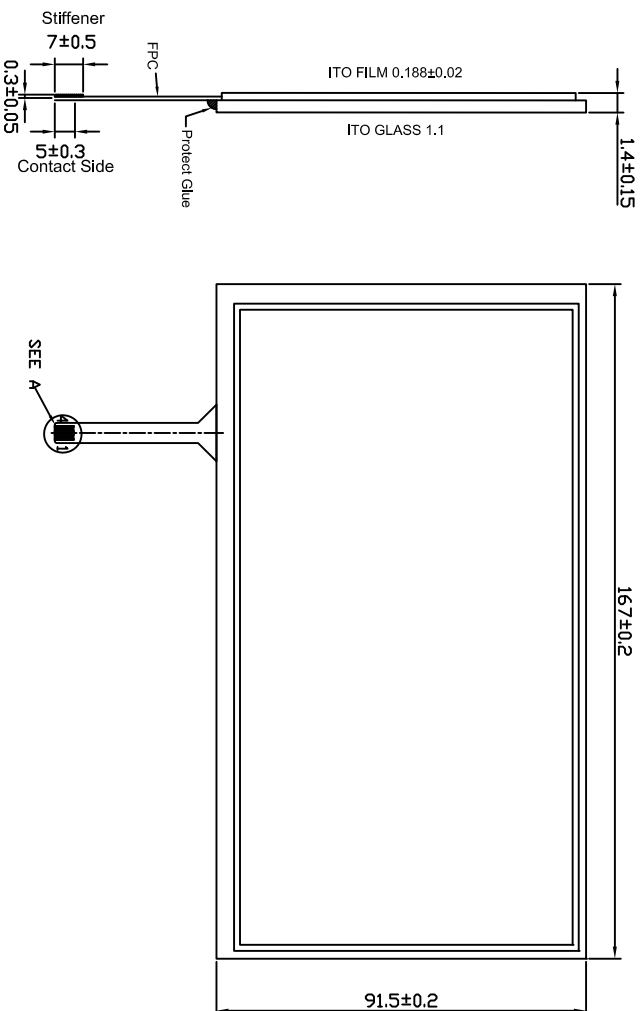

- Notes:
- 1.Type : Film/Glass/fpc tail
 - 2.Rated Voltage: 5V 1mA
 - 3.Insulation Resistance: >20MΩ(DC 25V)
 - 4.Linearity:<1.5%
 - 5.Operaation Force: 30~150g
 - 6.Transparency:>85%
 - 7.Hitting Durability:>1000k
 - 8.Charactering:<15ms
 - 9.Operaation Temperature: -20~70℃
 - 10.Storage Temperature: -30~80℃(Toyoko ITD Film)
- 35~85℃(Dike KA Type ITD Film)

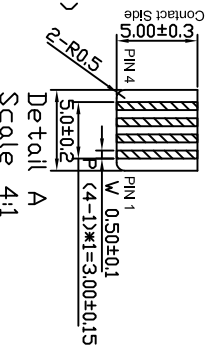

PIN #	ASSIGNMENT
PIN 1	LEFT
PIN 2	BOTTOM
PIN 3	RIGHT
PIN 4	TOP

REV/	DATE	REVISED DESCRIPTIONS	DIMENSION UNIT	mm	MODEL NO.	GP-070F-4M-NA02A	CUSTOMER APPROVED	NOTE
1		DRAWN	STEVE	ISSUE DATE	2013/03/25	SCALE	-/-	
2		CHECK	MIKE	CUSTOMER ID	GTOUCH			
3		APPROVED	SCOTT					



坤巨資訊股份有限公司
Groovy Technology Corp.