Front View

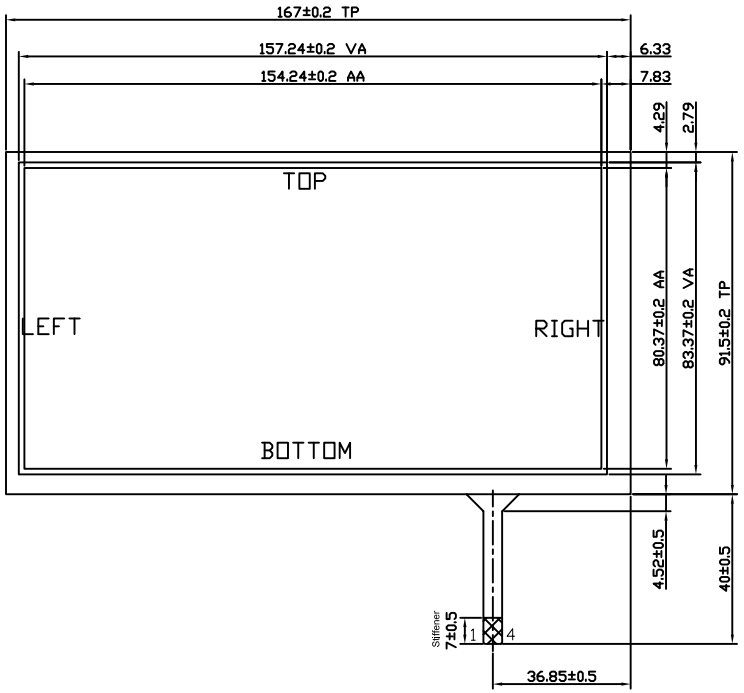

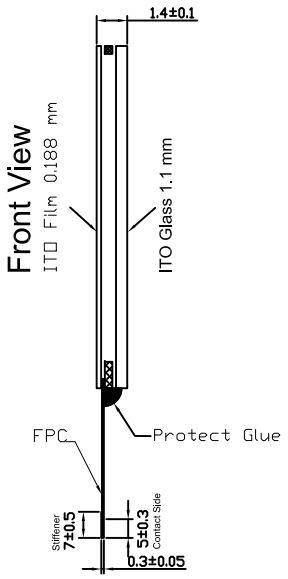

Back View

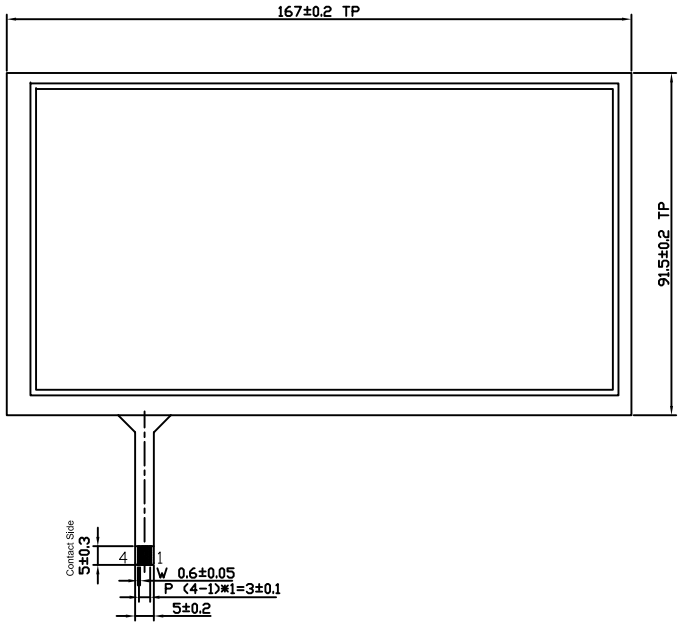

Notes:
1.Type : Film/Glass/fpc tail
2.Rated Voltage: 5V 1mA
3.Insulation Resistance: >20MΩ(DC 25V)
4.Linearity:<1.5%
5.Operation Force: 30~150g
6.Transparency:>85%
7.Hitting Durability:>1000k
8.Chattering:<15ms
9.Operation Temperature: -20~70℃
10.Storage Temperature: -30~80℃ (Toyobo ITO Film)
-35~85℃ (Oike KA Type ITO Film)

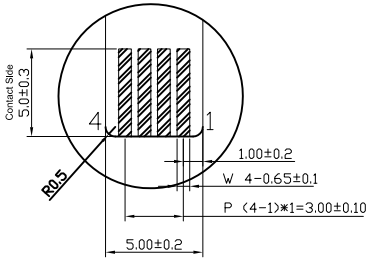

Detail A
Scale 4:1

T/P	
Pin	Assignment
1	Left
2	Bottom
3	Right
4	Top

REV.	DATE	REVISED DESCRIPTIONS	DIMENSION UNIT	mm	MODEL NO.	GP-070F-4M-NA03A		CUSTOMER APPROVED	NOTE
1			DRAWN	STEVE	ISSUE DATE	2013/03/26			
2			CHECK	MIKE		SCALE	-/-		
3			APPROVED	SCOTT		CUSTOMER ID	GTOUCH		

YOUR RELIABLE TOUCH MATE GTOUCH

坤巨資訊股份有限公司
Groovy Technology Corp.

SHEET NO: 1/1