



Front View

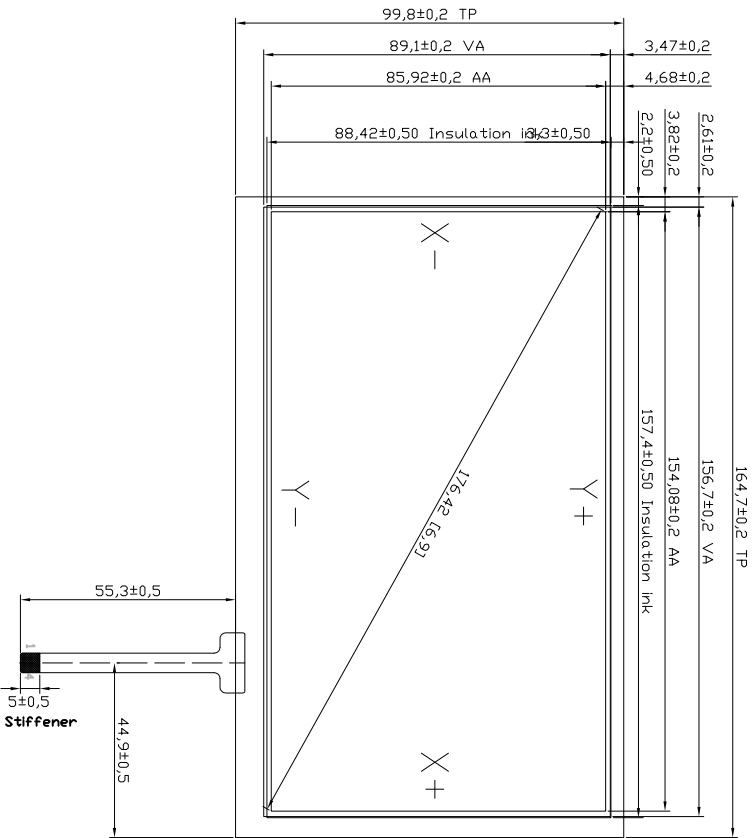

Back View

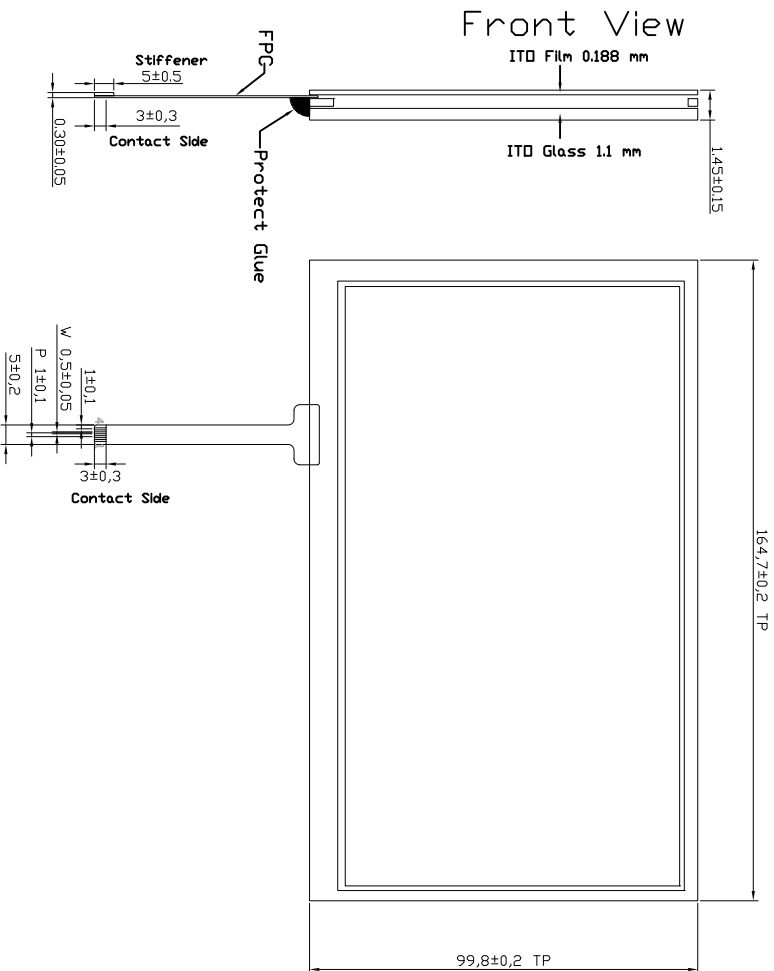

- Notes:
- 1.Type : Film/Glass/fpc tail
 - 2.Rated Voltage: 5V 1mA
 - 3.Insulation Resistance: >20MΩ(DC 25V)
 - 4.Linearity:<1.5%
 - 5.Operaton Force: 30~150g
 - 6.Transparency:>85%
 - 7.Hitting Durability:>1000K
 - 8.Charactering:<15ms
 - 9.Operaton Temperature: -20~70?
 - 10.Storage Temperature:like KA Type ITD Film~85?<

| PIN # | Assignment |
|-------|------------|
| 1 | X- |
| 2 | Y- |
| 3 | X+ |
| 4 | Y+ |

| REV/ | DATE | REVISED DESCRIPTIONS | DIMENSION UNIT | mm | MODEL NO. | GP-070F-4M-NA04A | CUSTOMER APPROVED | NOTE |
|------|------|----------------------|----------------|-------------|------------|------------------|-------------------|------|
| 1 | | DRAWN | STEVE | ISSUE DATE | 2013/03/11 | SCALE | -/- | |
| 2 | | CHECK | MIKE | CUSTOMER ID | GTOUCH | | | |
| 3 | | APPROVED | SCOTT | | | | | |



坤巨資訊股份有限公司
Groovy Technology Corp.