



- NOTES:**
1. Operation Temperature: -10°C~+60°C
Storage Temperature: -20°C~+70°C
 2. Life Time: >1,000,000 times.
 3. Linearity: ≤1.5%.
 4. ITO Film: Anti-Glare Hard Coated & Anti-Newton Ring
Sheet Resistance: 400±100 Ω;
ITO Glass: Sheet Resistance: 400±100 Ω
 5. Tail Type :FPC Golden Plated
 6. All Tolerance Without Marked:±0.2

FRONT VIEW

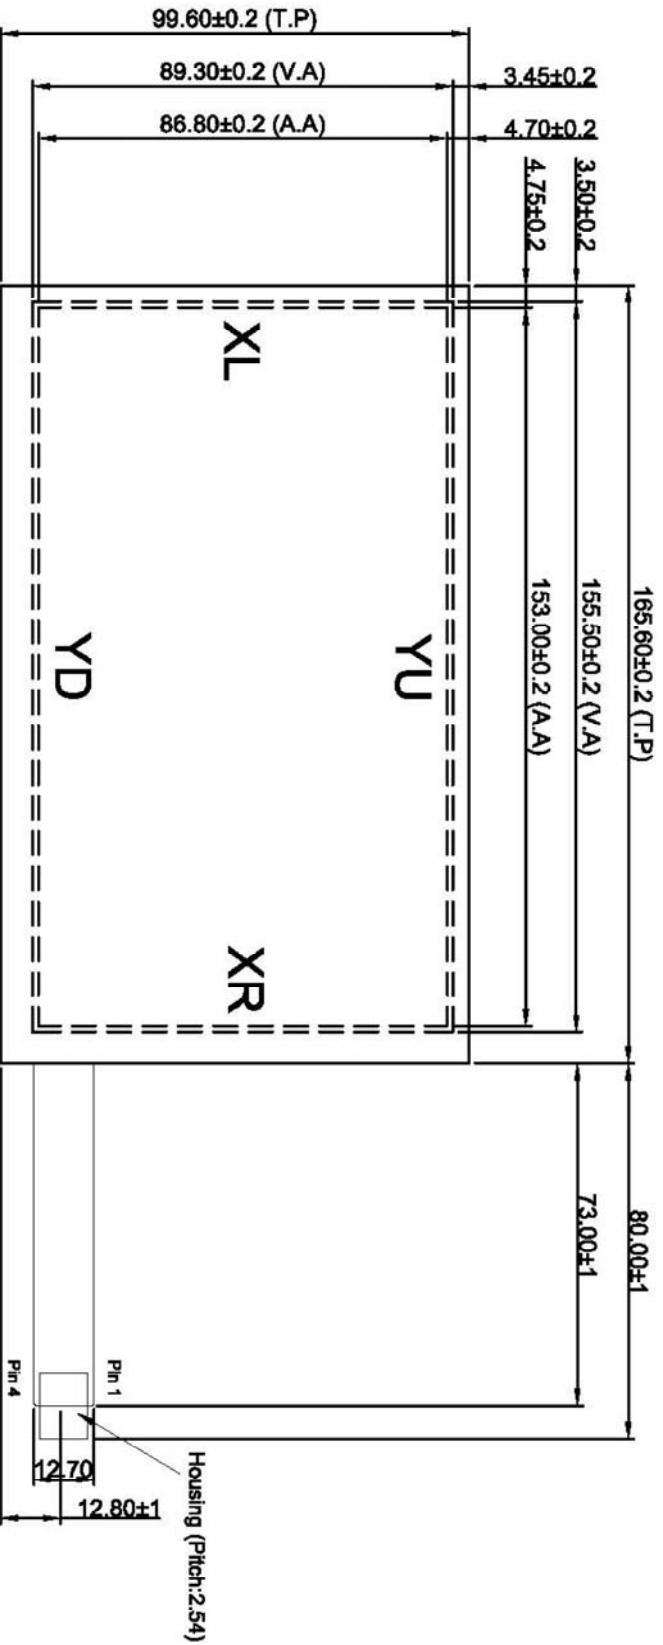

Pin#	Assignment
Pin1	YU
Pin2	XR
Pin3	YD
Pin4	XL

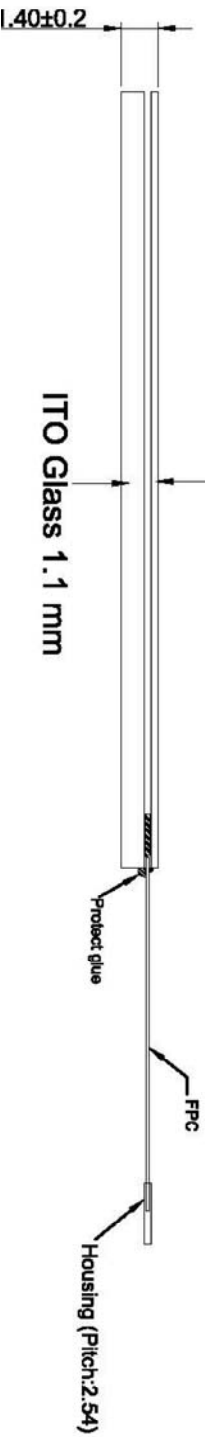

REV/	DATE	REVISED	DESCRIPTIONS	DIMENSION	UNIT	mm	MODEL	NO.	GP-070F-4W-NA06A	CUSTOMER	APPROVED	NOTE
1		DRAWN	STEVE	ISSUE	DATE	2013/04/16	SCALE	-/-				
2		CHECK	MIKE				CUSTOMER	ID	GTOUCH			
3		APPROVED	SCOTT									



坤巨資訊股份有限公司
Groovy Technology Corp.