





Front View

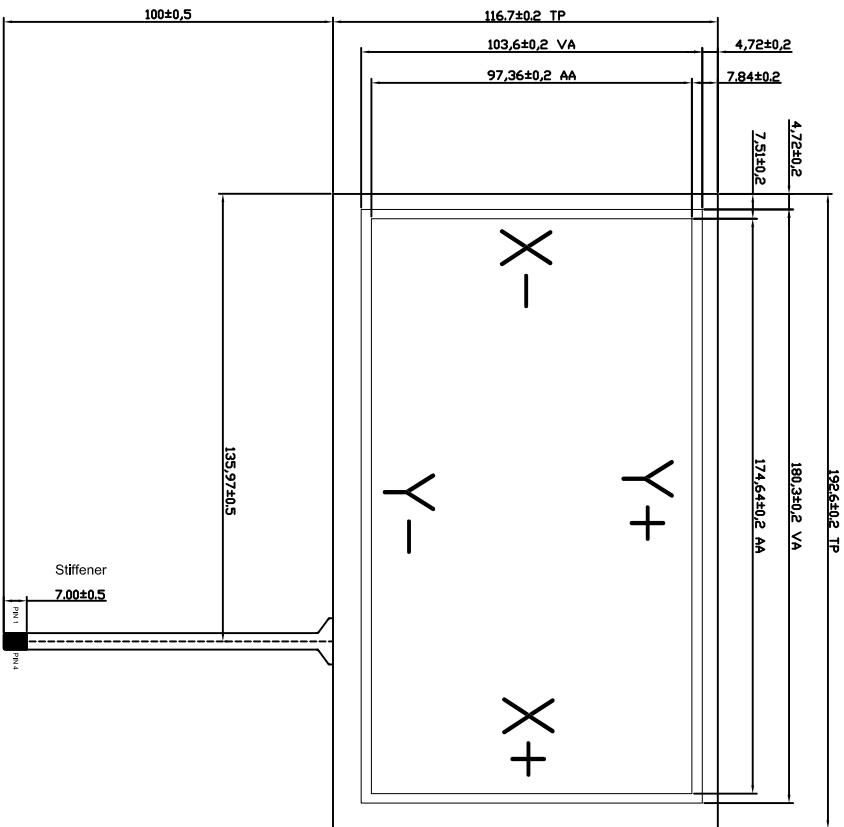

Back View

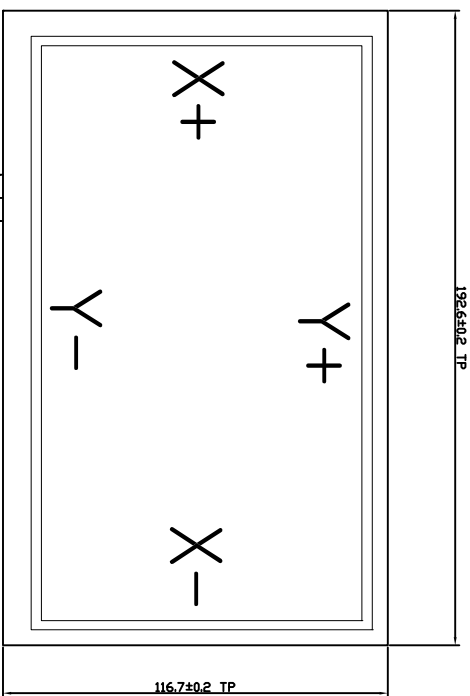


Front View

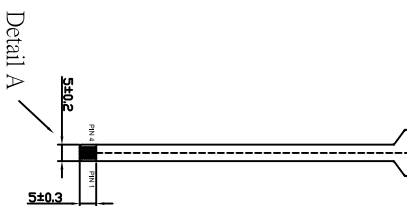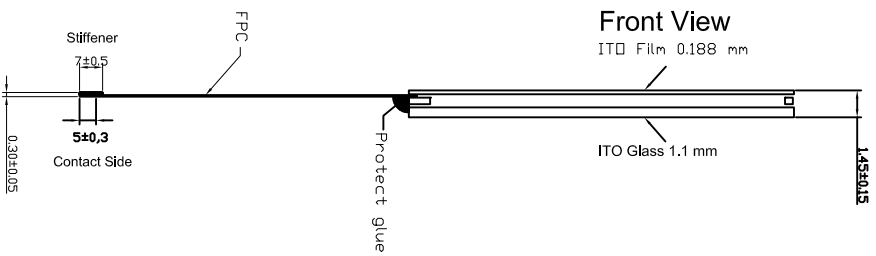

- Notes:
- 1.Type : Film/Glass/fpc tail
 - 2.Rated Voltage: 5V 1mA
 - 3.Insulation Resistance: >20MΩ(DC 25V)
 - 4.Linearity:<1.5%
 - 5.Operation Force: 30-150e
 - 6.Transparency:>85%
 - 7.Hitting Durability:>1000K
 - 8.Chatterng:<1ms
 - 9.Operation Temperature: -20-70°C
 - 10.Storage Temperature: -30-80°C (Dioxide ITO Film)
-35-85°C (Oxide KA Type ITO Film)

T/P	Pin Assignment
1	X-
2	Y-
3	X+
4	Y+

Detail A
Scale 4:1



REV	DATE	REVISED DESCRIPTIONS	DIMENSION UNIT	mm	MODEL NO.	ISSUE DATE	GP-080F-4M-NA01A	CUSTOMER APPROVED	NOTE
1		DRAWN	STEVE		GP-080F-4M-NA01A	2013/03/11			
2		CHECK	MIKE		SCALE				
3		APPROVED	SCOTT		CUSTOMER ID				



坤巨資訊股份有限公司
Groovy Technology Corp.