



Front View

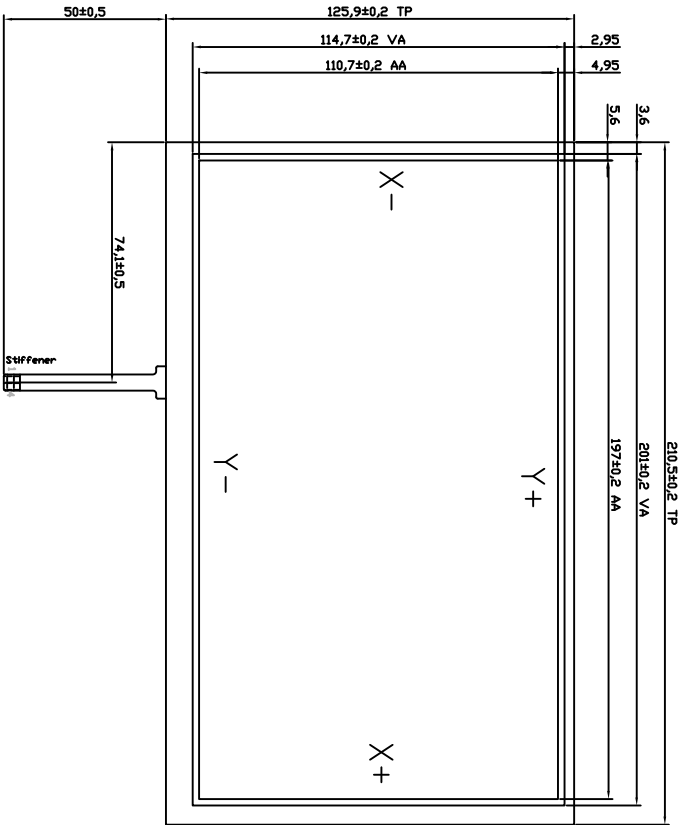

Back View

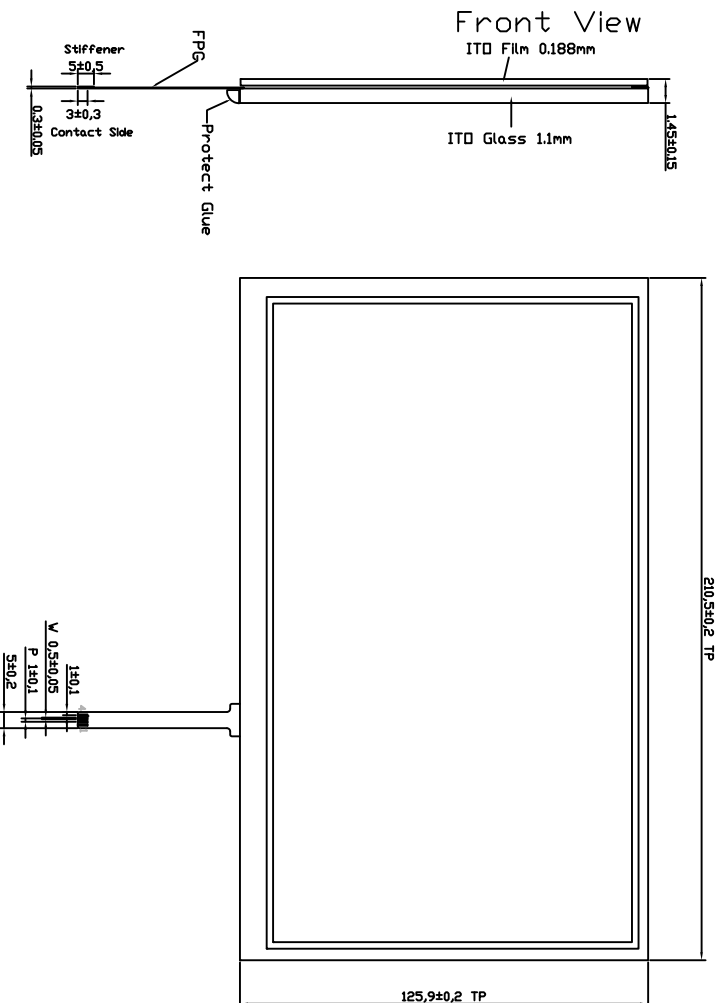

- Notes:
- 1.Type : Film/Glass/fpc tail
 - 2.Rated Voltage: 5V 1mA
 - 3.Insulation Resistance: >20MQ@DC 25V)
 - 4.Linearity:<1.5%
 - 5.Operation Force: 30~150g
 - 6.Transparency:>85%
 - 7.Hitting Durability:>1000k
 - 8.Chatting<15ms
 - 9.Operation Temperature: -20~70?
 - 10.Storage Temperature: <50~85? (Film)
- DIKE KA Type ITD Film~85?K

PIN #	Assignment
1	Y+
2	X-
3	Y-
4	X+

REV./DATE	REVISED DESCRIPTIONS	DIMENSION UNIT	MM	MODEL NO.	GP-090F-4M-NA01A	CUSTOMER APPROVED	NOTE
1	DRAWN	STEVE	ISSUE DATE	2013/03/11	SCALE	-/-	
2	CHECK	MIKE	CUSTOMER ID	GTOUCH			
3	APPROVED	SCOTT					



坤巨資訊股份有限公司
Groovy Technology Corp.