



Front View

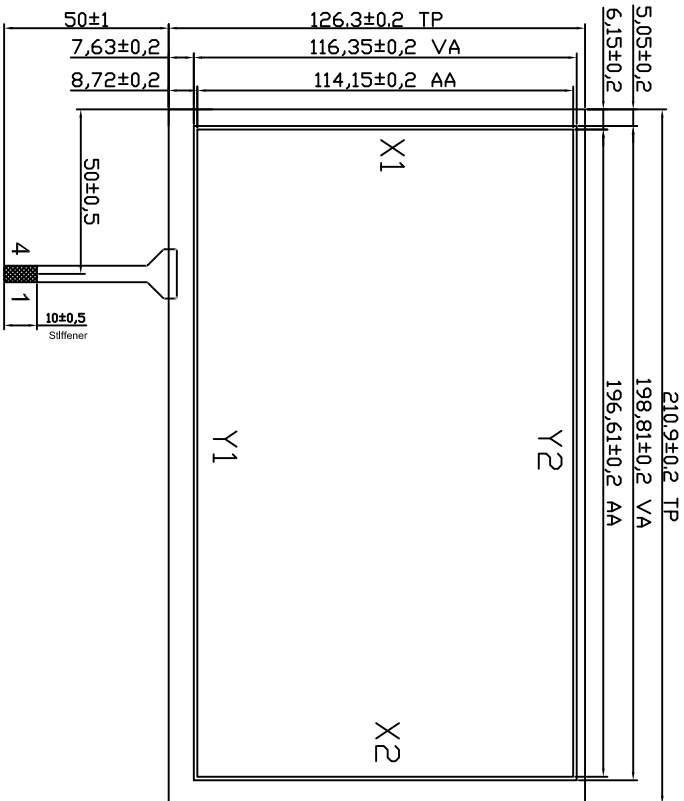

Back View

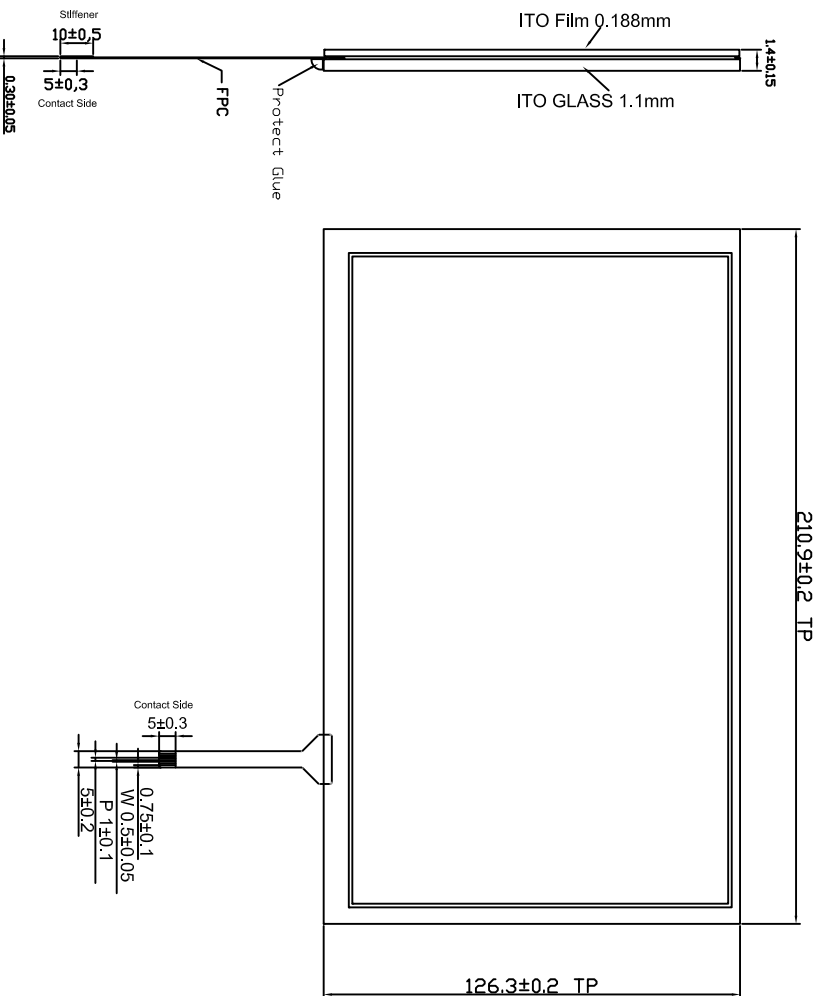

- Notes:
- 1.Type : Film/Glass/fpc tail
 - 2.Rated Voltage: 5V ImA
 - 3.insulation Resistance: >20MΩDC 25V)
 - 4.Linearity<1.5%
 - 5.□Operation Force: 30~150g
 - 6.□Transparency>85%
 - 7.□Hitting Durability>1000k
 - 8.□Chattering<15ms
 - 9.□Operation Temperature: -20~70℃
 - 10.□Storage Temperature: -30~80℃(Toyoko ITD Film)
- 35~85℃(Like KA Type ITD Film)

PIN #	Assignment
1	Y2
2	X2
3	Y1
4	X1

REV\ DATE	REVISED DESCRIPTIONS	DIMENSION UNIT	mm	MODEL NO.	GP-090F-4M-NA02A	CUSTOMER APPROVED	NOTE
1	DRAWN	STEVE	ISSUE DATE	2013/03/05			
2	CHECK	MIKE	SCALE	-/-			
3	APPROVED	SCOTT	CUSTOMER APPROVED				



坤巨資訊股份有限公司
Groovy Technology Corp.