

Intelligent Controller

Sigma Control 2™



Sigma Control 2™

The next dimension of compressed air control

Kaeser Compressors has revolutionized compressed air controls with the Sigma Control 2. With integration across Kaeser's extensive product range of rotary screw compressors, vacuum, screw blower, and integrated blower packages, this versatile control system enhances communications and energy efficiency without sacrificing ease of operation.

Integrated Intelligence

Sigma Control 2™ is our most advanced controller, combining safe and efficient internal supervision with important information and maintenance friendly features. The operator interface offers easy access to all settings and information. This controller provides a broad range of capabilities while at the same time is simple and reliable.

Protection For Your Equipment

Our control provides full time protection for the equipment. It monitors over 20 critical parameters including airend discharge temperature, direction of rotation, motor temperature, internal pressure, electrical overload status, filter differential pressure, and auto drain status (if equipped). The controller safely shuts down the machine to avoid component damage. Sigma Control 2 also tracks service and load hours, which helps schedule routine maintenance and minimize downtime. It stores the alarm and operating history, aiding in faster trouble-shooting and reducing unscheduled downtime. The RFID feature provides secure access to the control menus, preventing unauthorized access and tampering.

Superior Energy Efficiency

Two-unit lead/lag sequencer programming is standard in Sigma Control 2. This functionality equalizes runtimes, extends maintenance intervals and prevents unnecessary compressor starts. Further, it is pre-programmed with multiple user selectable control profiles (Quadro, Vario, Dual, Continuous, and Dynamic) to meet a wide variety of operating preferences. The precision electronic pressure sensor enables tighter switching differentials for further savings.

Flexible Communications

More and more customers desire the ability to remotely monitor or control their compressed air systems. Whether you have a standalone system or want to make it part of your plant-wide controls, Sigma Control 2 was designed for maximum communication flexibility. Our built-in web server and Ethernet port (standard) let you view your equipment from any PC with a standard web browser. The open architecture makes it easy to integrate it into existing plant-wide monitoring systems utilizing optional communication adapters such as Modbus, Profibus, DeviceNet, and Profinet.





Multiple Operating Profiles

Sigma Control 2 comes standard with pre-loaded control profiles. Select the one that best fits your operating needs:

- **Dual Control:** Operates the machine at full load and idle mode via minimum/maximum pressure settings and a timer. Pressure band and timer values are preset to match system requirements.
- **Quadro Control:** An improved version of Dual Control that includes an additional timer to effectively fine-tune the idle period and bypasses idle mode after periods of low air demand.
- **Vario Control:** Uses a smart timer to vary the idle time based on the frequency of motor starts, resulting in more energy savings.

- **Dynamic Control:** The machine will switch from load to stop at low motor temperature and to idle when the motor is hot. The control may bypass idle mode if the motor temperature is low and more starts are permissible.
- **Sigma / Omega Frequency Control:** The most advanced and energy-efficient type of control that varies output capacity according to system pressure requirements using a variable speed drive system (if so equipped).
- **Modulation Control:** Regulates air delivery using proportional inlet valve to provide a constant output pressure (if so equipped).

Security with RFID

Sigma Control 2 provides high level security with its integrated RFID (Radio Frequency Identification) key. This technology ensures secure log-in for users and service personnel so service work and system changes can be performed only by authorized and qualified personnel. This protects the equipment and your operations.



Advanced Communications Capabilities

Superior System Integration

Sigma Control 2 comes ready for external communication with utility management and central control systems. A built-in web server is accessible via the standard Ethernet port, making it possible to view operational parameters from any computer — via Intranet or Internet — with a standard web browser without any additional software. Optional cellular modem also available for remote access.

In addition, Profibus DP, Modbus

RTU or TCP, DeviceNet, Profinet and other common industrial communication buses are available for integration into your centralized telemetry or plant monitoring system. Digital and analog inputs and outputs are available to monitor optional sensors and equipment or to send signals back to an alarm or telemetry system. To further enhance remote monitoring, email notifications of alarms and operational messages can be sent via an SMTP server.

Upgrades and Data Storage

A convenient SD card slot (standard) with included SD card enables fast, easy software upgrades and storing key operational parameters. This feature minimizes service costs, provides system back up capability, and offers long-term data storage for trending and analysis purposes.


Customer Network

You can view each machine through its **Ethernet** port and web server. Sigma Air Manager can also be viewed through its Ethernet port and web server or via Modbus or other industrial communications. Contact Kaeser for details.



Kaeser Equipment

Each Sigma Control 2 has its own Ethernet port and web server. Shown with optional **Profibus** communication adapter.

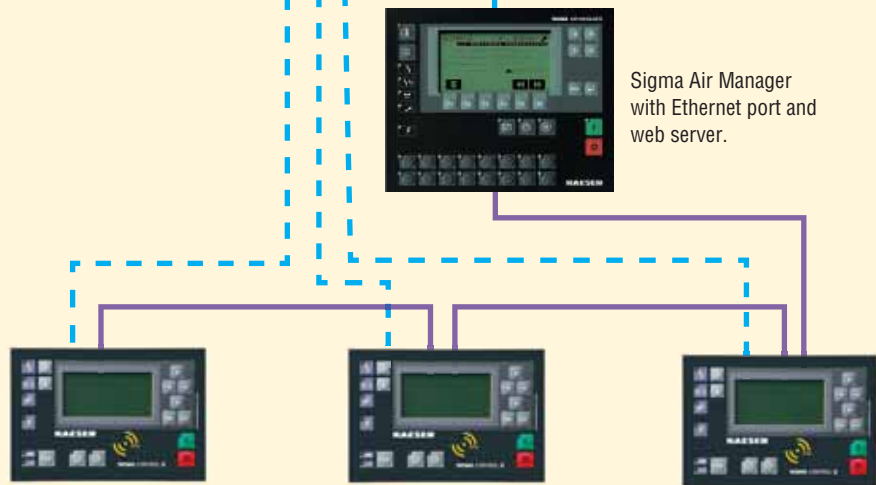

Sigma Air Manager with Ethernet port and web server.

Features and Options

Hardware

- Advanced processor hardware
- Backlit 255 X 128 pixel graphical display with 8 lines, 30 characters each
- 9 LED indicators and 13 tactile membrane keys
- Real-time clock with 10 year battery back-up
- Precision electronic pressure transducer
- RFID reader for touchless security
- All components designed for industrial operating conditions

Data recording

- On-site diagnosis at a glance
- Graphical representation of equipment status



Interfaces

- RJ45 10/100MB Ethernet
- I/O bus RS485 for communication with up to 6 input/output modules
- USS interface RS485 for communications with up to three frequency converters
- SD card slot for updates and data storage

Optional interfaces

Plug in Profibus DP, Modbus RTU or TCP, DeviceNet, Profinet or other communication adapters



Optional Profibus adapter

Control modes

Dual, Quadro, Vario, Continuous, and Dynamic (dependent on compressor size)

Control cabinet

Dust- and water-resistant, IP 54 compliant; input / output modules with color coded terminals for the signal sensor connection cable; terminal strips for additional floating contacts.

Certifications



Sigma Control 2 Interface

Sigma Control 2 features an easy to read plain-text display and durable input keys. All relevant information can be viewed by navigating the menu with a few simple key strokes, and you have 30 languages to choose from.

Function keys and indicators



ON key

Switches ON the machine in automatic, self control operation



OFF key

Switches the machine OFF



Idle key

Switches the machine from load to idle (and reverse)



Load/Idle indicator

Green LED indicates whether the machine is loaded (making air) or idling



Remote ON key and LED

Add function. Green LED indicates external control is enabled



Timer ON/OFF Key

Switches the timer ON and OFF. Green LED indicates the timer mode is active



Alarm Indicator

Red LED indicates the machine has shut down with an alarm



Communication Fault Indicator

Red LED indicates faulty external communication



Maintenance Indicator

Yellow LED indicates maintenance is due



Main Power Indicator

Green LED indicates there is power to the machine (the control cabinet is energized)

Navigation keys



Scroll

Scrolls up and down, line by line. Scrolls right and left.



Escape Key

Returns to the next higher menu level



Enter/Return

Goes to next sub-menu down or accepts inputted value



Acknowledge

Acknowledges alarms and, when permitted, resets the alarm memory



Info

Access to additional information

The Air Systems Specialist

We earn our customers' business by supplying superior quality equipment and services. Our products are designed for reliable performance, easy maintenance, and energy efficiency. Prompt and dependable customer service, quality assurance, training, and engineering support contribute to the value our customers have come to expect from Kaeser. Our employees are committed to implementing and maintaining the highest standards of quality to merit customer satisfaction. We aim for excellence in everything we do.

Our engineers continue to refine manufacturing techniques and take full advantage of the newest machining innovations. Extensive commitment to research and development keeps our products on the leading edge of technology to benefit our customers. Our industry-leading controls continue to set the standard for efficient system operation. With over 90 years of experience, Kaeser is the air systems specialist.

Kaeser Compressors, Inc.

511 Sigma Drive
Fredericksburg, Virginia 22408 USA
Phone: 540-898-5500
Toll Free: 800-777-7873
Email: info.usa@kaeser.com

Certified Management Systems



Kaeser Compressors Canada Inc.

3760 La Verendrye Street
Boisbriand, QC J7H 1R5 CANADA
Telephone: (450) 971-1414
Toll free: (800) 477-1416
info.canada@kaeser.com

Kaeser Compresores de México S de RL de CV

Calle 2 #123
Parque Industrial Jurídica
76100 Querétaro, Qro.
Telephone: 01 (442) 218 64 48
sales.mexico@kaeser.com

Kaeser Compresores de Guatemala y Cia. Ltda.

Calz. Atanasio Tzul 21-00, zona 12
El Cortijo II, Bodega 501
01012-Guatemala City
Telephone: +502 2412-6000
info.guatemala@kaeser.com

