



8 a.m. - 5 p.m. Sales Available International: 1-919-443-0207 Toll Free: 1-888-551-3082



Visit Our Website www.wakeindustrial.com



Email Us sales@wakeindustrial.com

All Products from Wake Industrial, LLC, come with:

### Sales and Repairs

We specialize in providing immediate product delivery when your system goes down. We have thousands of In-Stock automation products and offer a full range of repair options.

## **Fast Shipping**

We ship worldwide, offering any type of shipping method with all the major logistic companies such as FedEx, UPS, DHL, USPS, and a variety of freight carriers.

## **Quality Guarantee**

With standards like our 1 year warranty on ALL products, we can guarantee a better customer service experience than any other company within our industry.

## **Damage Free Delivery**



All of our products are cleaned, go through quality control and are shipped using a custom military grade foam to ensure your product arrives undamaged. We have the capability to ship both small 1lb products and large 200lb+ automation parts regardless of your location.

### Stay In Touch


Wake Industrial, LLC 1620 Old Apex Road Cary, NC 27513 Wake Industrial is not affiliated with nor an authorized distributor or representative of any manufacturers, brands or products listed.

Call: 1-888-551-3082 International:1-919-443-0207 Fax:1-919-267-1705

**Email:** sales@wakeindustrial.com **Website:** www.wakeindustrial.com



Compact operator panels
10.4" display
IndraControl VCP 35



# 10.4" display ■ IndraControl VCP 35

Documentation



#### **Technical data**


	VCP 35.2	
Processor	101 00.2	
CPU	RISC ARM9 200MHz	
	RISC ARMS 200MINZ	
Memory	2.112	
Use / application	3 MB	
Flash size	16 MB	
Slot	1	
Display		
Туре	TFT	
	Graphic-oriented	
Size	26.4 cm (10.4")	
Colors/gray scales	256	
	Colors	
Resolution	640 x 480	
Operation		
Туре	Touch screen	
Interfaces		
Ethernet	1 x Ethernet TCP/IP (Standard)	
USB	2 x USB-Host (Standard)	
Serial	RS232/RS485 (Standard)	
Fieldbus		
PROFIBUS	1 x PROFIBUS DP-Slave (Option)	
Electrical data		
Power supply U	24 V DC	
U <sub>min</sub> U <sub>max</sub>	19 V DC 30 V DC	
Power consumption	19,2 W	
Protection		
Degree of protection front	IP65	
Degree of protection rear	IP20	
Environmental conditions		
Environmental conditions		


# 10.4" display ■ IndraControl VCP 35

Permissible temperature (operation)	+5 °C +45 °C	
Permissible humidity (operation)	5% 85%, EN 61131-2	
Weight		
Weight	2.3 kg	

#### **Dimensions**

		VCP 35.2
Dimensions		
Height H	[mm]	249
Width B	[mm]	328
Length T	[mm]	54
Screen size X	[mm / "]	264 / 10,4

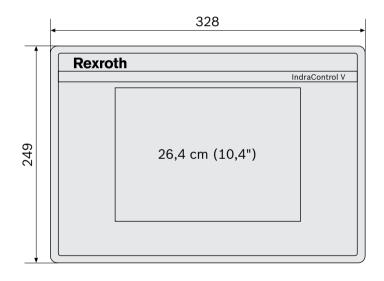



### **Ordering information**

Type code	Description	Material number:
VCP35.2ECN-003-NN-NN-PW	IndraControl VCP 35	R911171110
VCP35.2ECN-003-PB-NN-PW	IndraControl VCP 35 with PROFIBUS DP slave	R911171111
VCP35.2ECN-003-SR-NN-PW	IndraControl VCP 35 with serial interfaces R9111	

#### Accessories

Type code	Description	Material number:
VAS04.1-001-002-NN	Battery kit	R911316662

# 10.4" display ■ IndraControl VCP 35

#### Documentation

4

Type code	Description	Material number:
DOK-SUPPL*-VCP*35.2***-PR01-DE-P	IndraControl VCP 35 (DE)	R911323105
DOK-SUPPL*-VCP*35.2***-PR01-EN-P	IndraControl VCP 35 (EN)	R911323106

#### **Accessories**

### **Auxiliary components**

Description		
HMI/industrial PC	Accessories	IndraControl VAC, VAP, VAU



#### **Bosch Rexroth AG**

Postfach 13 57 97803 Lohr, Germany Bgm.-Dr.-Nebel-Str. 2 97816 Lohr, Germany Tel. +49 9352 18-0 Fax +49 9352 18-8400 www.boschrexroth.com/electrics

#### Local contact information can be found at:

www.boschrexroth.com/adressen

The data specified above only serve to describe the product. As our products are constantly being further developed, no statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification.

It must be remembered that our products are subject to a natural process of wear and aging.