



8 a.m. - 5 p.m. Sales Available
International: 1-919-443-0207
Toll Free: 1-888-551-3082



Visit Our Website
www.wakeindustrial.com



Email Us
sales@wakeindustrial.com

All Products from Wake Industrial, LLC, come with:

Sales and Repairs

We specialize in providing immediate product delivery when your system goes down. We have thousands of In-Stock automation products and offer a full range of repair options.

Fast Shipping

We ship worldwide, offering any type of shipping method with all the major logistic companies such as FedEx, UPS, DHL, USPS, and a variety of freight carriers.

Quality Guarantee

With standards like our 1 year warranty on ALL products, we can guarantee a better customer service experience than any other company within our industry.

Damage Free Delivery



All of our products are cleaned, go through quality control and are shipped using a custom military grade foam to ensure your product arrives undamaged. We have the capability to ship both small 1lb products and large 200lb+ automation parts regardless of your location.

Stay In Touch

Wake Industrial, LLC
1620 Old Apex Road
Cary, NC 27513

Wake Industrial is not affiliated with nor an authorized distributor or representative of any manufacturers, brands or products listed.

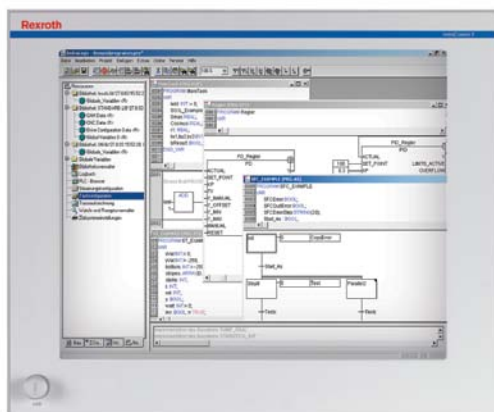
Call: 1-888-551-3082
International: 1-919-443-0207
Fax: 1-919-267-1705

Email: sales@wakeindustrial.com
Website: www.wakeindustrial.com

Displays

19" display ■ IndraControl VDP 60**Documentation**

- Project planning manual

**Technical data**

	VDP 60.3 FE
Display	
Type	TFT
Size	48.3 cm (19")
Colors/gray scales	16 Mio
	Colors
Resolution	1280 x 1024
Operation	
Type	Touch operation
Status LED	Voltage
	Hard disk
	Temperature
	UPS
Interfaces	
USB	1 x Front USB
	4 x USB
Serial	1 x CDI interface Industrie-PC connection to display/terminal
Electrical data	
Power supply U	24 V DC
U _{min} ... U _{max}	19 V DC ... 30 V DC
Power consumption	40 W
Protection	
Degree of protection front	IP65
Miscellaneous	
Colors	RAL 7035 light gray
Load	
Vibration resistance	1 g
Shock resistance	15 g
Norms and Standards	
Certification	CE

Displays

19" display ■ IndraControl VDP 60

Environmental conditions	
Permissible temperature (operation)	+5 °C ... +45 °C
Permissible humidity (operation)	5% ... 85%, EN 61131-2
Weight	
Weight	7.3 kg

Dimensions

		VDP 60.3 FE
Dimensions		
A	[mm]	400
B	[mm]	483
C	[mm]	62
X	[mm / "]	48.3 cm (19")

Ordering information

Type code	Description	Material number:
VDP60.3FEN-D1-NN-NN	IndraControl VDP 60 with 48.3 cm (19") display, touch screen	R911171737

Type code	Description	Material number:
DOK-SUPPL*-VDP*XX.3***-PR03-DE-P	IndraControl VDP project planning manual (DE)	R911328471
DOK-SUPPL*-VDP*XX.3***-PR01-EN-P	IndraControl VDP project planning manual (EN)	R911328472
DOK-SUPPL*-VDP*XX.3***-IT03-DE-P	Instruction manual IndraControl VDP (DE)	R911336377
DOK-SUPPL*-VDP*XX.3***-IT03-EN-P	Instruction manual IndraControl VDP (EN)	R911336378

Accessories**Auxiliary components**

Description		
HMI/industrial PC	Accessories	IndraControl VAC, VAP, VAU

Bosch Rexroth AG

Postfach 13 57
97803 Lohr, Germany
Bgm.-Dr.-Nebel-Str. 2
97816 Lohr, Germany
Tel. +49 9352 18-0
Fax +49 9352 18-8400
www.boschrexroth.com/electrics

Local contact information can be found at:

www.boschrexroth.com/adressen

The data specified above only serve to describe the product. As our products are constantly being further developed, no statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification.

It must be remembered that our products are subject to a natural process of wear and aging.