UTC-115

15.6" Ubiquitous Touch Computer UTC-115G with Intel® Pentium® N4200



Features

- Slimmer and Lighter design
- Low power and fanless system design
- Built-in Intel Pentium[®] N4200
- 15.6" monitor with 16:9 widescreen display
- IP65-rated front panel for water and dust resistance
- Clean back cover design with 3 Way IO cable routing
- · Supports both landscape and portrait screen orientations
- VESA 100 mm standard mounting holes for varied mounting demands
- PoE supported on Pentium N4200 platform (with optional module)
- Support DeviceOn/iService software for remote device management

Mindows' (C) (L) C E FCC Rotts

Introduction

DeviceOn/iService

UTC-115 features an all-in-one computing system which equipped with wide format, touch based LCD panel. It is easy to integrate key peripherals and display systems for diversified self-service and interactive signage deploy in different application areas.

Thanks for the slim and light looking with 3 way cable routing design, makes UTC-115 good fit to diverse scenarios and areas.

The systems deliver updated information with well-designed interactive interfaces, with fully ensure relevant content and targeted promotions are delivered. UTC series touch panel computers are the best investments to enhance user satisfaction, further brand equity, and maximize business profits.

Moreover, Advantech DeviceOn/iService Software is a next-generation unified device management unified device management solution based on the WISE-DeviceOn platform. With support for batch operations and multi-device control, DeviceOn/iService enables easy device configuration and deployment for convenient remote device management.

Specifications

Process system CPU Intel® Peartum® M200 (UTC-115G) Henory 1.x 244 pin SO-DIMM DDRSL 1600 MHz up to 8 GB Storage 1 x M2 242 SS D/ 1 x 22 24 SS D/ 1 x 25 internal SATA storage Network 2 x Gigabit Ethernet ports (Suroptor SWake on LAW) Viework 2 x Gigabit Ethernet ports (Suroptor SWake on LAW) Viework 2 x Gigabit Ethernet ports (Suroptor SWake on LAW) Viework 2 x Gigabit Ethernet ports (1 with PoE) 1 x HDM 114 1 x M2 key224 (2485) 4 x USB 30 1 x M2 key224 (2485) Bus expansion 1 x M2 key230, 1 x M2 key224 (2485) Bus expansion 1 x M2 key230, 1 x M2 key224 (2485) Bus expansion 1 x M2 key230, 1 x M2 key224 (2485) Bus expansion 0 x M2 key2424	-			
Memory 1 x 204 pin S0-DiMM D0R3i 1600 MHz up 6 8.8 Storage 1 x M 2 242 SSD /1 x 2.5 internal SATA storage Network 2 x Gigabit Ethernet ports (Supports Wake on LAN) 2 x Gigabit Ethernet ports (Supports Wake on LAN) 2 x Gigabit Ethernet ports (Supports Wake on LAN) 2 x Gigabit Ethernet ports (Supports Wake on LAN) 2 x Gigabit Ethernet ports (Wath POE) 4 x US3 0 2 x Gigabit Ethernet ports (Wath POE) 1 x HOM IN 1.4 1 x Audio Phone Jack Stereo Speaker 2 x 2W Bus expansion 1 x M 2 key220, 1 x M 2 key2242 Mounting VES A 100 x 100 mm (Screw Size, M4, 7mm) Dimension (WethD) 398 8 x 248 2 x 29.5 Weight 2.4 Kg OS Support Win 10 10 T Enterprise 64bit Android 10.1 Linux 1 un katoret contensing Vibration 0.5 G Shock 10 G pack acceleration (11 msec. duration) Generating temperature 0 - 40 °C (32 - 104 °F)* Relative Humidity 10 - 95% @ 40 °C non-condensing Vibration 0.5 G Shock 10 G pack acceleration (11 msec. duration) Certification CE, FCC, CB, U		CPU	Intel [®] Pentium [®] N4200 (UTC-115G)	
Storage 1 x M.2 2242 SSD / 1 x 2.5 internal SATA storage Network 2 x Gigabit Ethernet ports (Supports Wake on LAN) 2 x FS 222 COM (COUX PS 222/422/4SS) 4 x USB3.0 4 x USB3.0 2 x Gigabit Ethernet ports (1 with PoE) 1 x HDMI 1.4 1 x HDMI 1.4 1 x HDMI 1.4 1 x M2 key2230, 1 x M.2 key2242 Mounting VEXAND WITO MO me Jack Mounting VEXAND WITO MO THOR WITO MO MIC ***********************************		Base/Burst Frequency	1.10Ghz/2.50Ghz (Quad-Core)	
Network 2 x Gipabil Ethernet ports (Supports Wake on LÅN) 2 x RS -232 COM (COM/2 RS -232/422/485) 4 x USB3.0 2 x Sigabil Ethernet ports (1 with PoE) 1 x HOHIN 1.4 1 x Audio Phone Jack Stereo Speaker 2 x 2W Bus expansion 1 x M2 key2242 Mounting VESA 100 x 100 nm (Screw Size, M4, 7mm) Dimension (WxHxD) 398 x 248 2 x 29.5 Weight 2 4 Kg Mounting 2 4 x (2 x - 104 °F)* Relative Humdity 2 4 x 20 - 104 °F)* Relative Humdity 10 - 5% @ 40 °C non-condensing Vibration 0.56 Stock 106 peak acceleration (11 msec. duration) Certification CErtification Prover Supply DC Input Rating DC Input Rating 12/5A-24V/2.5A, 60W ITE Adapter Poener Supplin DC Input Rating DC Input Rating 12/5A-24V/2.5A, 60W ITE Adapter Poener Supplin DC Input Rating DC Input Rating 12/5A-24V/2.5A, 60W ITE Adapter Poener Supplin Sec/Hv 22 (V)(2 - 44V/2.5A, 60W ITE Adapter <td< td=""><td></td><td>Memory</td><td>1 x 204 pin SO-DIMM DDR3L 1600 MHz up to 8 GB</td><td></td></td<>		Memory	1 x 204 pin SO-DIMM DDR3L 1600 MHz up to 8 GB	
Network 2 x 6 igabit Ethernet ports (Supports Wake on LÅN) 2 x RS -232 COM (COM2 RS -232/422/485) 4 x USB3.0 2 x Sigabit Ethernet ports (1 with PoE) 1 x HOHIN 1.4 1 x Audio Phone Jack Stereo Speaker 2 x 2W Bus expansion 1 x M2 key2242 Mounting VESA 100 x 100 nm (Screw Size, M4, 7mm) Dimension (WxHxD) 398 x 248 2 x 29.5 Weight 2.4 Kg Mounting 2.4 Kg Mounting 2.4 Kg Vibration 2.4 Kg Android 0.1 Linux Universion (WxHxD) 2.4 Kg Mounting 2.4 Kg contact set set set set set set set set set se		Storage	1 x M.2 2242 SSD / 1 x 2.5 internal SATA storage	
Process system I/O Ports 2 x FS-232 COM (COM2 RS-232/422/485) 4 x USB 0 2 x Gigabit Ehernet ports (1 with PoE) 1 x HDM 1.4 1 x AUGh Phone Jack Bise expansion 2 x 2W Buse expansion 1 x M 2 key220.1 x M2 key2242 Mounting VESA 100 x 100 mm (Screw Size, M4, 7mm) Dimension (WAHAD) 398.8 x 24.8 2 x 29.5 Buse expansion 2 x 4 Q Monting 2 4 Kq Buse prior (WAHAD) 2 6 Kq Buse prior (WAHAD) 2 6 Kq Buse prior (WAHAD) <t< td=""><td></td><td></td><td></td><td></td></t<>				
Bus expansion 1 x M 2 key2230, 1 x M 2 key2242 Mounting VESA 100 x 100 mm (Screw Size, M4, 7mm) Dimension (WxHzD) 398.8 x 248.2 x 29.5 Weight 2.4 Kg Mounting Win 10 IoT Enterprise 64bit Android 10.1 Linux Performent Specification Operating temperature 0 - 40 °C (32 - 104 °F)* Relative Humidity 10 - 95% @ 40 °C non-condensing Userprise Vitration 0.56 Userprise Stock Obsolve Dorok 106 geak acceleration (11 msec. duration) Stock Power Supply Do Input Rating 12V/5A-24V/2.5A, 60W ITE Adapter Stock Power consumption 200 (put Rating) 200 x 1080 Stock LCD Display Size/Type 15.6° HD 15.6° FHD (Option) Max Resolution 366 x 768 1920 x 1080 Max Max Resolution 252(H) x 252(V) 370(H) x 170(V) 370(H) x 170(V) Max Resolution 252(H) x 252(V) 370(H) x 170(V) 370(H) x 170(V) Max Resolution 252(H) x 252(V) 370(H) x 170(V) 370(H) x 170(V) Max R	Process system	I/O Ports	2 x RS-232 COM (COM2 RS-232/422/485) 4 x USB3.0 2 x Gigabit Ethernet ports (1 with PoE) 1 x HDMI 1.4	
Mounting VESA 100 x 100 mm (Screw Size, M4, 7mm) Dimension (WxHxD) 398.8 x 248.2 x 29.5 Weight 2.4 kg OS Support Weight Operating temperature 0.4 0°C (32 - 104 °F)* Relative Humidity 10 - 95% @ 40 °C non-condensing Vibration 0.56 Shock 106 peak acceleration (11 msec. duration) Certification CE, FCC, CB, UL, CCC, BSMI Front Panel Protection IP 65 Compliant Power Supply Do Input Rating Pole IEE 802.30/30W (Optional) Power consumption 26W LCD Display Size/Type Max Resolution 1366 x 768 Max Color 262(H) x 252(V) Max Color 262(H) x 252(V) Max Color 262(H) x 252(V) Weight Sign = 90°/50° 170°/170° Weight Sign = 90°/50° 300 View Angle 90°/50° Wibration > 85%		Stereo Speaker	2 x 2W	
Dimension (WkHxD) 398.8 x 248.2 x 29.5 Weight 2.4 Kg OS Support Win 10 IoT Enterprise 64bit Android 10.1 Linux Presention Operating temperature 0 - 40 °C (32 - 104 °F) ° Relative Humidity 10 - 95% @ 40 °C onconcendensing Vibration Vibration 0.56 Shock 106 peak acceleration (11 msec. duration) Certification CE, FCC, CB, UL, CCC, BSMI - Front Panel Protection IP 65 compliant - Power Supply PoE IEEE 802.3at/30W (Optional) - Power consumption 26W - - LCD Display Max. Resolution 1366 x 768 1920 x 1080 Max. Color 262K 262K 262K Pixel Pitch (um) 252(H) x 252(V) 179(H) x 179(V) - Brightness (cd/m2) 220 300 - View Angle 90°/50° 70°/170° - Touch Screen Option Light Transmission > 85% - -		Bus expansion	1 x M.2 key2230, 1 x M.2 key2242	
Weight 2.4 Kg OS Support Win 10 IoT Enterprise 64bit Android 10.1 Linux Android 10.1 Linux Environment Specification Operating temperature 0 ~ 40 °C (32 - 104 °F)* Relative Humidity 10 - 95% @ 40 °C non-condensing Vibration Vibration 0.5G Shock Shock 106 peak acceleration (11 msec. duration) Certification Certification CE, FCC, CB, UL, CCC, BSMI Front Panel Protection Power Supply PoE IEEE 802.3at/30W (Optional) Power consumption 26W Size/Type Size/Type 1.56 ° HD 1.56 ° FHD (Option) Max. Resolution 366 × 768 1920 × 1080 Max. Color 262K 262K Pixel Pitch (um) 252(H) × 252(V) 179(H) × 179(V) Brightness (cd/m2) 220 300 View Angle 90°/50° 170°/170° Touch Screen Option Light Transmission > 85%		Mounting	VESA 100 x 100 mm (Screw Size, M4, 7mm)	
Weight 2.4 Kg OS Support Win 10 IoT Enterprise 64bit Android 10.1 Linux Android 10.1 Linux Environment Specification Operating temperature 0 ~ 40 °C (32 - 104 °F)* Relative Humidity 10 - 95% @ 40 °C non-condensing Vibration Vibration 0.5G Shock Shock 106 peak acceleration (11 msec. duration) Certification Certification CE, FCC, CB, UL, CCC, BSMI Front Panel Protection Power Supply PoE IEEE 802.3at/30W (Optional) Power consumption 26W Size/Type Size/Type 1.56 ° HD 1.56 ° FHD (Option) Max. Resolution 366 × 768 1920 × 1080 Max. Color 262K 262K Pixel Pitch (um) 252(H) × 252(V) 179(H) × 179(V) Brightness (cd/m2) 220 300 View Angle 90°/50° 170°/170° Touch Screen Option Light Transmission > 85%		Dimension (WxHxD)	398.8 x 248.2 x 29.5	
OS Support Android 10.1 Linux Deprating temperature 0 - 40 °C (32 - 104 °F)* Relative Humidity 10 - 95% @ 40 °C non-condensing Vibration 0.56 Stock 10G peak acceleration (11 msec. duration) Certification CE, FCC, CB, UL, CCC, BSMI Front Panel Protection IP 65 Compliant Power Supply DC Input Rating PoE IEEE 802.3at/30W (Optional) Power consumption 26% Max. Resolution 1366 x 768 Max. Color 262 K Max. Color 262 (H) x 252(V) Max. Color 262 (H) x 252(V) Max. Color 262 (H) x 252(V) Yiew Angle 90°/50° Yiew Angle 90°/50° Yiew Angle 90°/50° Yiew Angle 90°/50°			2.4 Kg	
Relative Humidity 10 ~ 95% @ 40 °C non-condensing Vibration 0.5G Shock 10G peak acceleration (11 msec. duration) Certification CE, FCC, CB, UL, CCC, BSMI Front Panel Protection IP 65 Compliant Power Supply PoE IEEE 802.3at/30W (Optional) Power consumption 26W Size/Type 15.6" HD 15.6" FHD (Option) Max.Resolution 1366 x 768 1920 x 1080 Max. Color 262K 262K Pike IPitch (um) 252(H) x 252(V) 300 Brightness (cd/m2) 200 300 View Angle 90°/50° 170°/170° Touch Screen Option Light Transmission > 85%	OS Support		Android 10.1	
Vibration 0.5G Shock 10G peak acceleration (11 msec. duration) Certification CE, FCC, CB, UL, CCC, BSMI Front Panel Protection IP 65 Compliant Power Supply DC Input Rating 12V/5A-24V/2.5A, 60W ITE Adapter Power consumption 26W		Operating temperature	0 ~ 40 °C (32 ~ 104 °F)*	
Environment Specification Shock 10G peak acceleration (11 msec. duration) Certification CE, FCC, CB, UL, CCC, BSMI	5	Relative Humidity	10 ~ 95% @ 40 °C non-condensing	
Shock TOG peak acceleration (TI msec. duration) Certification CE, FCC, CB, UL, CCC, BSMI Front Panel Protection IP 65 Compliant DC Input Rating 12V/5A-24V/2.5A, 60W ITE Adapter Power Supply PoE PoE IEEE 802.3at/30W (Optional) Power consumption 26W Image: Size/Type 15.6" HD Size/Type 15.6" ABD Max.Resolution 1366 x 768 Max.Color 262K Pixel Pitch (um) 252(H) x 252(V) Brightness (cd/m2) 220 200 y 050° 300 Touch Screen Option Light Transmission		Vibration	0.5G	
Front Panel Protection IP 65 Compliant Power Supply DC Input Rating 12V/5A-24V/2.5A, 60W ITE Adapter PoE IEEE 802.3at/30W (Optional) Power consumption 26W Karsen Supply Size/Type Size/Type 15.6° HD Max. Resolution 1366 x 768 Max. Color 262K Pixel Pitch (um) 252(H) x 252(V) Brightness (cd/m2) 220 View Angle 90°/50° View Angle 90°/50° Touch Screen Option Light Transmission	Environment Specification	Shock	10G peak acceleration (11 msec. duration)	
DC Input Rating 12V/5A-24V/2.5A, 60W ITE Adapter Power Supply PoE IEEE 802.3at/30W (Optional) Power consumption 26W Size/Type 15.6" HD 15.6" FHD (Option) Max.Resolution 1366 x 768 1920 x 1080 Max.Color 262K 262K Pixel Pitch (um) 252(H) x 252(V) 179(H) x 179(V) Brightness (cd/m2) 220 300 View Angle 90°/50° 170°/170° Touch Screen Option Light Transmission > 85%		Certification	CE, FCC, CB, UL, CCC, BSMI	
Power Supply PoE IEEE 802.3at/30W (Optional) Power consumption 26W Size/Type 15.6" HD 15.6" FHD (Option) Max.Resolution 1366 x 768 1920 x 1080 Max. Color 262K 262K Pixel Pitch (um) 252(H) x 252(V) 179(H) x 179(V) Brightness (cd/m2) 220 300 View Angle 90°/50° 170°/170° Touch Screen Option Light Transmission > 85%		Front Panel Protection	IP 65 Compliant	
Power consumption 26W Bize/Type 15.6" HD 15.6" FHD (Option) Max.Resolution 1366 x 768 1920 x 1080 Max.Color 262K 262K Pixel Pitch (um) 252(H) x 252(V) 179(H) x 179(V) Brightness (cd/m2) 220 300 View Angle 90°/50° 170°/170° Touch Screen Option Light Transmission > 85%		DC Input Rating	12V/5A~24V/2.5A, 60W ITE Adapter	
Power consumption 26W Bise/Type 15.6" HD 15.6" FHD (Option) Max.Resolution 1366 x 768 1920 x 1080 Max.Color 262K 262K Pixel Pitch (um) 252(H) x 252(V) 179(H) x 179(V) Brightness (cd/m2) 220 300 View Angle 90°/50° 170°/170° Touch Screen Option Light Transmission > 85%	Power Supply	PoE	IEEE 802.3at/30W (Optional)	
Max.Resolution 1366 x 768 1920 x 1080 Max. Color 262K 262K Pixel Pitch (um) 252(H) x 252(V) 179(H) x 179(V) Brightness (cd/m2) 220 300 View Angle 90°/50° 170°/170° Touch Screen Option Light Transmission > 85%		Power consumption		
LCD Display Max. Color 262K 262K Pixel Pitch (um) 252(H) x 252(V) 179(H) x 179(V) Brightness (cd/m2) 220 300 View Angle 90°/50° 170°/170° Touch Screen Option Light Transmission > 85%		Size/Type	15.6" HD	15.6" FHD (Option)
LCD Display Pixel Pitch (um) 252(H) x 252(V) 179(H) x 179(V) Brightness (cd/m2) 220 300 View Angle 90°/50° 170°/170° Touch Screen Option Light Transmission > 85%		Max.Resolution	1366 x 768	1920 x 1080
Pixel Pitch (um) 252(H) x 252(V) 1/9(H) x 1/9(V) Brightness (cd/m2) 220 300 View Angle 90°/50° 170°/170° Touch Screen Option Light Transmission > 85%		Max. Color	262K	262K
View Angle 90°/50° 170°/170° Tope Projected Capacitive. Touch Screen Option Light Transmission > 85%	LCD Display	Pixel Pitch (um)	252(H) x 252(V)	179(H) x 179(V)
View Angle 90°/50° 170°/170° Tope Projected Capacitive. Touch Screen Option Light Transmission > 85%		Brightness (cd/m2)	220	300
Touch Screen Option Light Transmission > 85%			90°/50°	170°/170°
Touch Screen Option Light Transmission > 85%		Туре	Projected Capacitive.	
Controller LISB Interface	Touch Screen Option			
		Controller	USB Interface	

ADVANTECH Interactive Self-service Terminals
All product specifications are subject to change without notice, * identify as optional function




Last updated: 8-Sep-2023

Specifications (Cont.)

	Operating System	Windows 10
	Common Controls (Reboot, Shutdown)	\checkmark
	Remote desktop	√(VNC)
	Device-Specific Controls (Audio)	\checkmark^{\star}
	Connection Status	\checkmark
	Hardware Status	\checkmark^{\star}
DeviceOn/iService Remote Device Management	Hard Disk Status	\checkmark^{\star}
	Batch Operation Support	\checkmark
	OTA Storage Management	FTP
	OTA Software Updates	\checkmark
	Software Watchlist	\checkmark
	Software Start/Stop	\checkmark^{\star}
	Kiosk Mode	
*Dependent on device model	Peripherals Watchlist	\checkmark^{\star}

Note: DeviceOn//Service software must be downloaded from the Advantech website at https://www.advantech.com/search/?q=DeviceOn%2FiService&st=support&sst=Utility

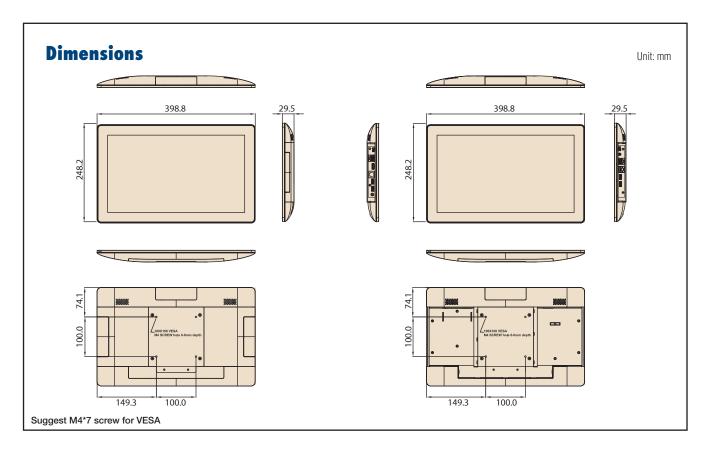

Fully- Integrated I/O



Ordering Information

For Worldwide Model

Part No.	Descriptions
UTC-115GP-WWW1F	15.6" FHD, Pcap, N4200, 4G RAM, 128G SSD, Win10, Wifi/BT, Silver
UTC-115GP-AWW1F	15.6" FHD, Pcap, N4200, 4G RAM, 128G SSD, Android, Wifi/BT, Silver

For US only Model

Part No.	Descriptions
UTC-115GP-WUS1F	15.6" FHD, Pcap, N4200, 4G RAM, 128G SSD, Win10, Wifi/BT, Power cord, Silver
UTC-115GP-NUS1F	15.6" FHD, Pcap, N4200, 4G RAM, 128G SSD, Wifi/BT, Power cord, Silver

For EU only Model

Part No.	Descriptions
UTC-115GP-WEU1F	15.6" FHD, Pcap, N4200, 4G RAM, 128G SSD, Win10, WiFi/BT, EU Power Cord
UTC-115GP-AWW1F	15.6" FHD, Pcap, N4200, 4G RAM, 128G SSD, Android, Wifi/BT, Silver

Extra ordering information

Part No.	Descriptions
1702002605	Power cord 2P FRANCE 10A/16A 220V 1.83M 90D
1702002600	Power Cord 3P UL/CSA(USA) 125V 10A 1.83M 180D
1700000596-11	Power Cord (China) CCC,10A 250V, 3P 1830mm
1700018704	Power Cord UK BSI 2P 10A 250V 180cm 18AWG
1700025928-02	COM Port Converter cable RJ48-10P10C to D-SUB 9P 35cm
UTC-T01-STANDE	Tri Shape Floor Stand 120cm
UTC-100P-STAND0E	L Stand for UTC-115
UTC-300P-D20E	Desk Stand, Silver, for UTC-115/120
UTC-UPOS-STANDOE	Double Hinge Stand
UTC-AVALO-STANDOE	Avalo Stand
ARES-2423X-S151001	Table Stand for UTC-115 (Black)
ARES-2425X-S271001	Tilt Table Stand for UTC-100 Serires (Black) (Support Portrait & Landscape)
ARES-12250-L101000	Vesa Wall-mount for UTC-100 Series (Black)

Peripheral Mountable on All 4 Sides



Peripherals for UTC-100(AIO system) series

Part No.	Description
UTC-100P-B11E	2D Barcode Scanner for UTC-115/120
UTC-100P-C10E	5M Camera for UTC-115/120
UTC-100P-R10E	RFID Scanner for UTC-115/120
UTC-100P-M10E	MSR Reader for UTC-115/120
UTC-100P-S10E	Smart Card Reader for UTC-115/120
UTC-100P-L10E	LED Light Bar for UTC-115/120
UTC-100P-F10E	Finger Print Reader for UTC-115/120
UTC-100P-T10E	Thermal Camera for UTC-115/120



DeviceOn/iService

Unified Remote Device Management Software

		Device	:011/13	ervice	
1	A construction of the cons		Restant DeviceOn/Service Termin Presente Tapat	0	
Ļ	Version of the second s				

Features

- Supports Advantech devices equipped with Windows, Android, and Linux OS
- Flexible device, location, user, and permissions management
- Enables remote monitoring and control of hardware, software, and peripherals
- Supports over-the-air (OTA) firmware and software updates
- Ensures quick, easy, and secure device onboarding
- RESTful APIs for third-party system integration

Introduction

33

ΆΡΙ

500

Ē

Advantech's DeviceOn/iService is a next-generation unified device management solution based on the WISE-DeviceOn platform. Designed to enable centralized monitoring and remote management, DeviceOn/iService supports Advantech devices equipped with Windows, Linux, or Android operating systems. The software also supports the management of applications and integrated peripherals, such as a barcode scanner, card reader, camera, and printer. Users can remotely access and control connected devices, take screenshots, rollout OTA upgrades, and use remote desktop capabilities for troubleshooting from any location at any time. Moreover, DeviceOn/iService supports batch operations to facilitate the management of multiple devices simultaneously for easy and convenient device configuration and deployment.

Total Management

Devices & Hardware

Windows, Linux, Android

Hardware, storage, battery

Software & Peripherals

Open for Expansion

Peripheral integration

Open APIs for integration

Software monitoring & access

Screens, USB devices, printers

Remote Access

Ŷ



- Real-Time MonitoringConnection/hardware status
- Software/peripheral status
- Failure notifications

Remote Controls

- Power controls
- Audio, backlight controls
- Software controls

Troubleshooting

- Screenshots
- Remote desktop support

Operational Efficiency

OTA updates

- System/software updates
- File repository management
- App store

Batch Controls 1-to-many batch reboot, etc. Time-saving tasks

<u>~</u>

Online Download www.vicpas.com

ΟΤΑ

Setup Booster

- Software/peripheral watchlist
- Roles, rule templates

Note: Some functions may vary according to the product

System Architecture

