


UTC-220

21.5" Open-frame panel PC UTC-220F with Intel® Core™ i5-6300U UTC-220G with Intel® Pentium® N4200

NEW

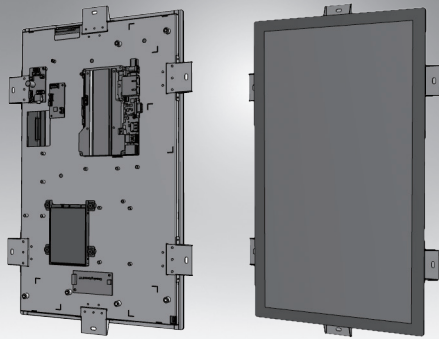

Features

- Available for embedded into kiosk chassis and wall mount type
- One-piece and fan-less design
- Rich screen size and core from UTC series
- Rich IO for extensional peripherals connection
- Built-in Intel® Core™ i5-6300U (UTC-220F)
- Built-in Intel® Pentium® N4200 (UTC-220G)
- Providing Natural Viewing Experience with 21.5" Display
- Could be take as monitor only

CE FCC

Introduction


UTC-220 features one-piece solution and fan-less design that easy to embedded into kiosk chassis or wall mount type. Continuation of the advantage from UTC series, It is easy to integrate key peripherals and display systems for diversified self-service and interactive signage deploy in different application areas. The systems deliver updated information with well-designed interactive interfaces, fully ensure relevant content and targeted promotions are delivered.

Specifications

Processor System	CPU	Intel® Core™ i5-6300U (UTC-220F) Intel® Core™ i3-6100U (Available)*	Intel® Pentium® N4200 (UTC-220G) Intel® Atom® E3950 (Available)*
	Base Frequency	2.4GHz (Dual-Core)	1.1 GHz (N4200/Quad-Core) 1.6 GHz (E3950/Quad-Core)
	Cache	L3 Cache 3MB	L2 Cache 2MB
	Memory	2 x SO DIMM DDR3L 1600MHz up to 16 GB	1 x SO-DIMM DDR3L 1867 MHz
	Storage	1 x 2.5 internal SATA HDD bay	1 x 2.5 internal SATA HDD bay
	Network (LAN)	2 x Gigabit Ethernet ports (Supports Wake on LAN)	
	I/O ports	2 x USB 2.0 / 2 x USB 3.0 2 x Gigabit Ethernet (RJ-45) 1 x VGA 1 x HDMI	2 x USB 2.0 / 2 x USB 3.0 2 x Gigabit Ethernet (RJ-45) 1 x VGA 1 x HDMI
	Stereo Speaker	10W x 2 (optional)	
	Bus expansion	Full-size MiniPCIe/mSATA	
	Dimensions (W x H x D)	21.5": 515.04 x 310.91 x 42.20(mm)	
Weight	21.5": 5.8kg		
OS Support	WES 7P 32bit WES 7E 32bit Windows Pro Embedded 7 SP1 64bit WE8S 64bit Windows Embedded 8.1 Industry Pro 64bit Win 10 IoT Enterprise Linux	Win 10 IoT Enterprise Android 6.0/8.1/10 Linux	
Environmental Specifications	Operating Temperature	0 ~ 40° C (32 ~ 104° F)	
	Relative Humidity	10 ~ 95% @ 40° C non-condensing	
	Vibration	0.5G	
	Shock	5G peak acceleration (11 msec. duration)	
	EMC/ Safety	CE, FCC	
Power Supply	Input Rating	12 V/7 A (84 W ITE Adapter)	
	Power consumption	Typical 45W Max. 65W	
LCD Display	Size/Type	21.5" TFT LCD with LED backlight	
	Max. Resolution	21.5": 1920 x 1080	
	Max. Color	16.7M	
	Pixel Pitch (um)	21.5": 248.25 x 248.25	
	Brightness (cd/m ²)	250 (Optional 400)	
Touch Screen Option (PE/RE/GE)	Type	Projected Capacitive. Analog Resistive 5-wires / Glass Panel	
	Light Transmission	80% ± 2% / 80% ± 5% / 90%	
	Controller	USB Interface / USB Interface / -	

Dimensions


Unit: mm

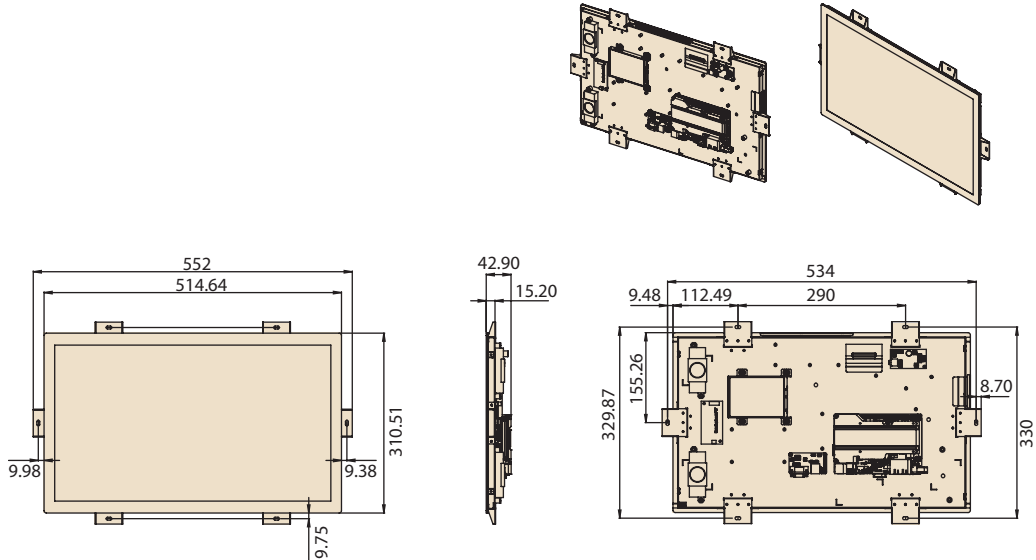

Ordering Information

Part No.	Description
UTC-220FP-AT00E	21.5" P T/S, Core i5 6300U, 4GB RAM, Open-frame
UTC-220GP-AT00E	21.5" P T/S, Pentium N4200, 4GB RAM, Open-frame
1702002605	Power cord 2P FRANCE 10A/16A 220V 1.83M 90D
1702002600	Power Cord 3P UL/CSA(USA) 125V 10A 1.83M 180D
1700000596-11	Power Cord (China) CCC, 10A 250V, 3P 1830mm
1700018704	Power Cord UK BSI 2P 10A 250V 180cm 18AWG

I/O View

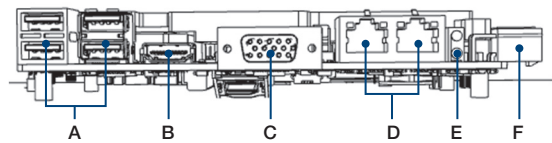

- A. USB
- B. HDMI
- C. VGA
- D. LAN
- E. PWR & HDD LED
- F. PWR Input

Peripherals for UTC-220 Series

Tentative Part No.	Description
TBD	5M Camera Module For UTC-220/232 (USB connection)
TBD	RFID Reader For UTC-220/232 (USB connection)
TBD	UTC WIFI KIT, EWM-W163, M.2, 2T2R, BT4.1 for UTC-220/232G
TBD	UTC WIFI KIT, DNXA-116, 2Tx/2Rx for UTC-220/232F
TBD	10W speaker 60X60X24.9mm for UTC-220/232
TBD	2D Barcode Module (Honeywell) for UTC-220/232 (USB connection)

* The cable is not been included due to different installation environment.